
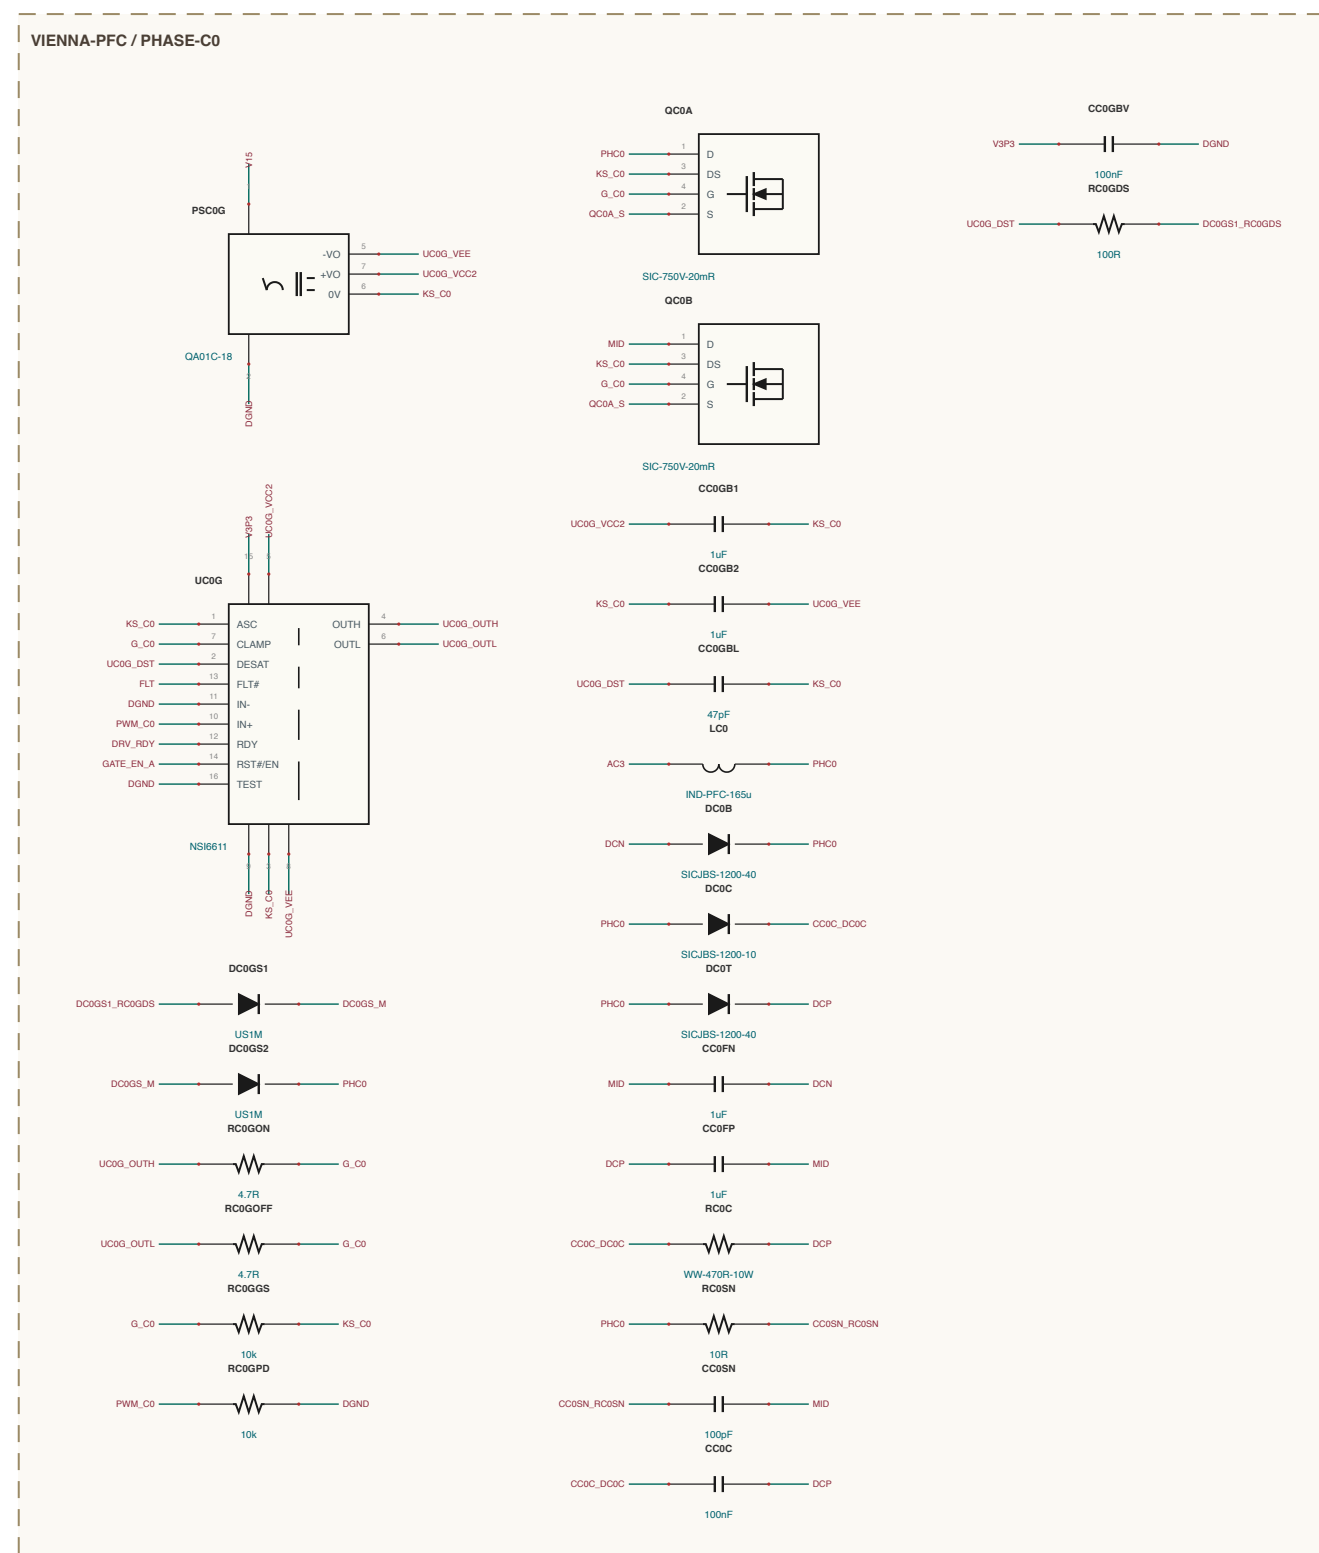
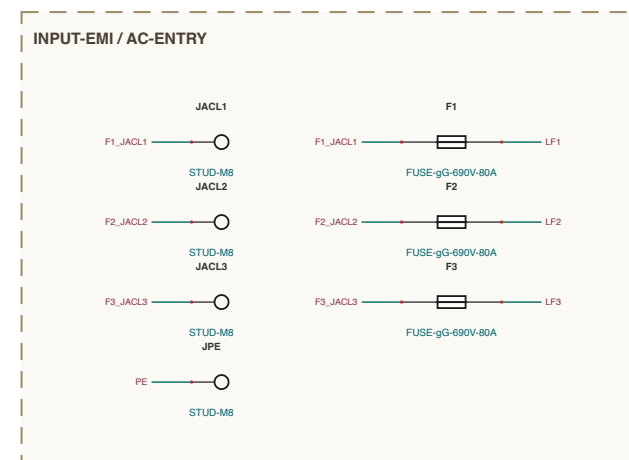
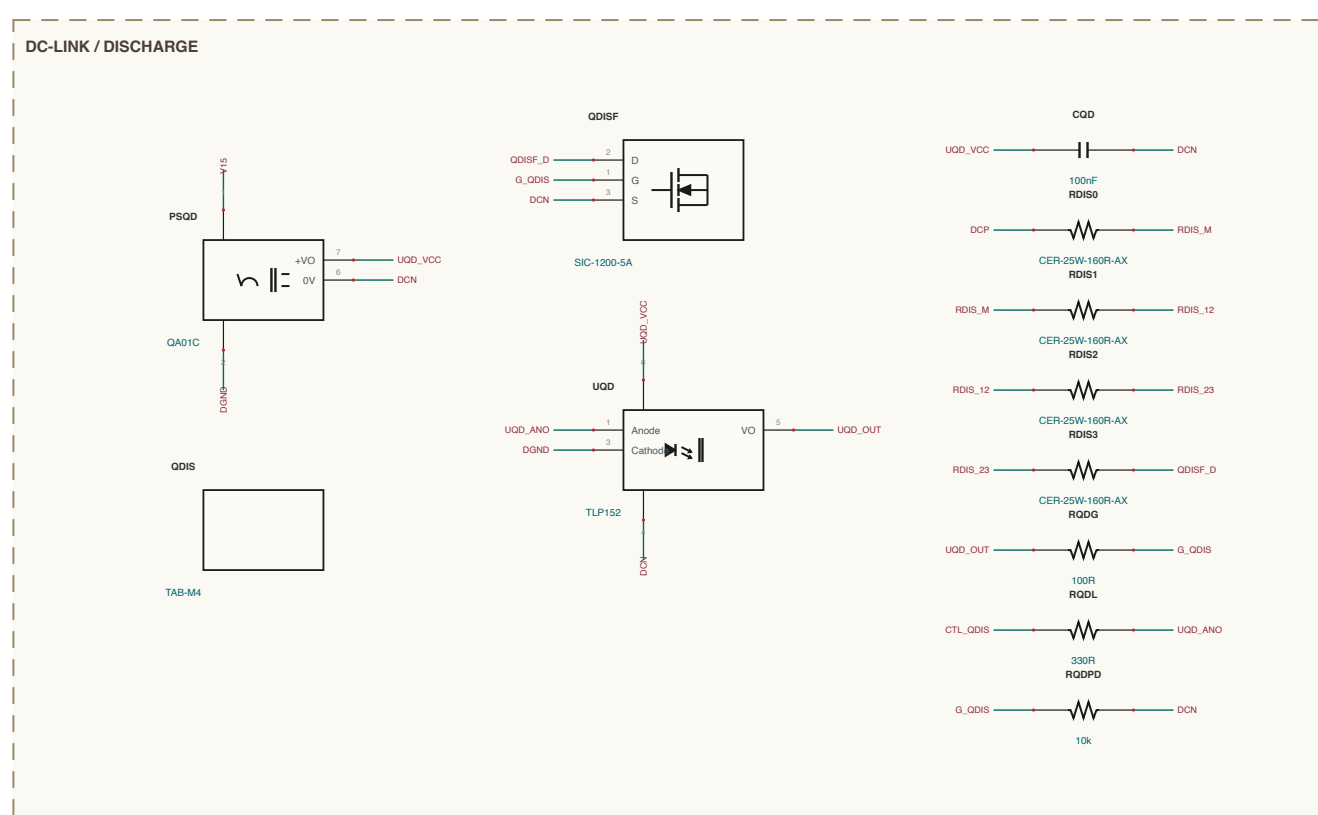
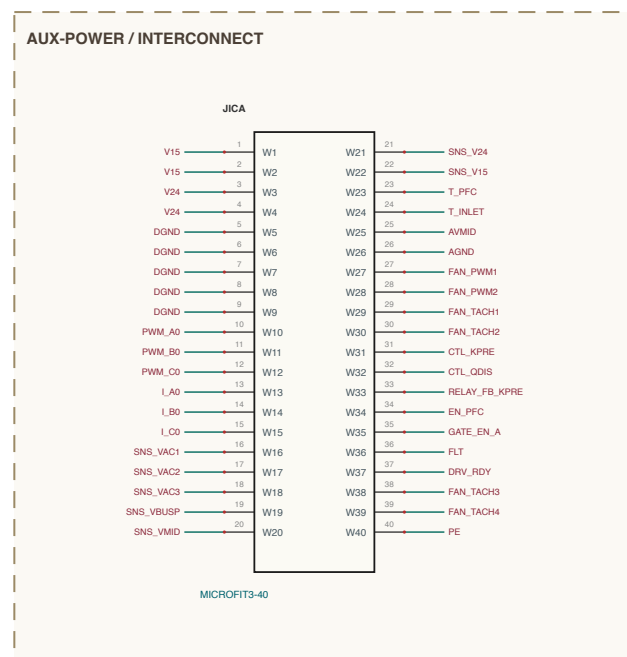
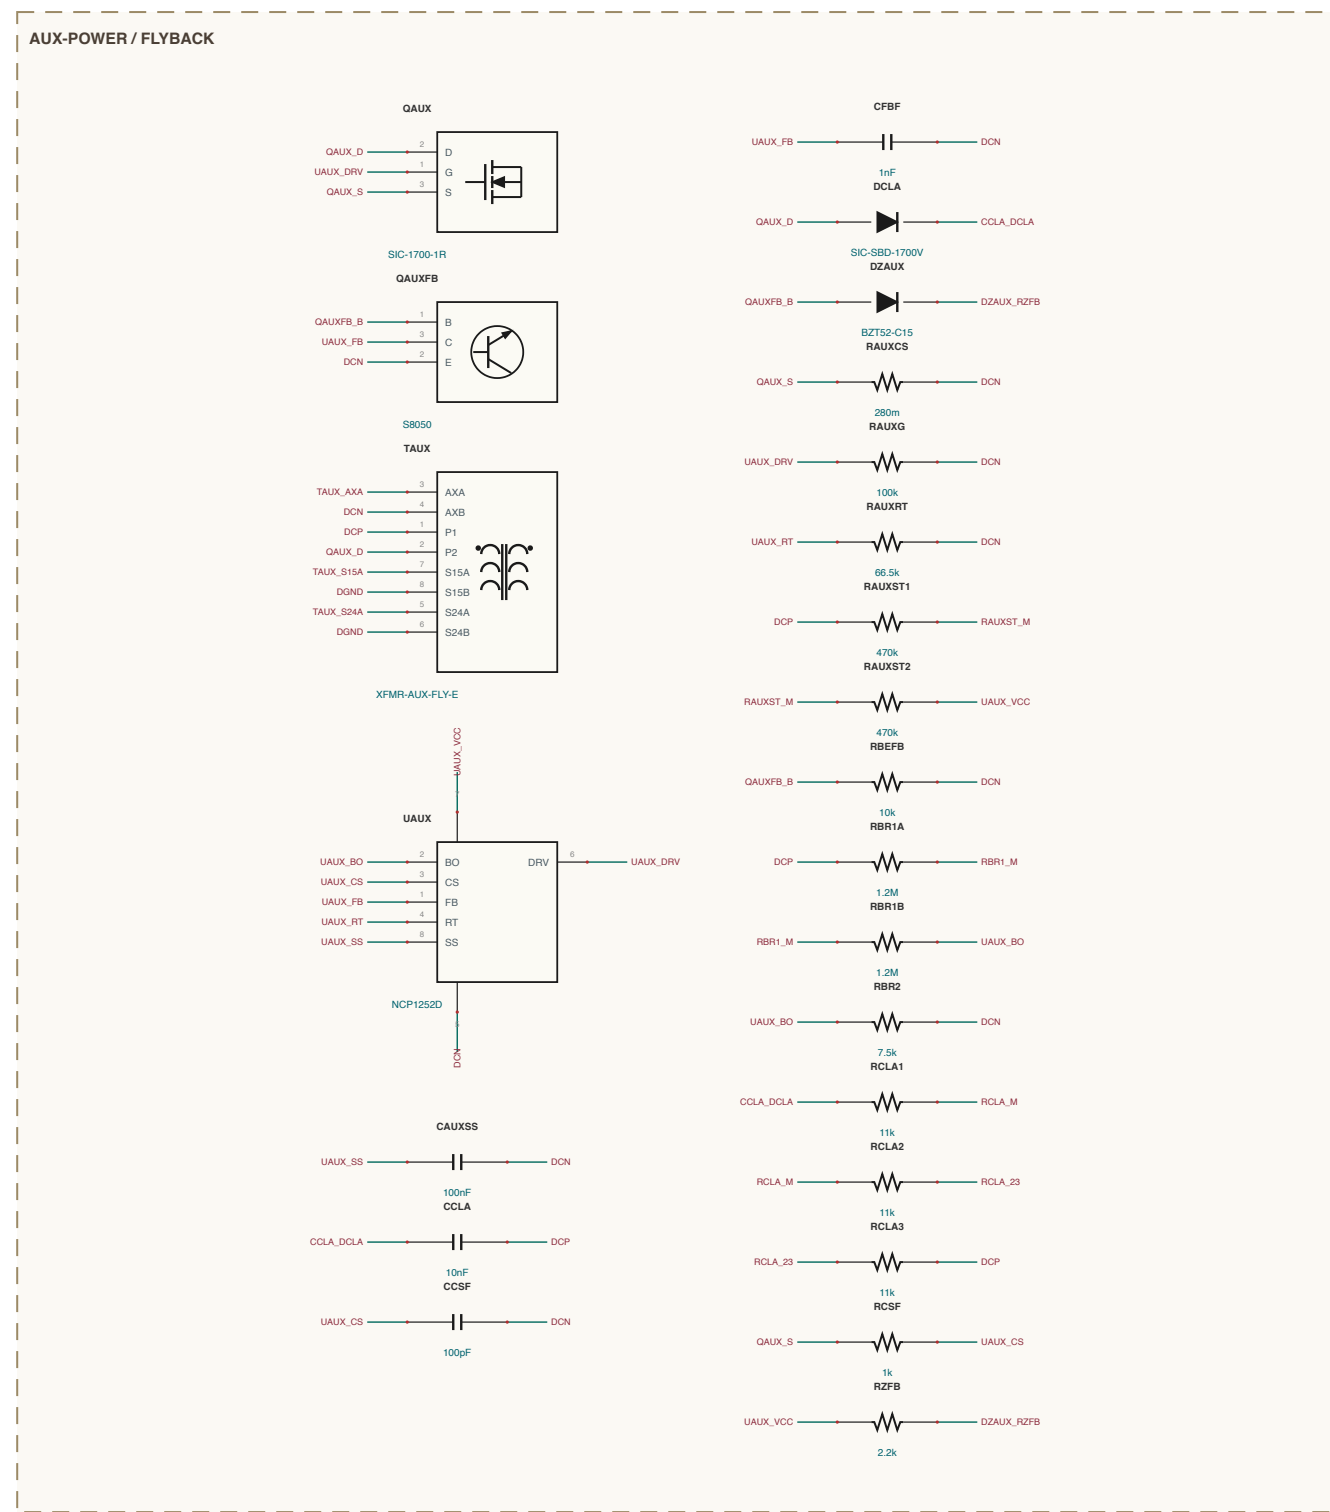
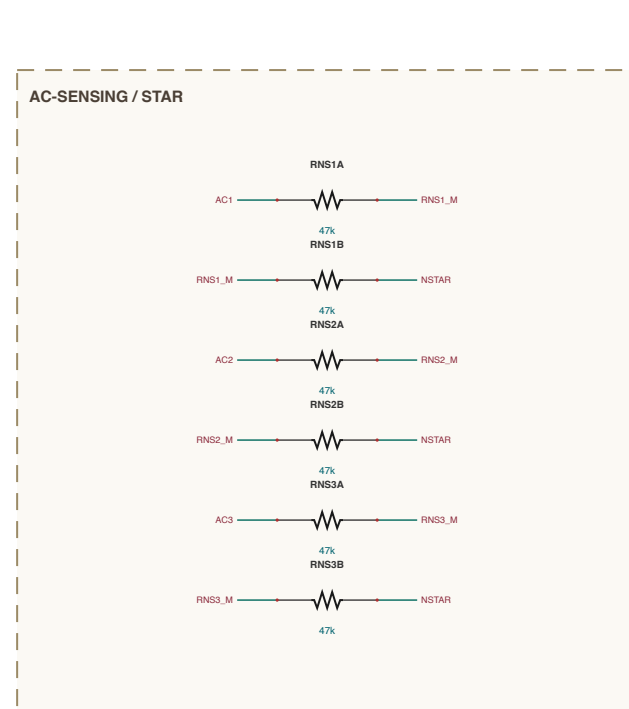
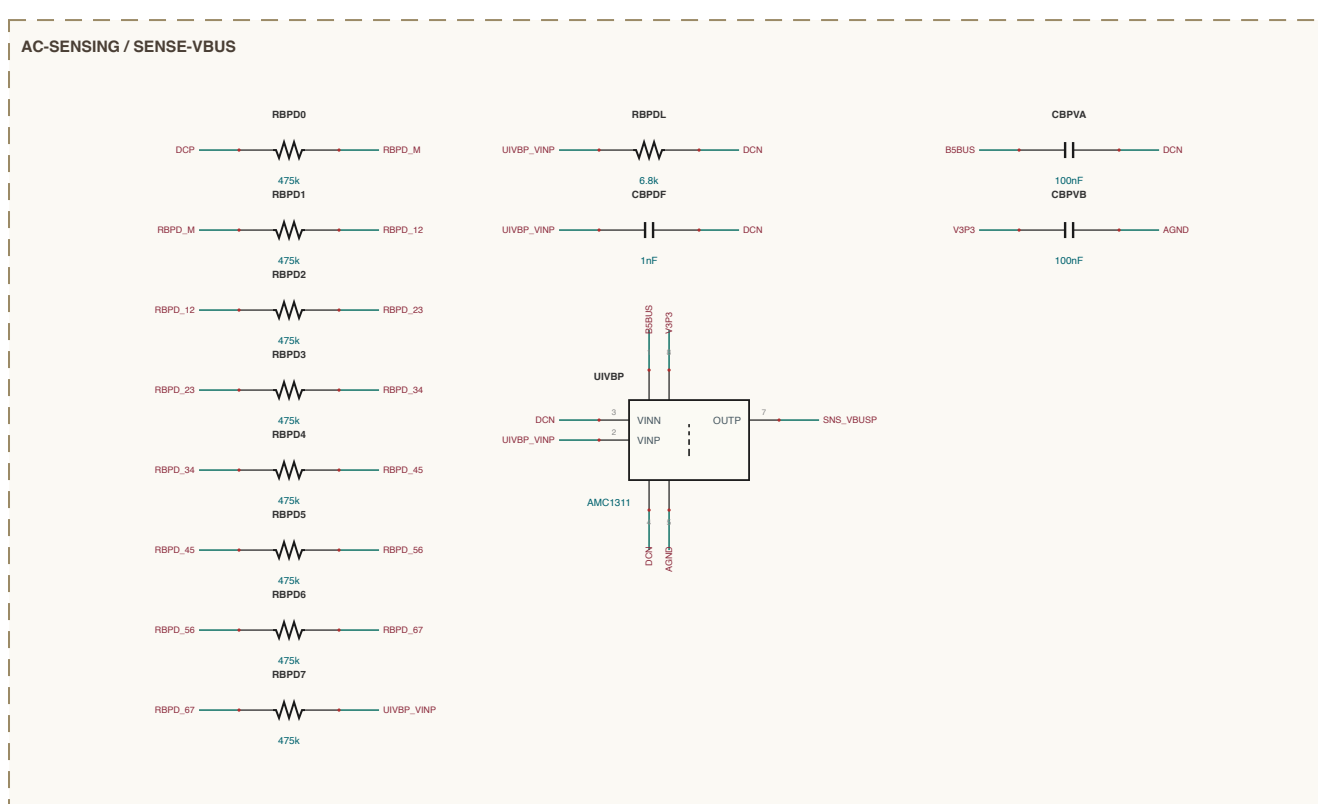
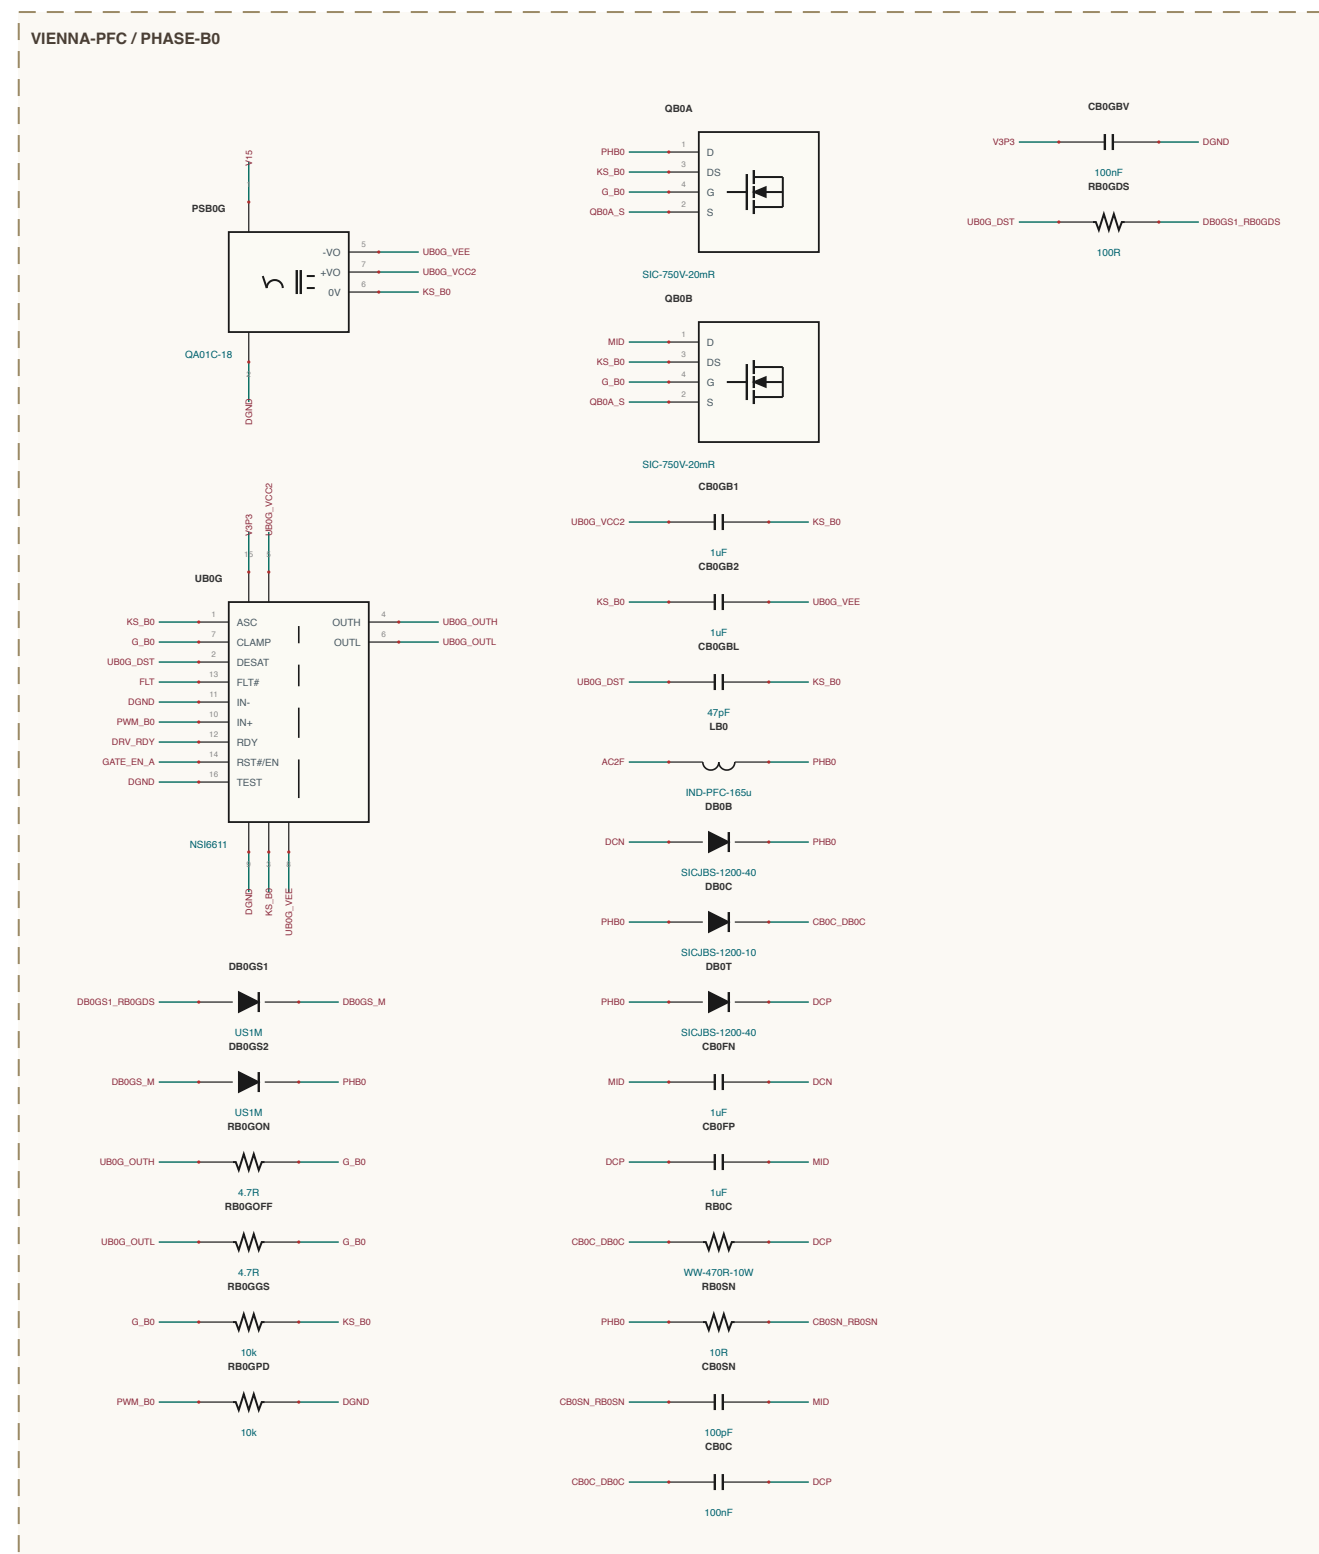
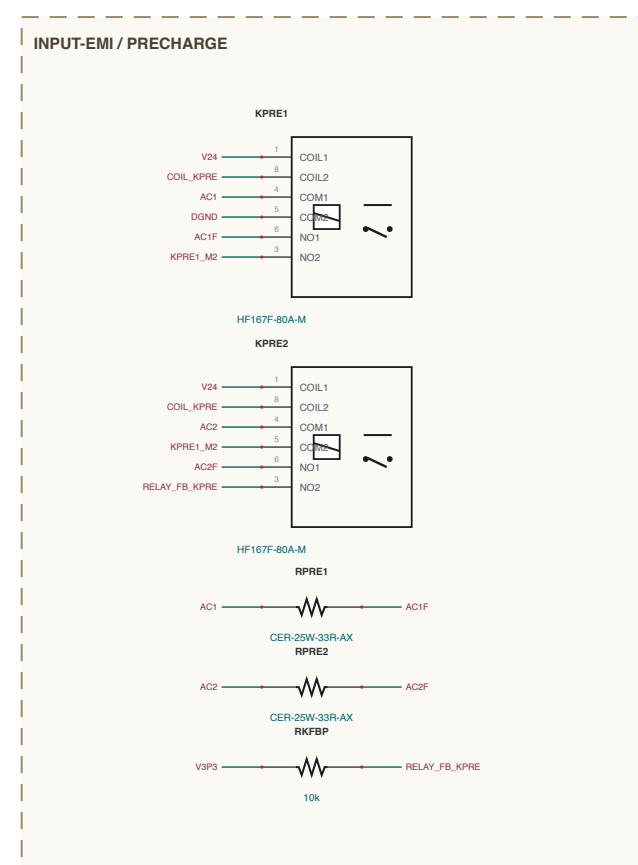
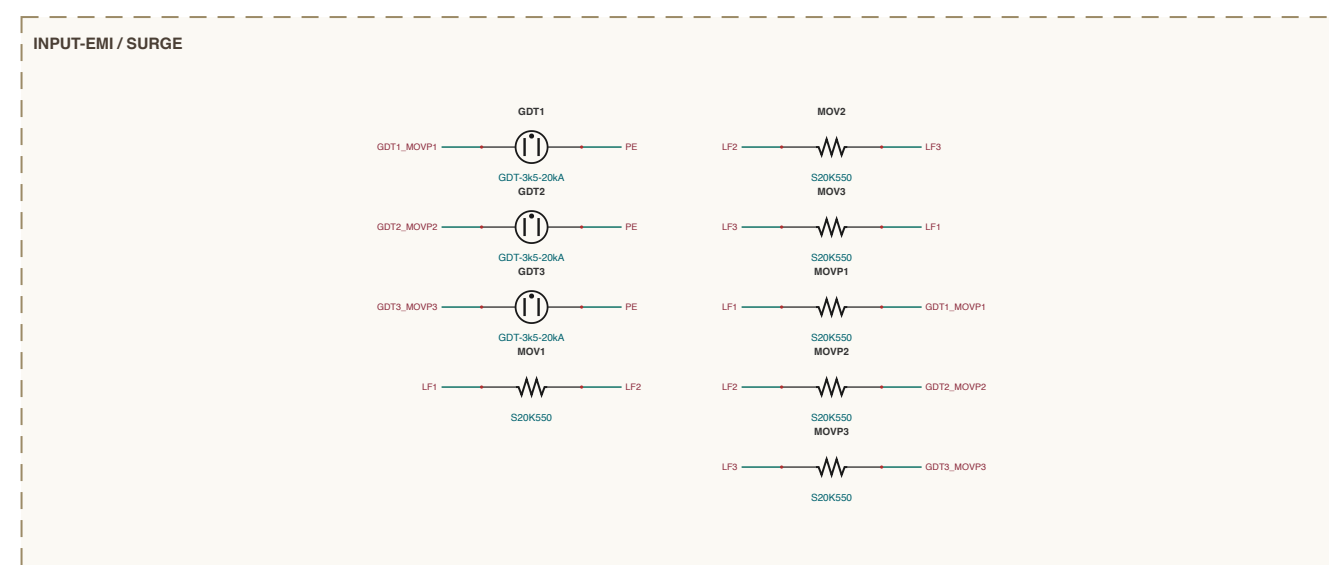
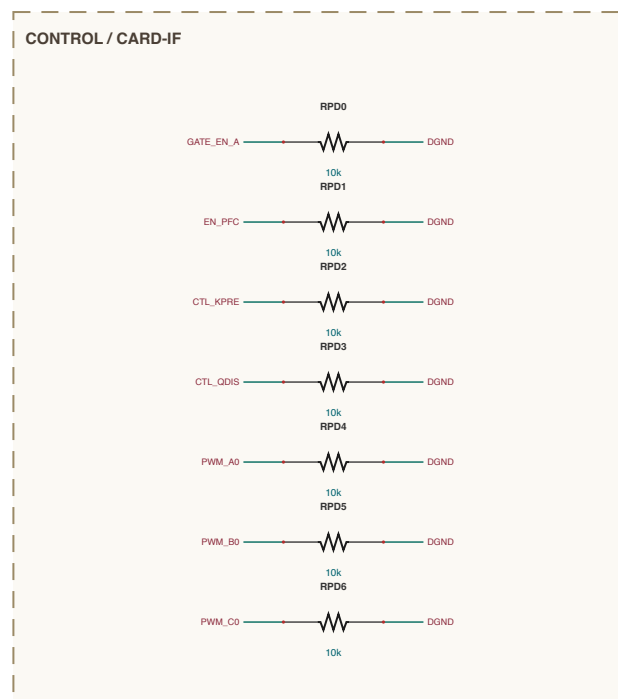
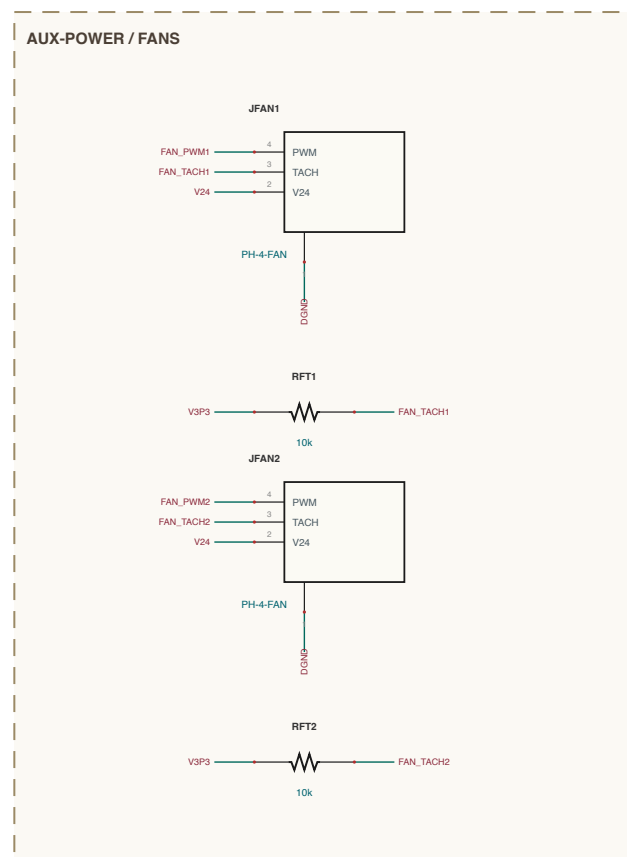
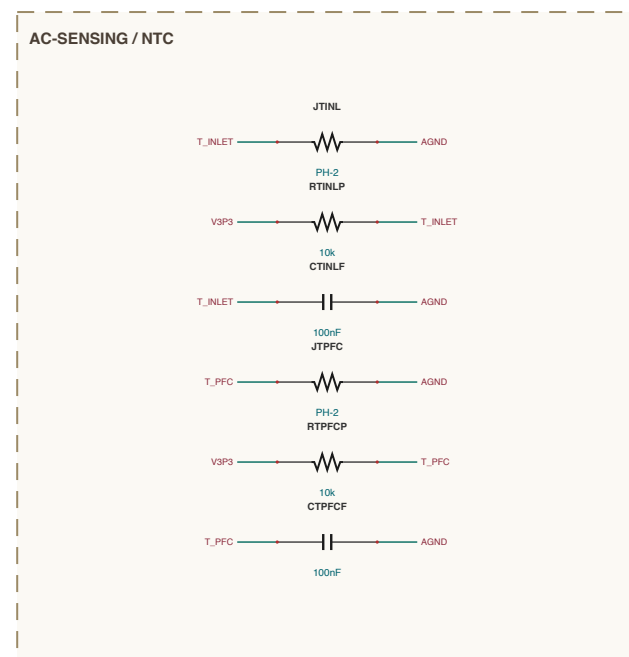
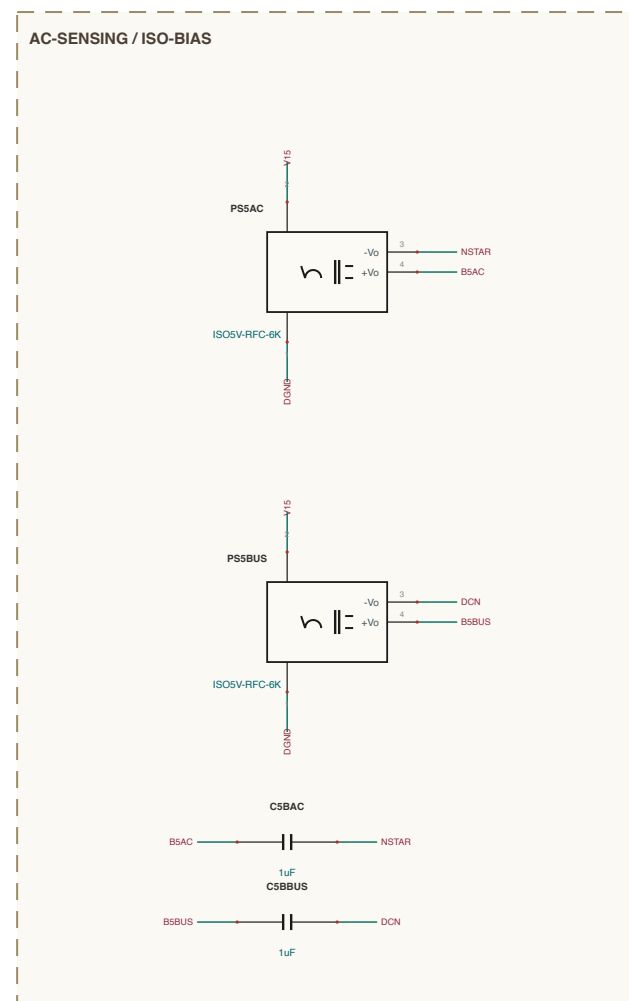
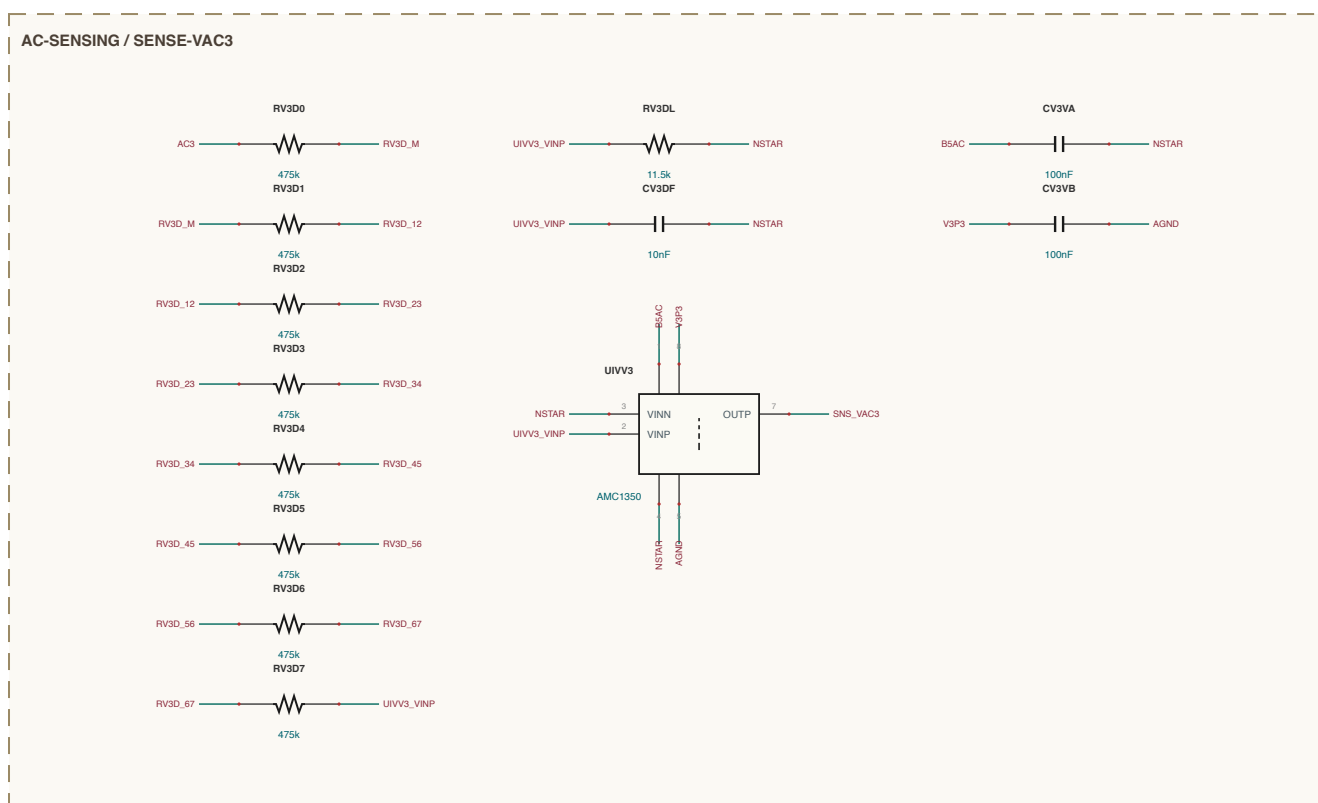
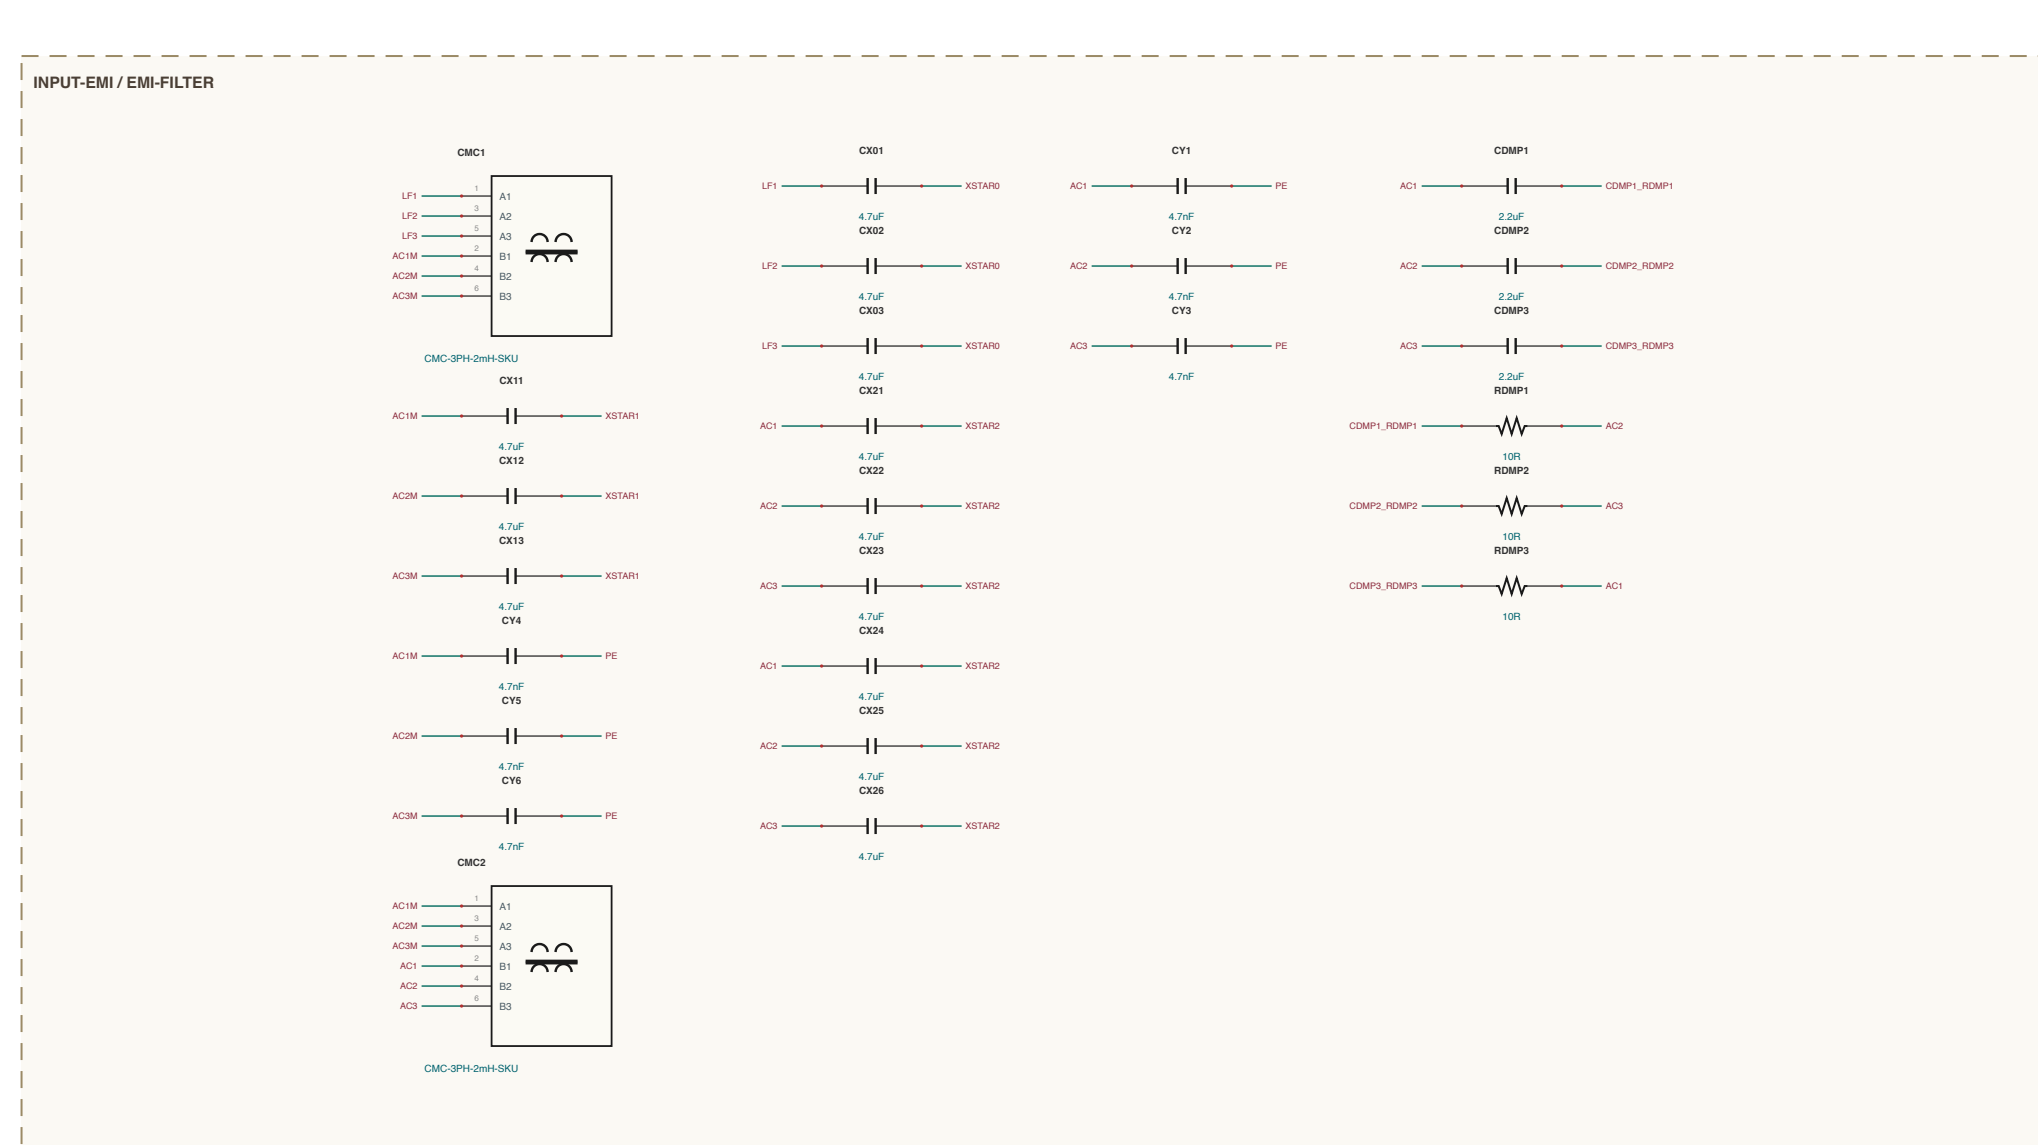
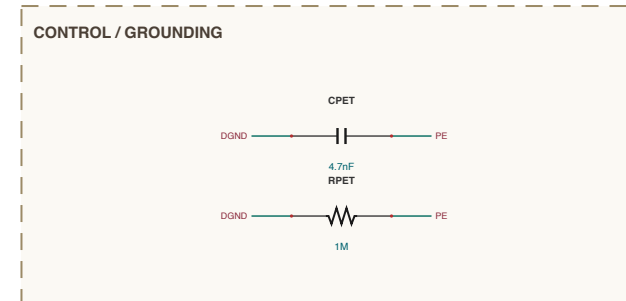
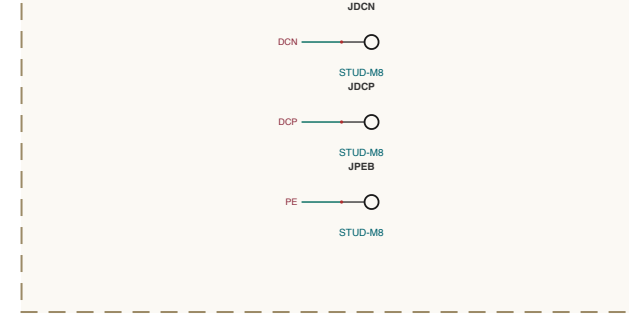
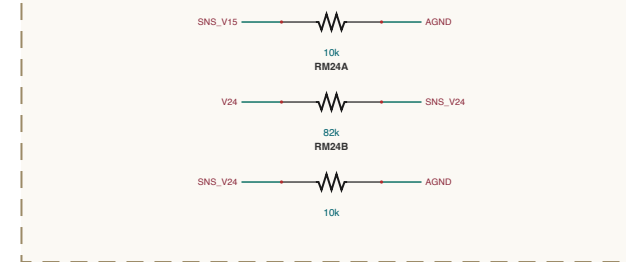
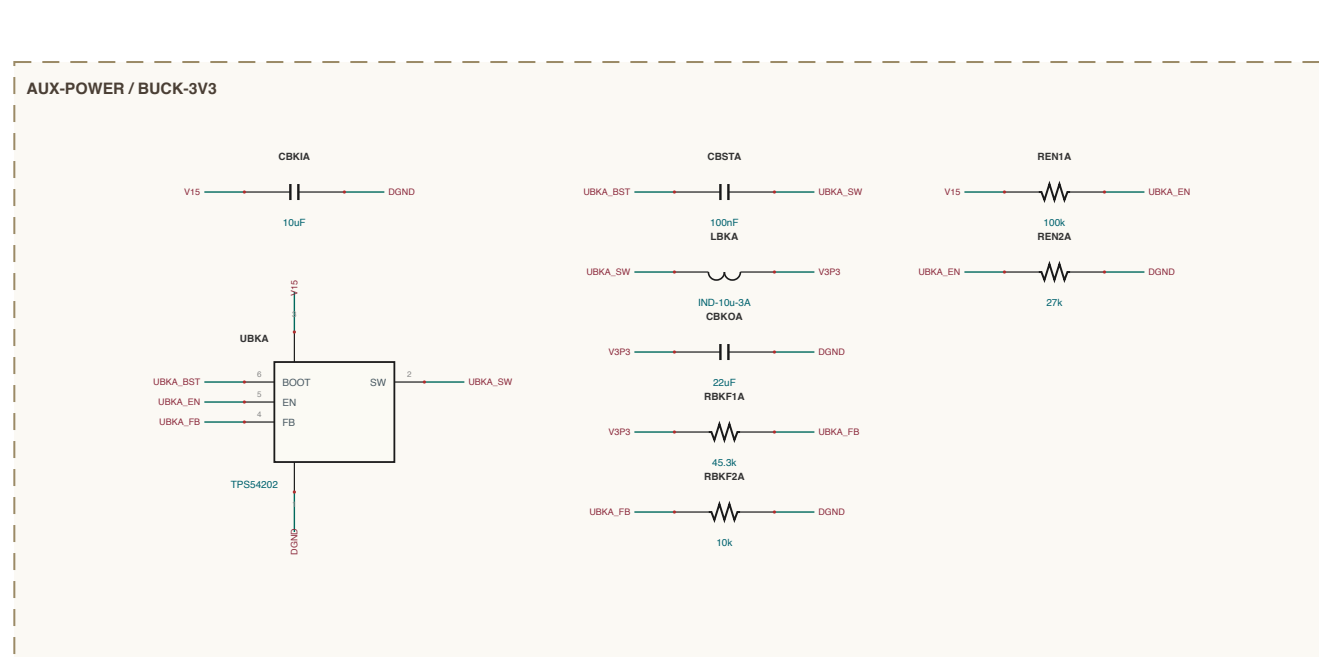
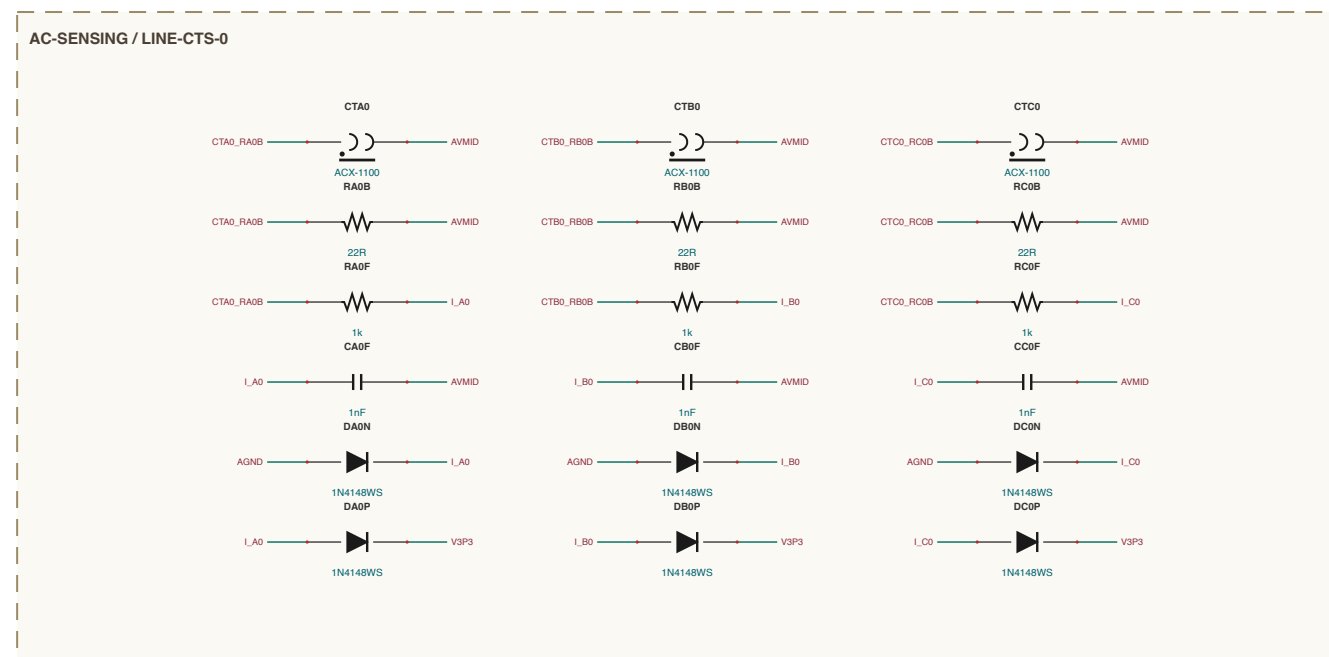
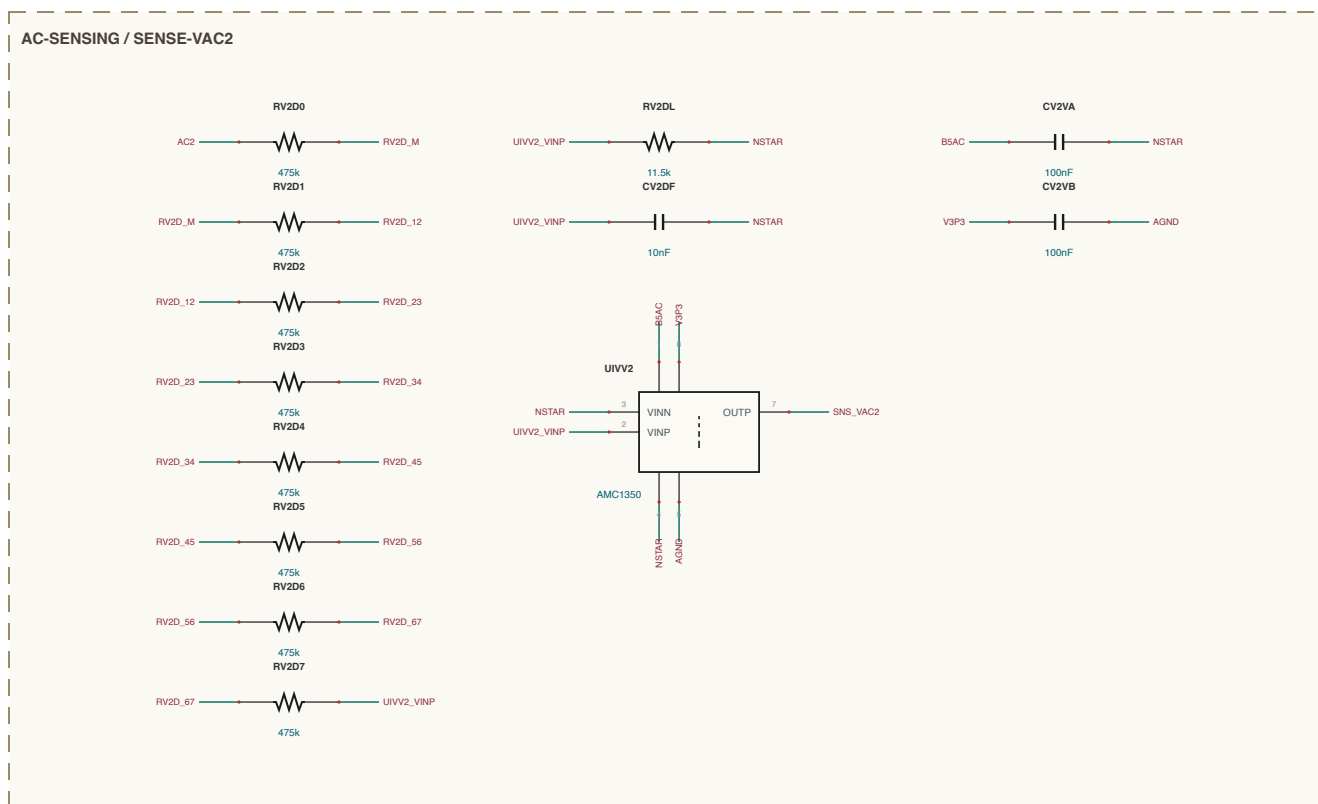
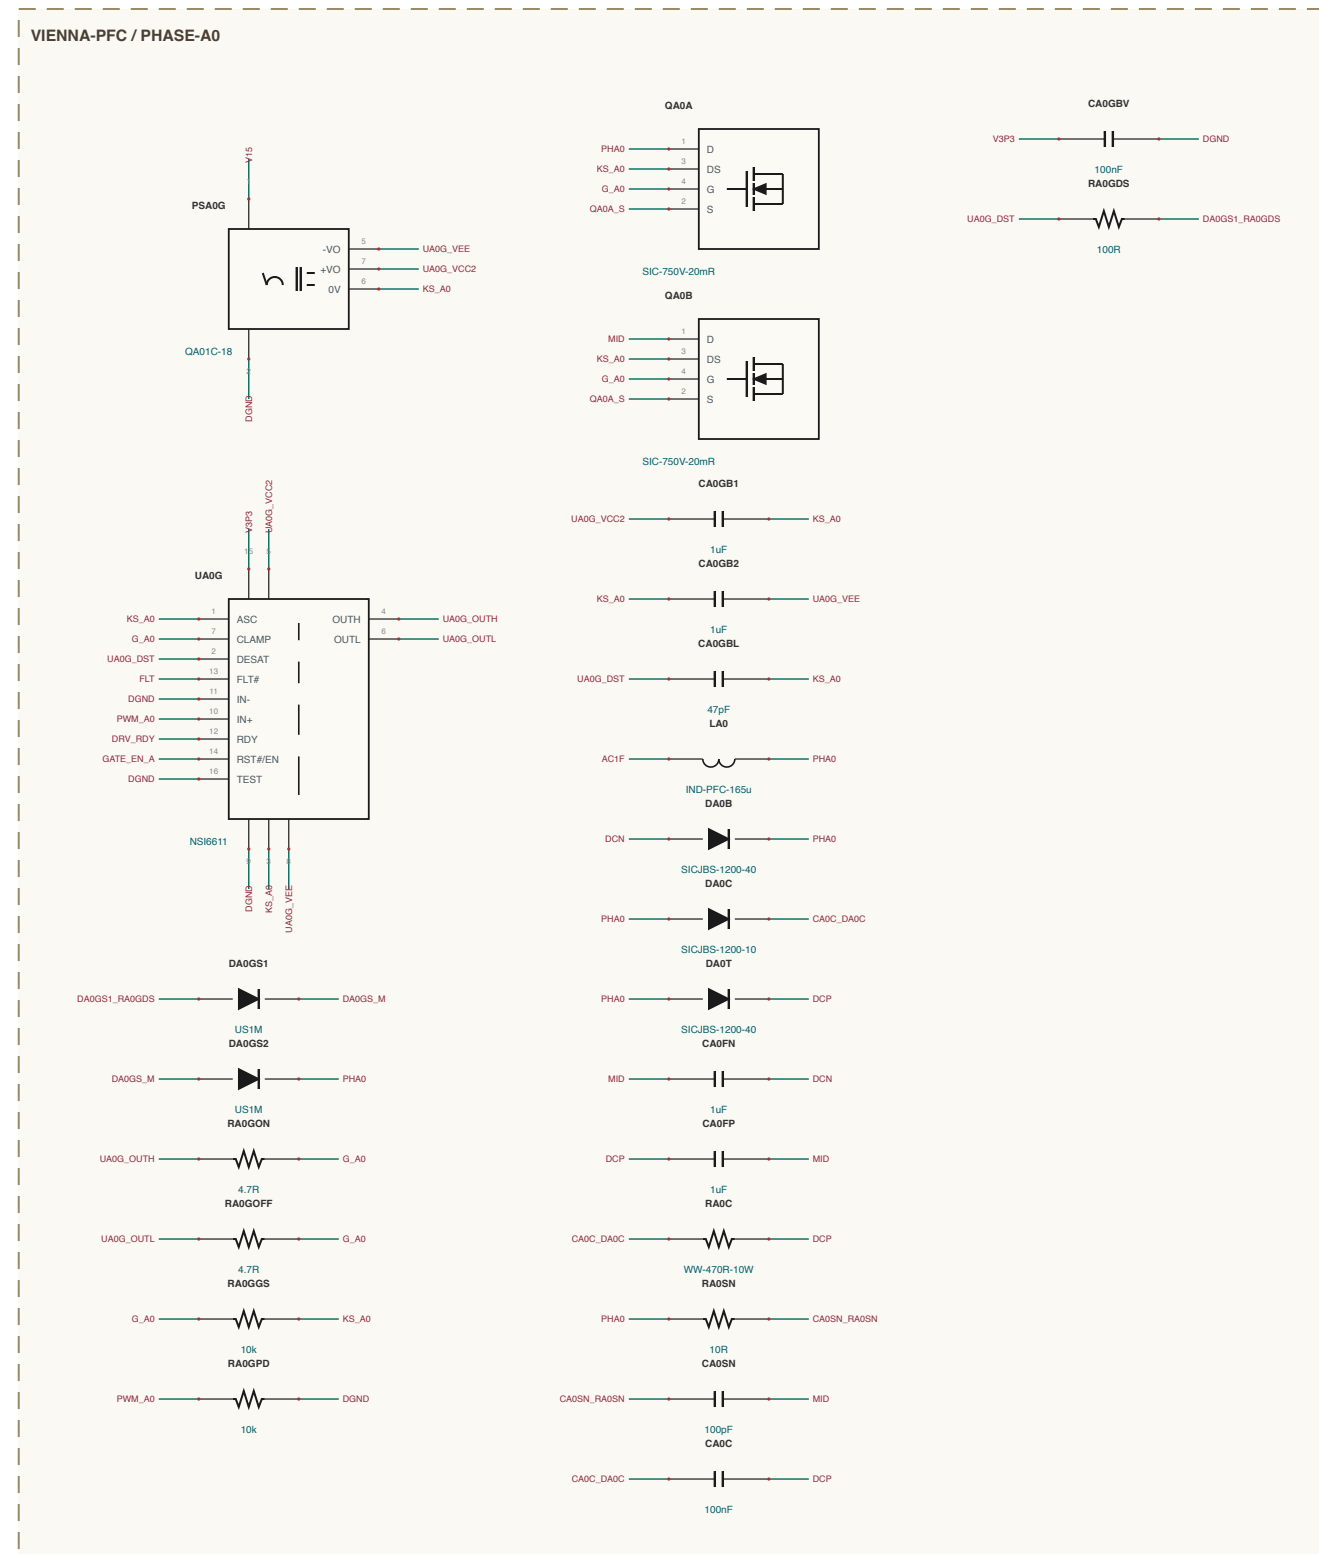
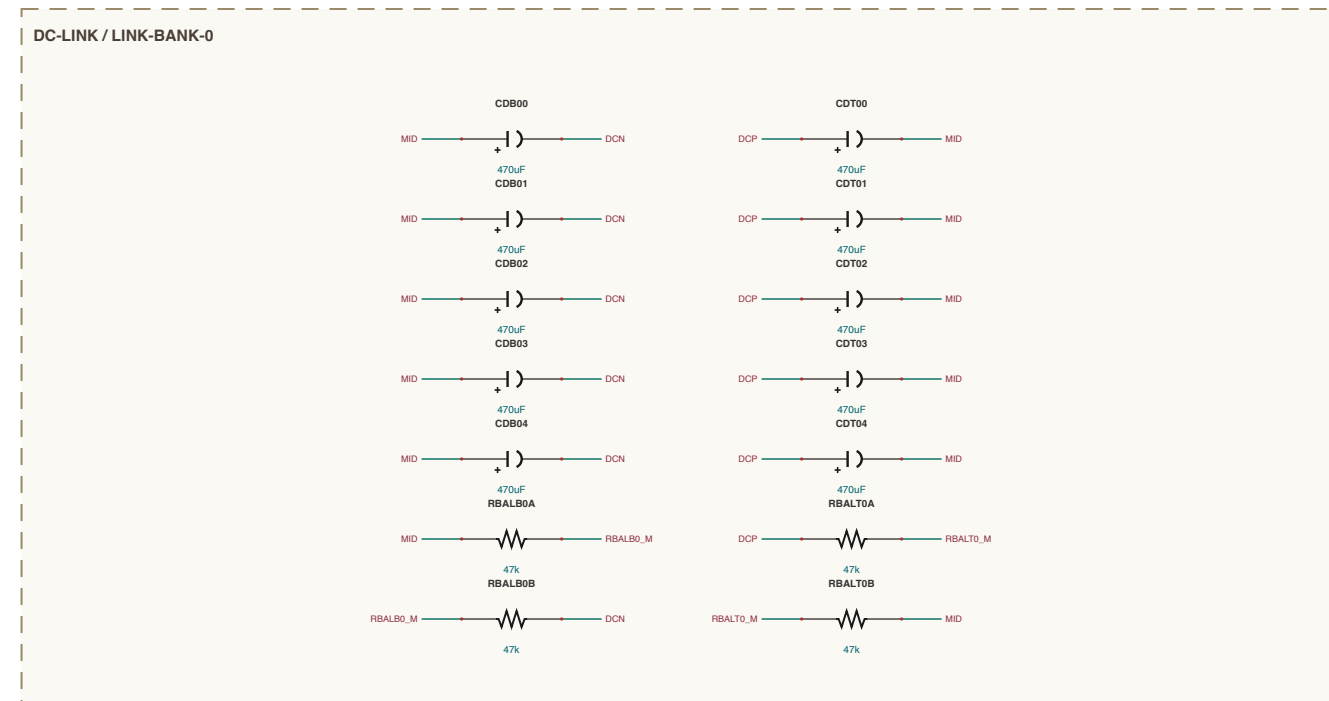
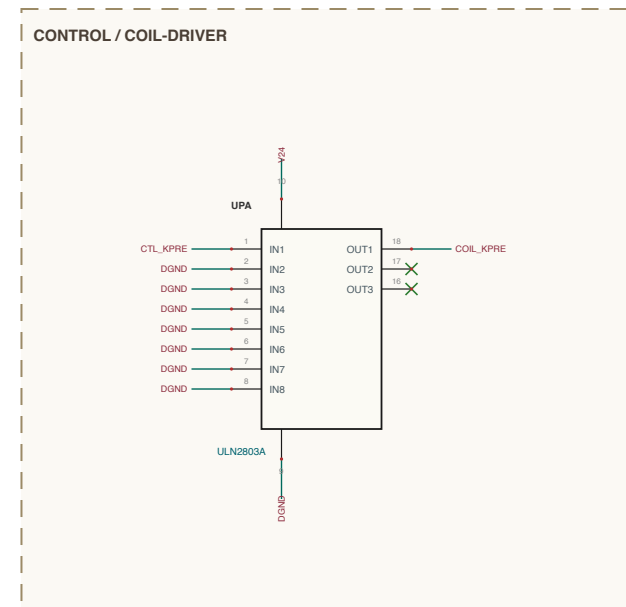
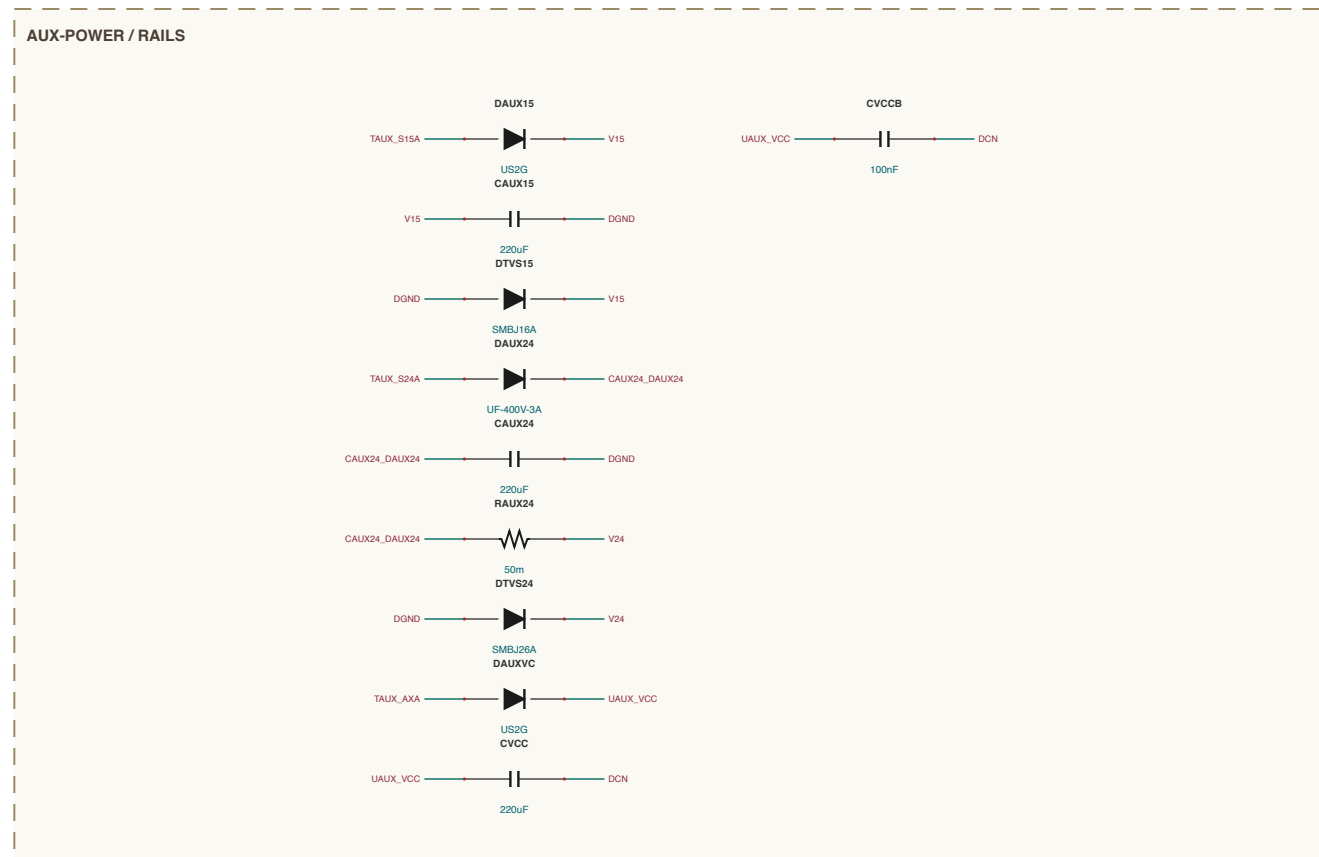
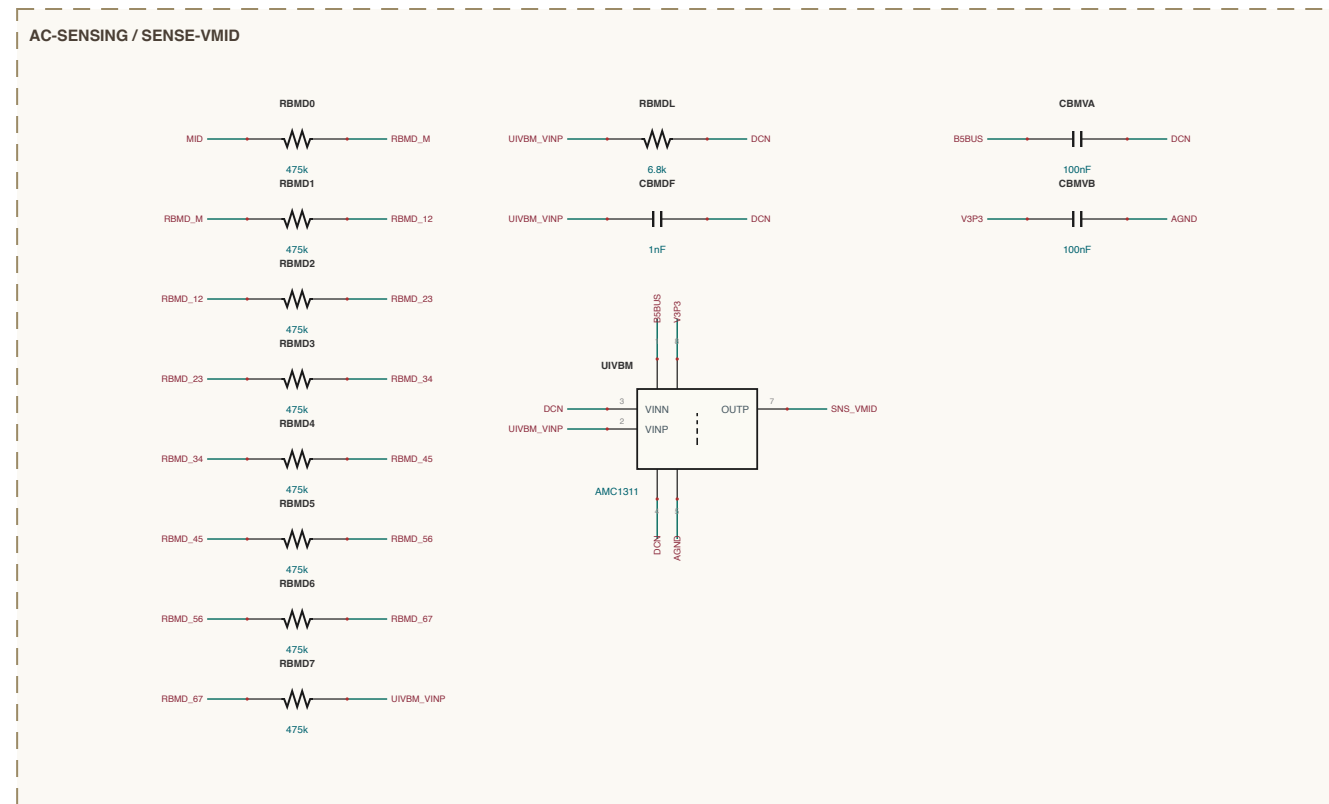


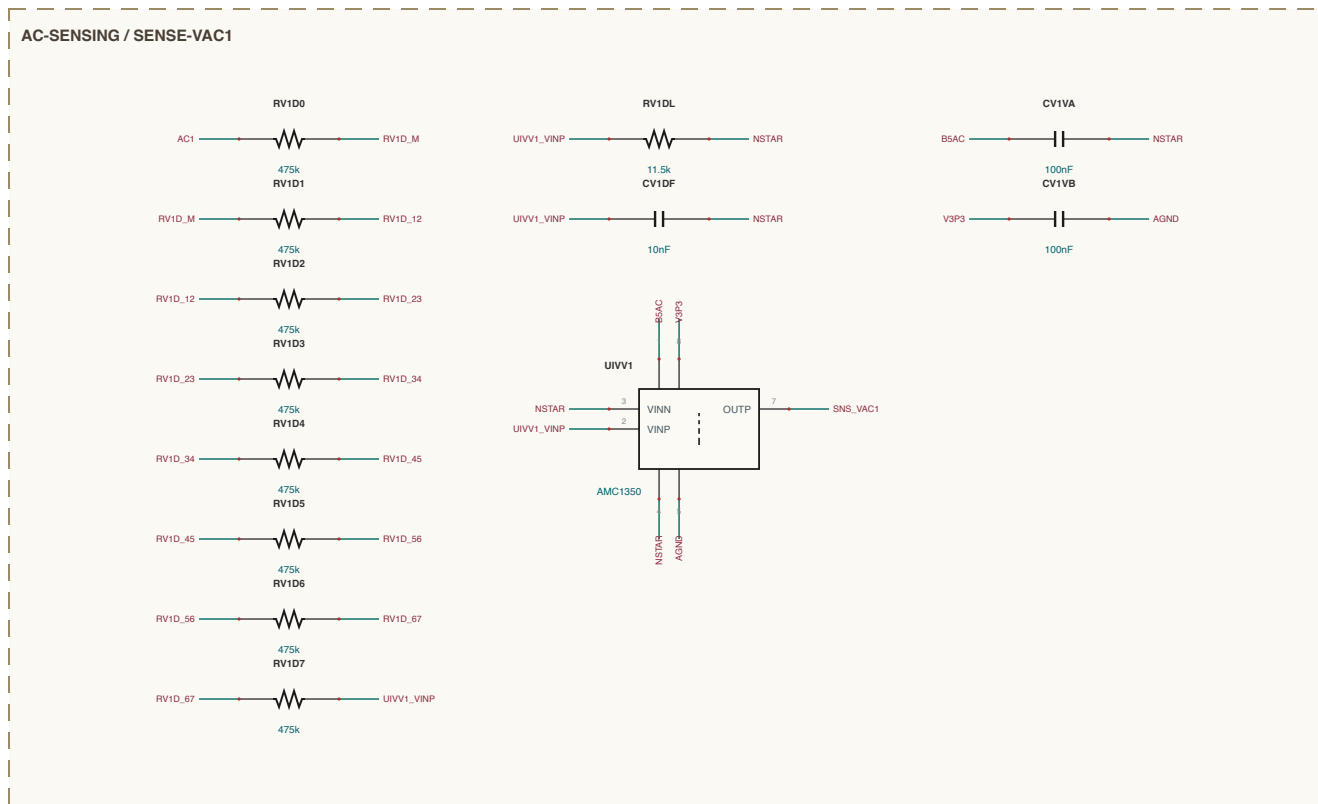

SHEET INDEX

3D MAX CAD (Covers: 1 of 3)
AC-BENDING - 3 sections
AC-POWERED - 3 sections
CONTROL - 4 sections
INPUT UNIT - 4 sections
OUTPUT - 3 sections
TERMINAL-PPC - 3 sections
on D.A. - 20 sections - 123 subparts

NET NAMING

internal junctions are named for what they join

Usual: `_*ffiles` node at final IC join e.g. `USFOIA_VSP`

Backtick: for midpoint of a section pair e.g. `REALLY_8`

Backtick, `_*` join before Frodothorin e.g. `FRID_01`

[all others are explicit design notes

MAGNETICS CONSTRUCTION

Identify per decomposition and Juran, pp9, 10a, acceptance items line (time)

1st L&L: L&L = 80770567 Kasilite, Nod8 (x=1 bit time), 3a(b=1=cm) 15mm = L2 10b(h, wt=7uF) 8524 ph 268,8322 value governor (q=100% for value)

838 ENR CHC1 = 12x K2 4 JLF = 3 or 2 stages + CHC2 + HC dumpers; ON EN dashes deleted

Or w/ T&C sections