
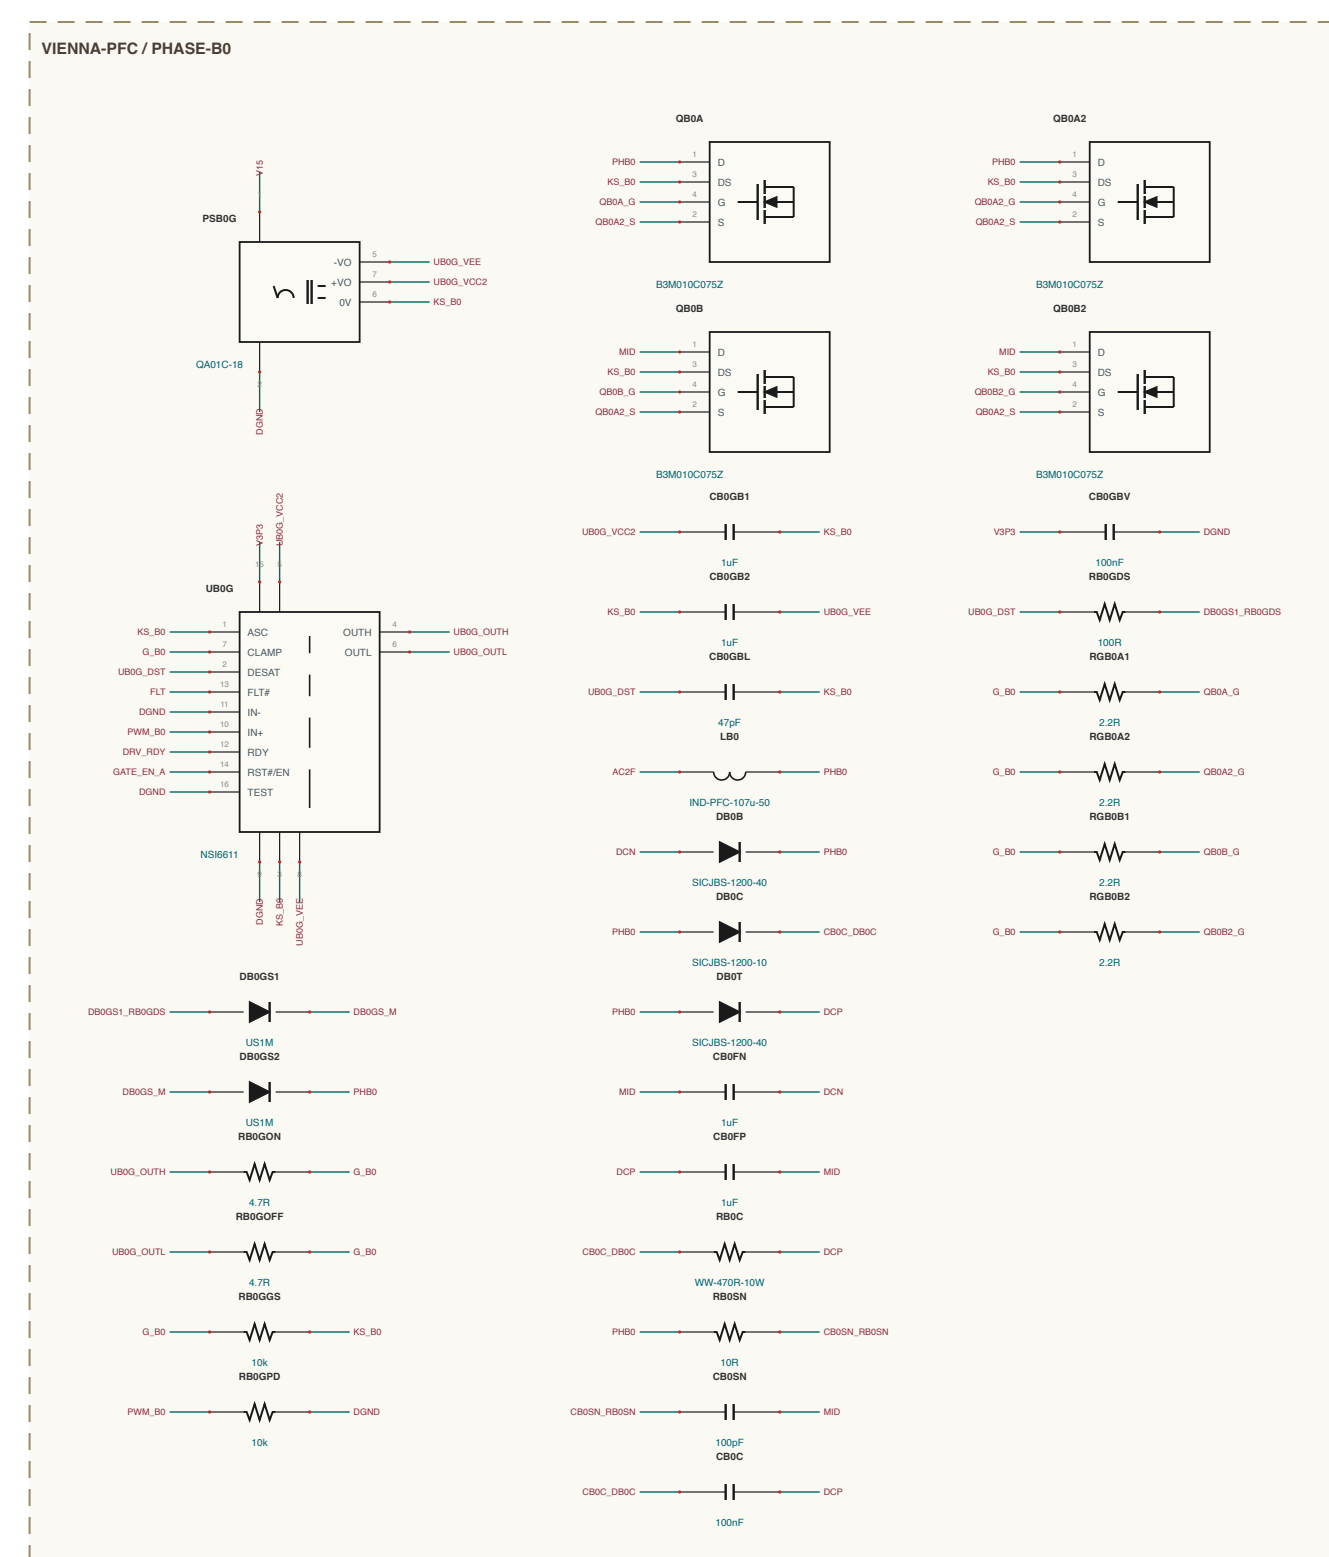
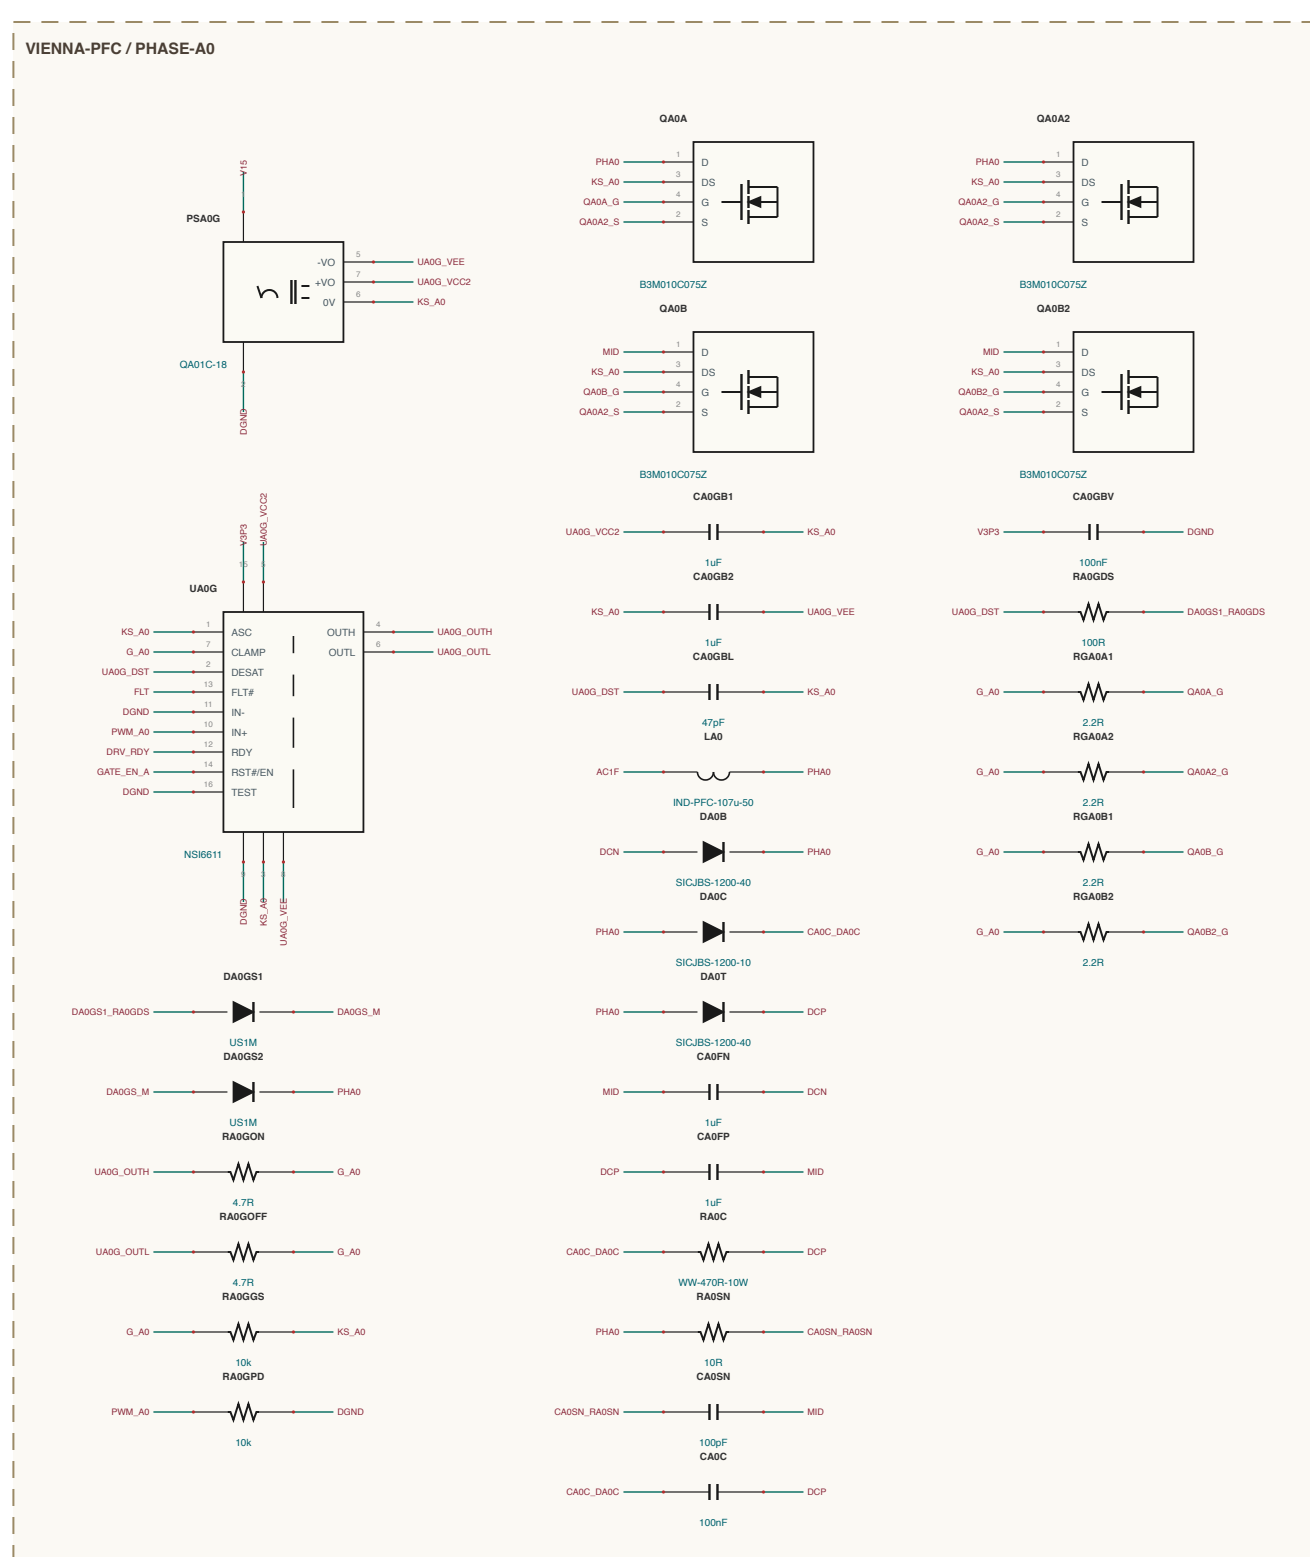
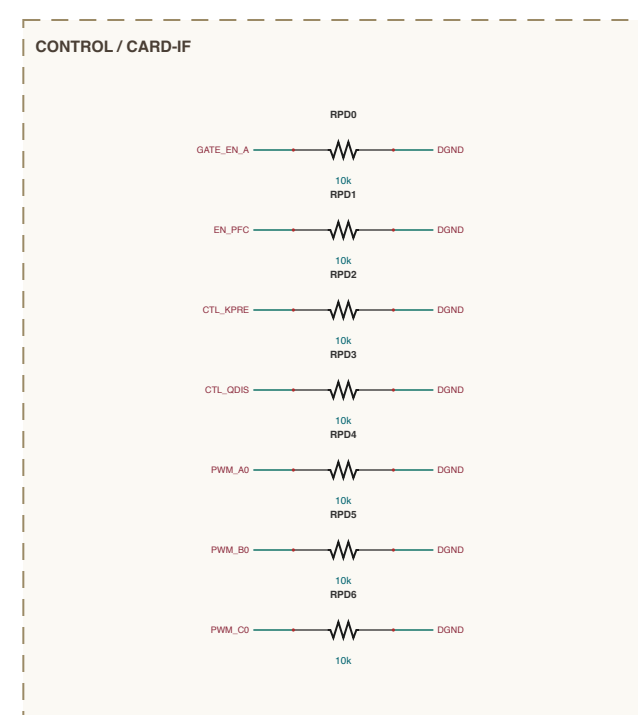
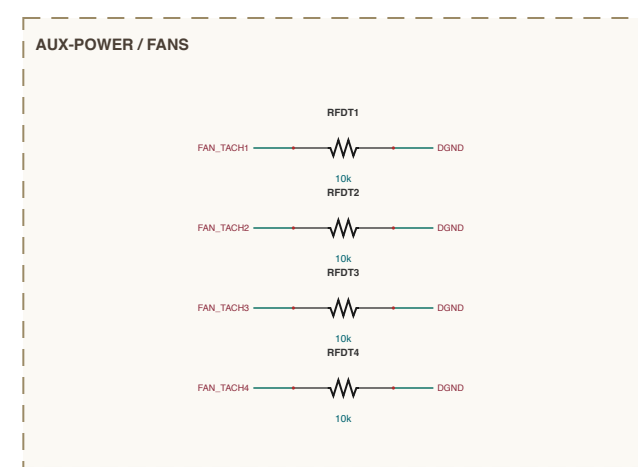
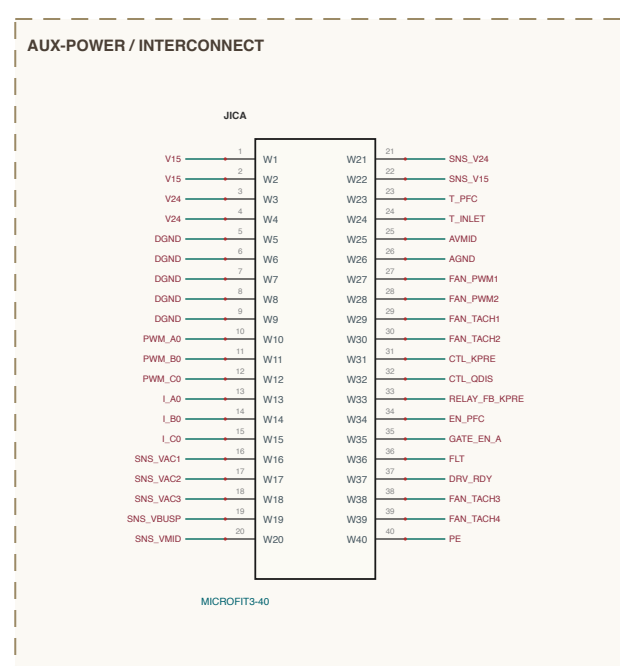
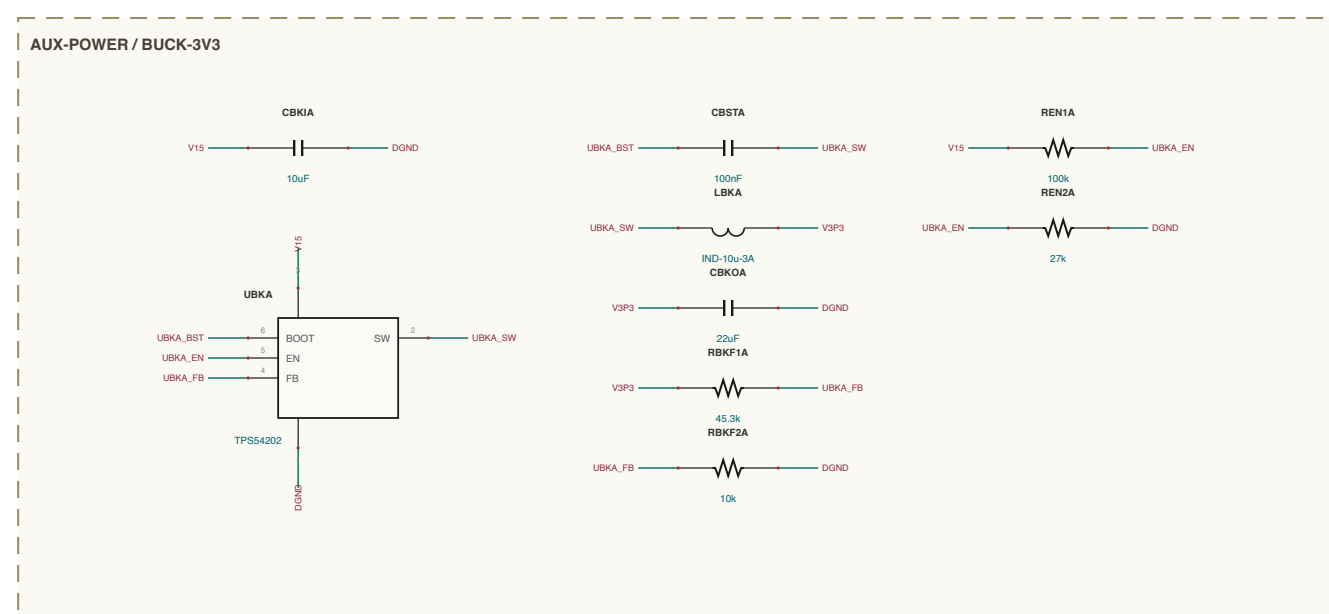
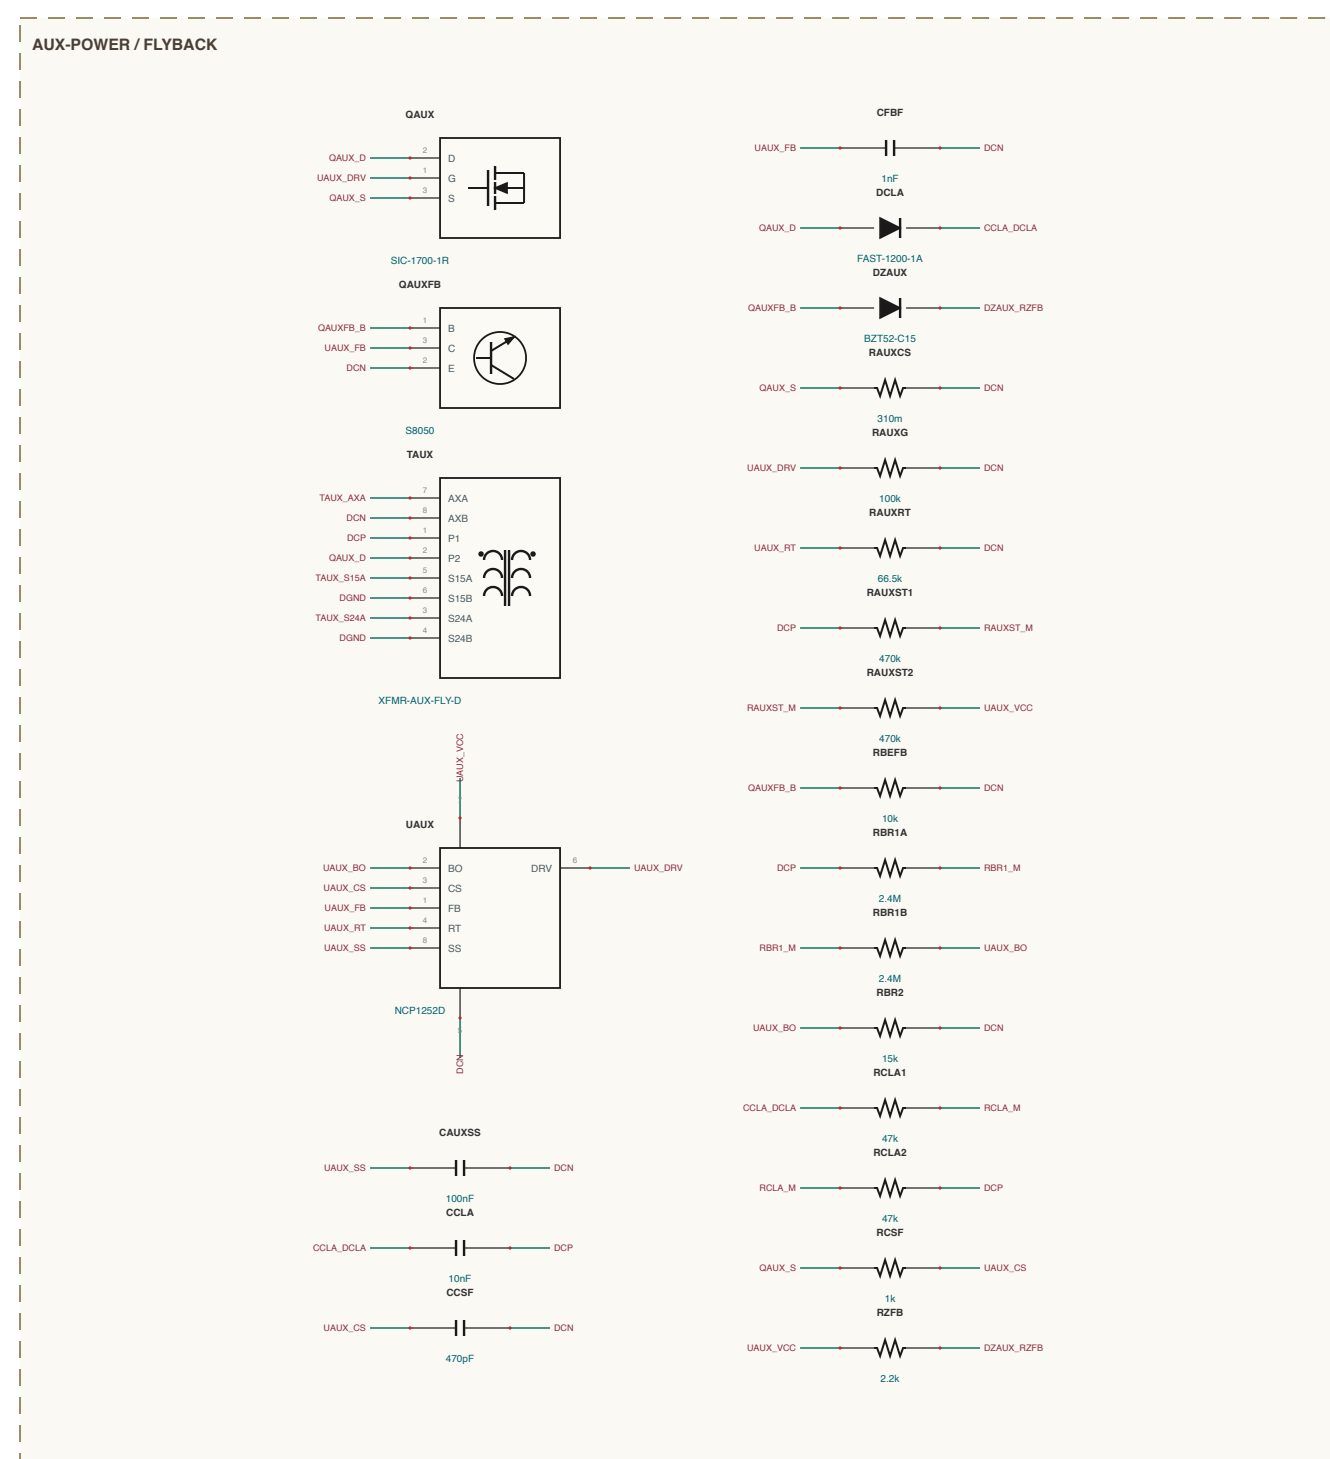
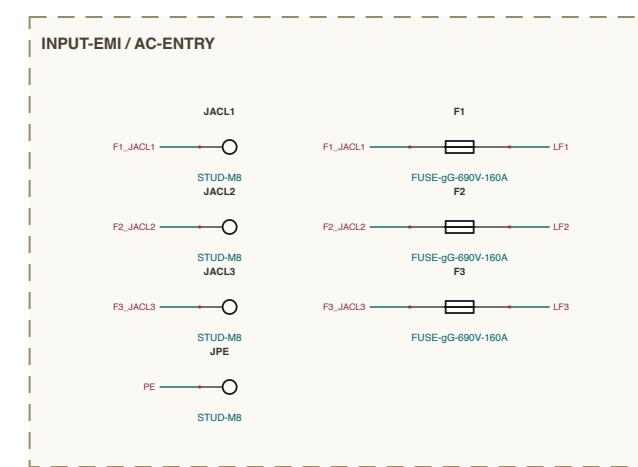
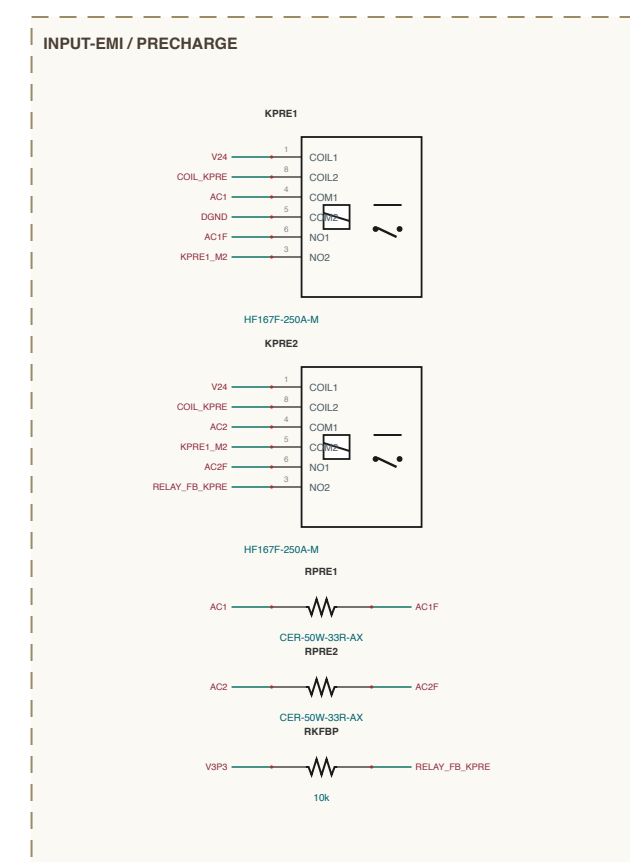
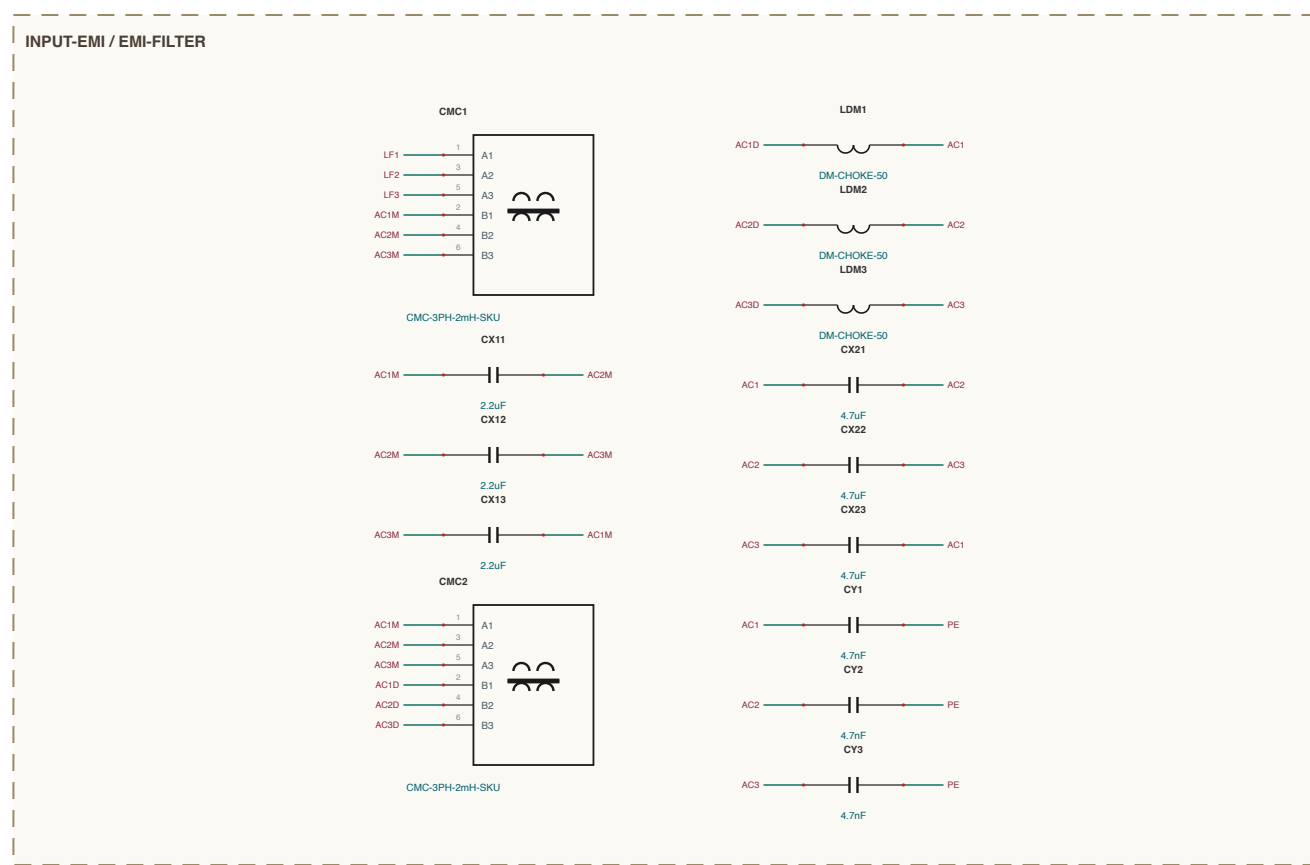
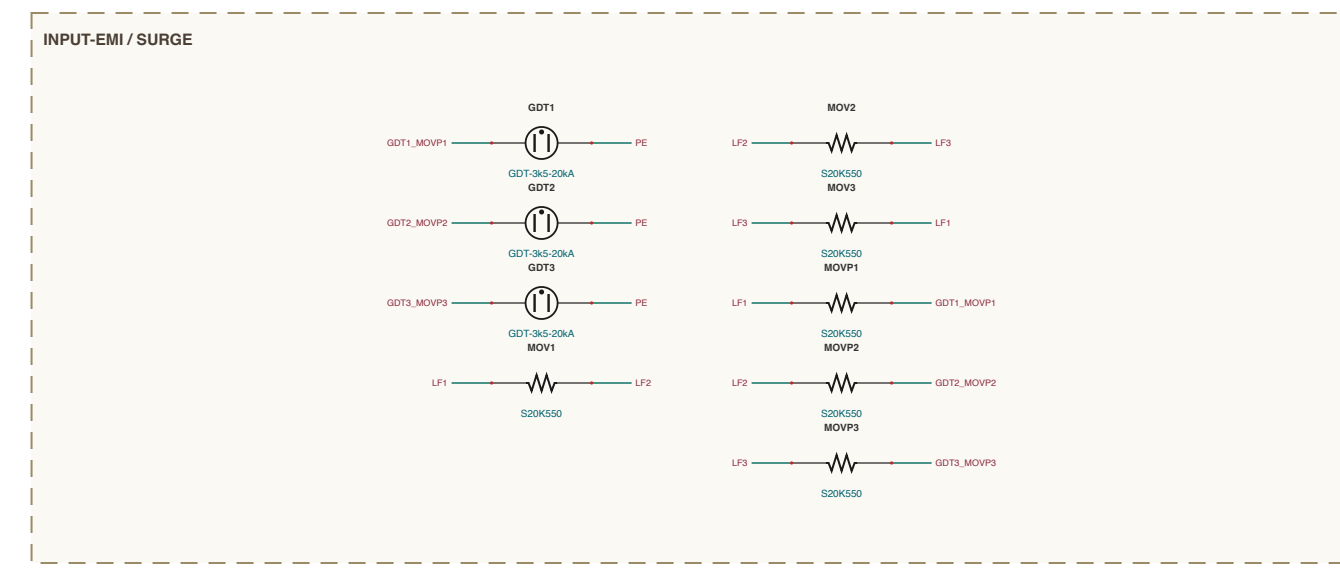
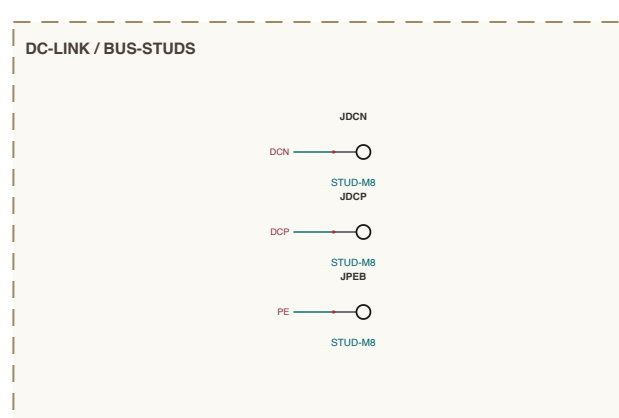
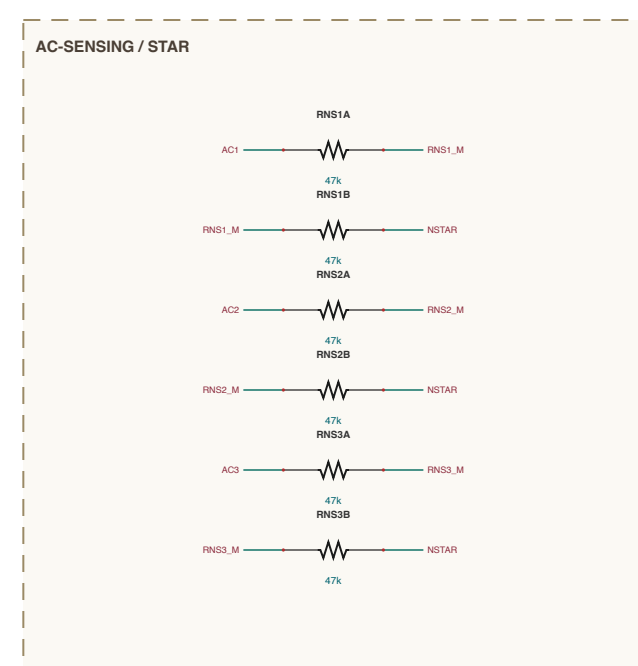
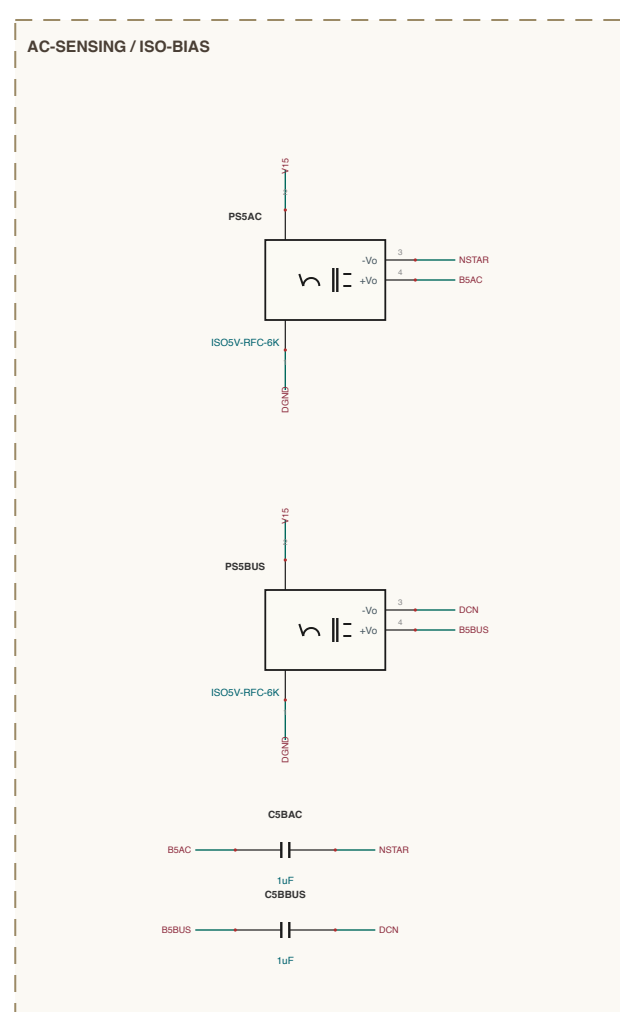
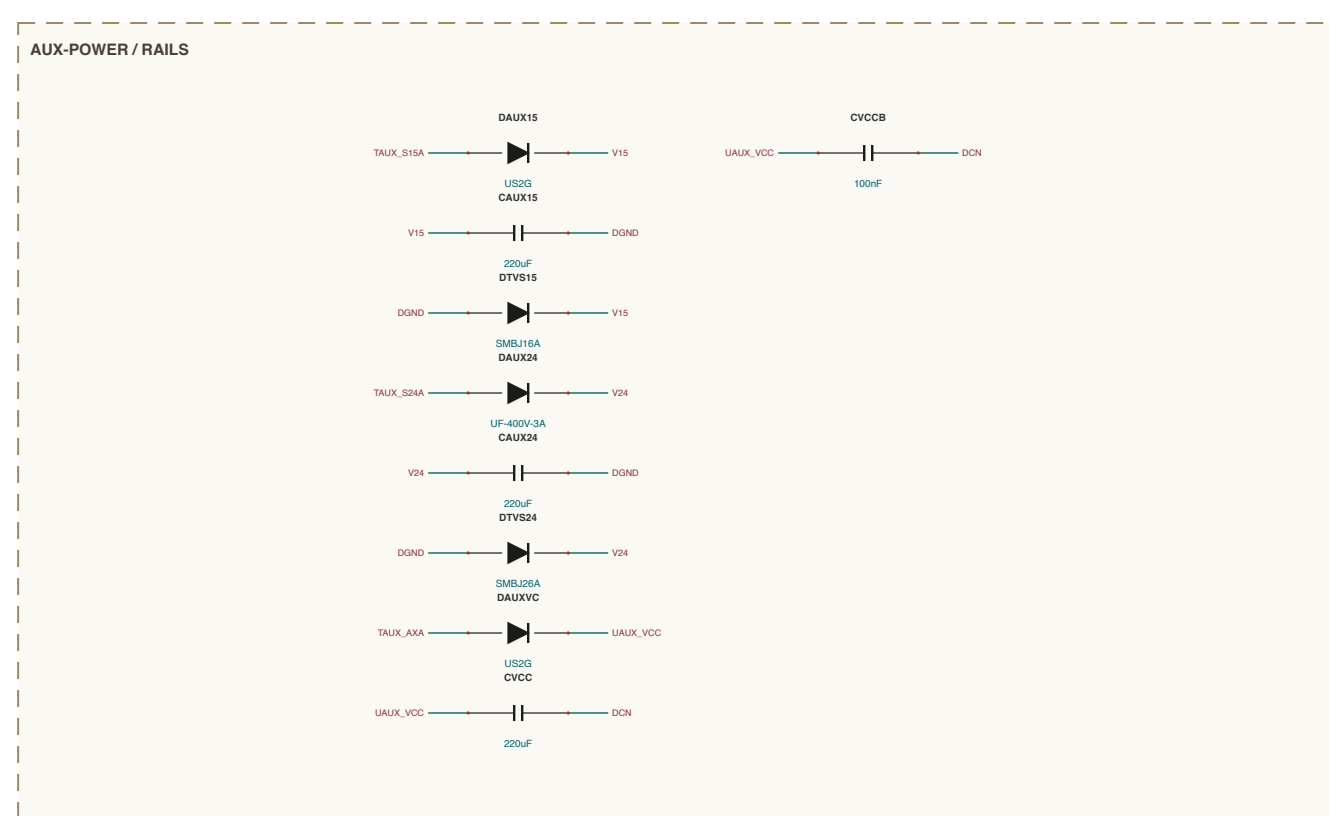
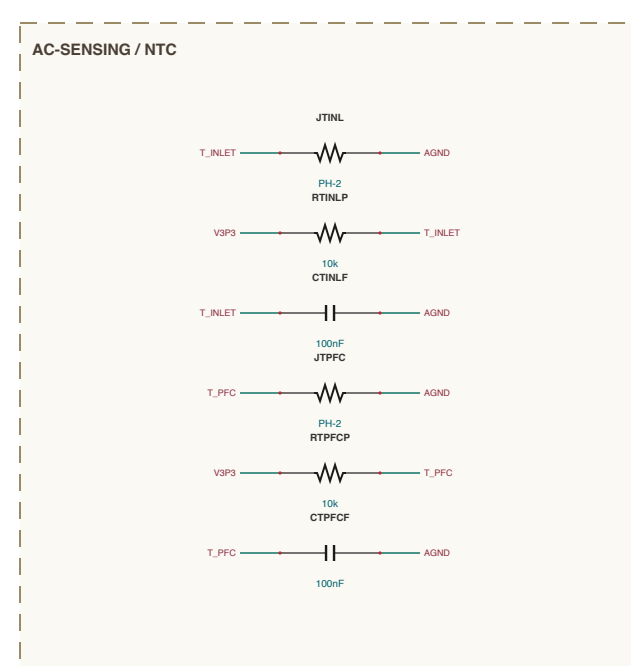
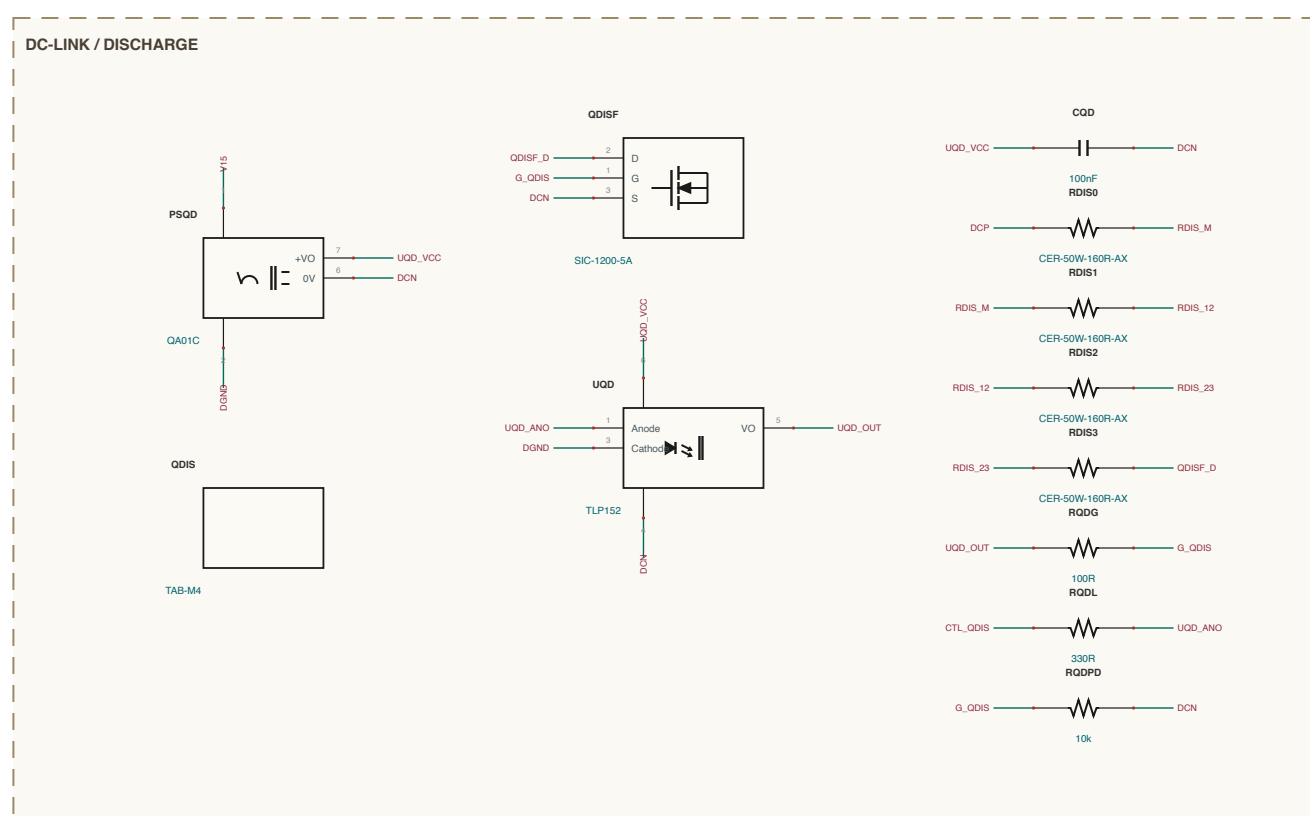
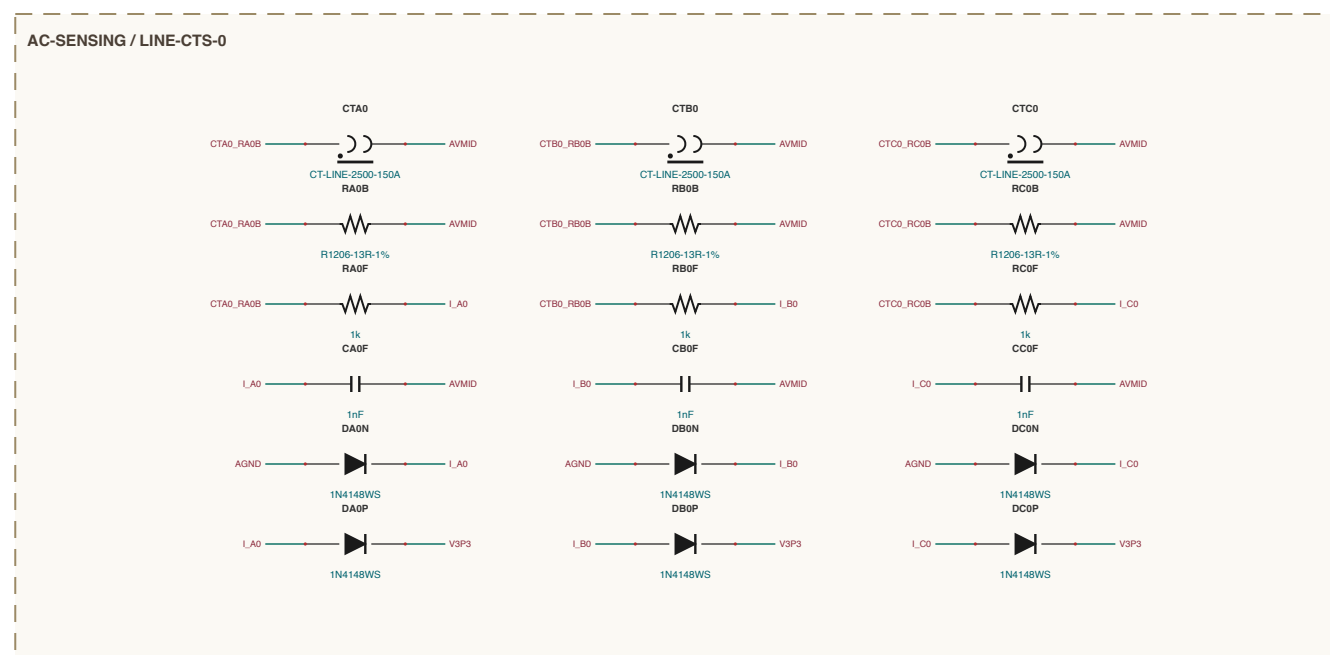
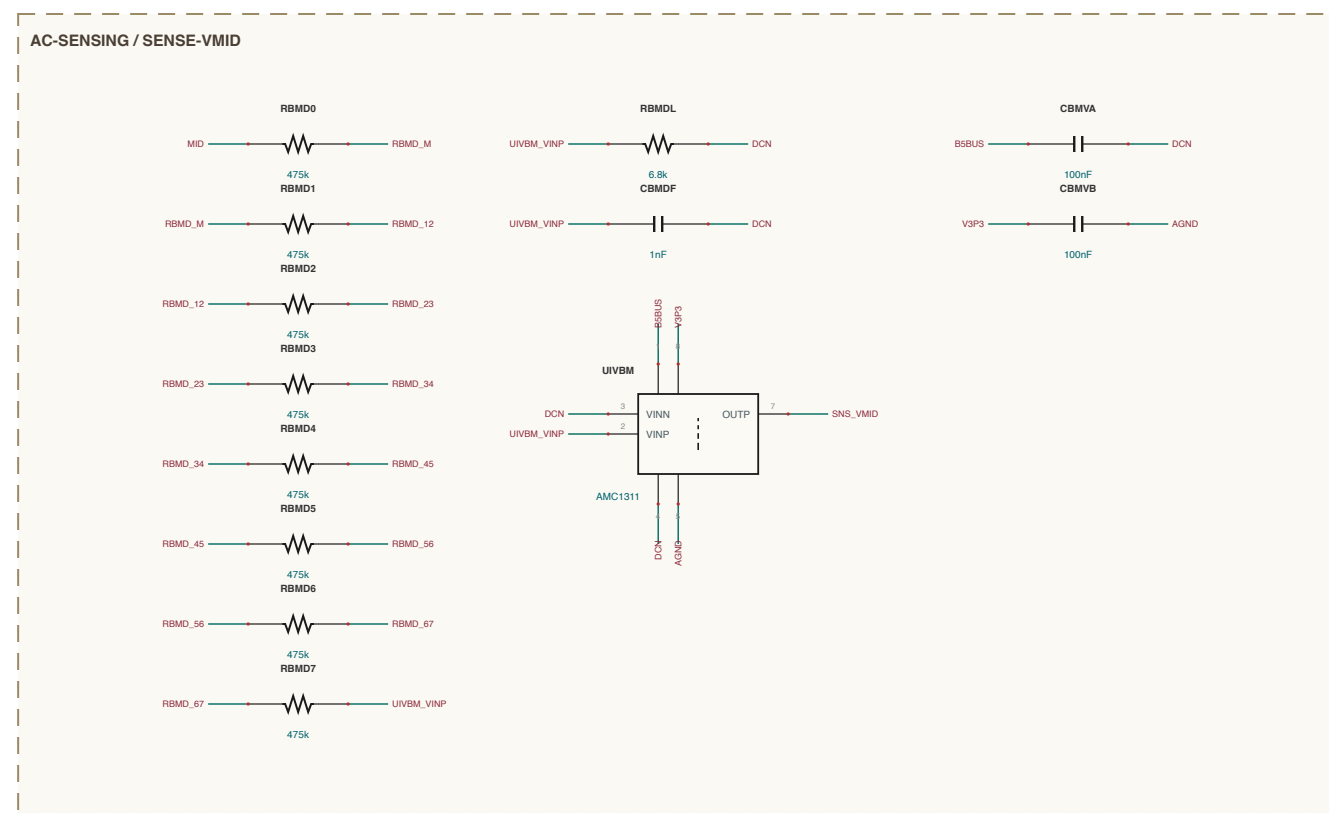
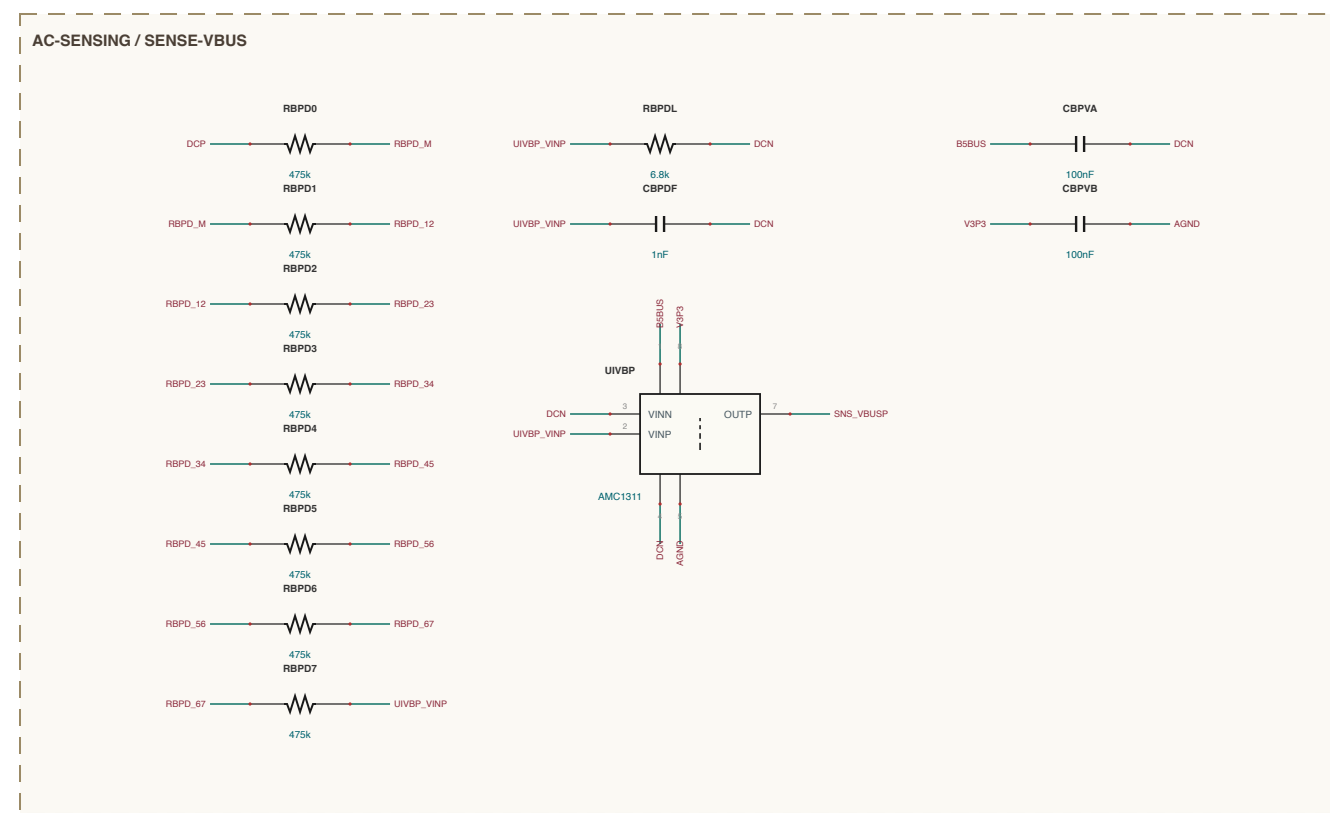
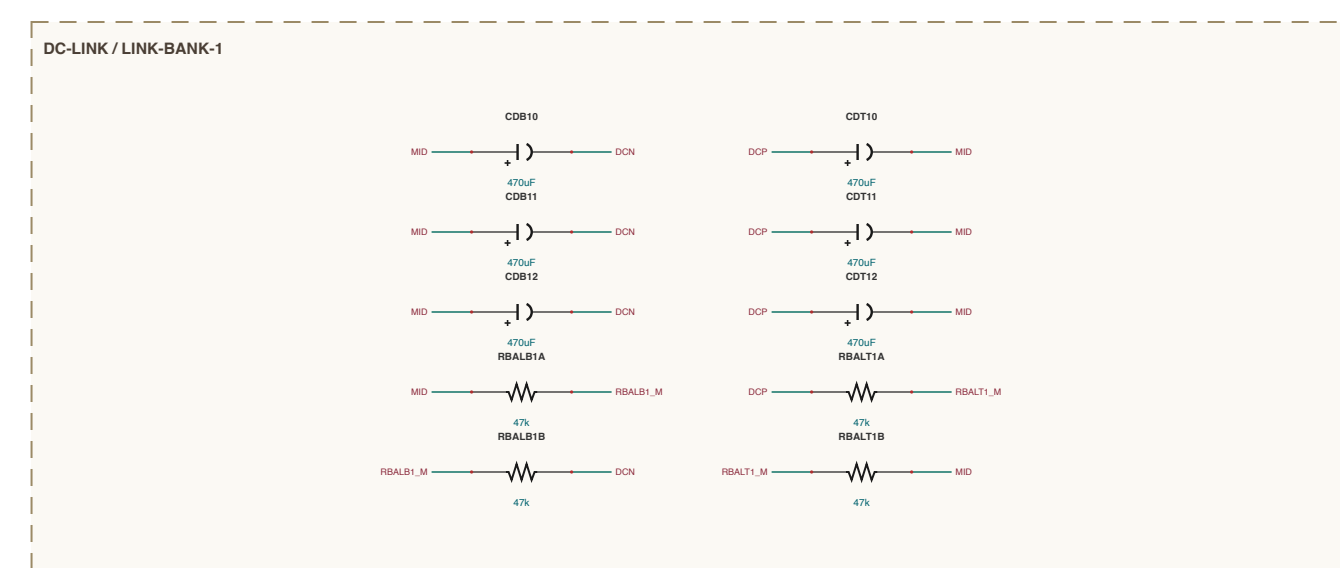
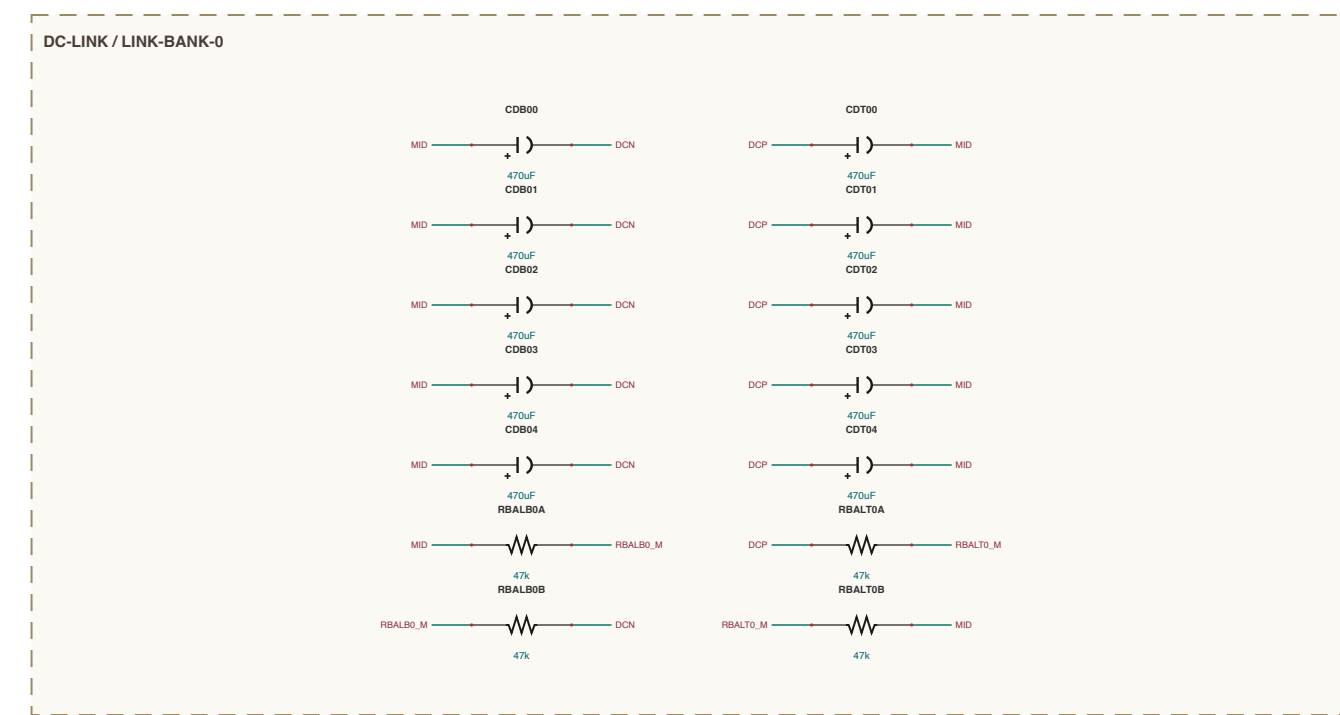
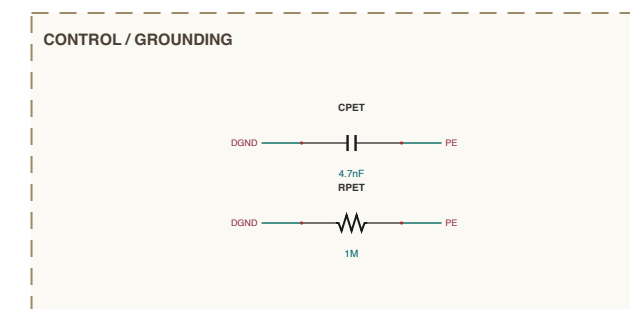
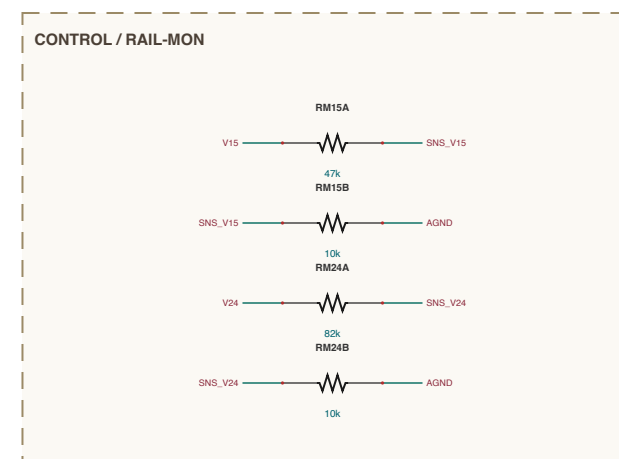
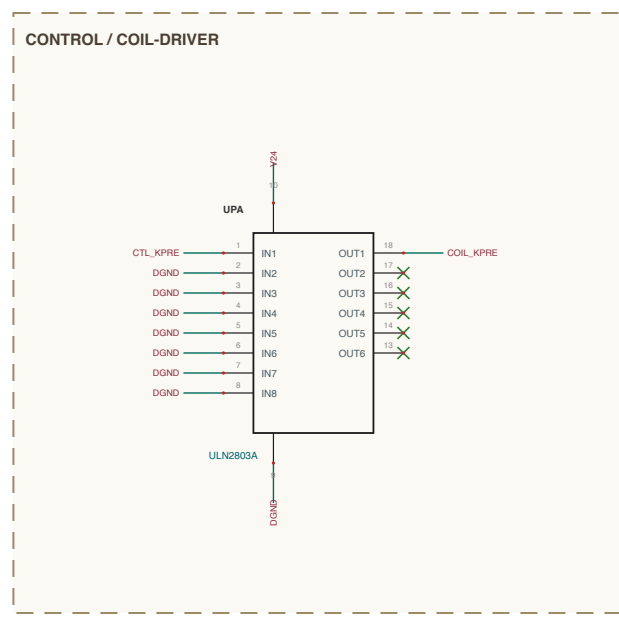
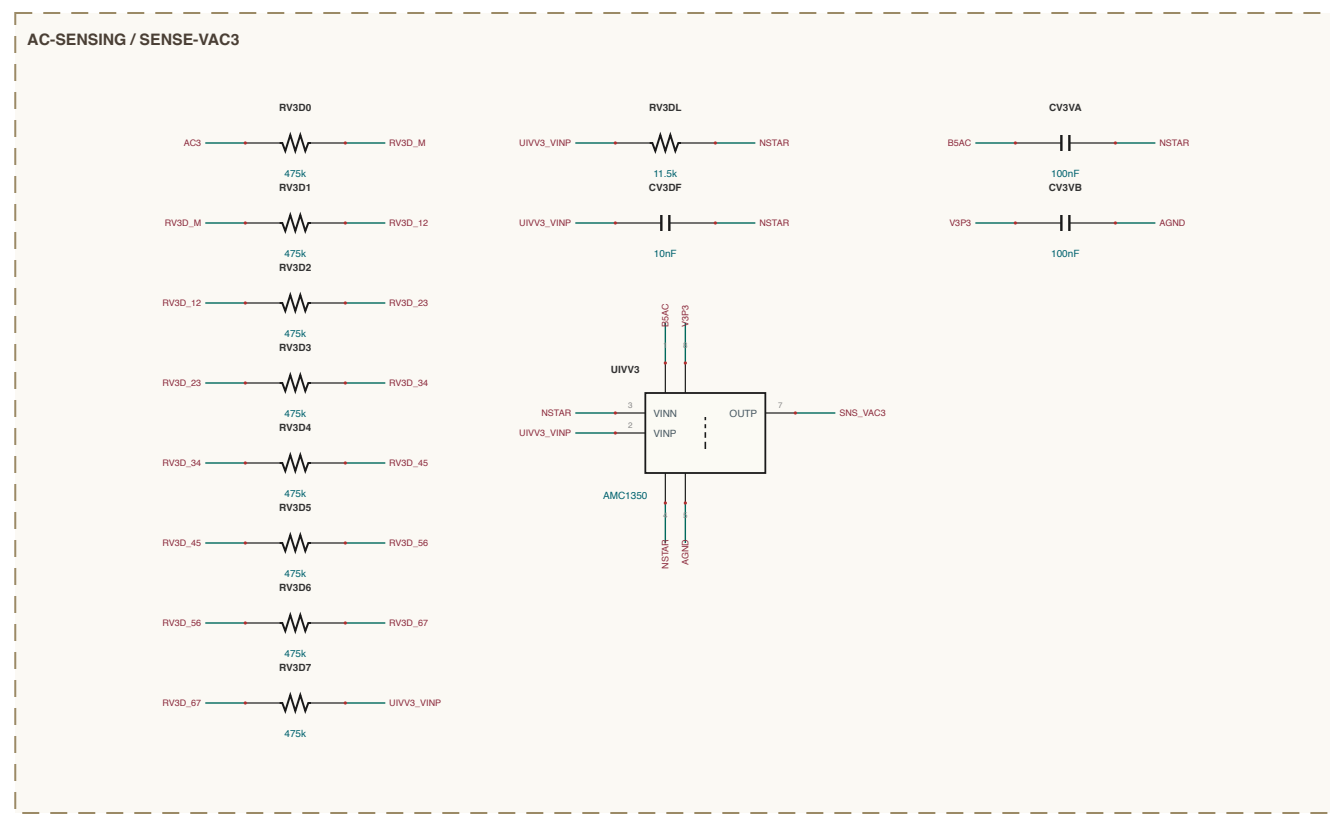
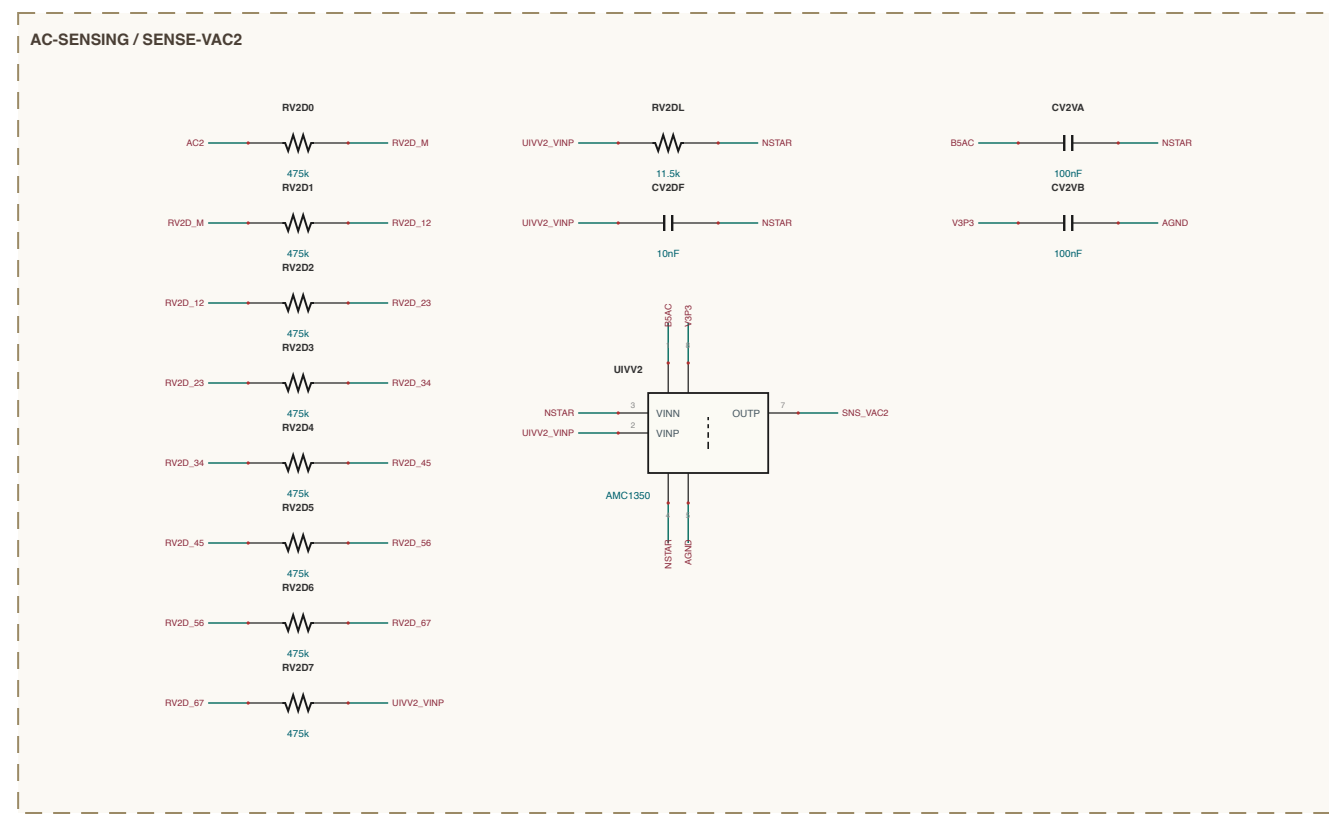


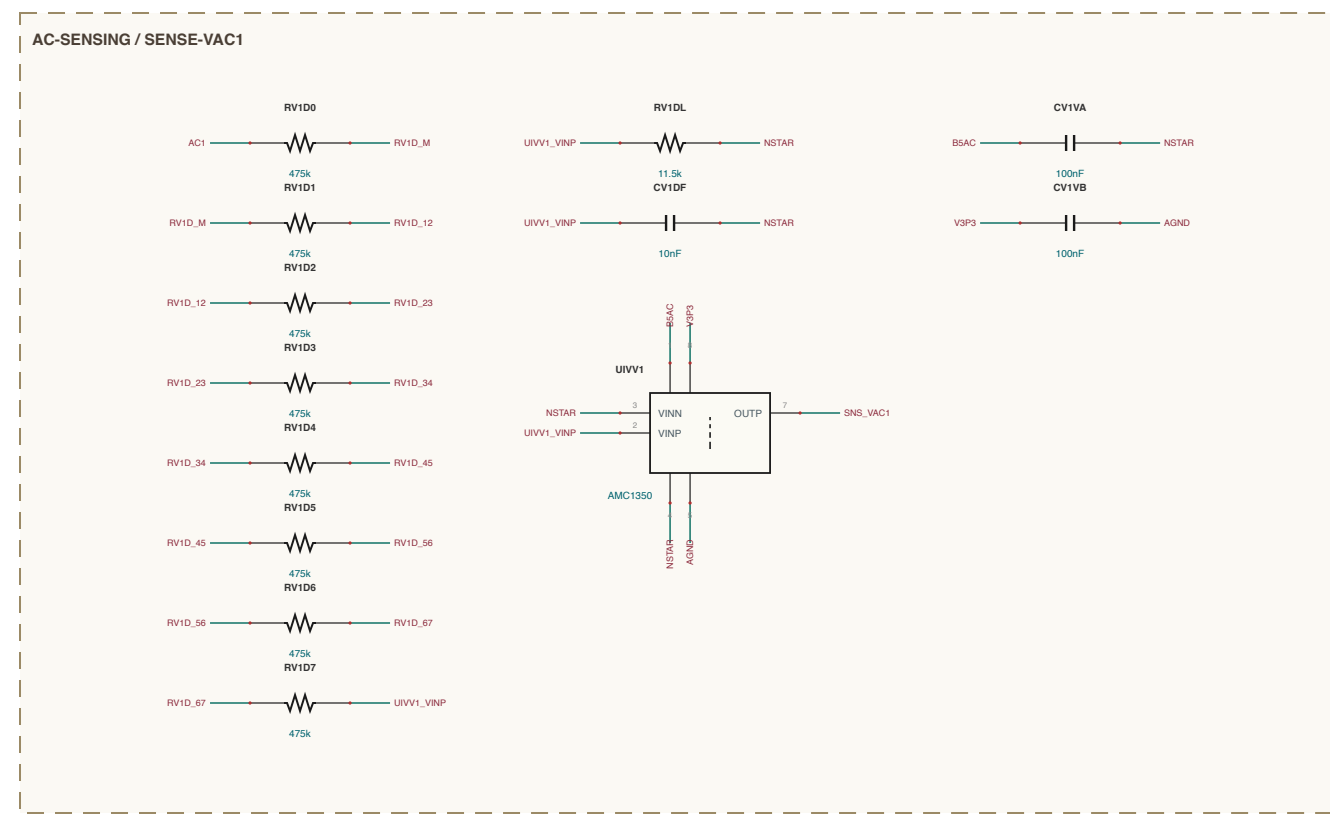

SHEET INDEX

SI-WF-7-7-2
AC-SENSING-8 sections
GIS-POWER-5 sections
CONTROL-6 sections
SC-LINK-4 sections
INPUT-DEM-6 sections
VERNAL-PTC-3 sections
SI-D-10 sections-100 components

NET NAMING

internal protocols are named for what they join

localhost_0000 made at that IP join e.g. 197124_1939

Resource: M assigned of a service port e.g. 1982474_M

Resource: codes link between ResourceCodes e.g. RYD2_01

all columns are explicit design notes

MAGNETICS CONSTRUCTION

Identify part characteristics and Duran, gage, SW, acceptance from flow sheet)

1) L&S LGS to T79 SW element (CATALOG AL7), 1000 ± 0.1 Ml/min ± 10 (10%), undist (1100 SLA per (E5))

2) DR 120H - 3 to T7D Mls, Ind, SL Asset = 12.5oz (1100 SLA per (Flow 11 APL, E5) measured inside 11.8 - 12oz)

Total Lr = 11m - measured after leakage (10m COMPENSATE leakage spread), CR at TANK section