
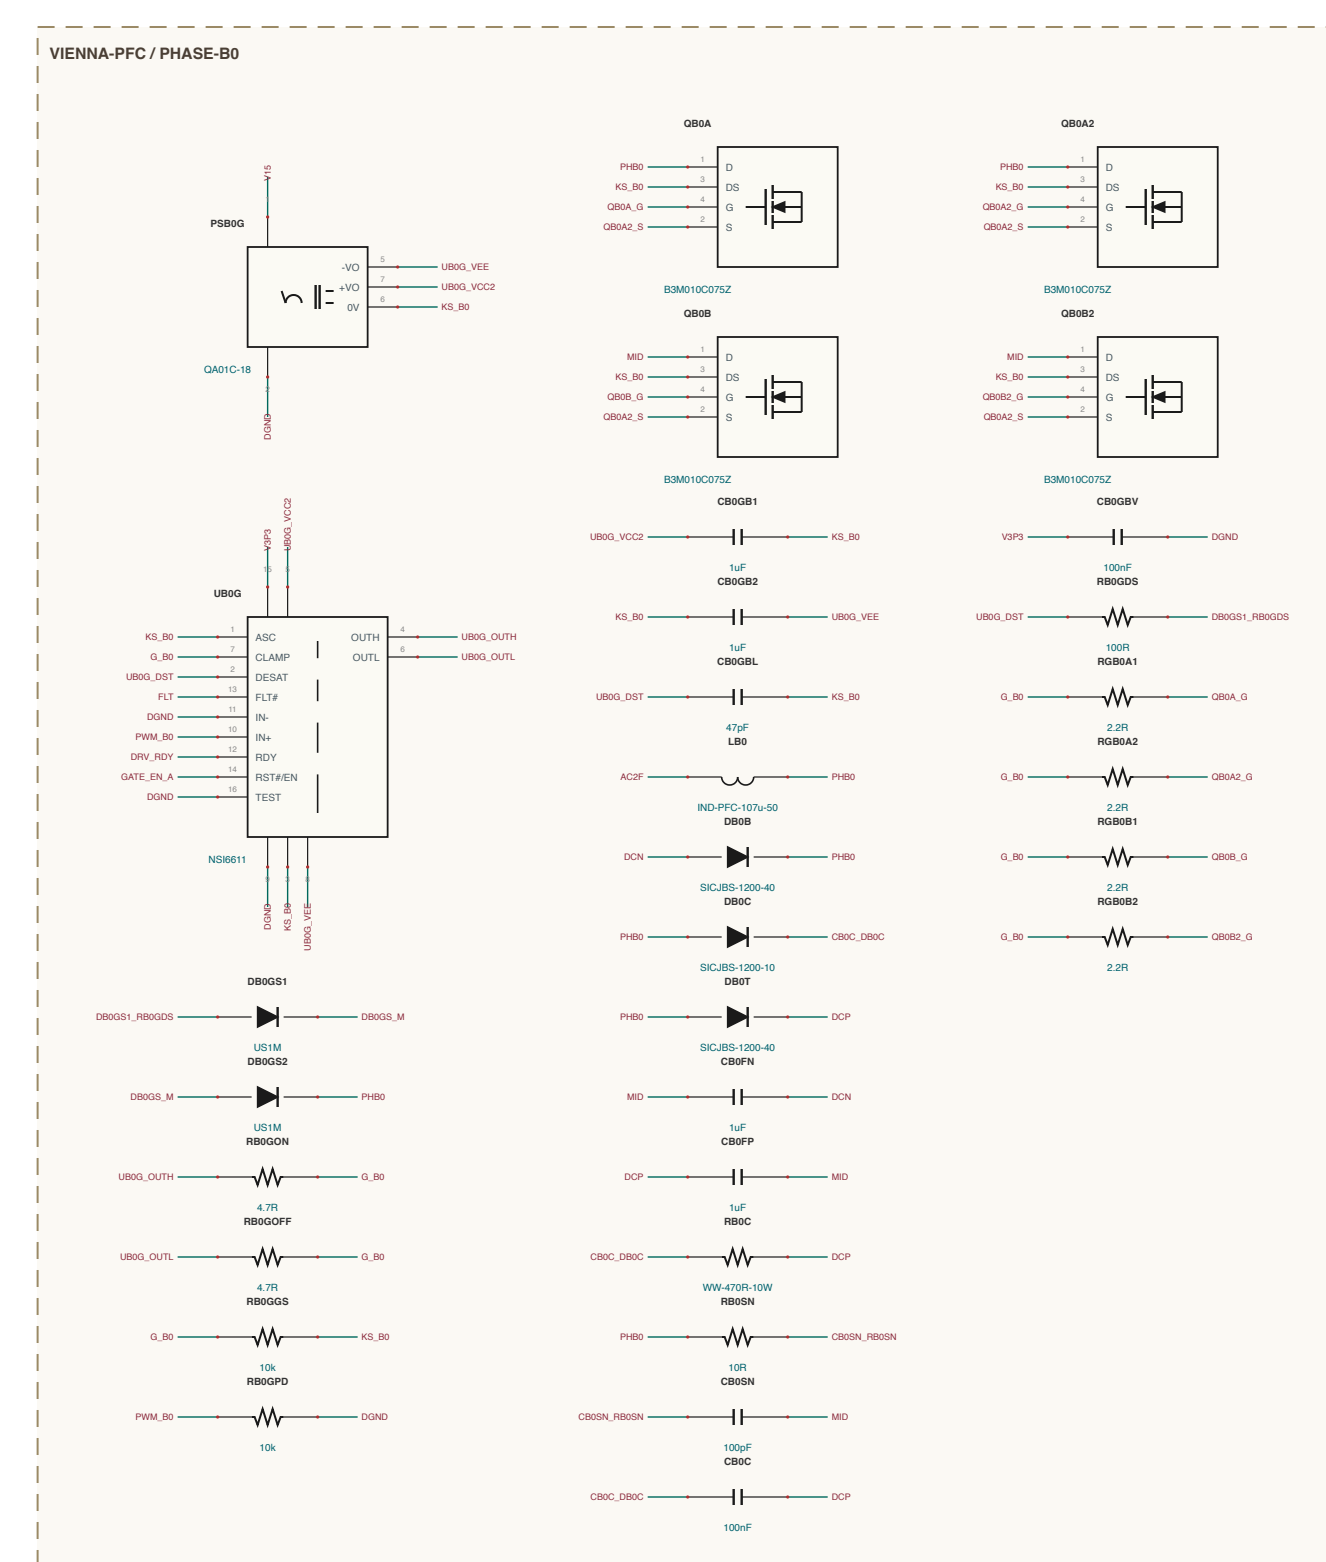
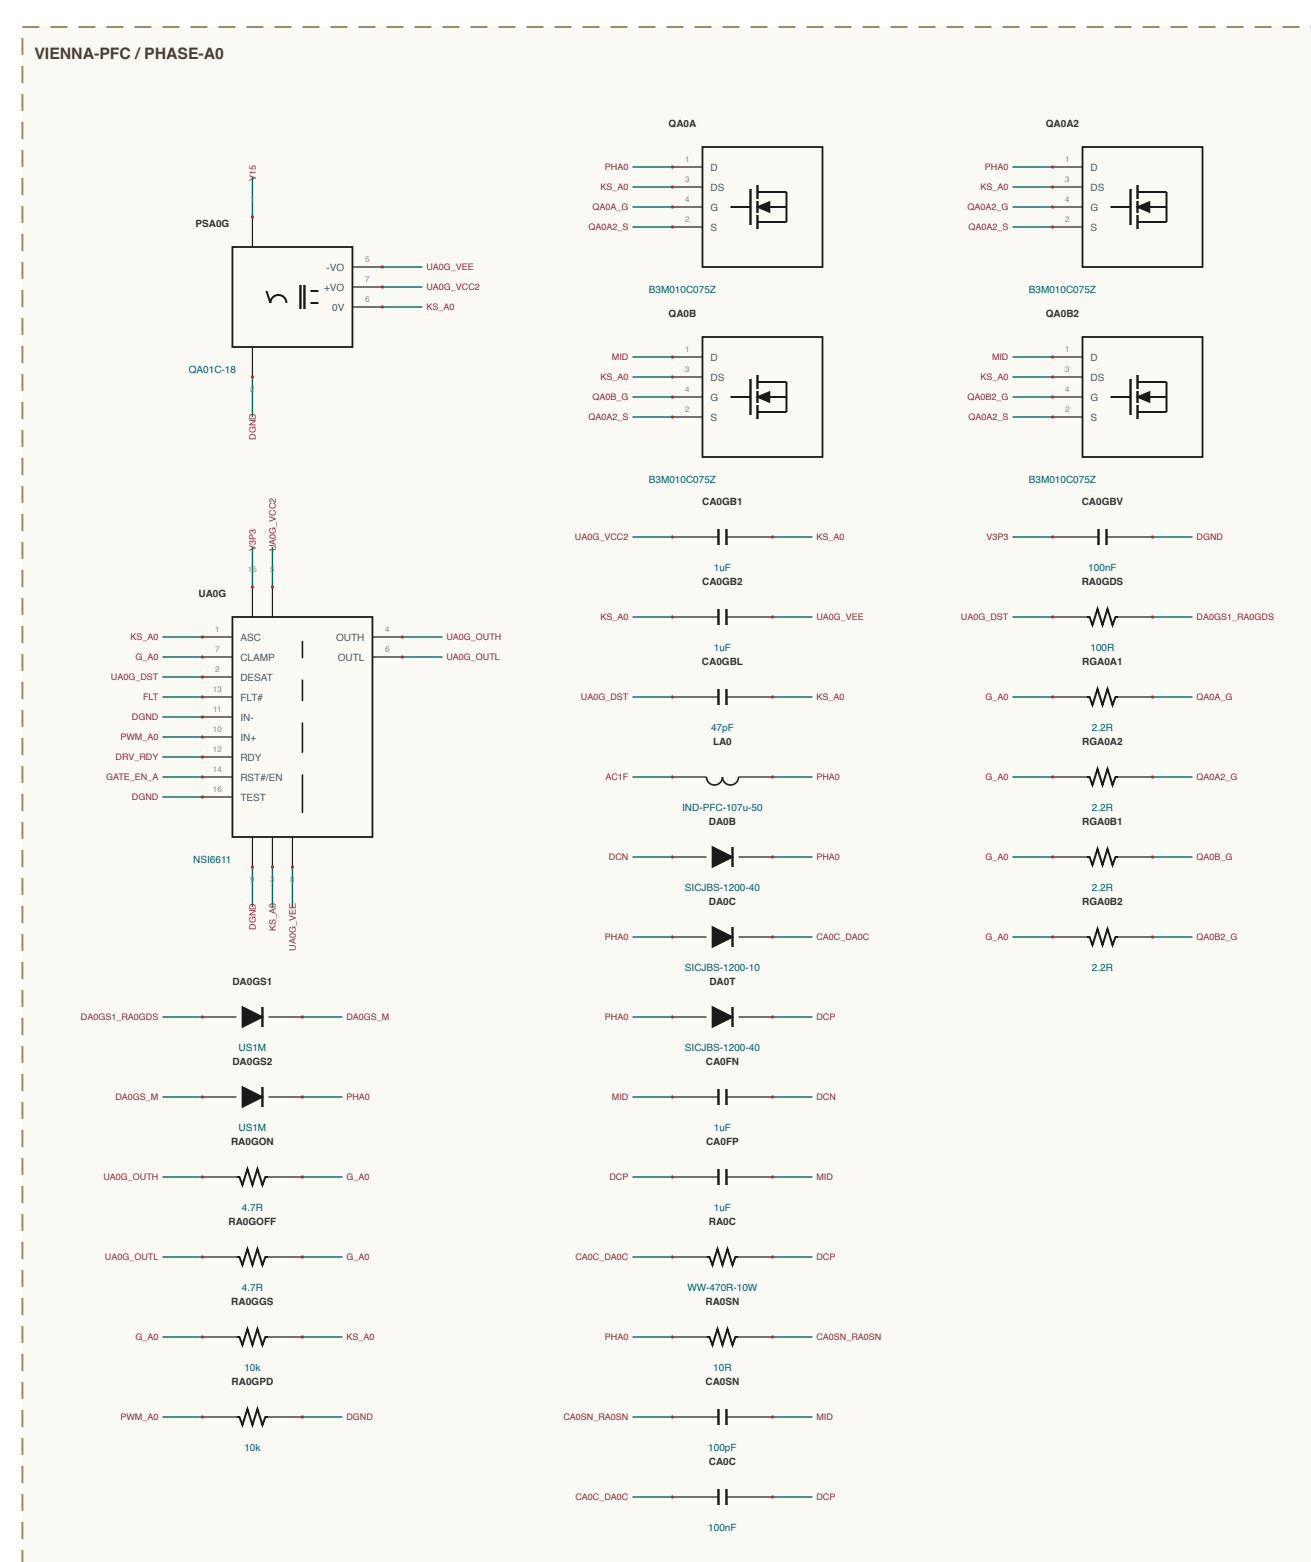
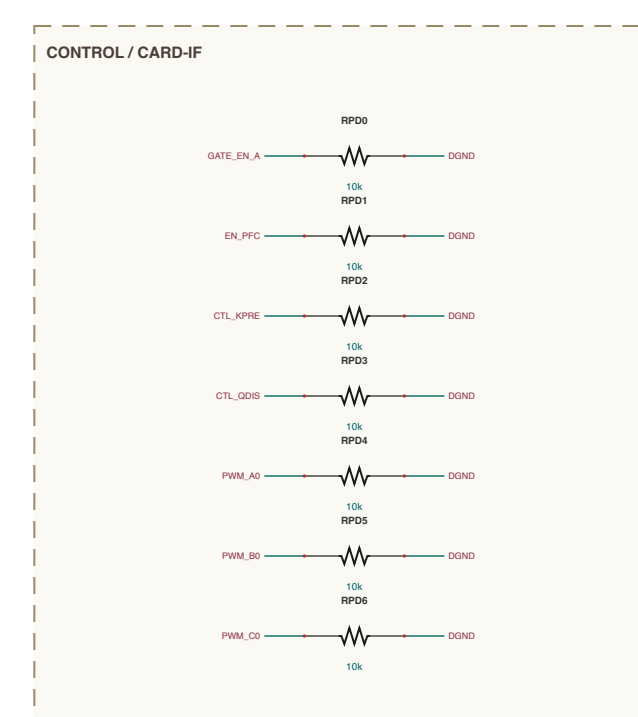
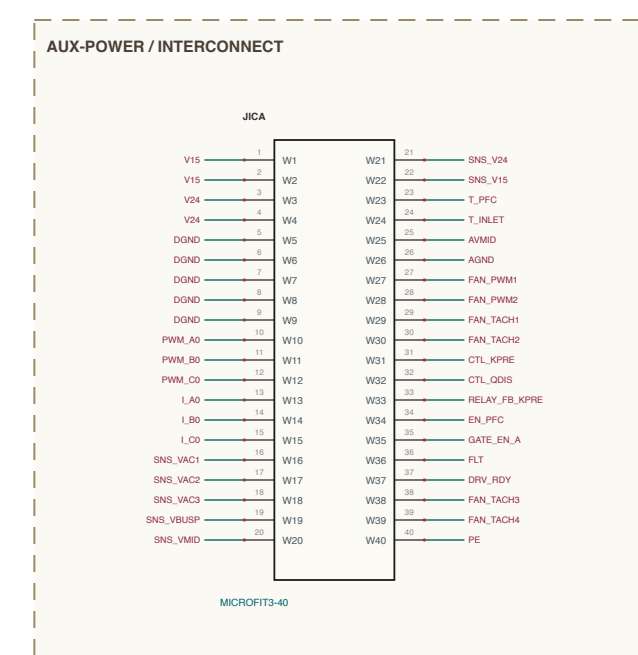
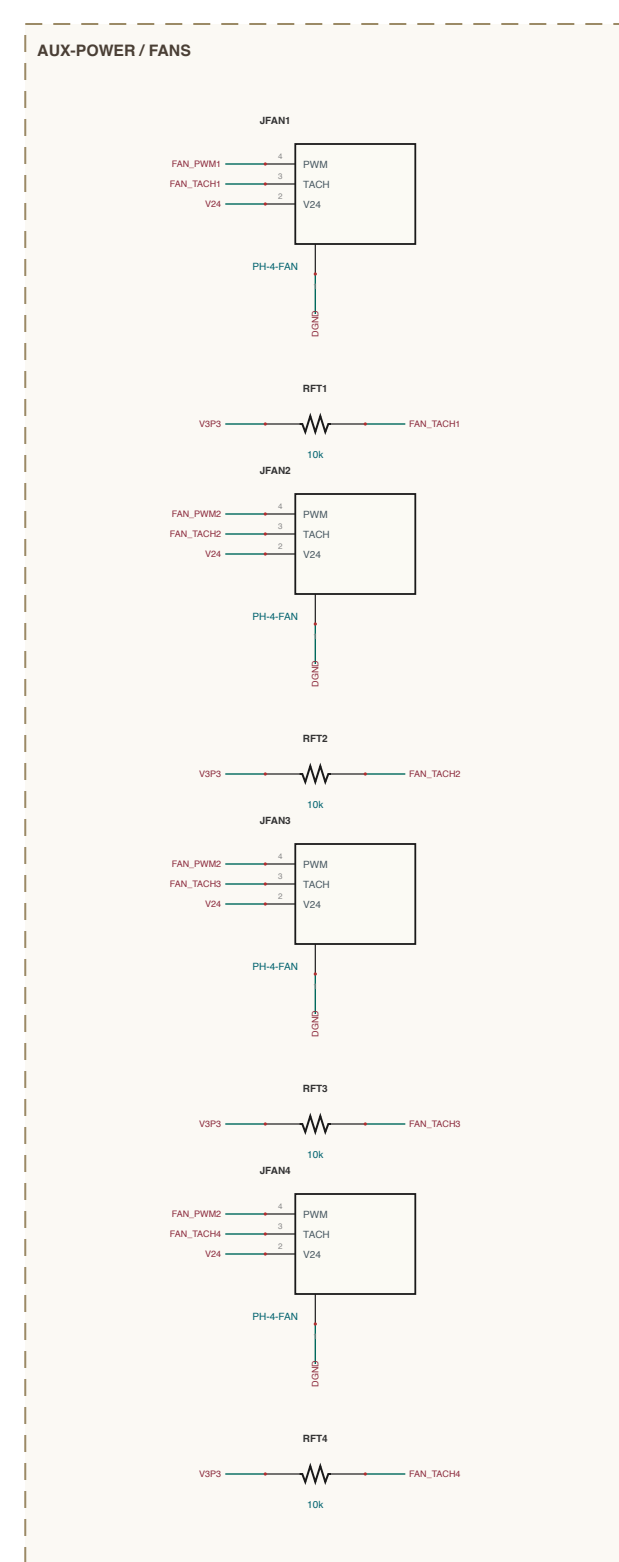
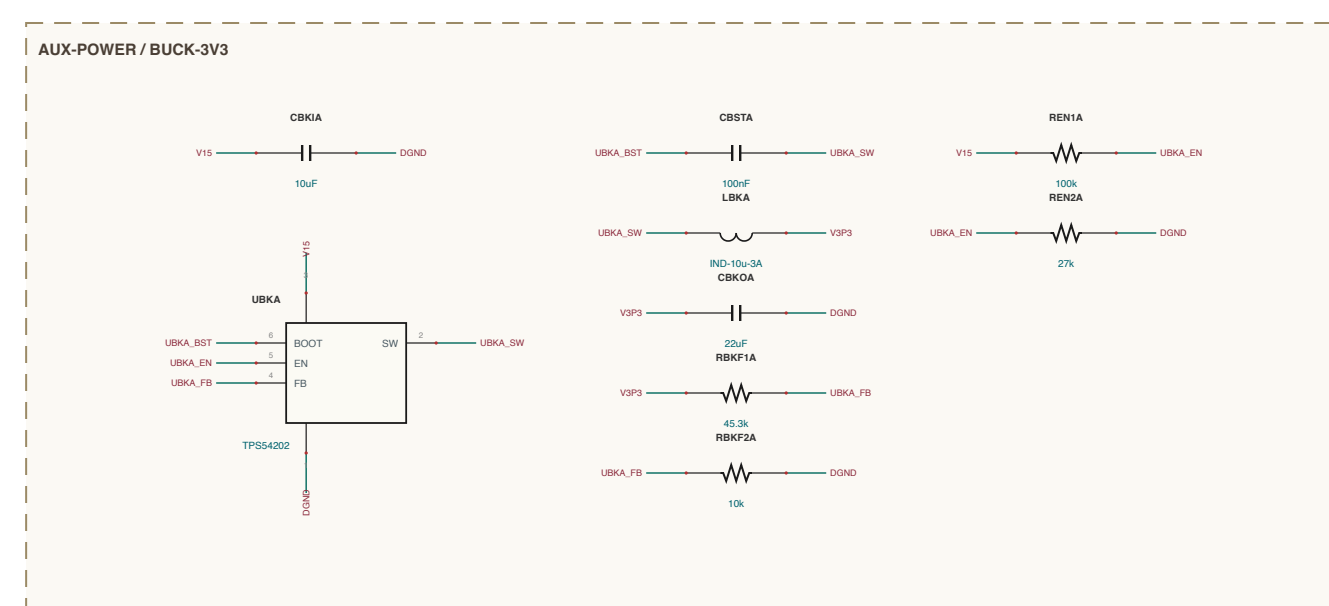
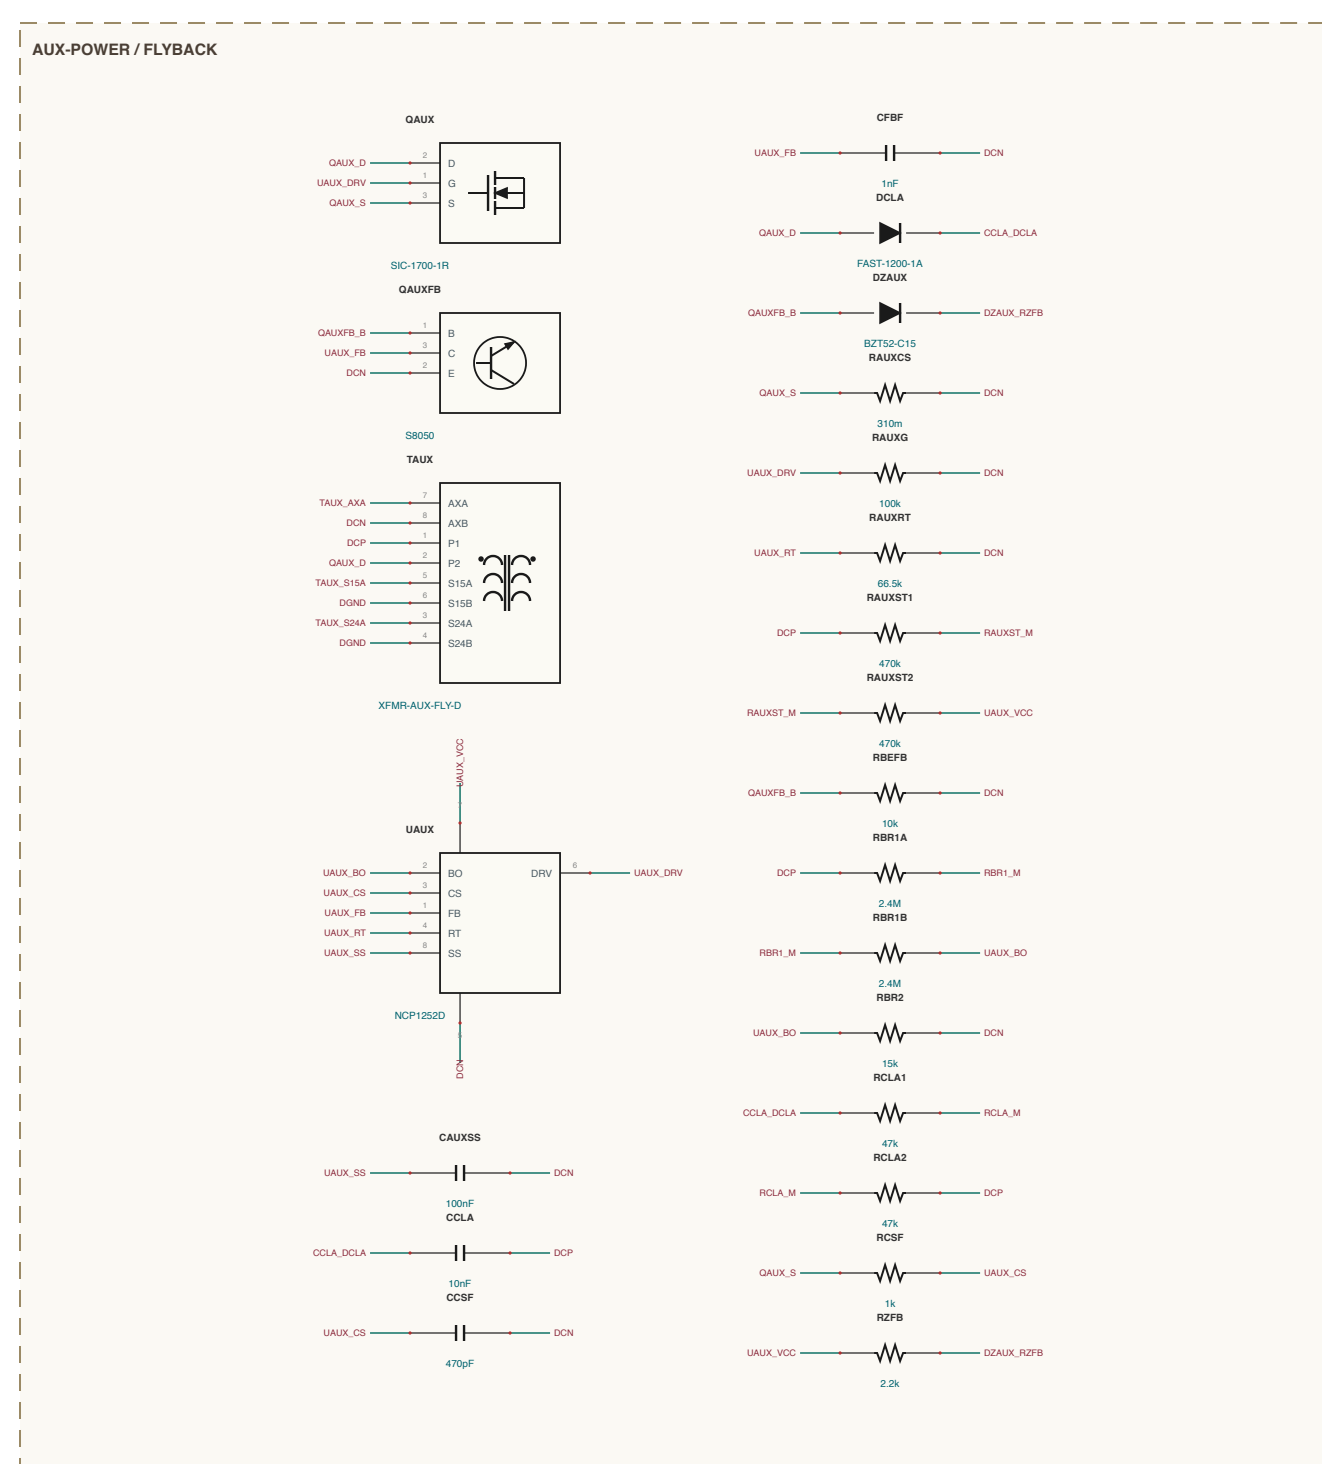
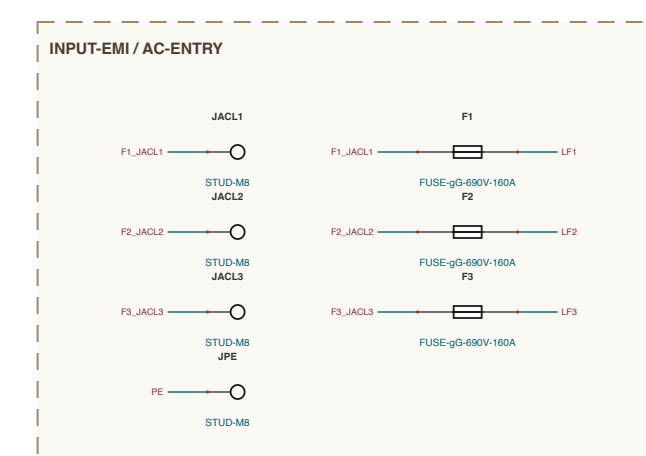
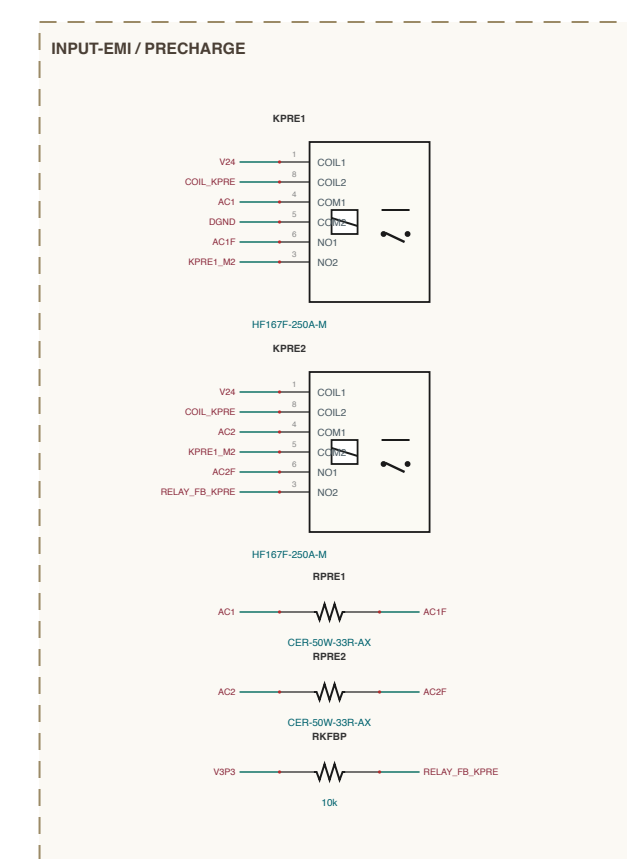
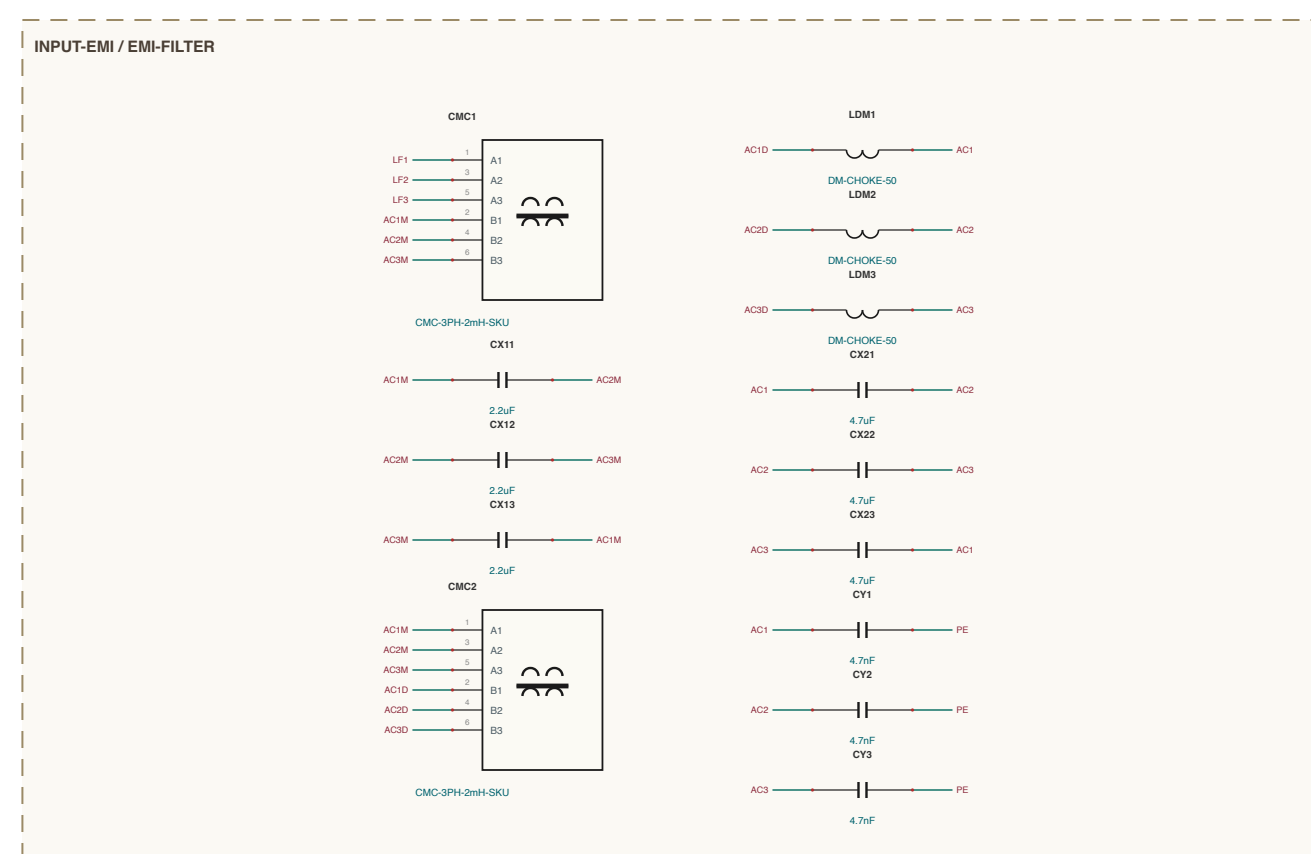
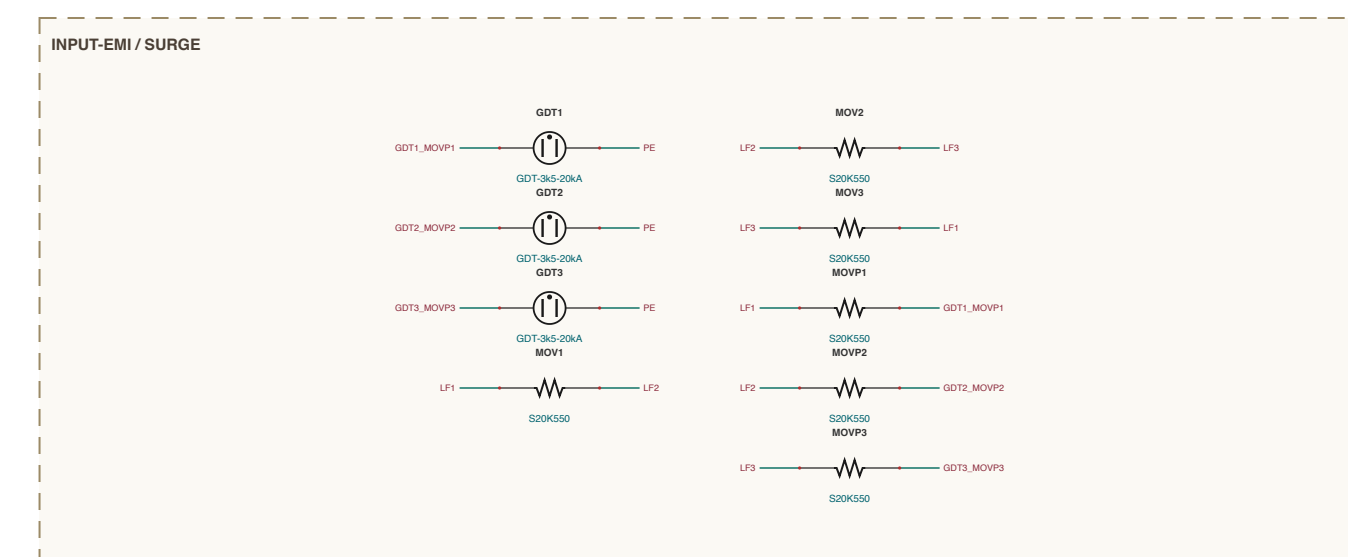
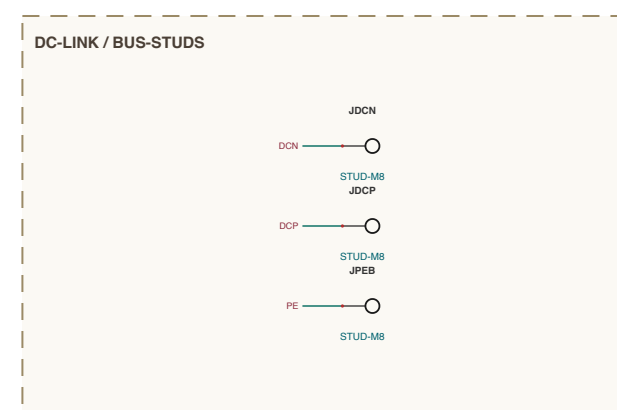
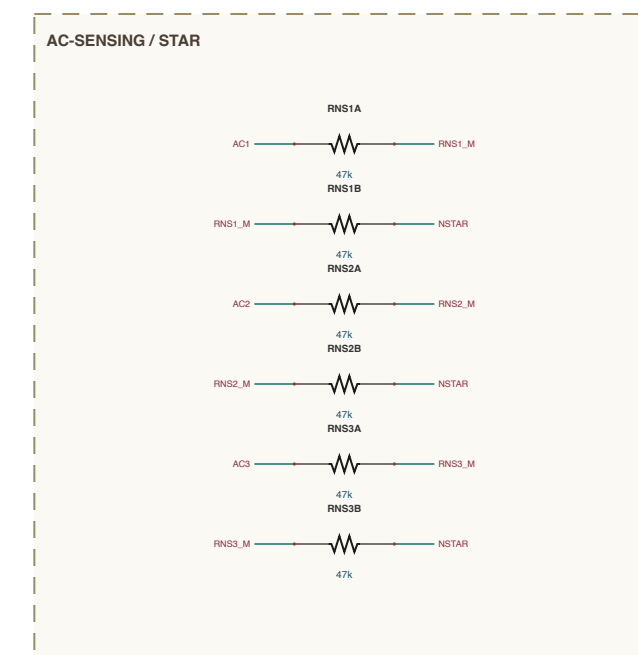
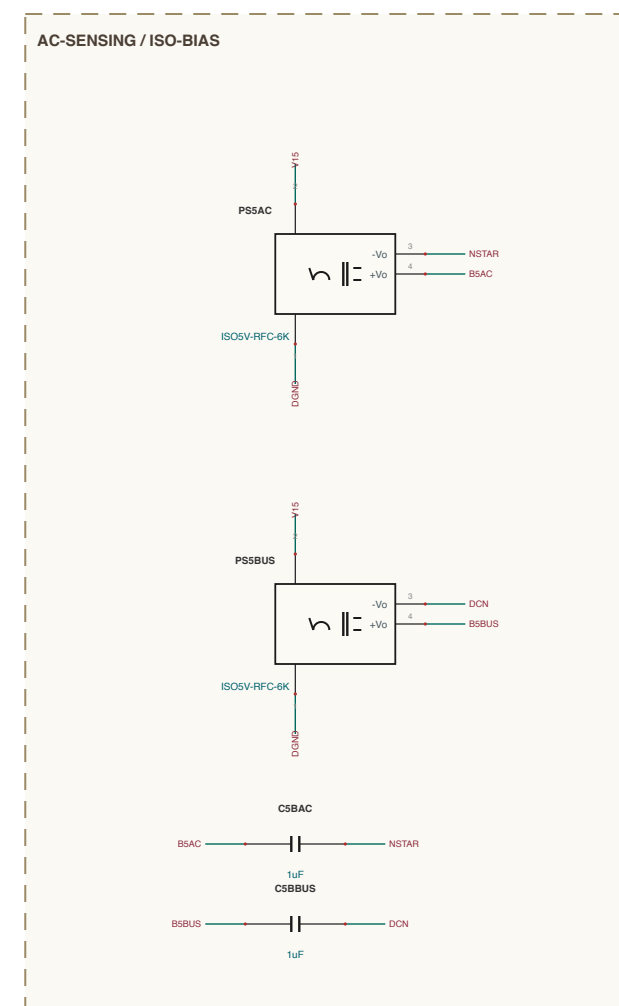
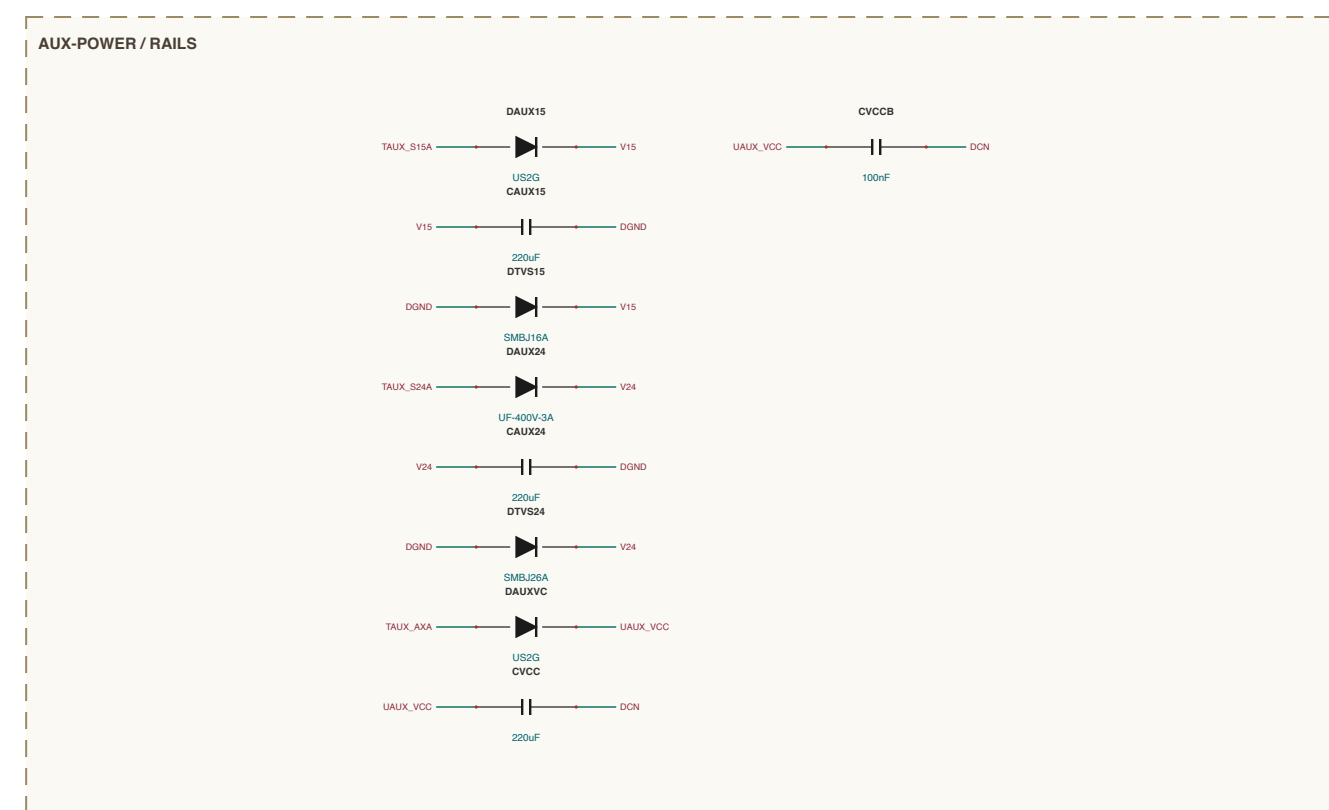
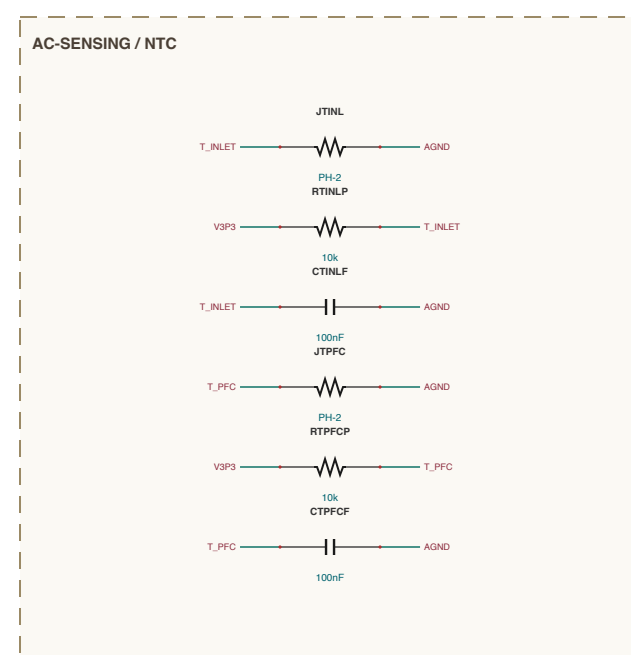
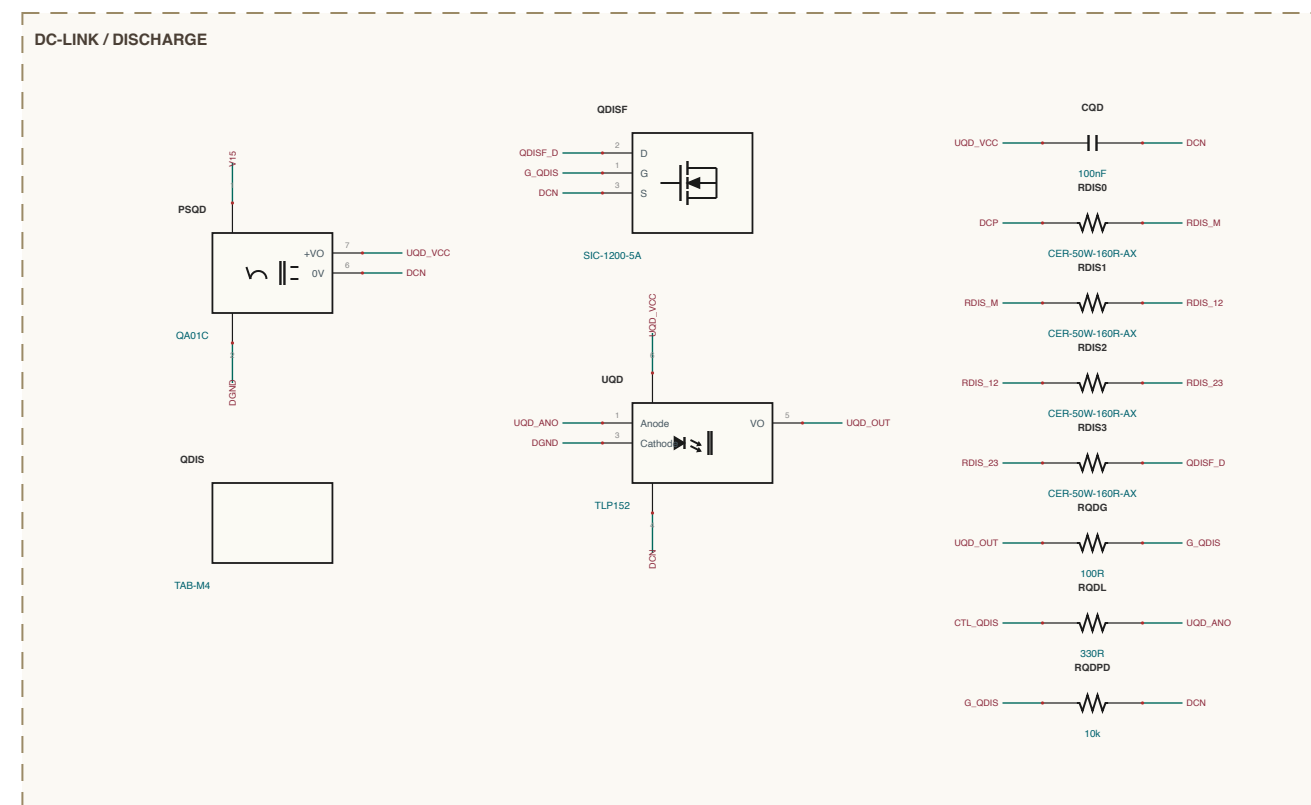
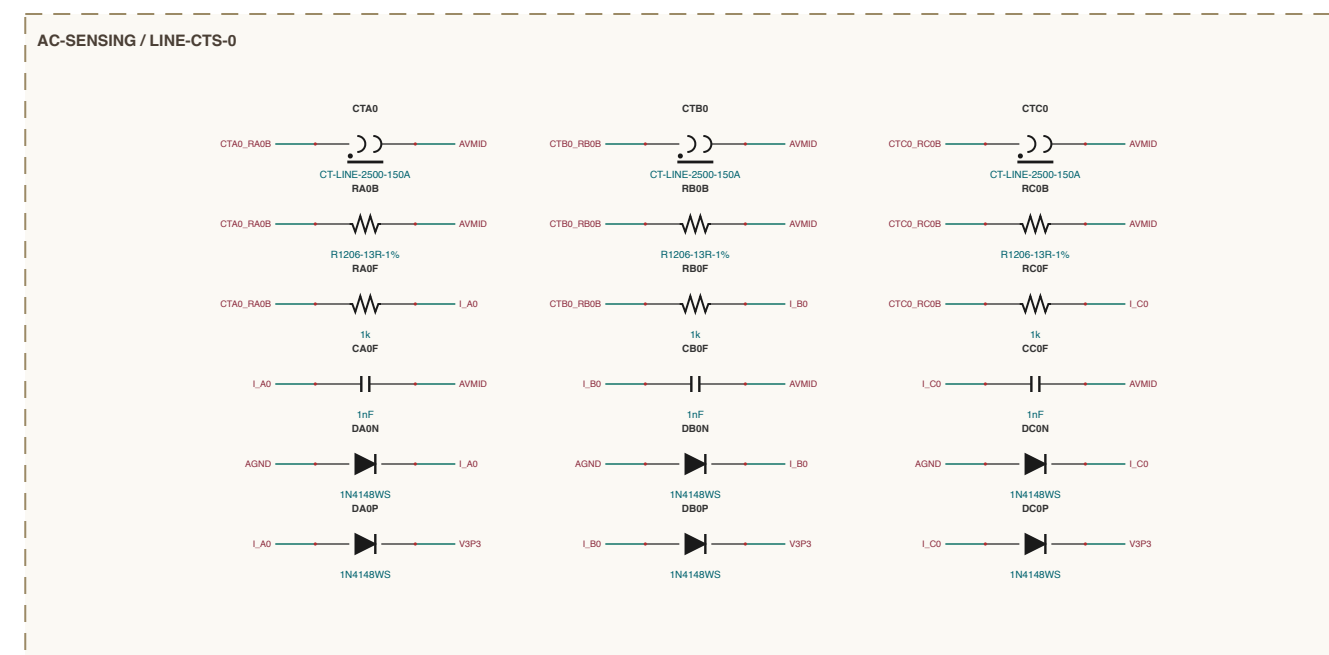
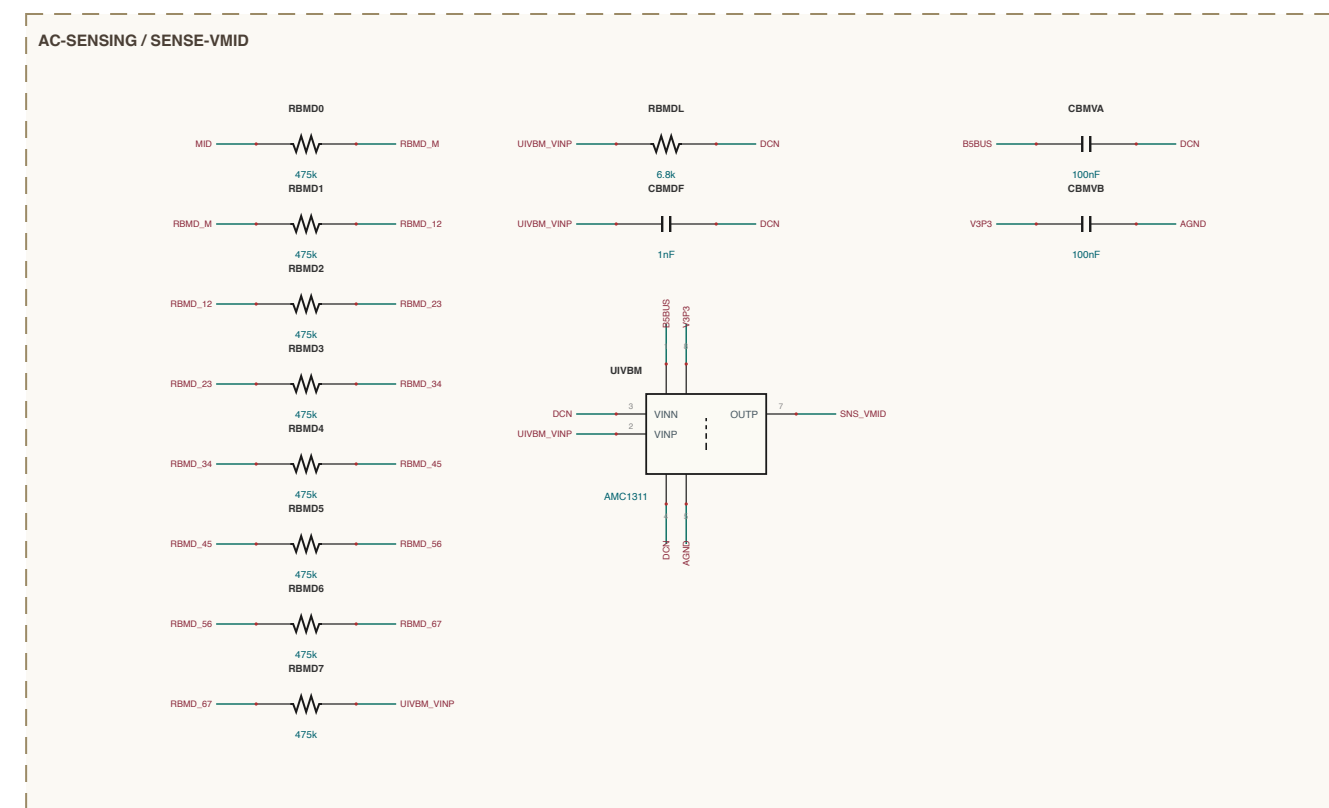
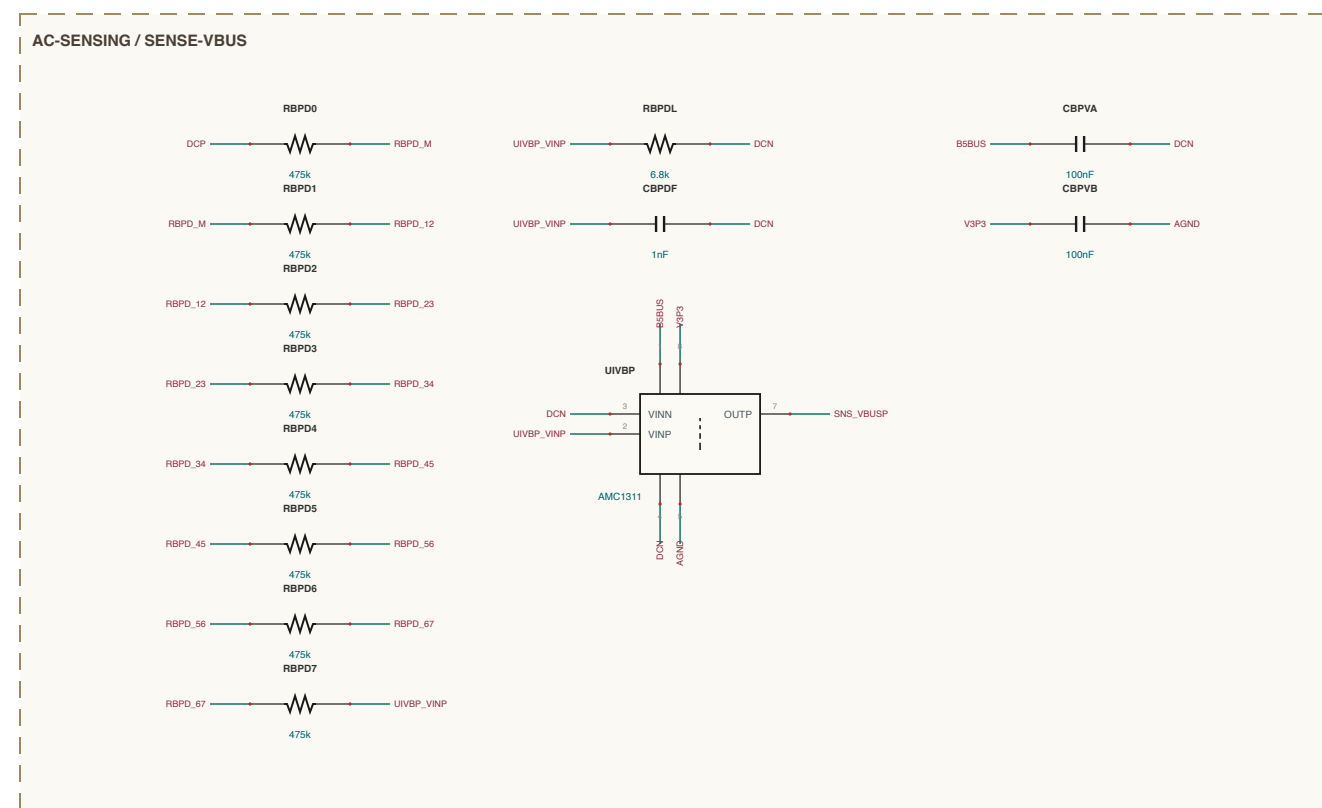
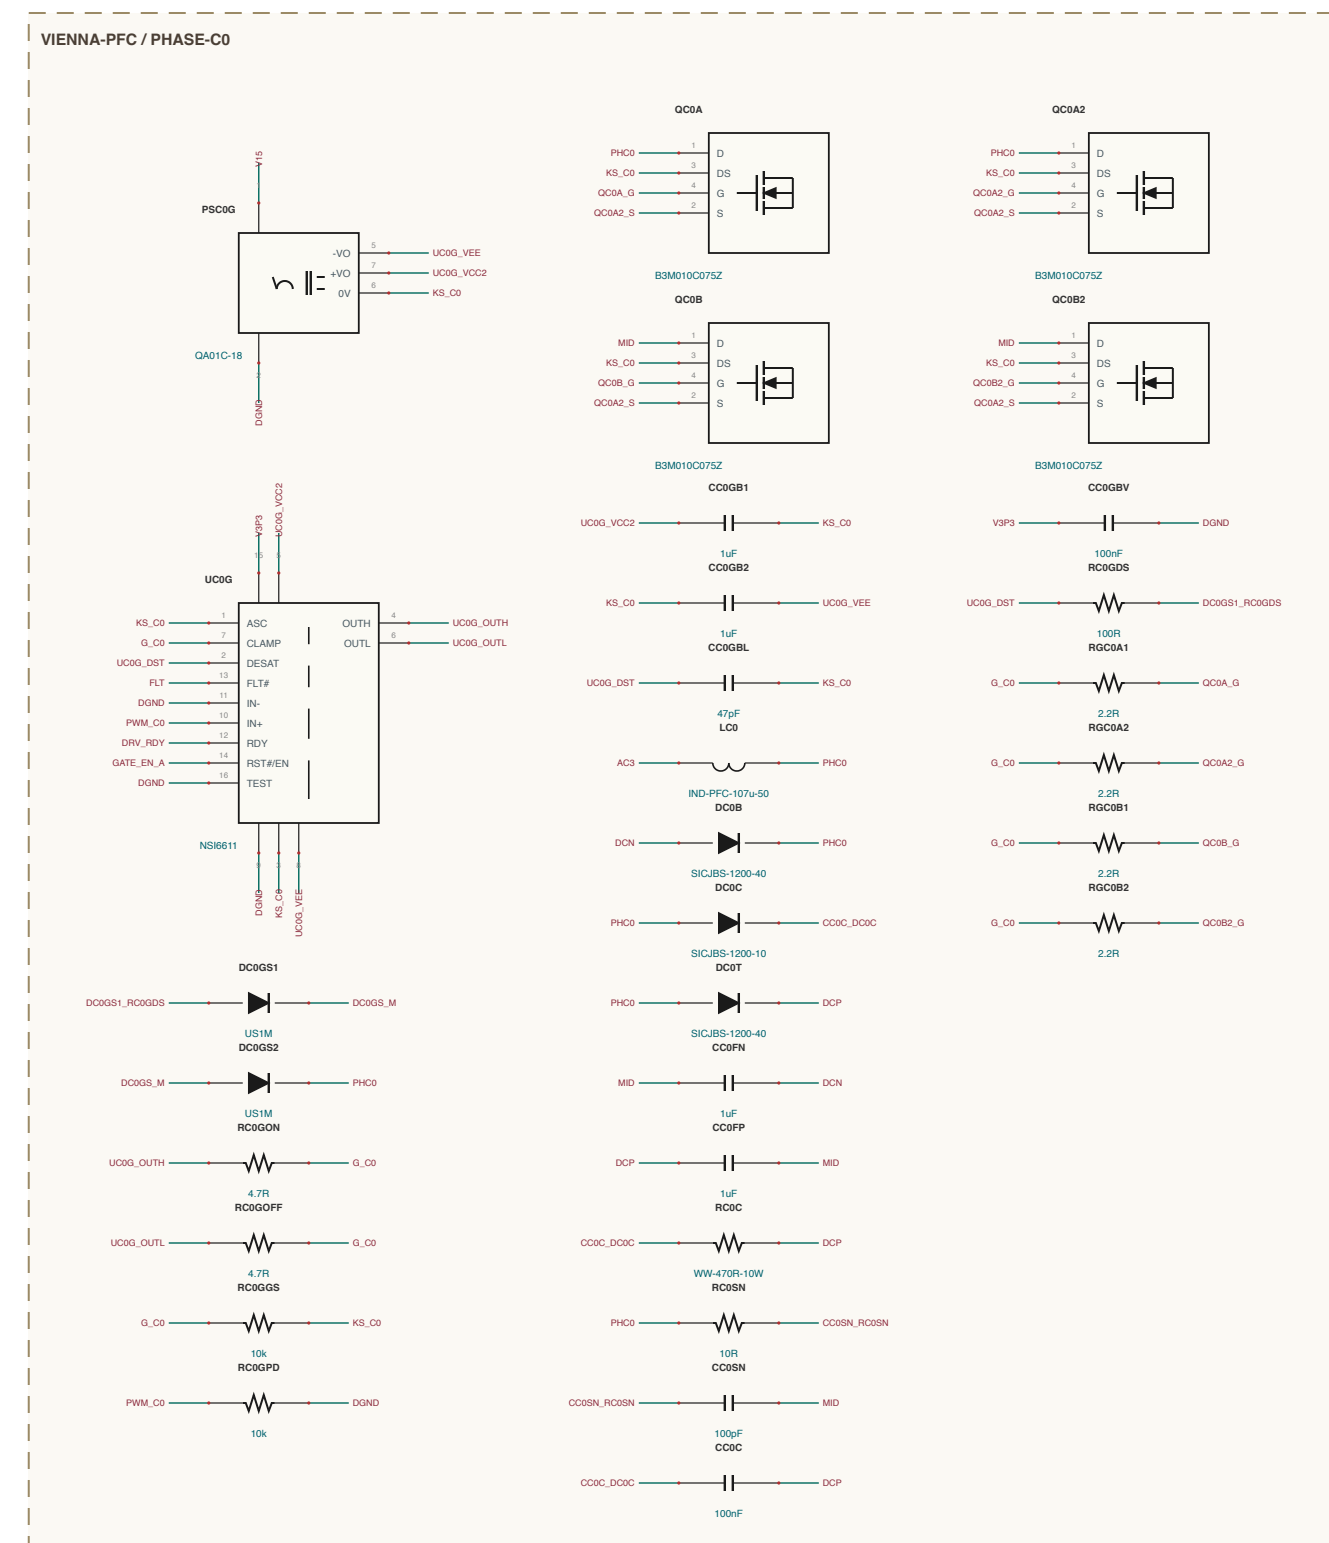
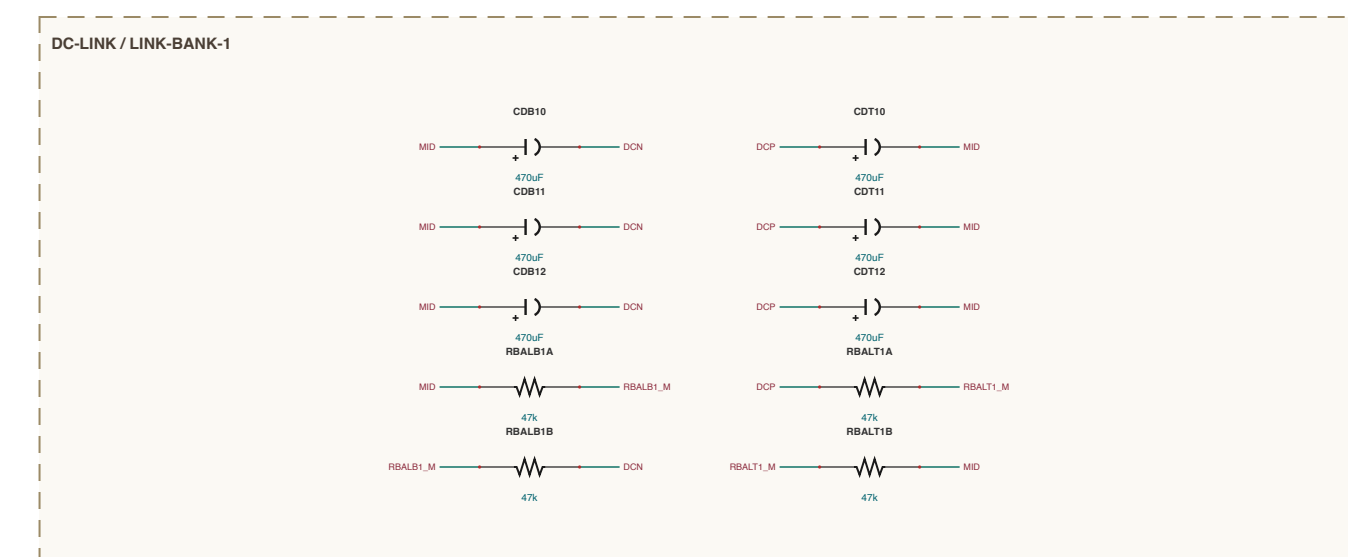
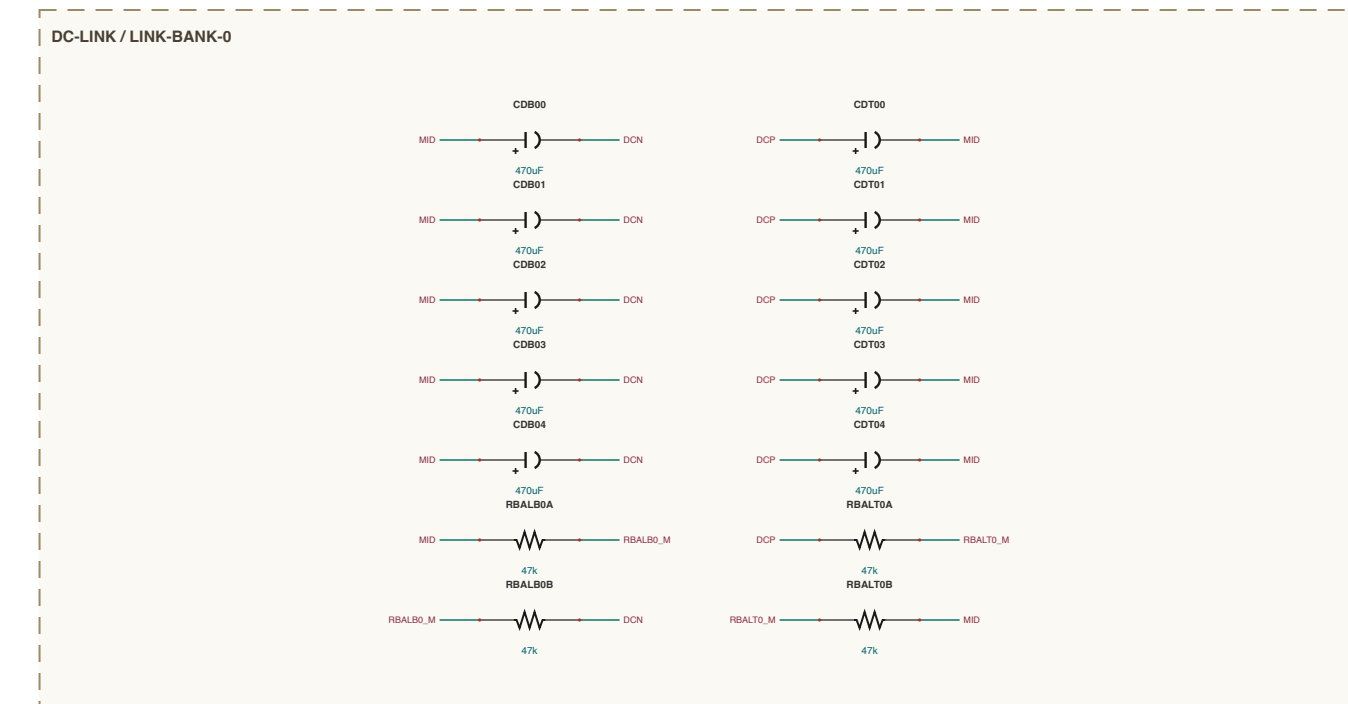
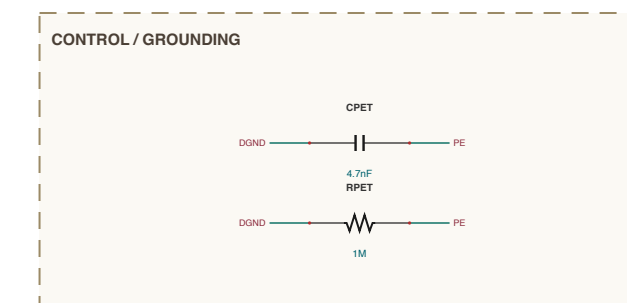
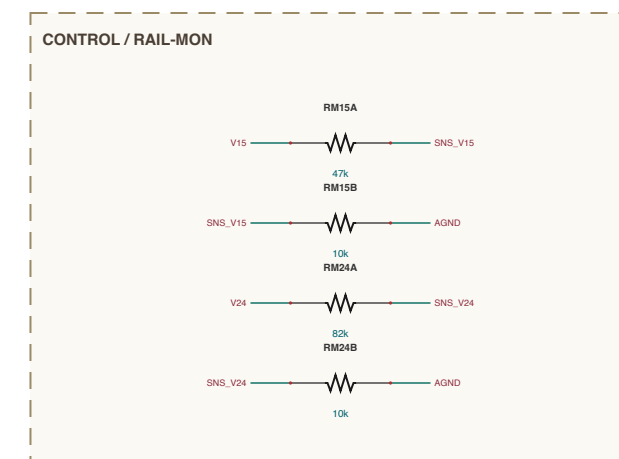
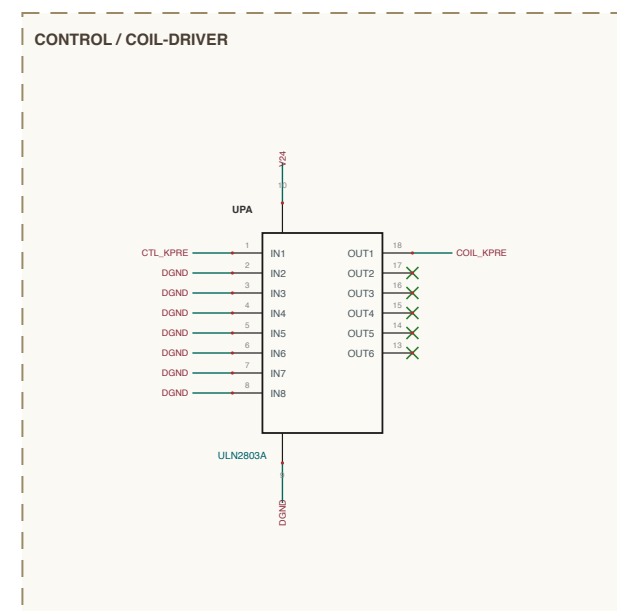
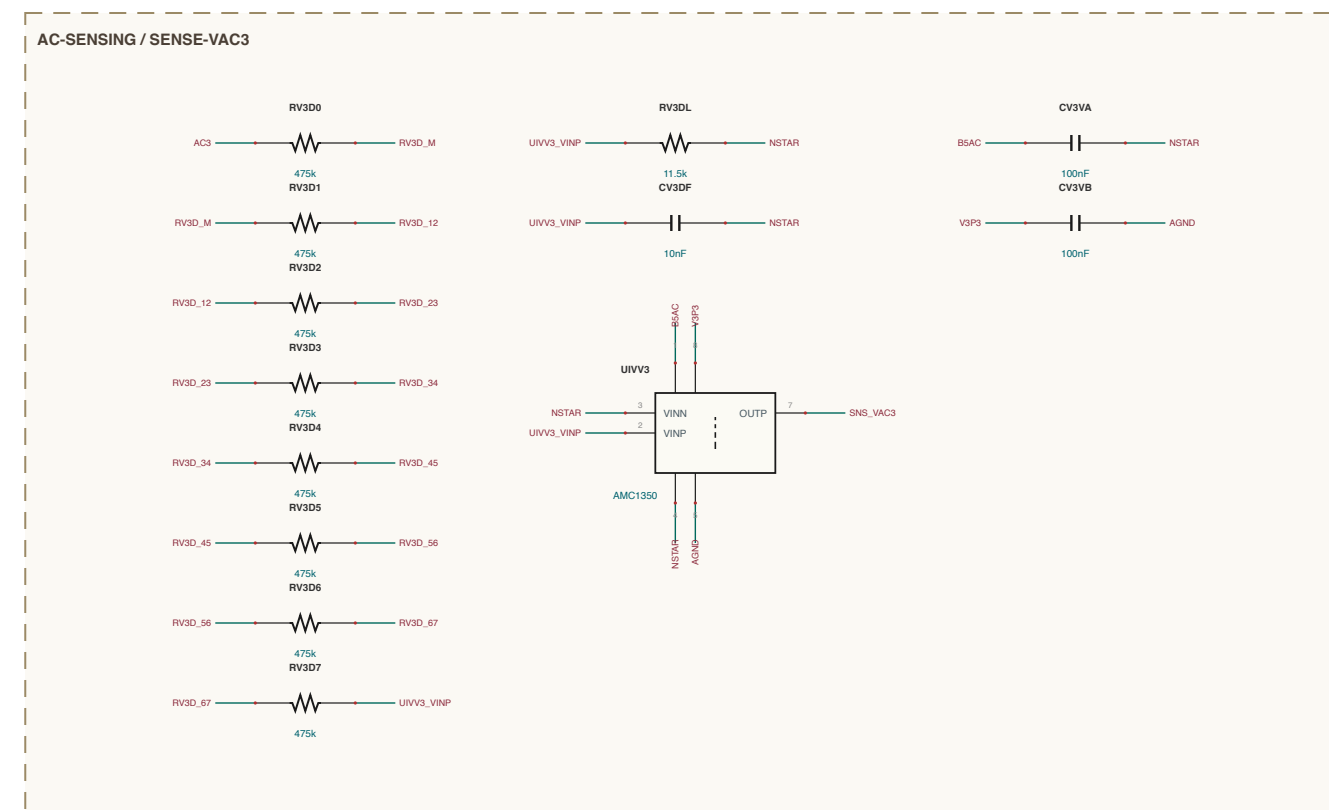
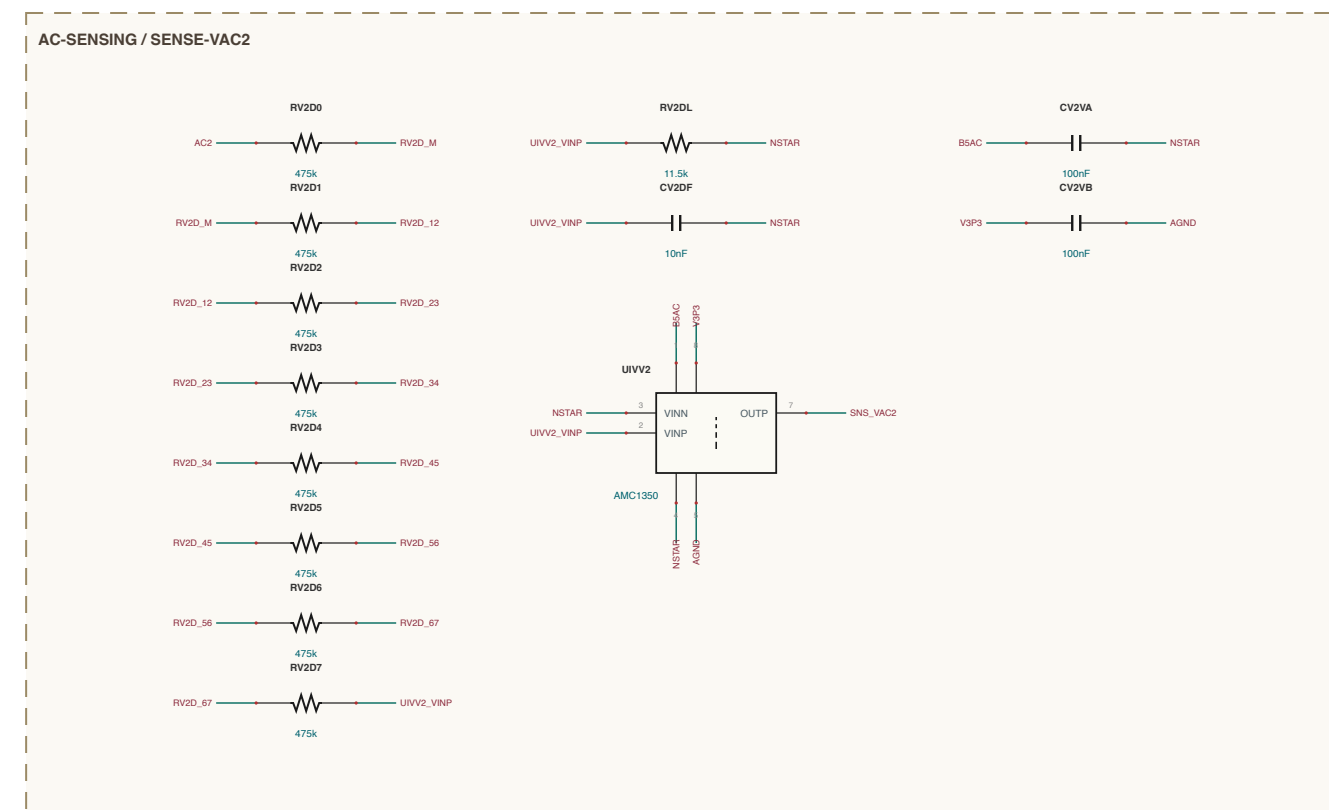


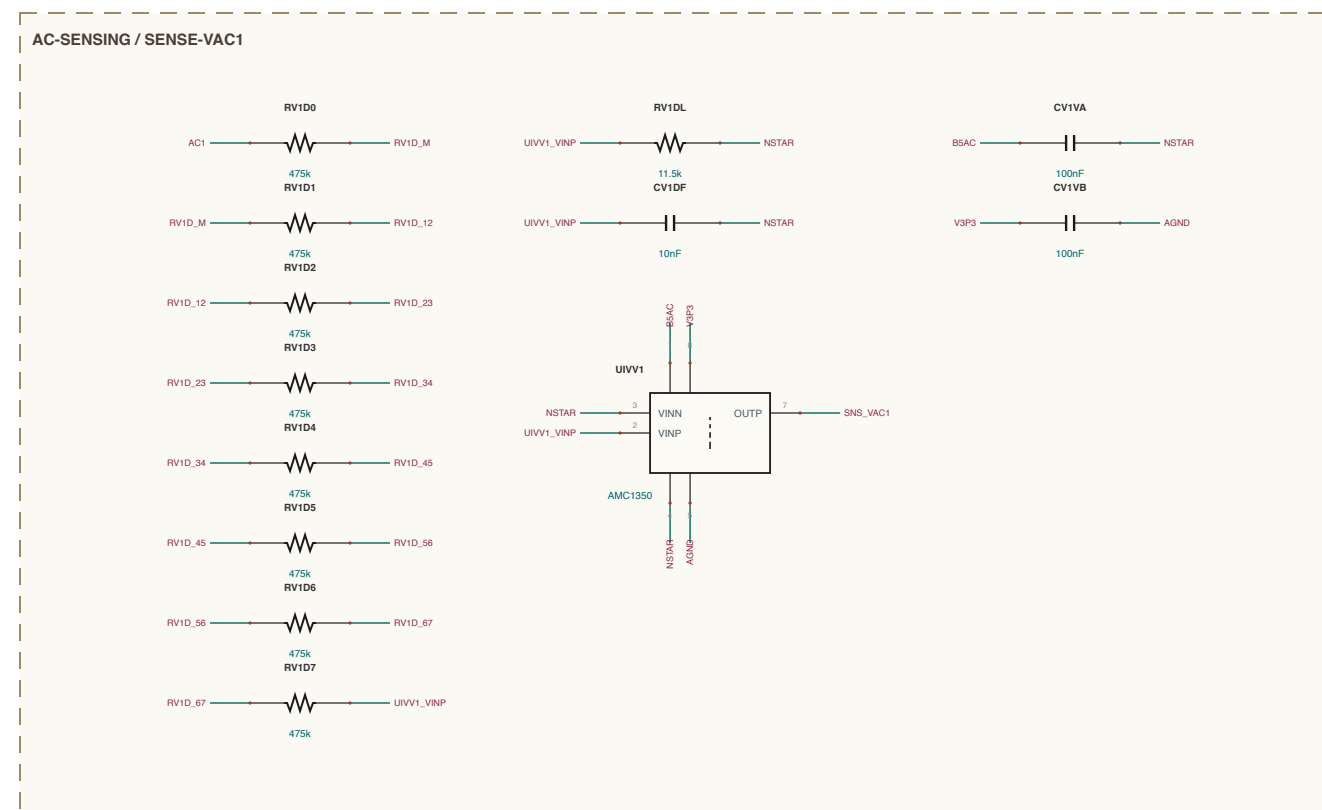

SHEET INDEX

IN W8 1-7 of 2

AC EXEMING - 5 sections

AIR FINDER - 5 sections

CONTROL - 4 sections

DELIC - 5 sections

REPT-EM - 4 sections

YENNA-PTC - 5 sections

ins DA 78 section - 202 components

NET NAMING

- internal junctions are named for what they join
 - example: `IF100` node at that IC pin e.g. `IF100_XNP`
- Resistor: M midpoint of a series pair e.g. `R5A1A_M`
- Resistor: `win` tag between Resistor(s) e.g. `RV1D_01`
- all others are explicit design notes

MAGNETICS CONSTRUCTION	
Identify per drawing: magnets, and (barra, gap, fix, acceptance lines like these)	
1) L84-L109 3x T70 30x60mm (CATALOG AL37), N42 ± 1 titr = 0.8 100T/m, ω 120 S/A (E5)	
2) LG L6M1-2 3x T57 60x, N42, 26.4mm ± 0.12 120 S/A (Boor 11.4A), E51 resistad beals 11.8 $\pm$ - mrd)	
total L = titre + measuored after leakage (this COMPENSATE leakage spread); Cr at TANK section	