
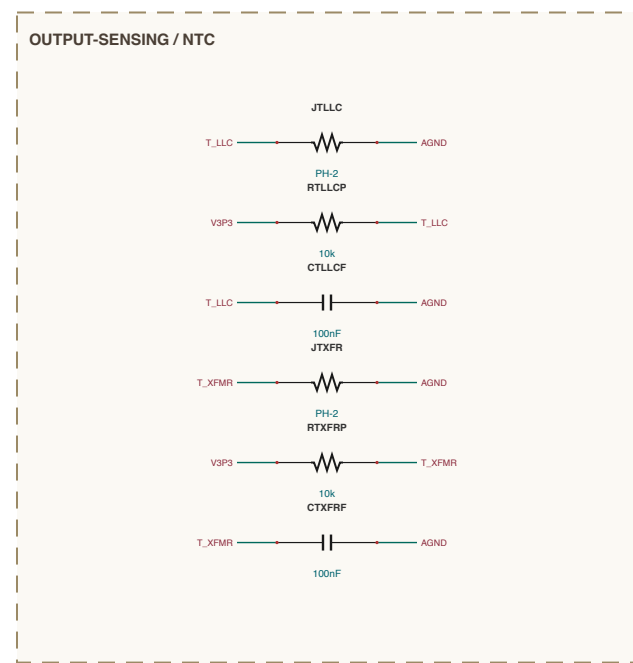
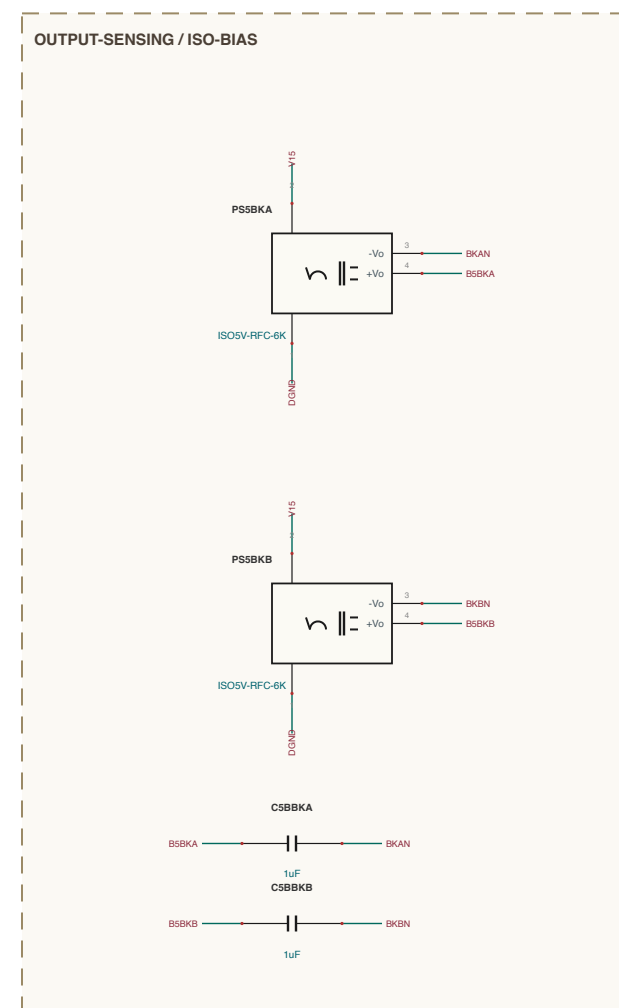
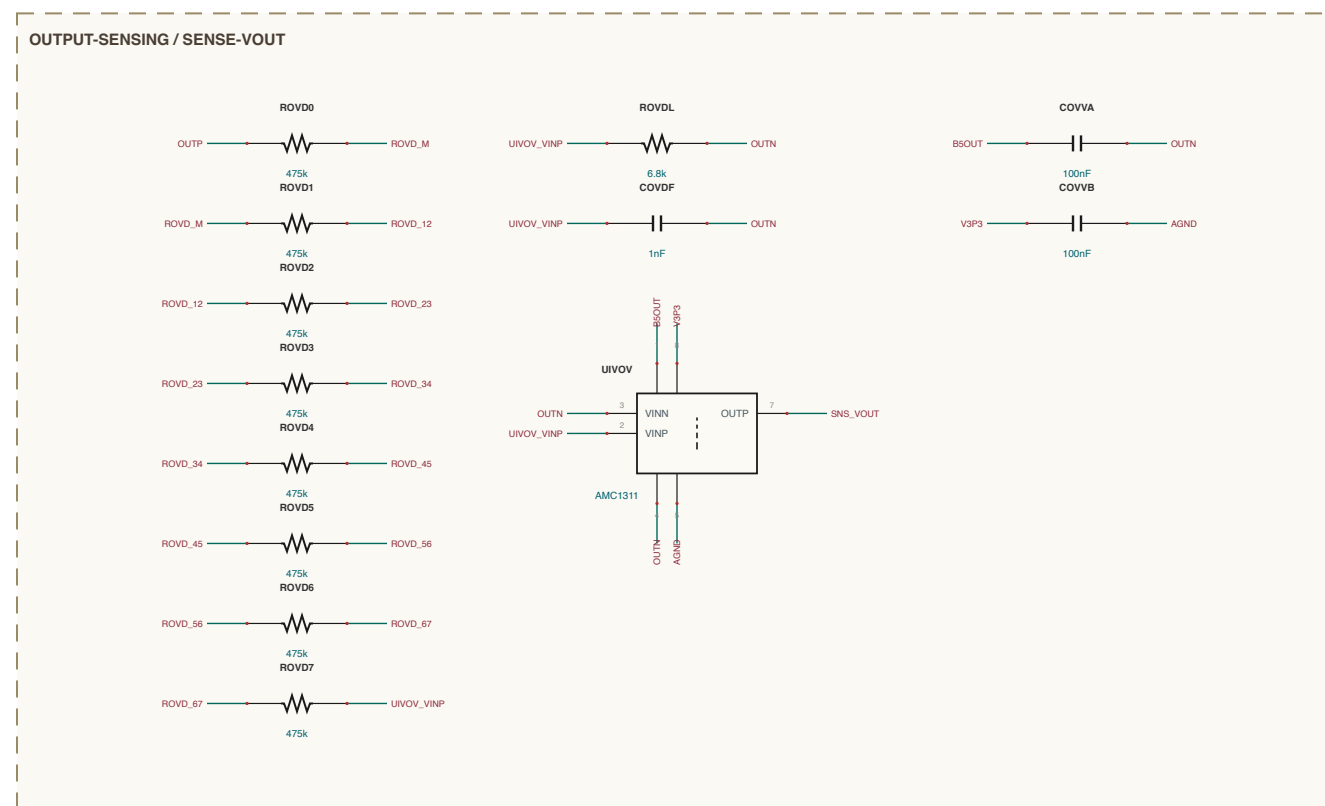
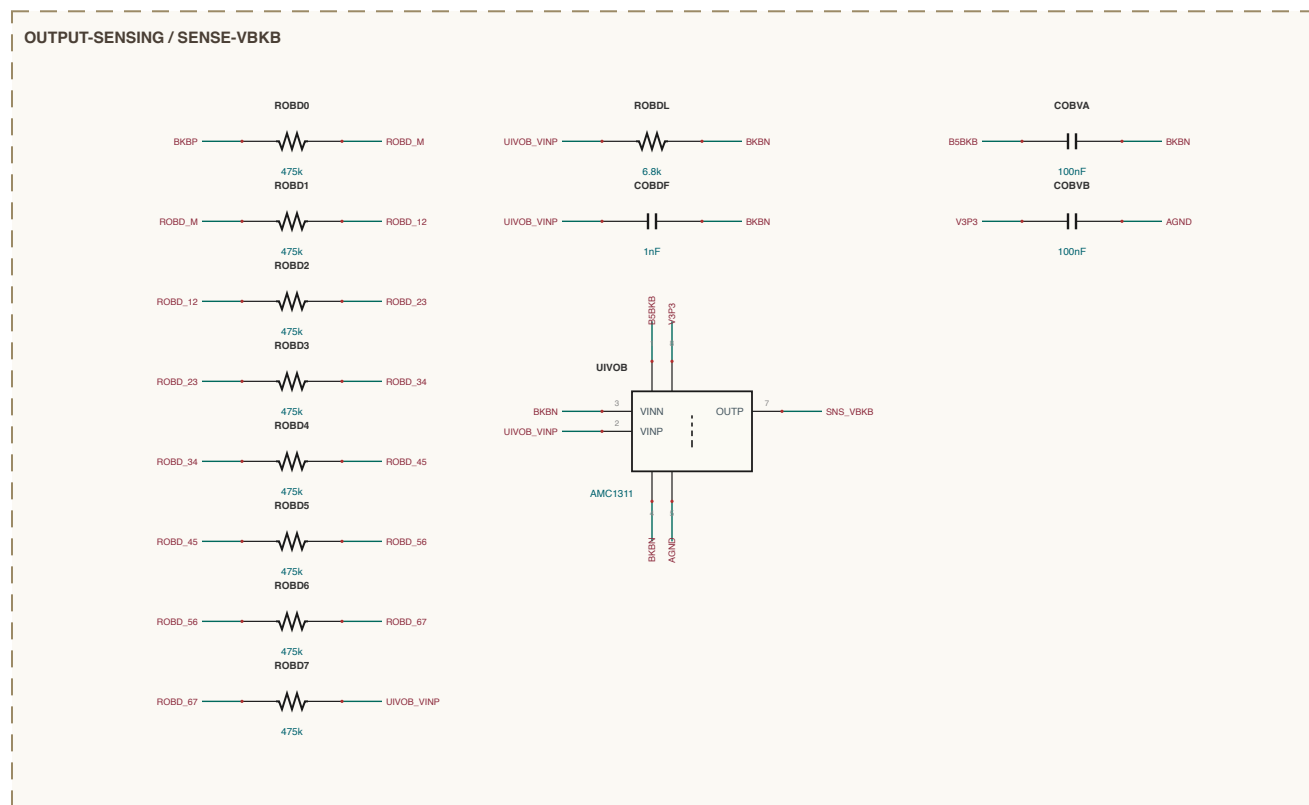
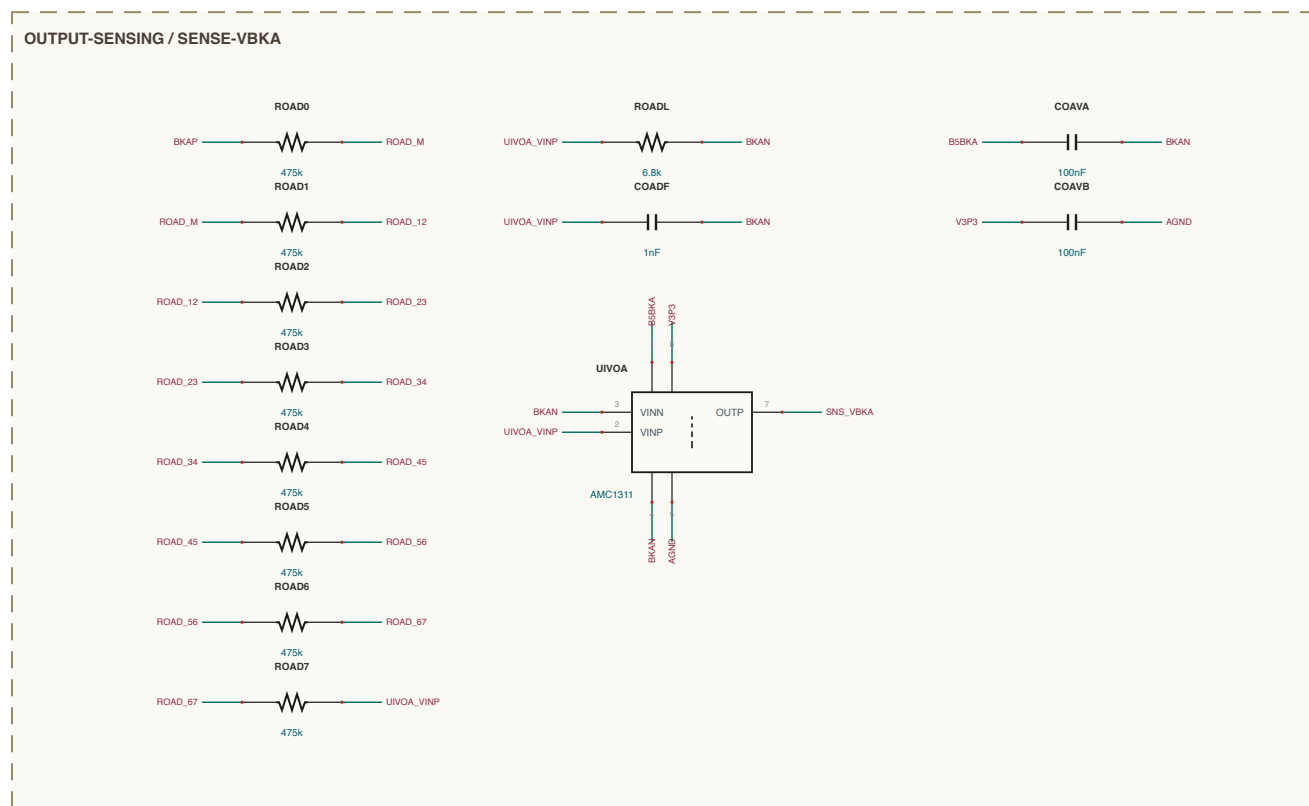
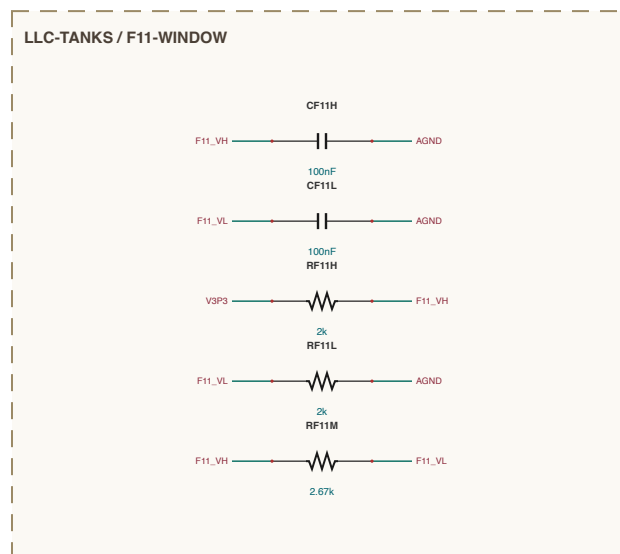
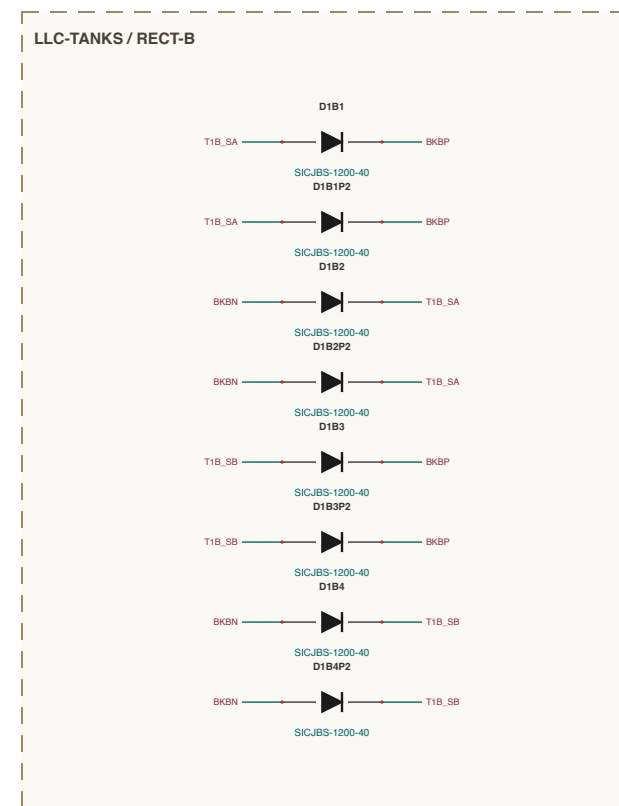
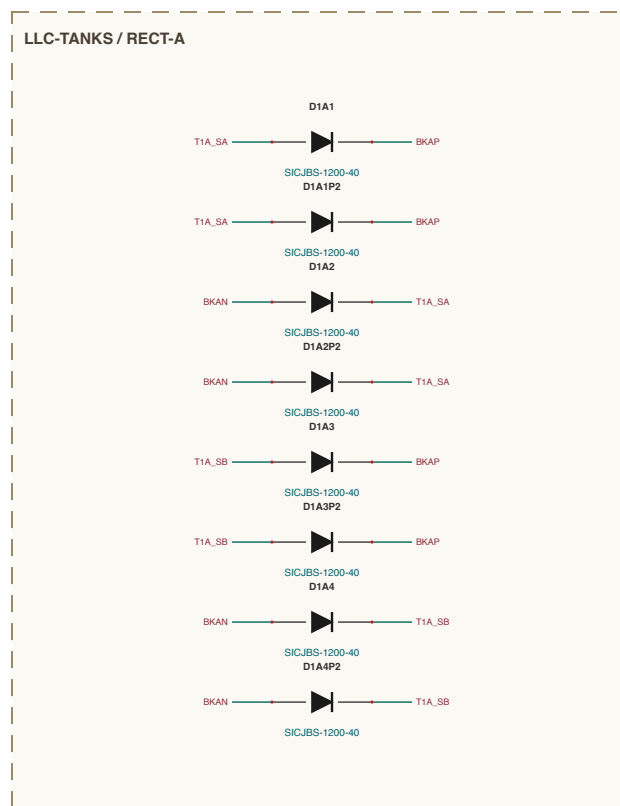
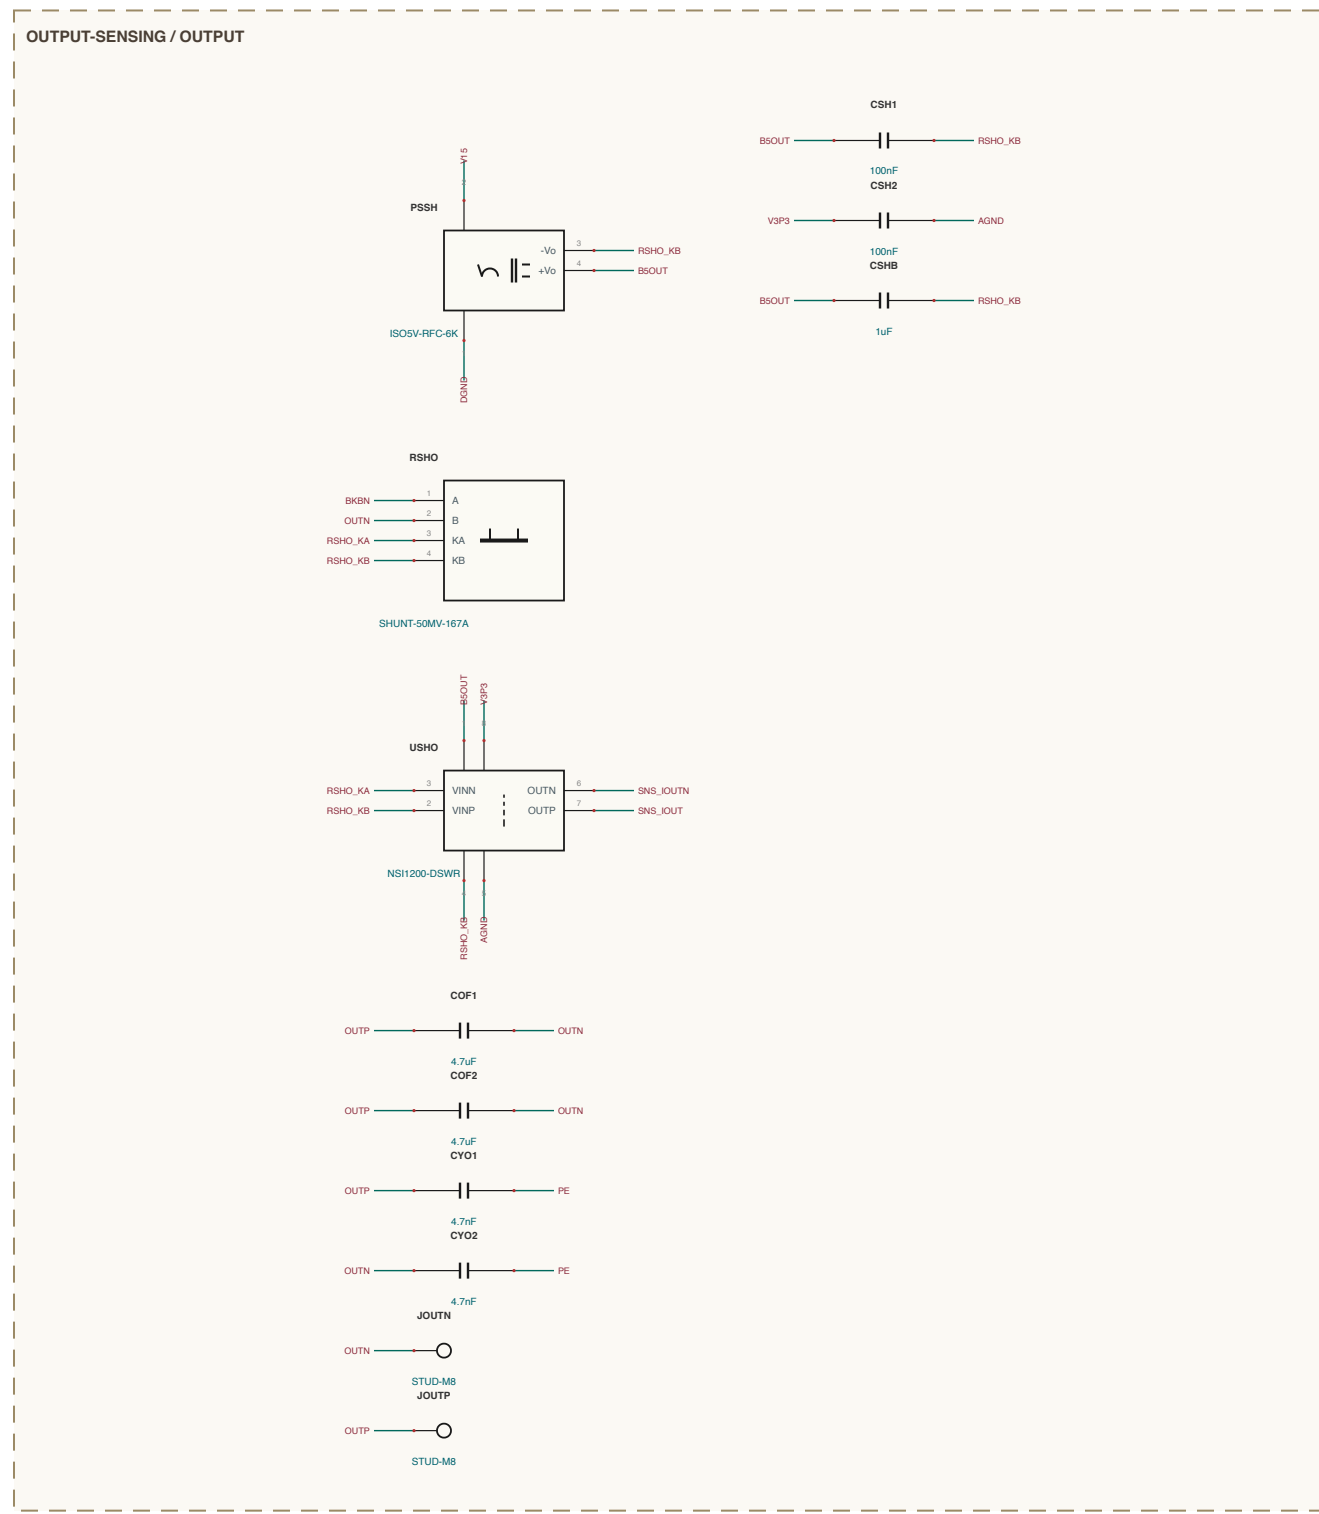
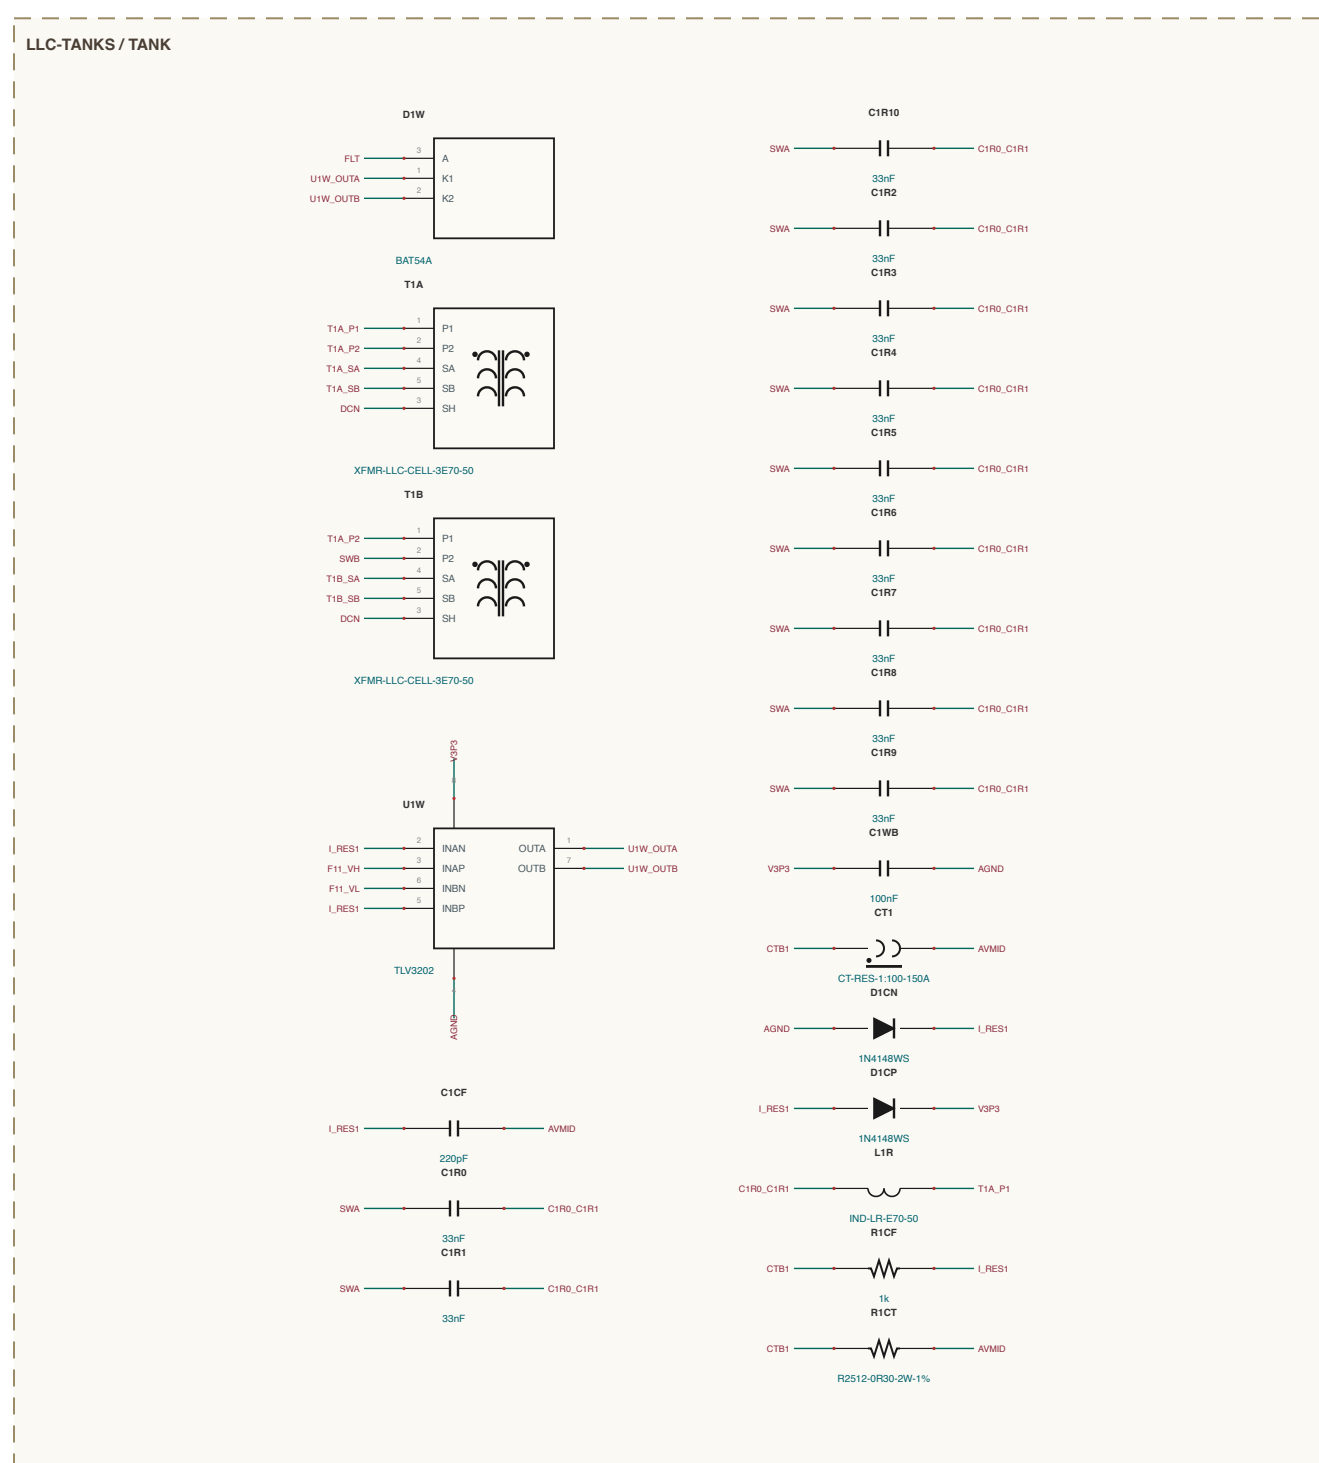
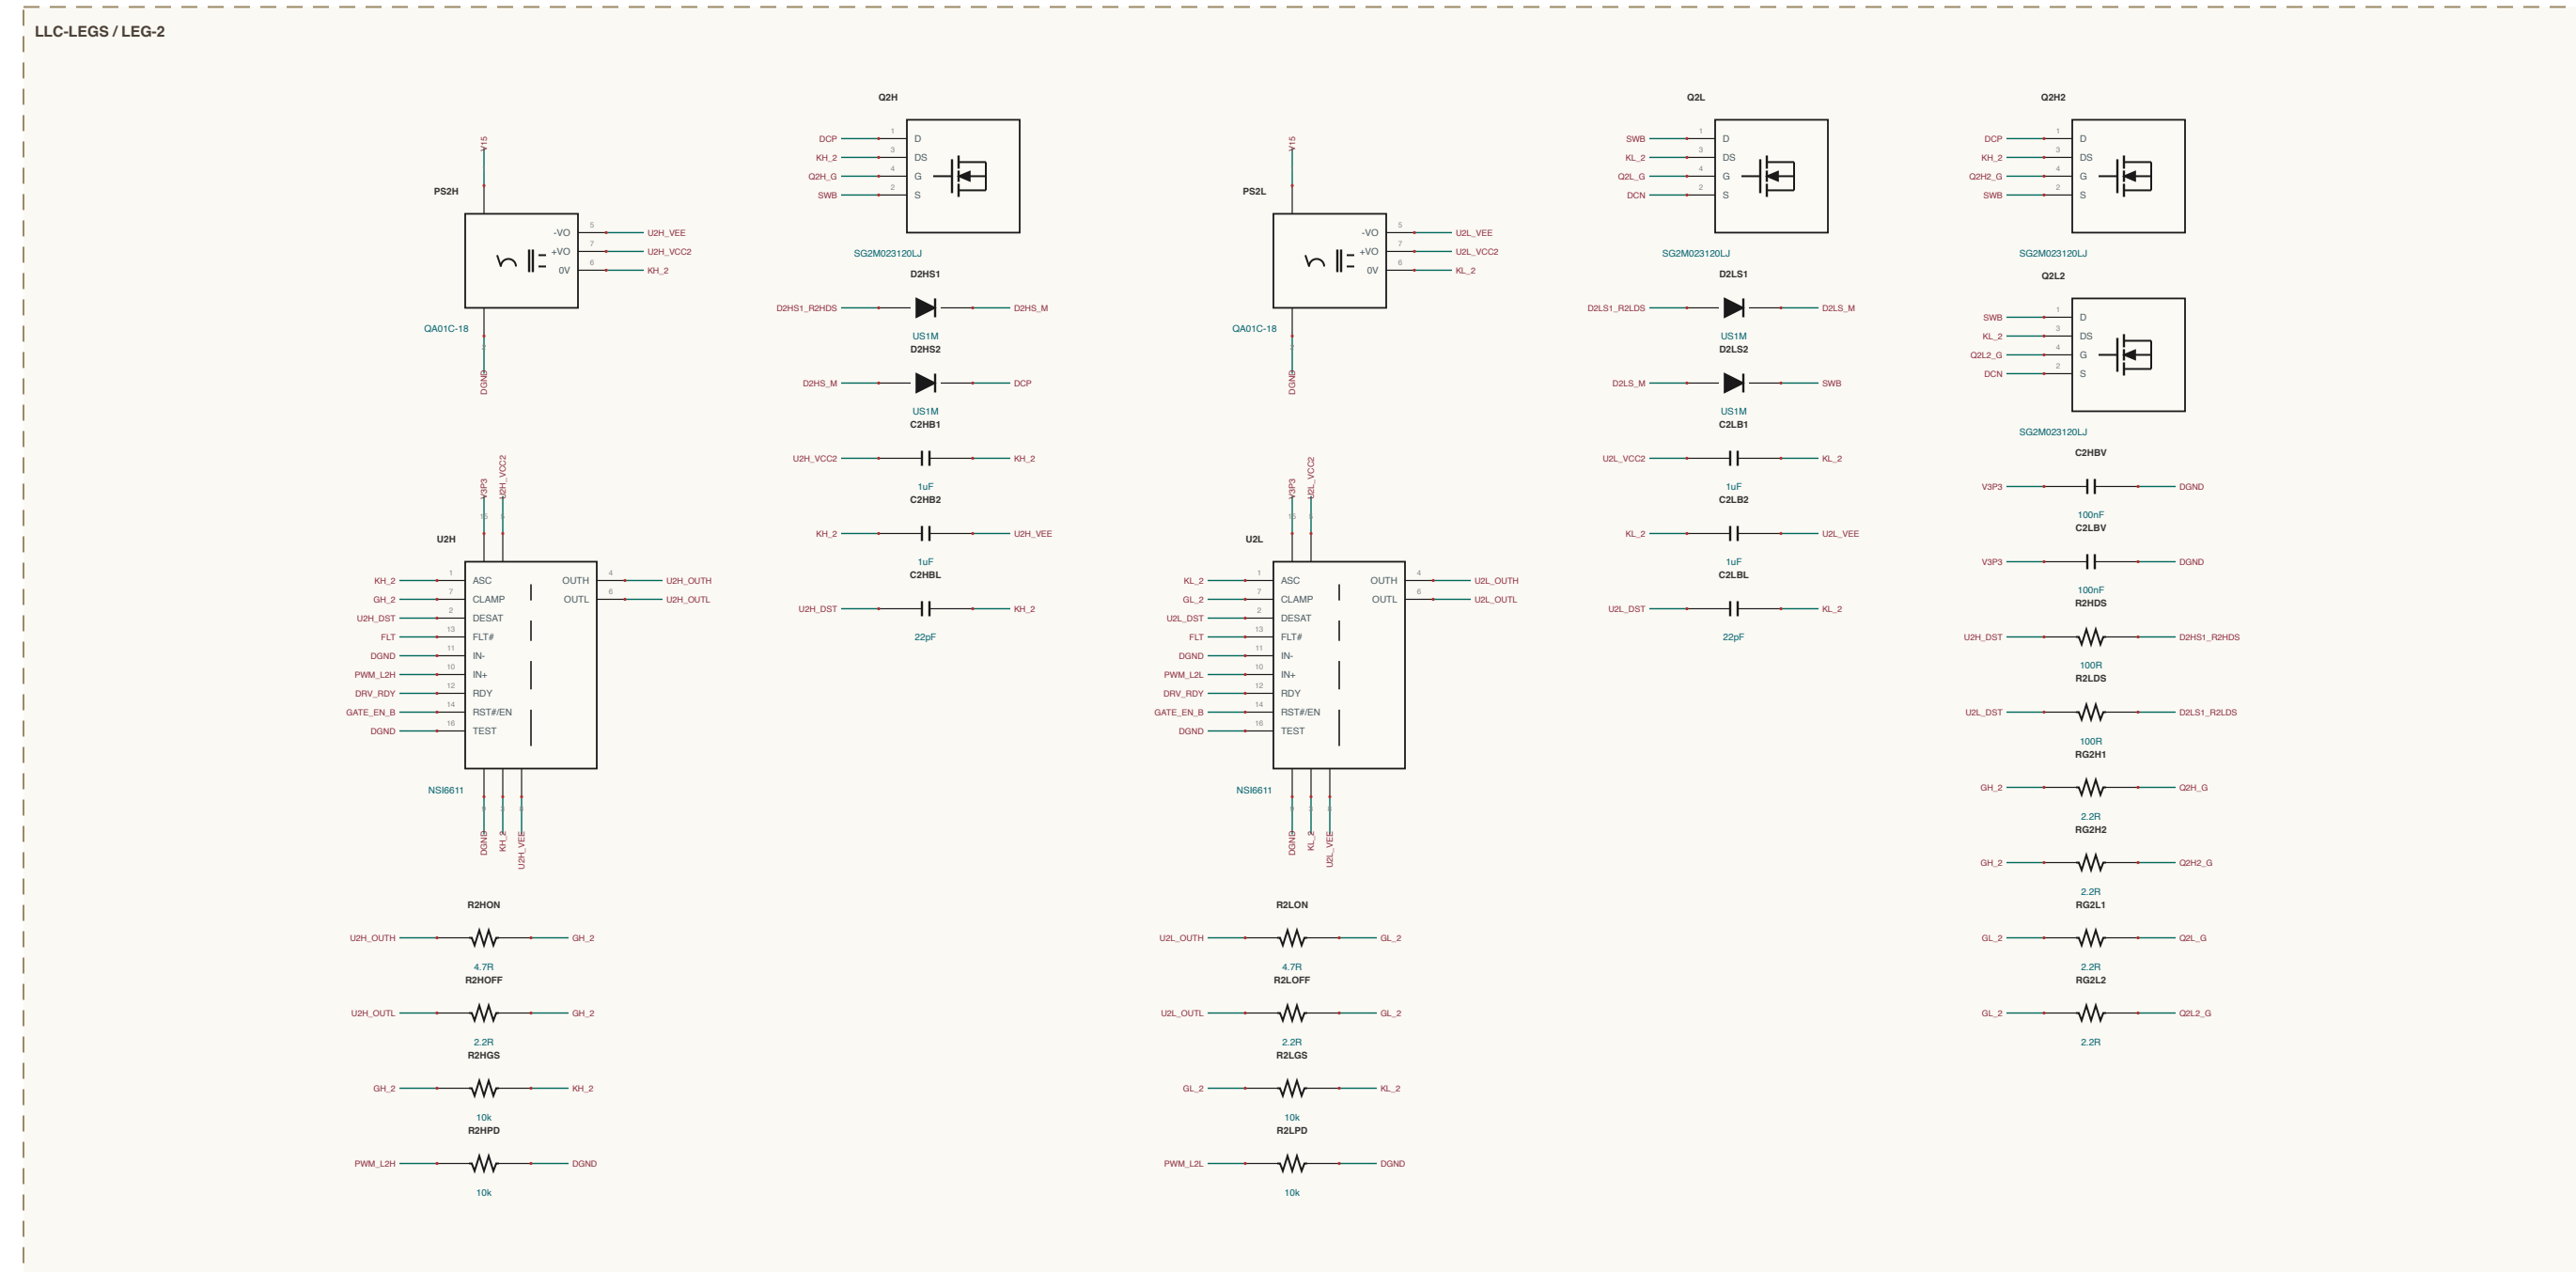
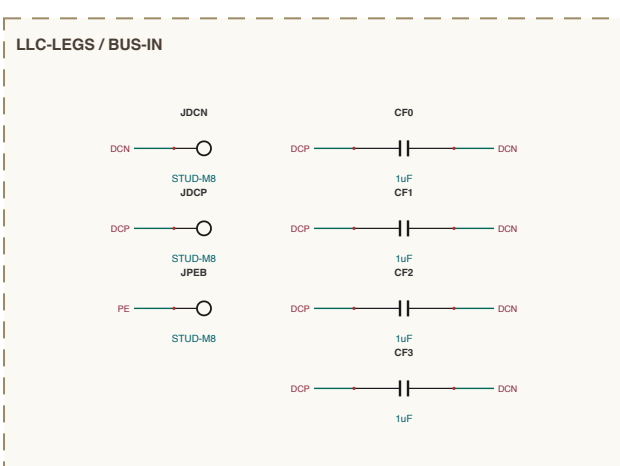
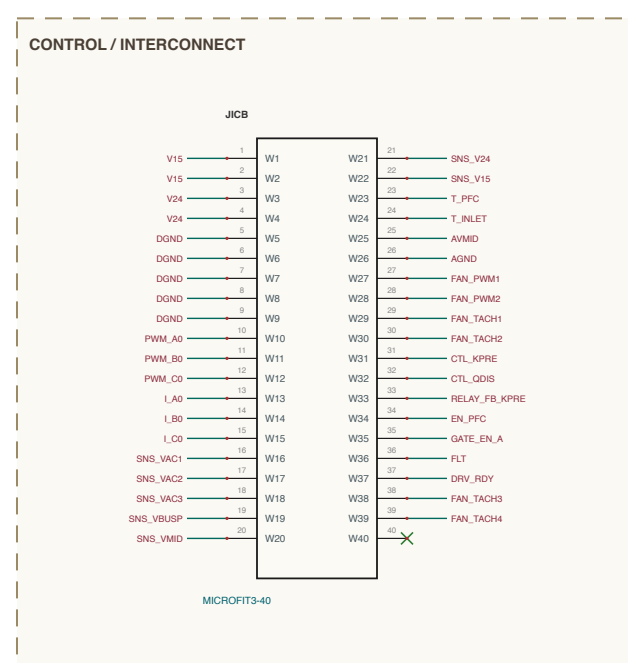
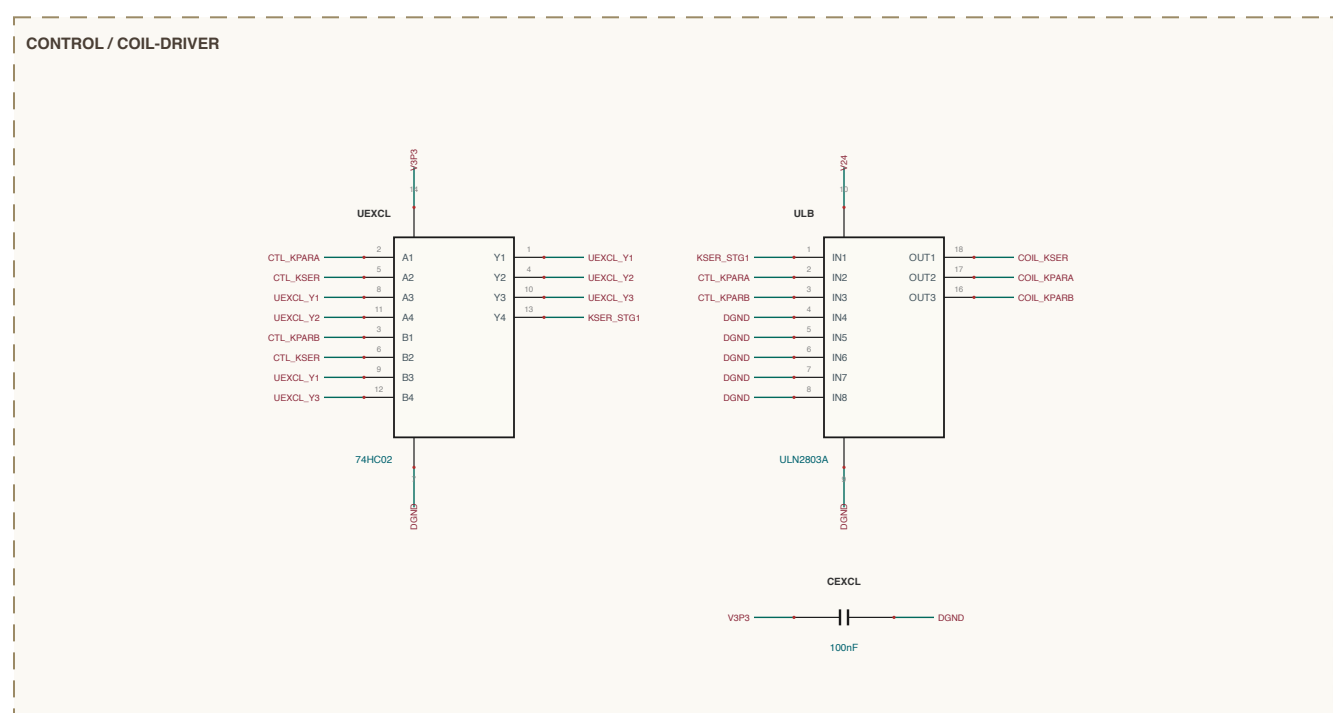
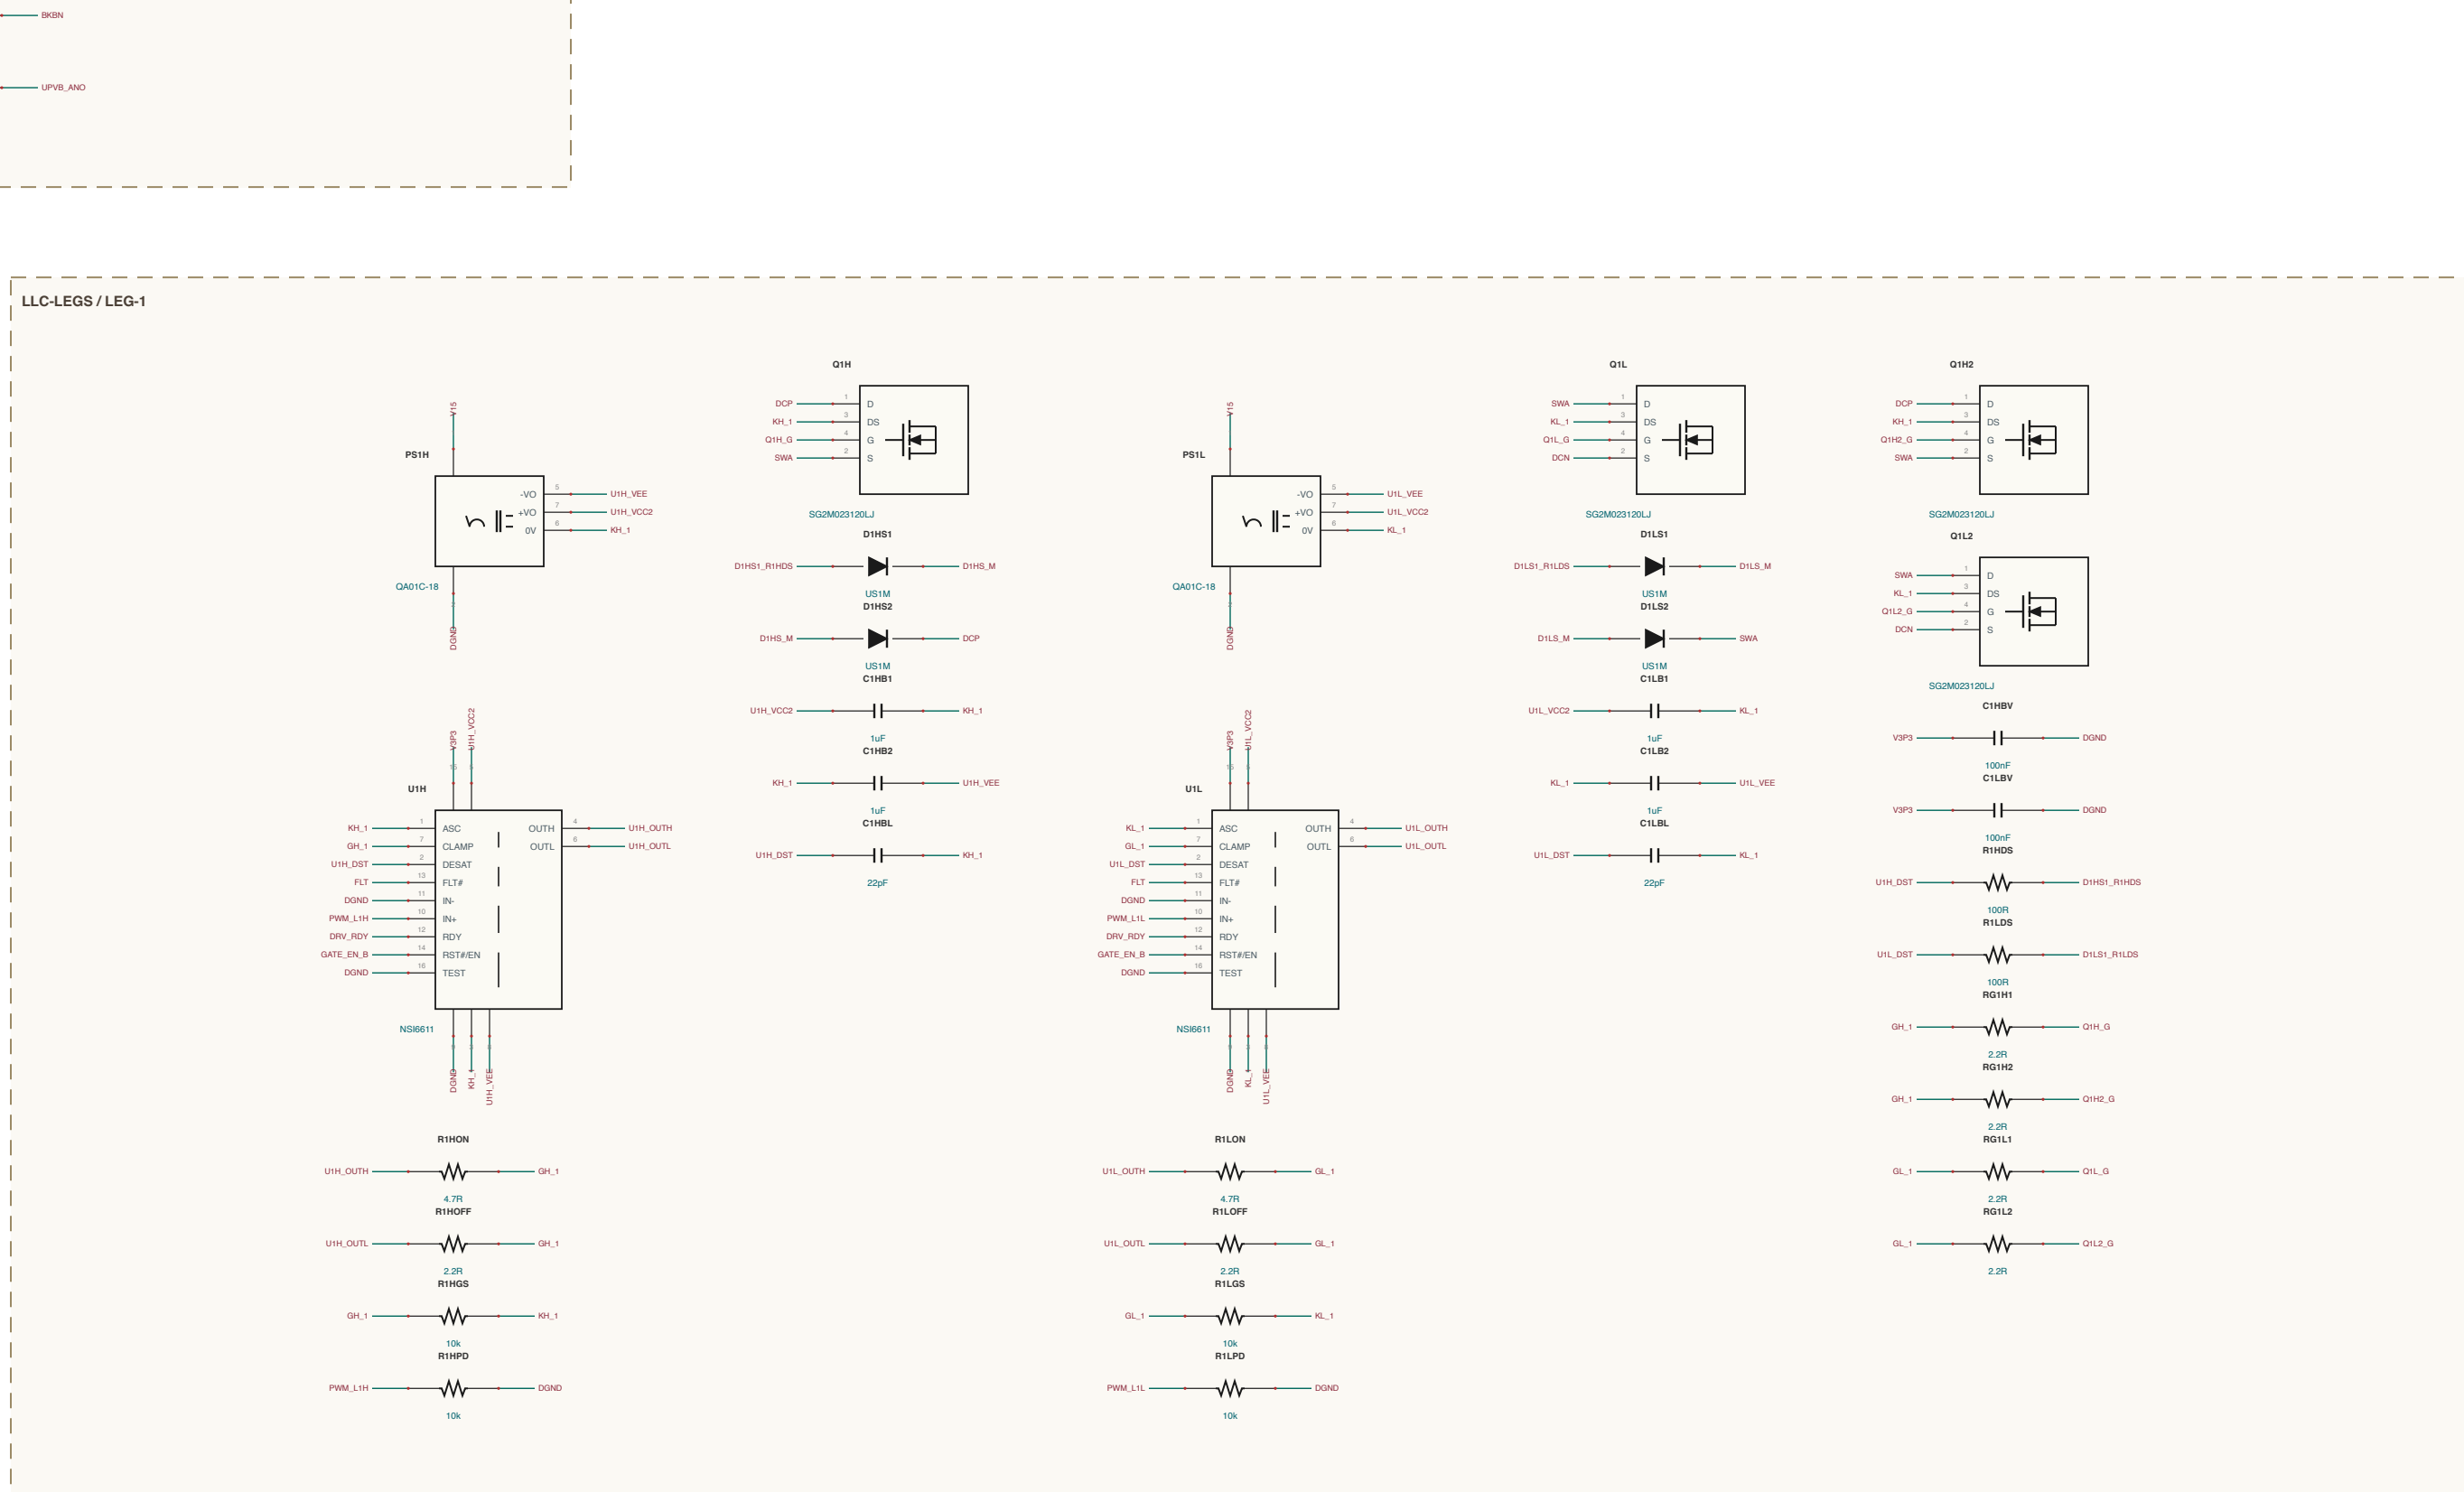
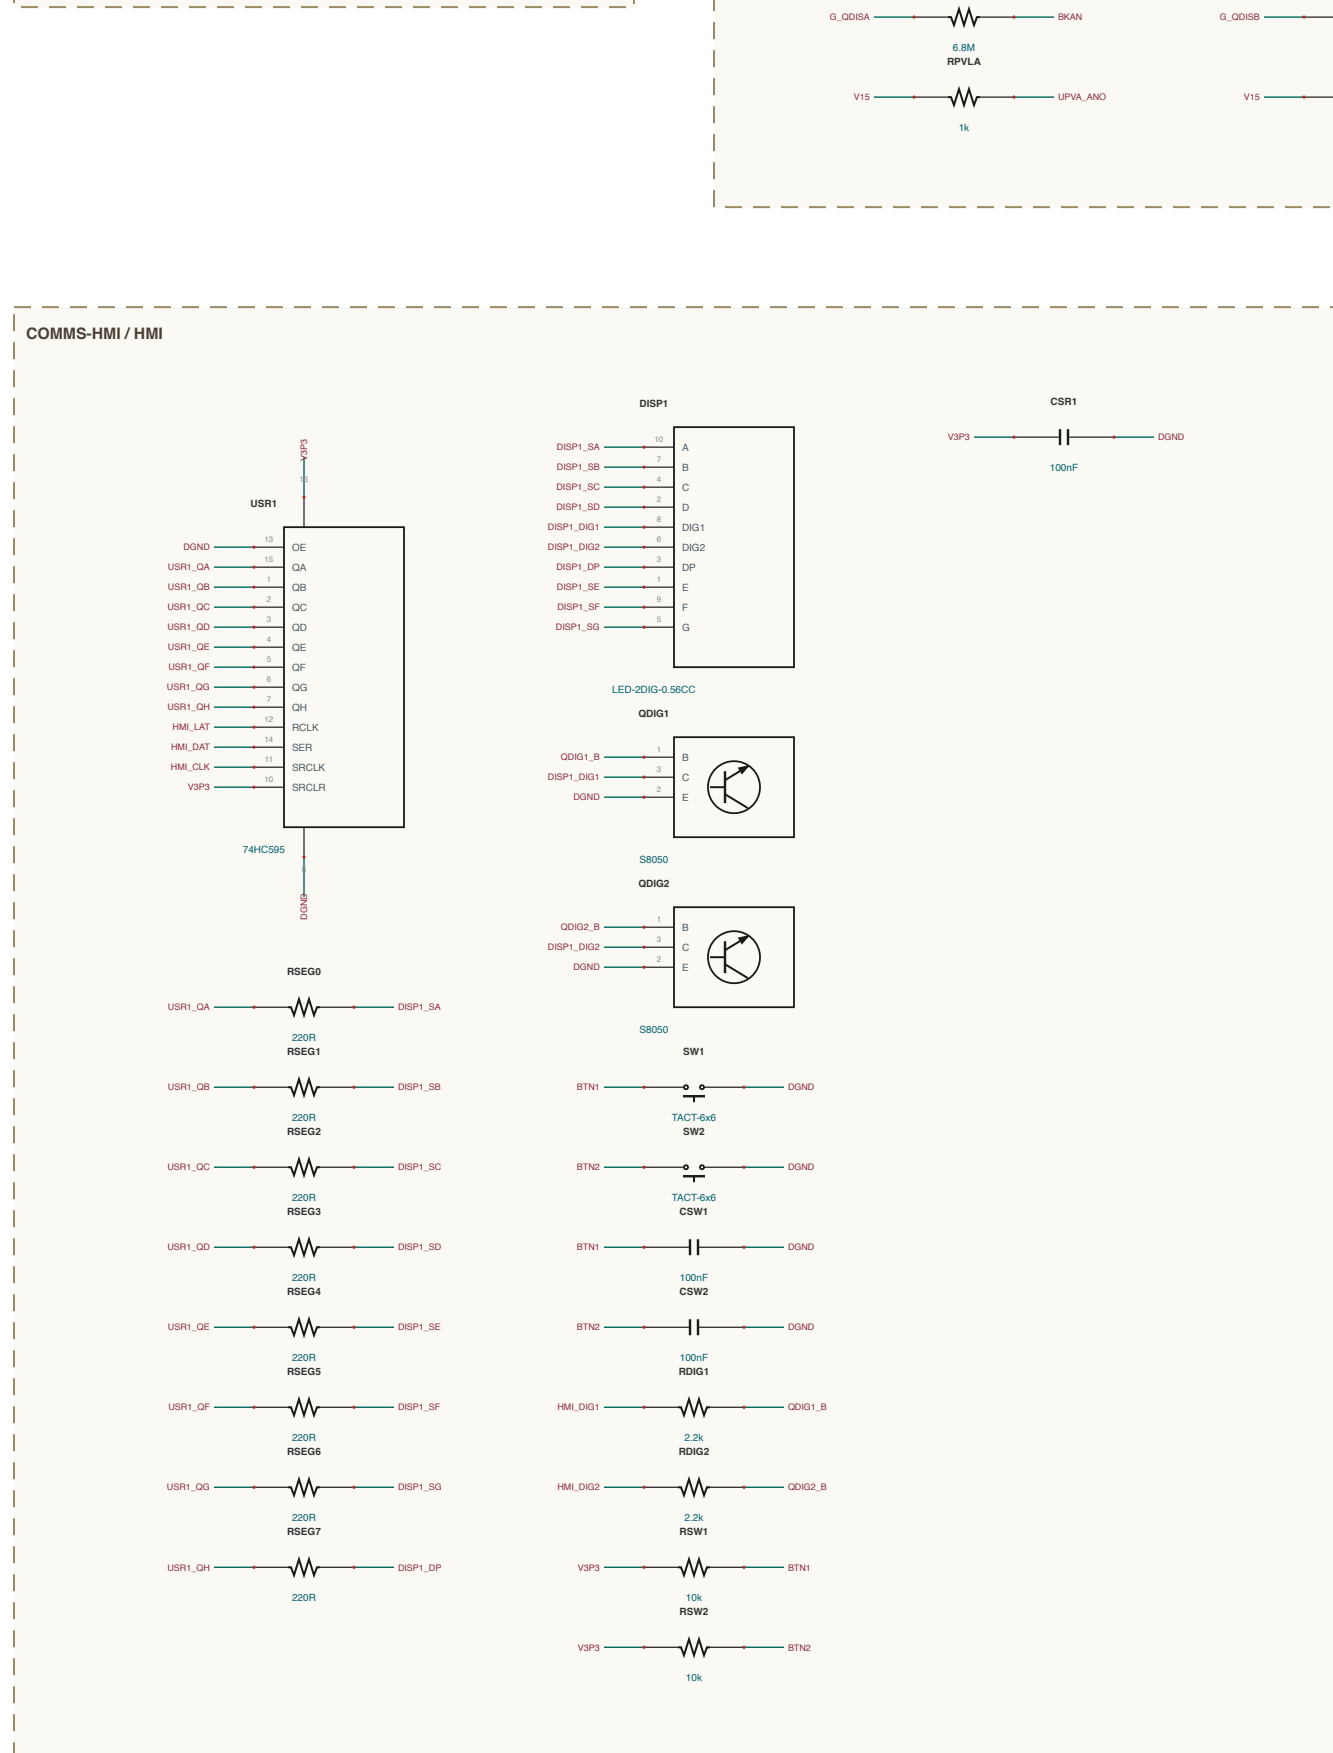
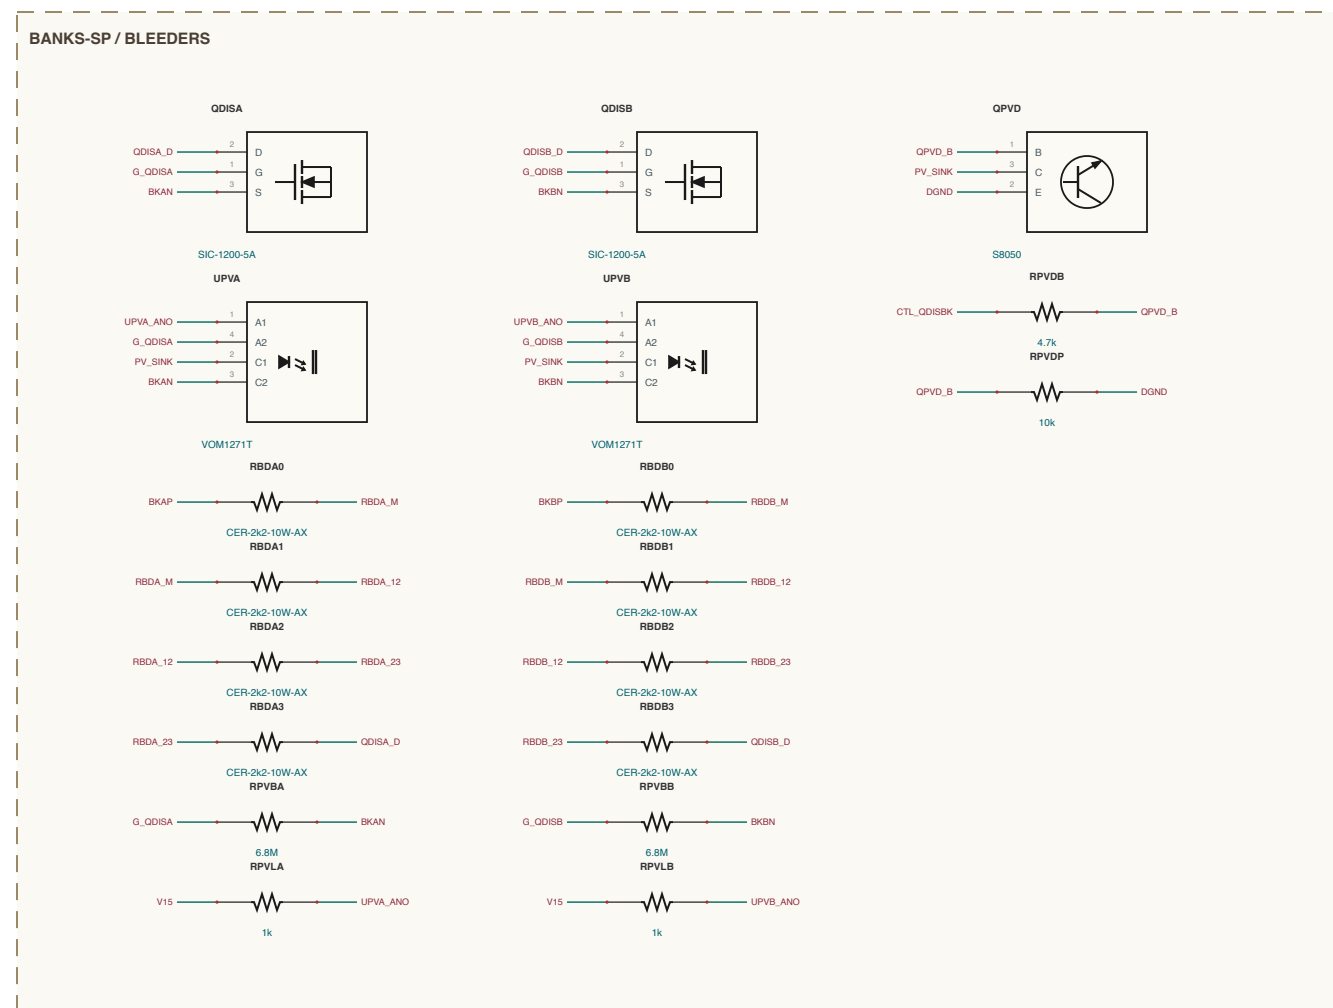
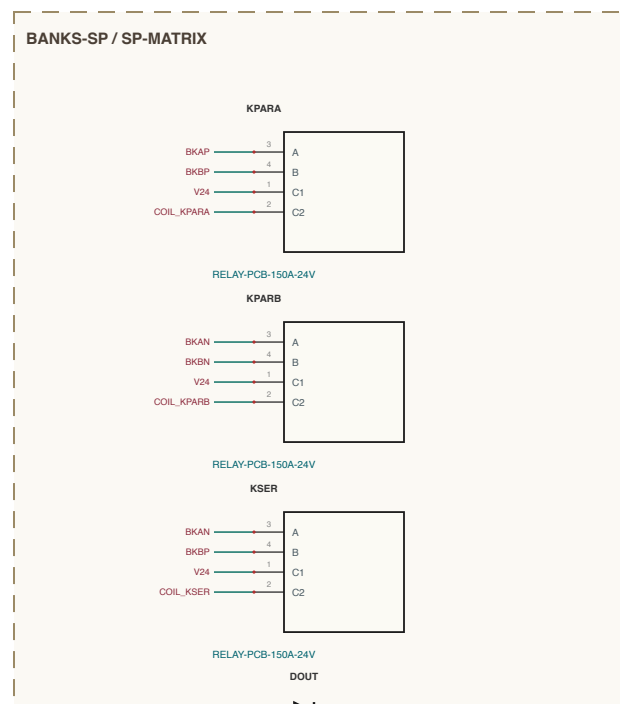


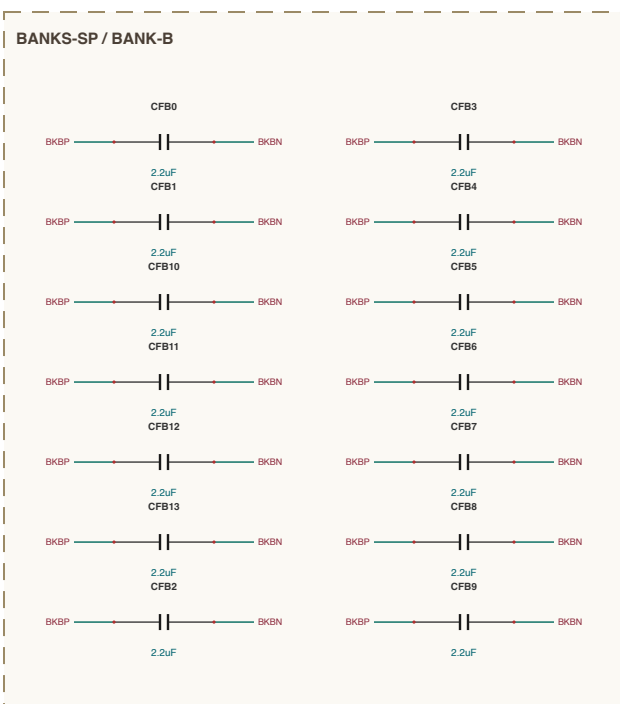

SHEET INDEX

30 VV Input DC DC Support: 2 of 3

OUTPUT WIRING: 6 sections

BACKUP - 4 sections

LLC TRANS: 4 sections

CONTROL: 3 sections

LLC LEADS: 3 sections

CONVMS-HB: 2 sections

no D4 - 32 sections: 178 components

NET NAMING

- Internal junctions are named for what they join
 - Example: `IC1` node of that IC pin e.g. `U1V0A_130A`
- Problems: `M` midpoint of a series pair e.g. `RES2A_M`

+ 2 more

[illegible]