
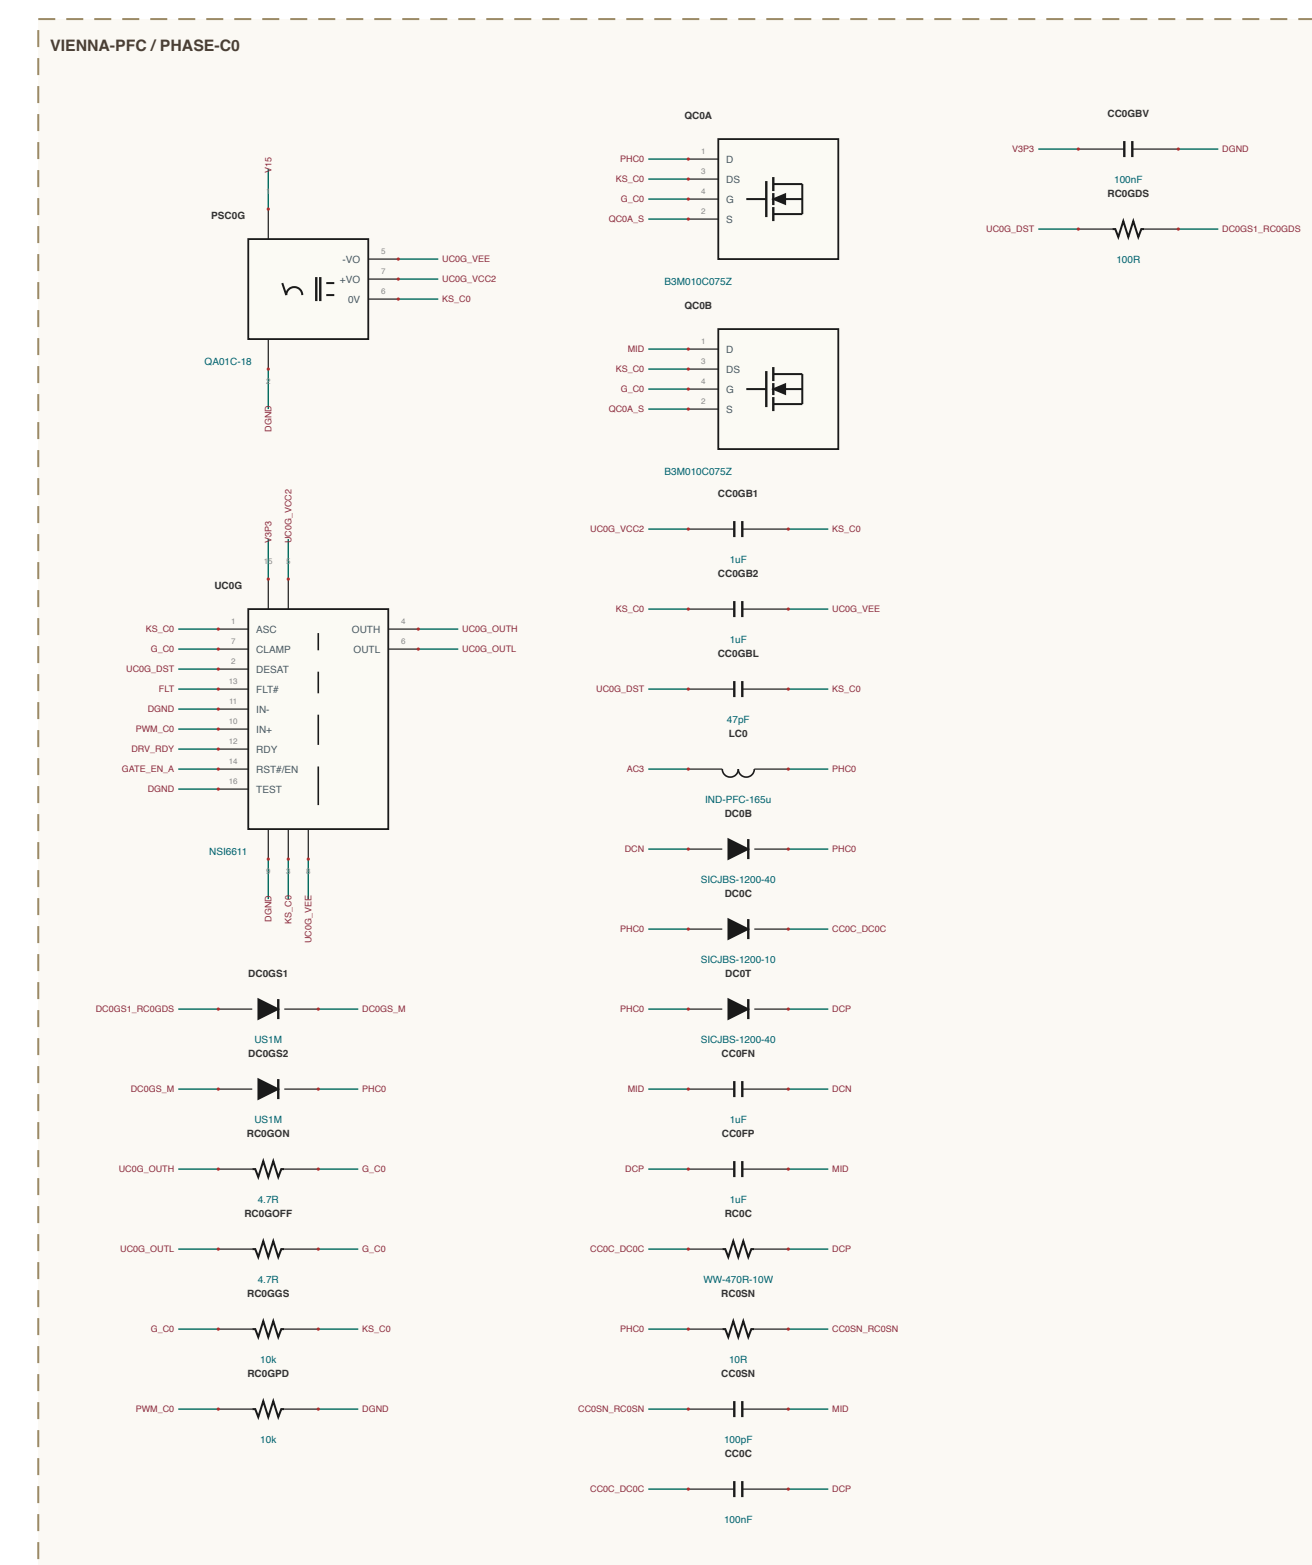
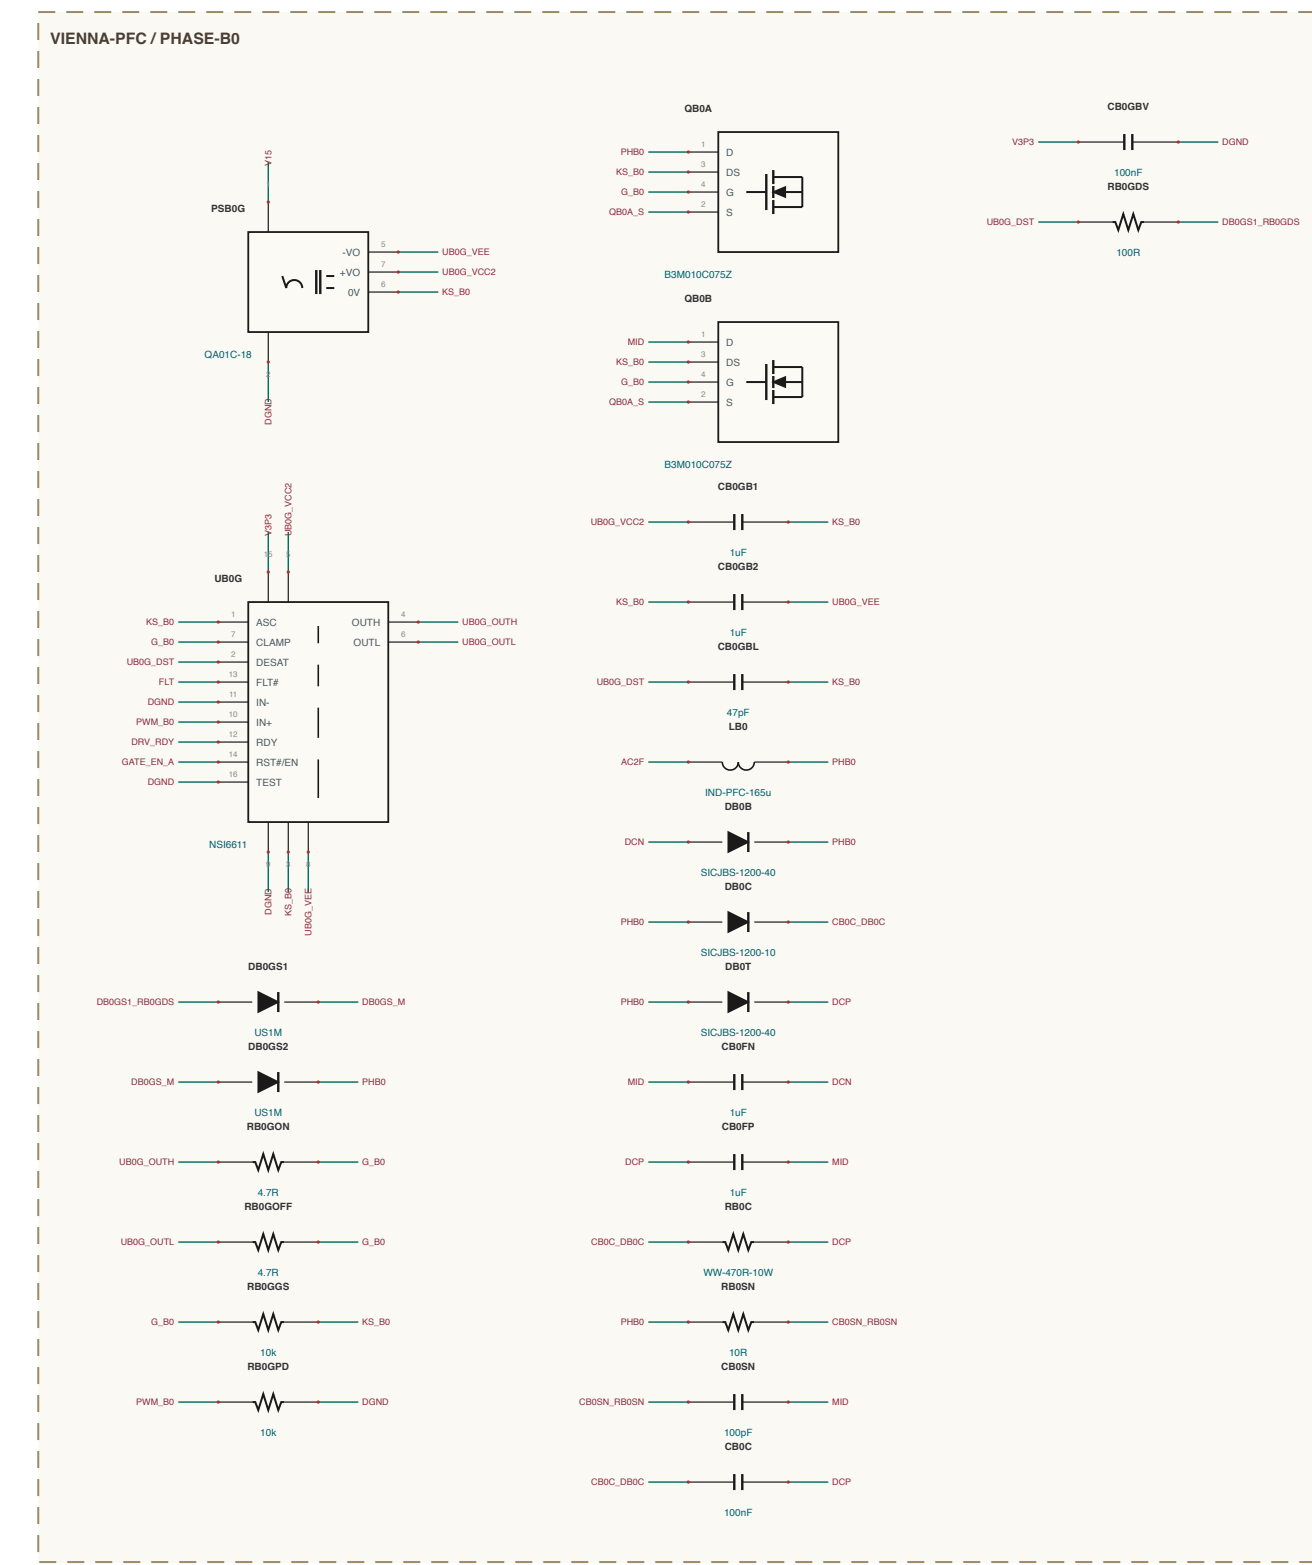
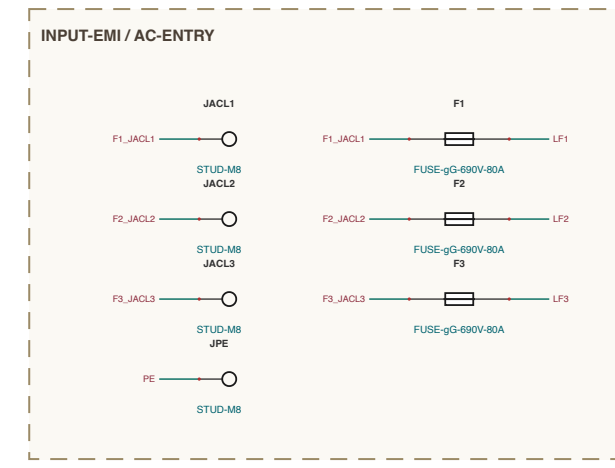
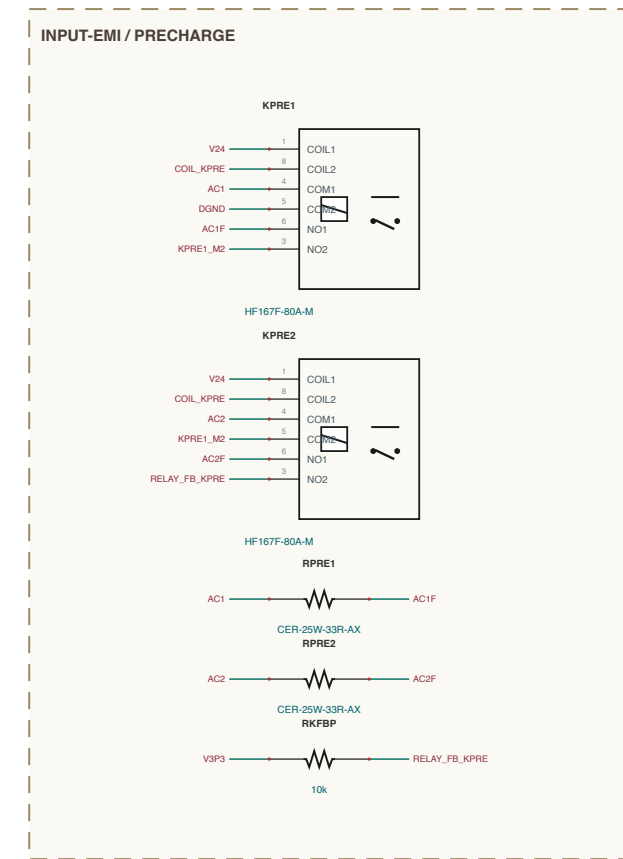
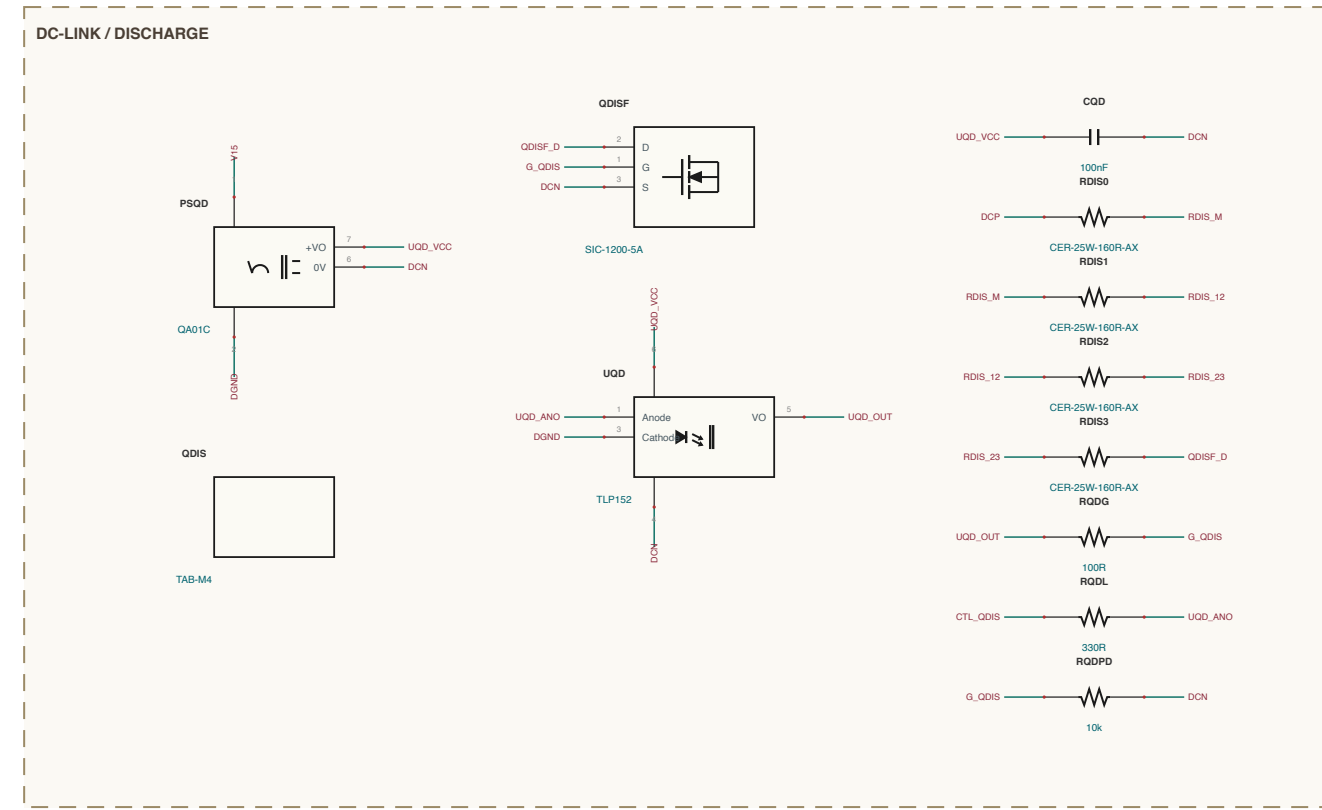
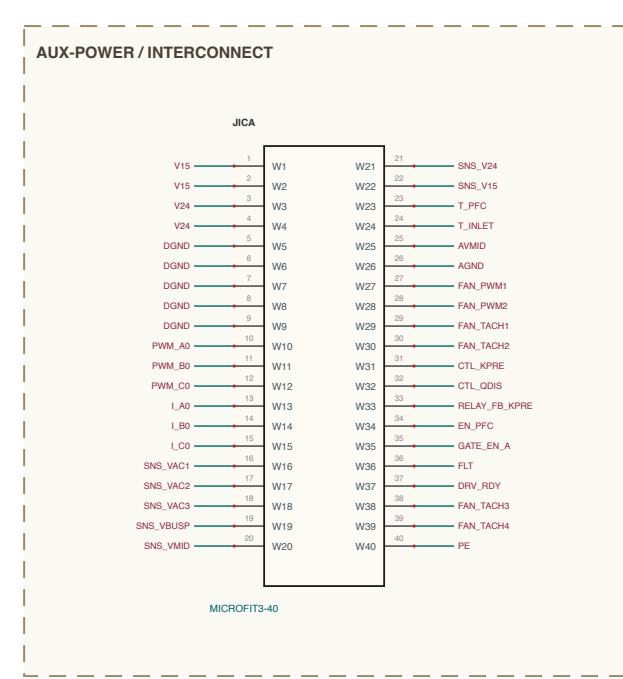
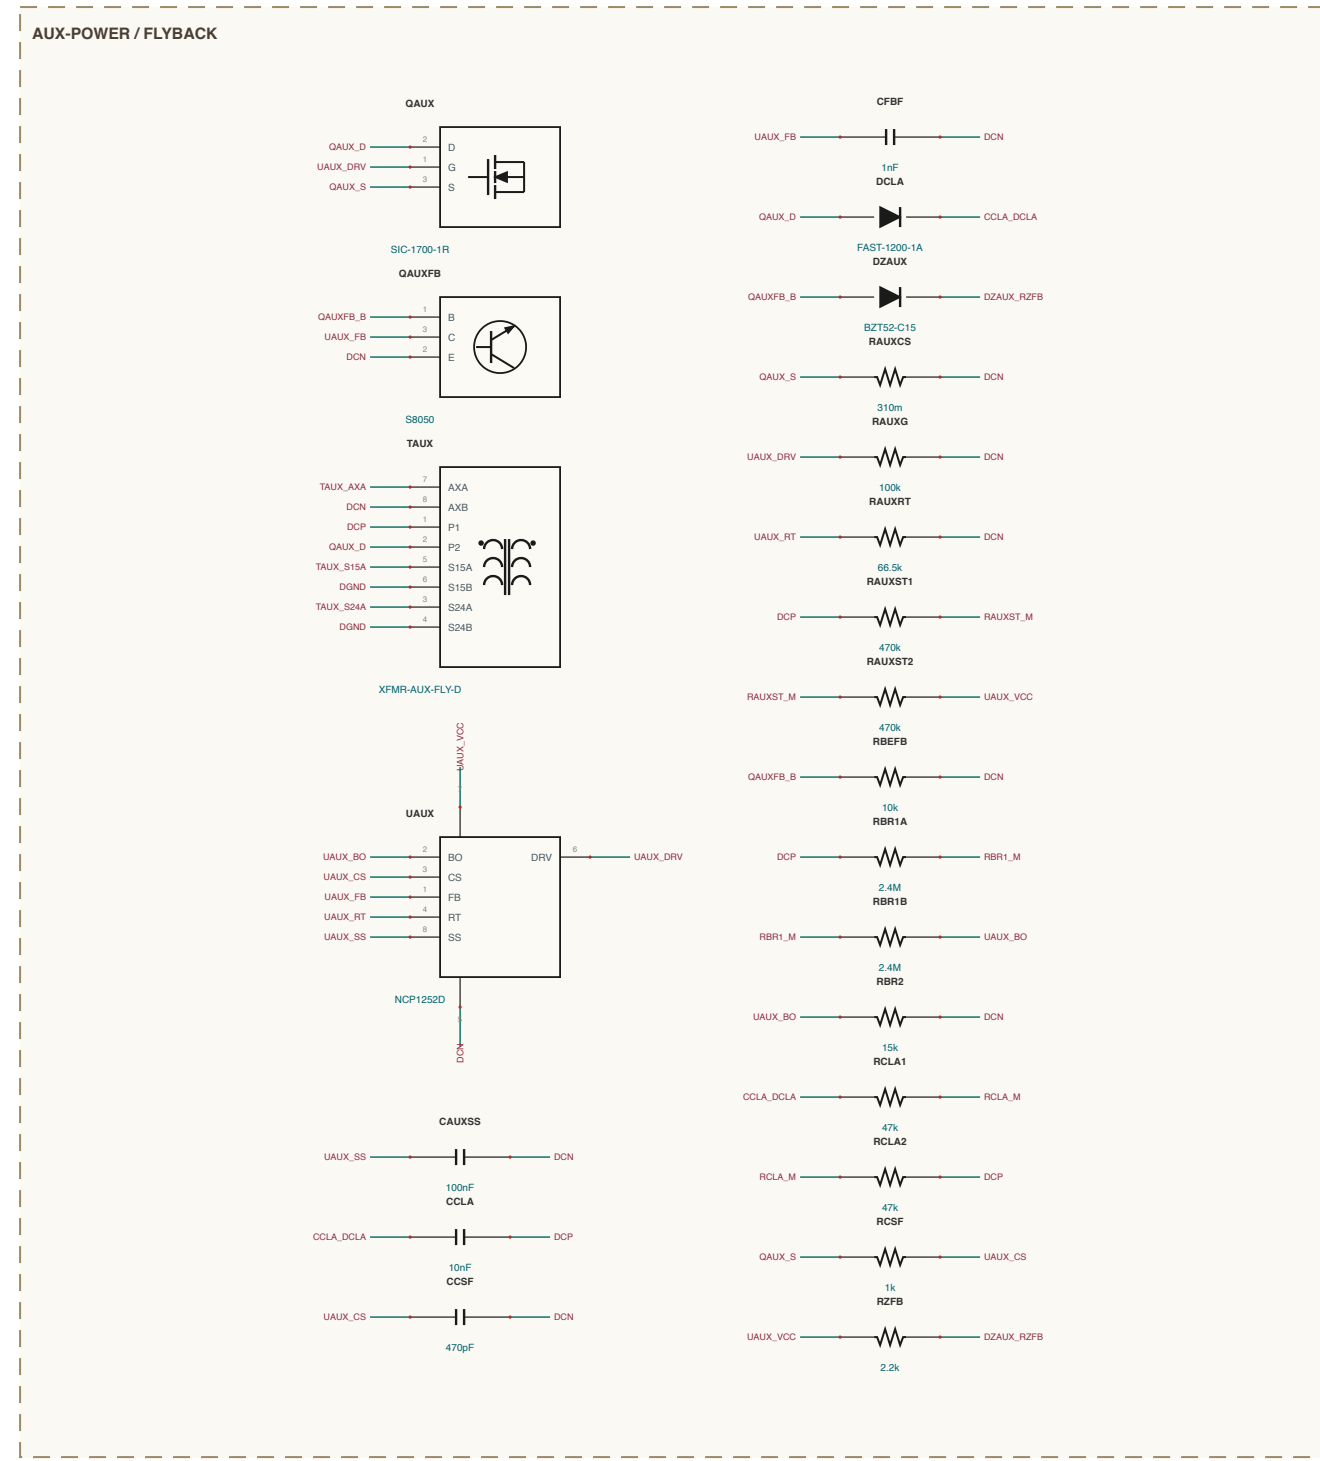
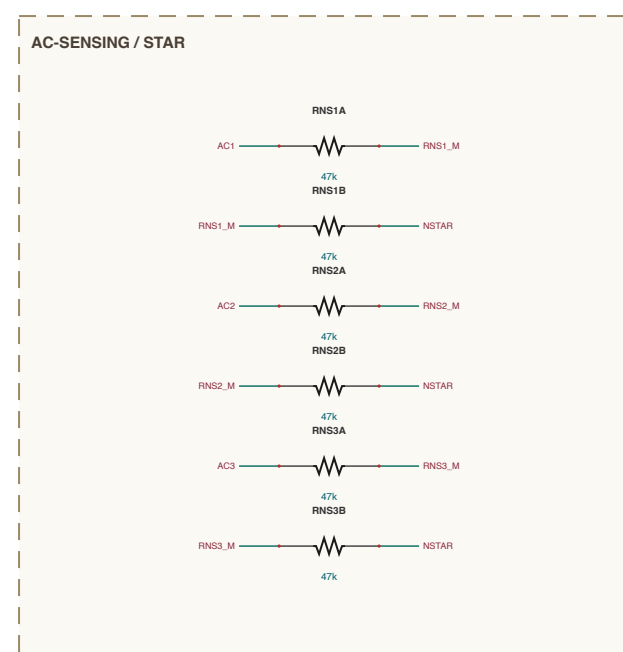
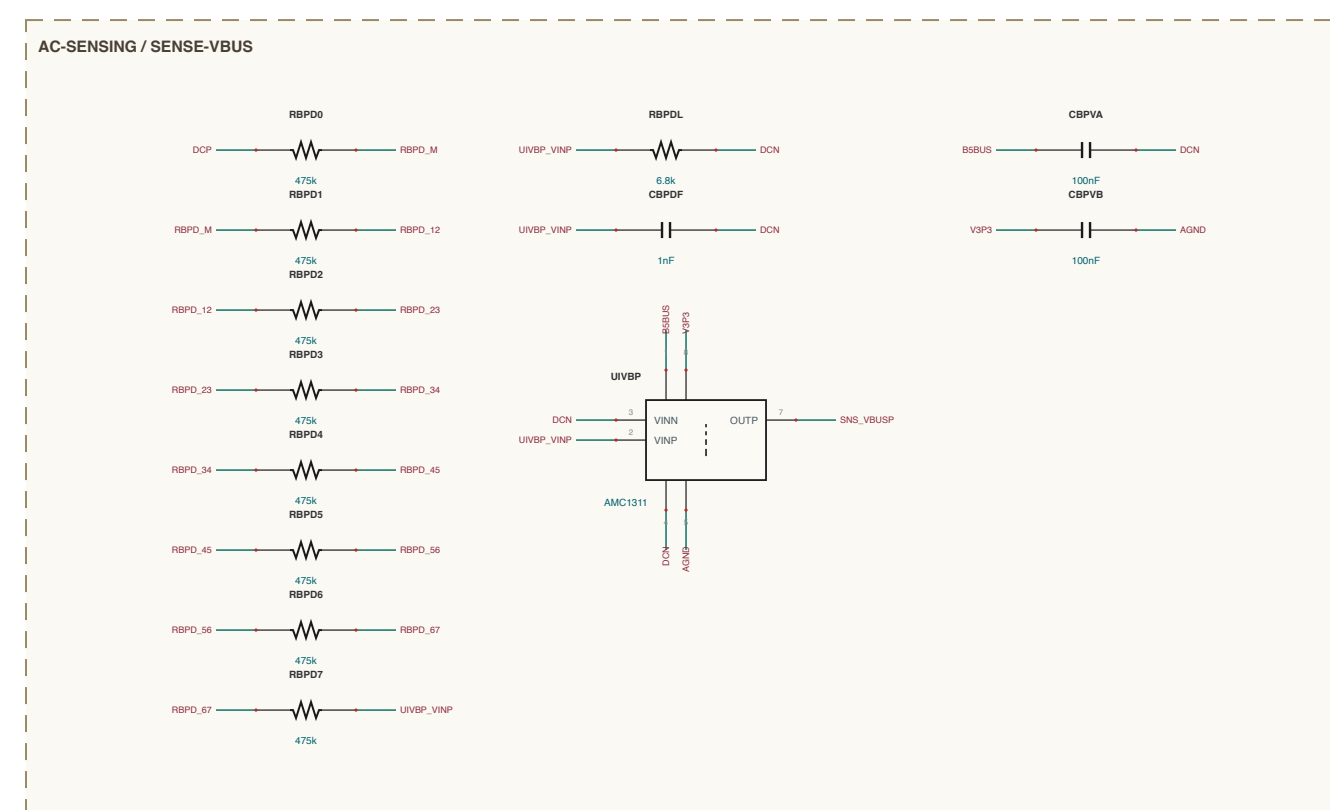
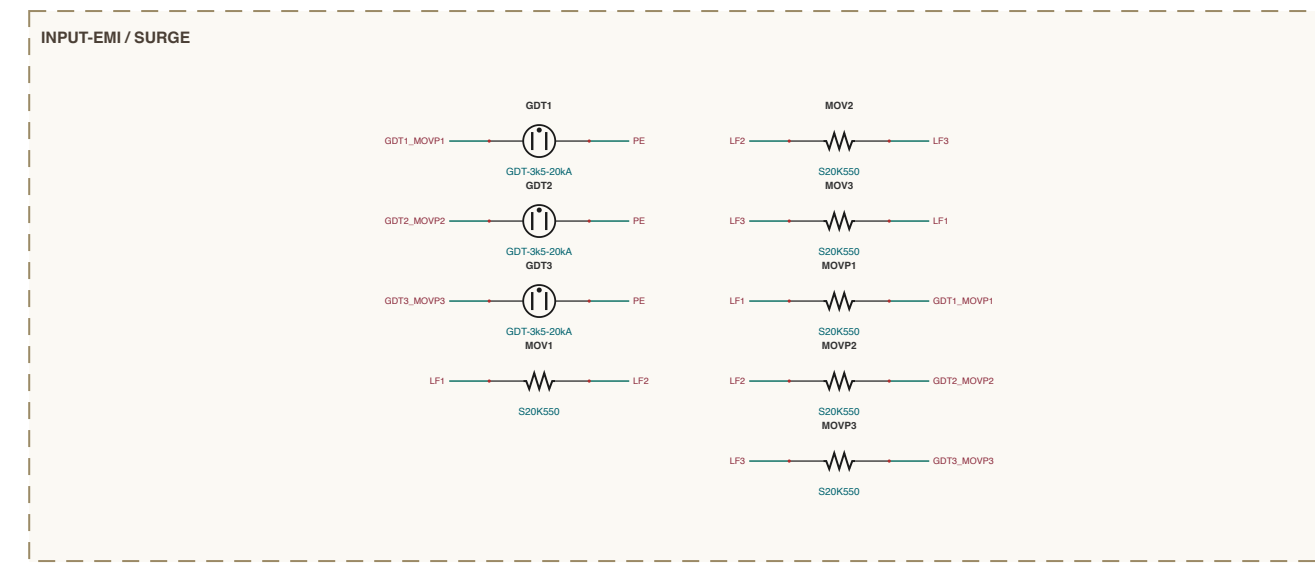
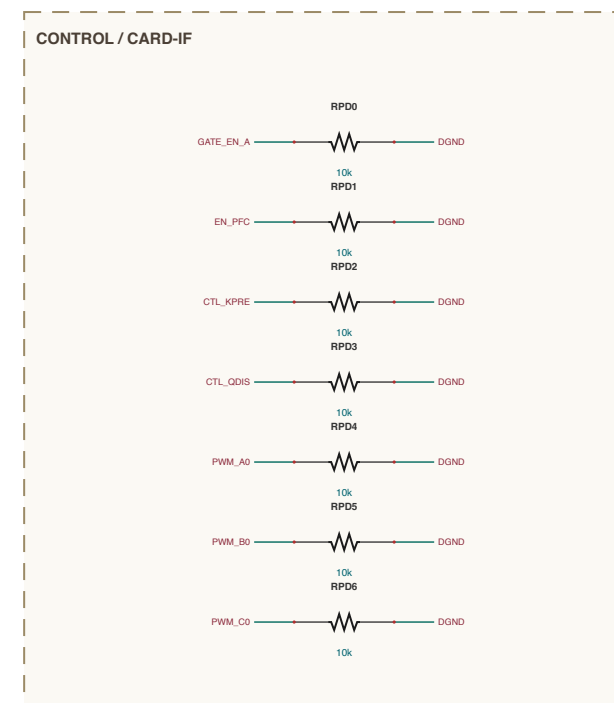
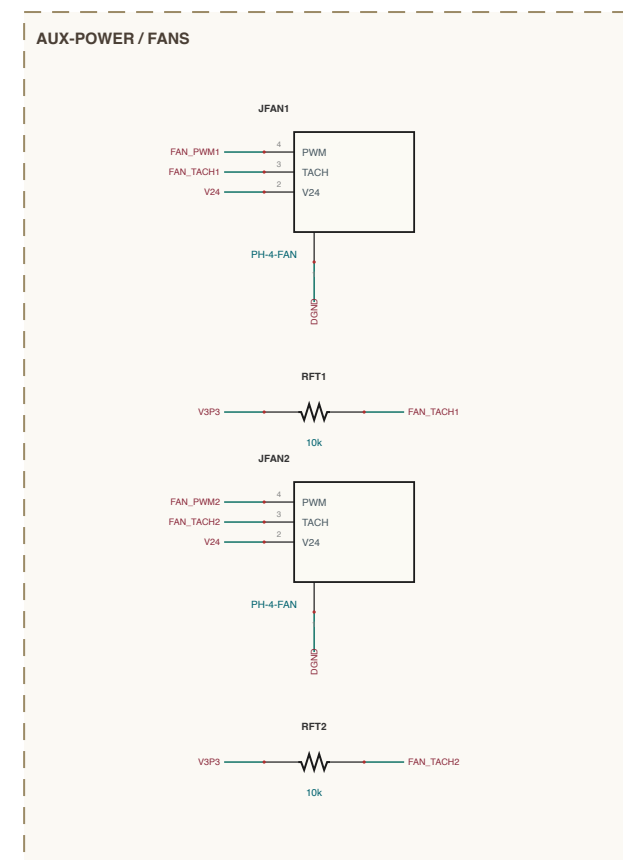
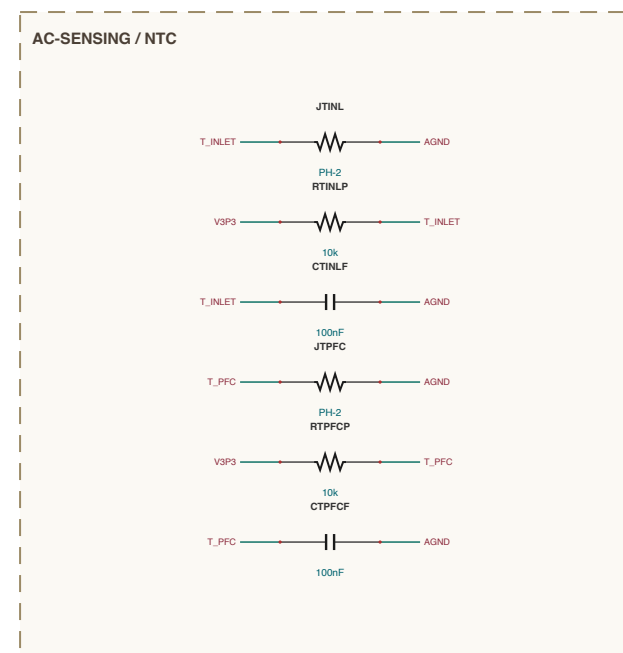
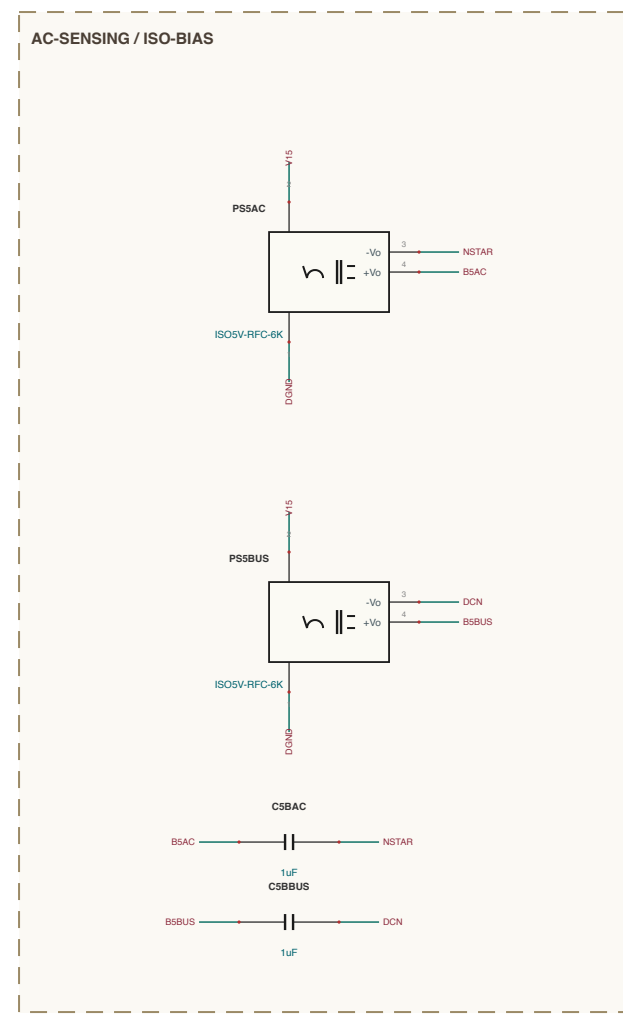
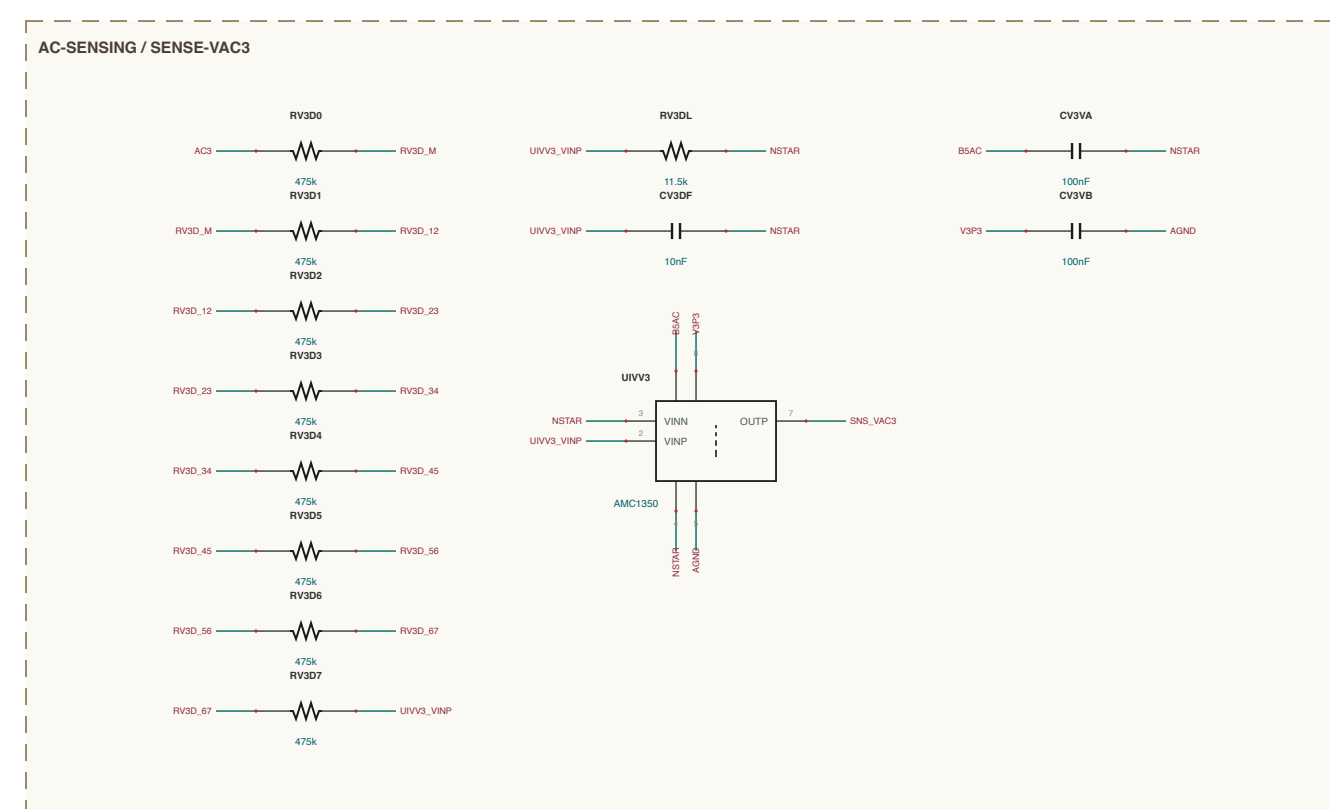
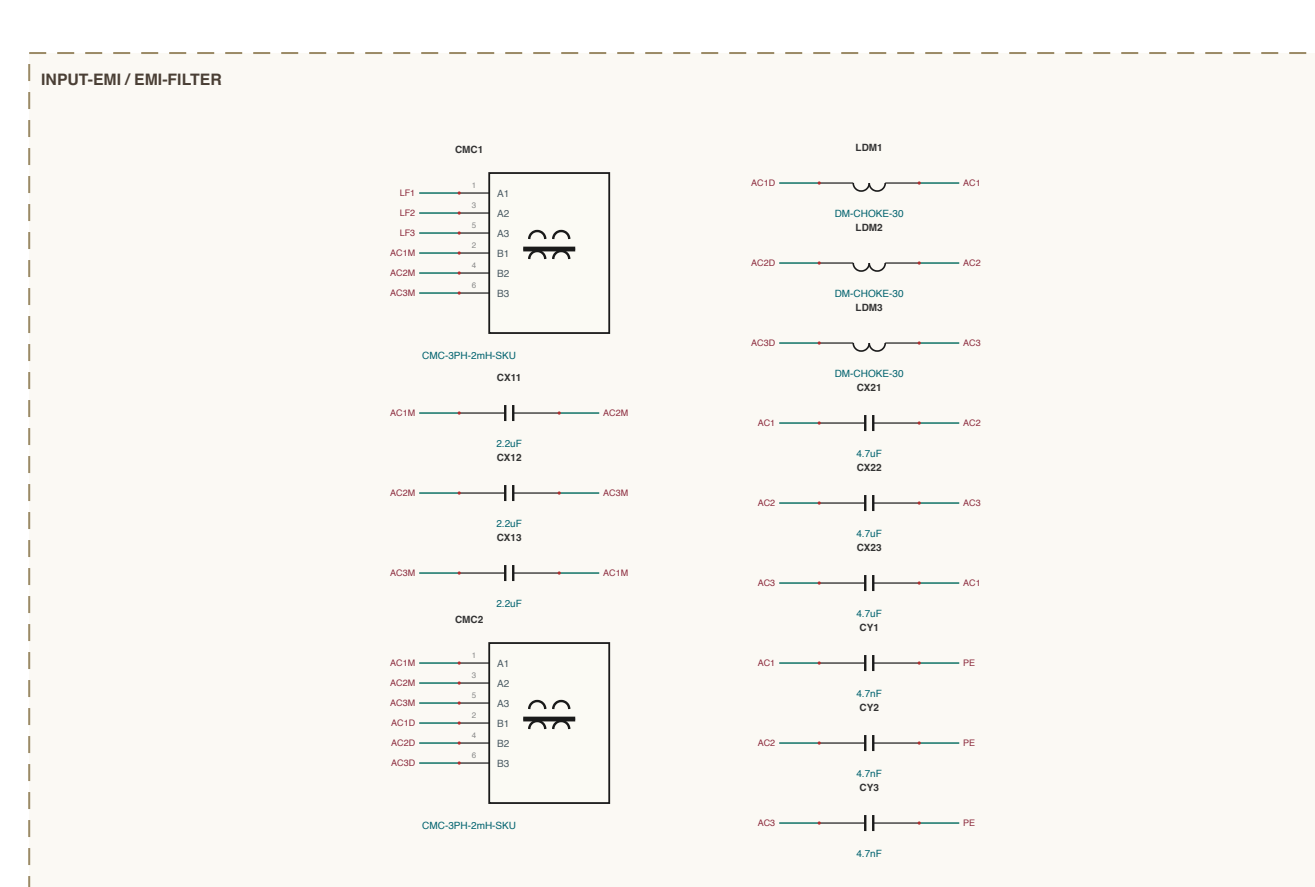
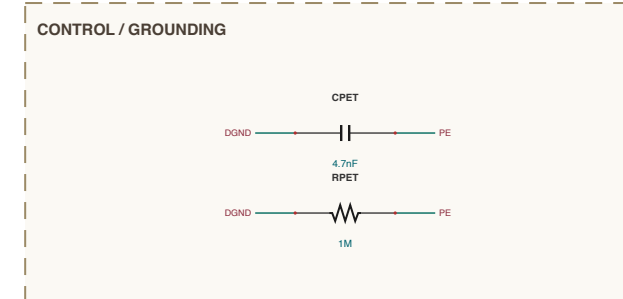
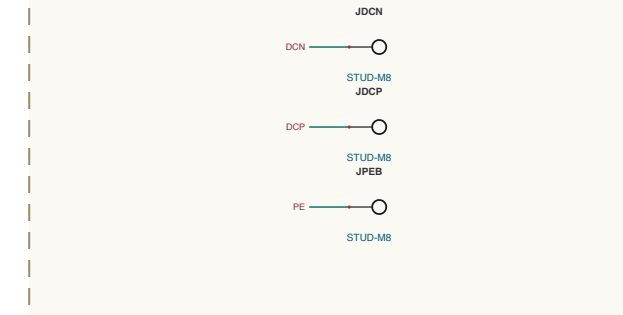
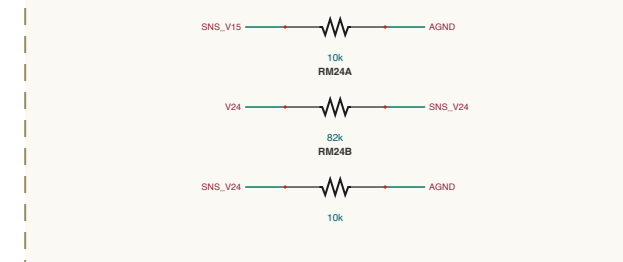
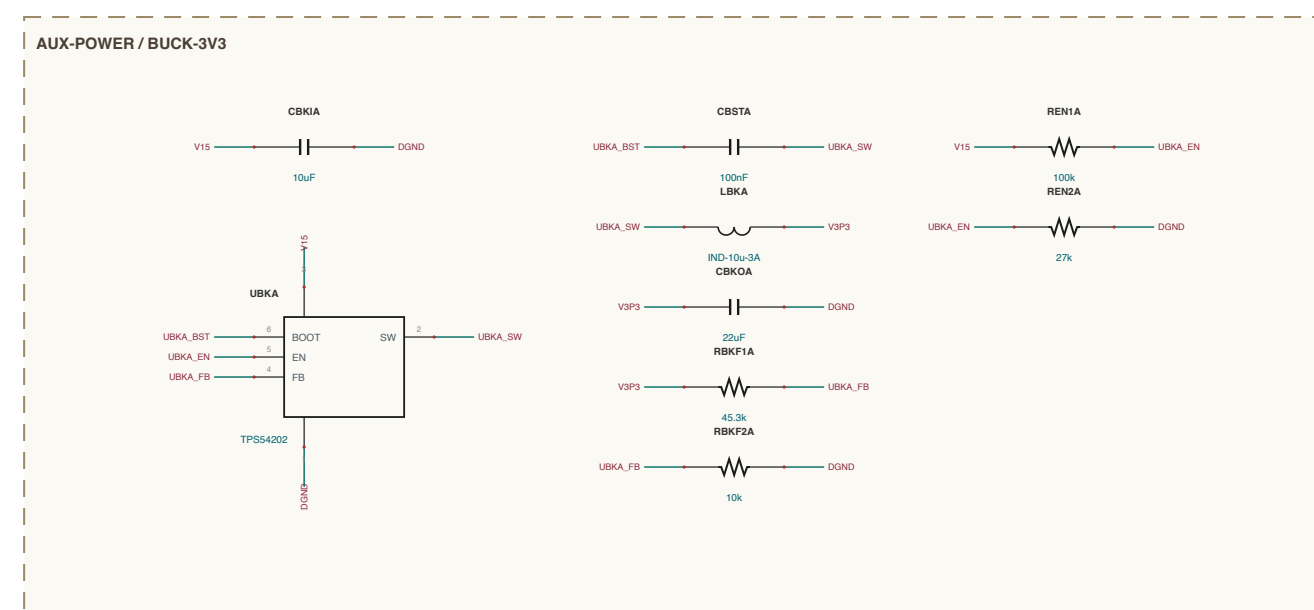
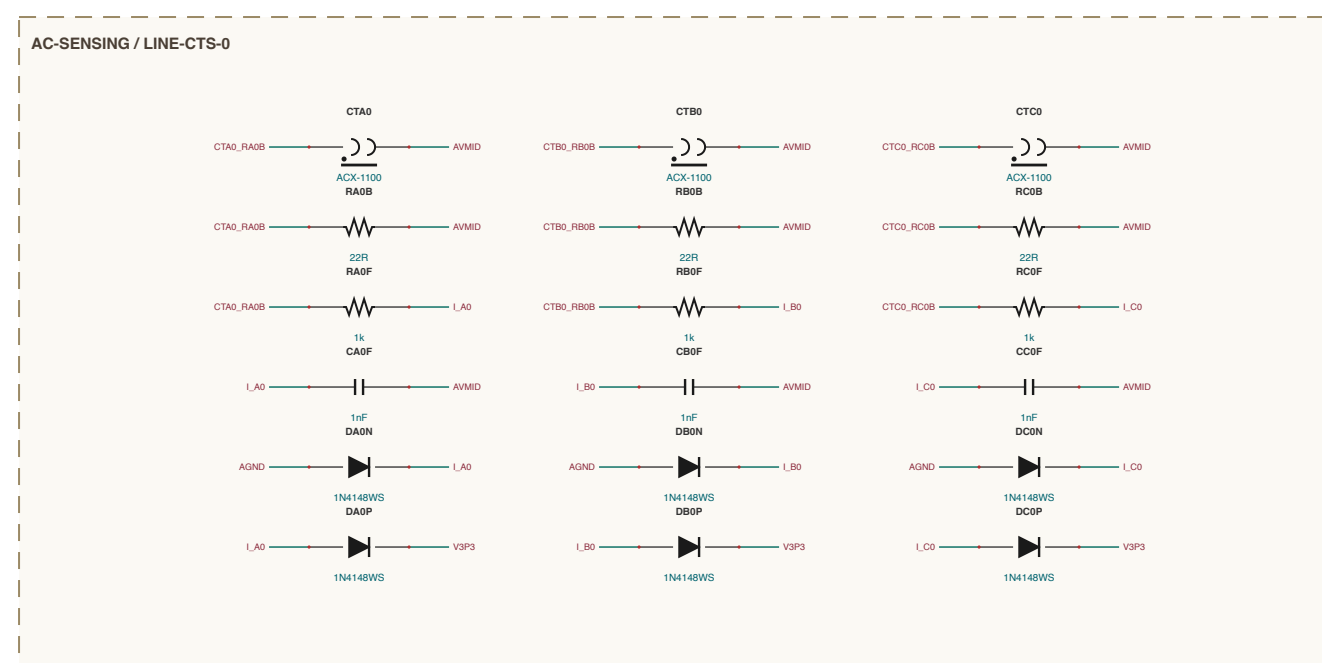
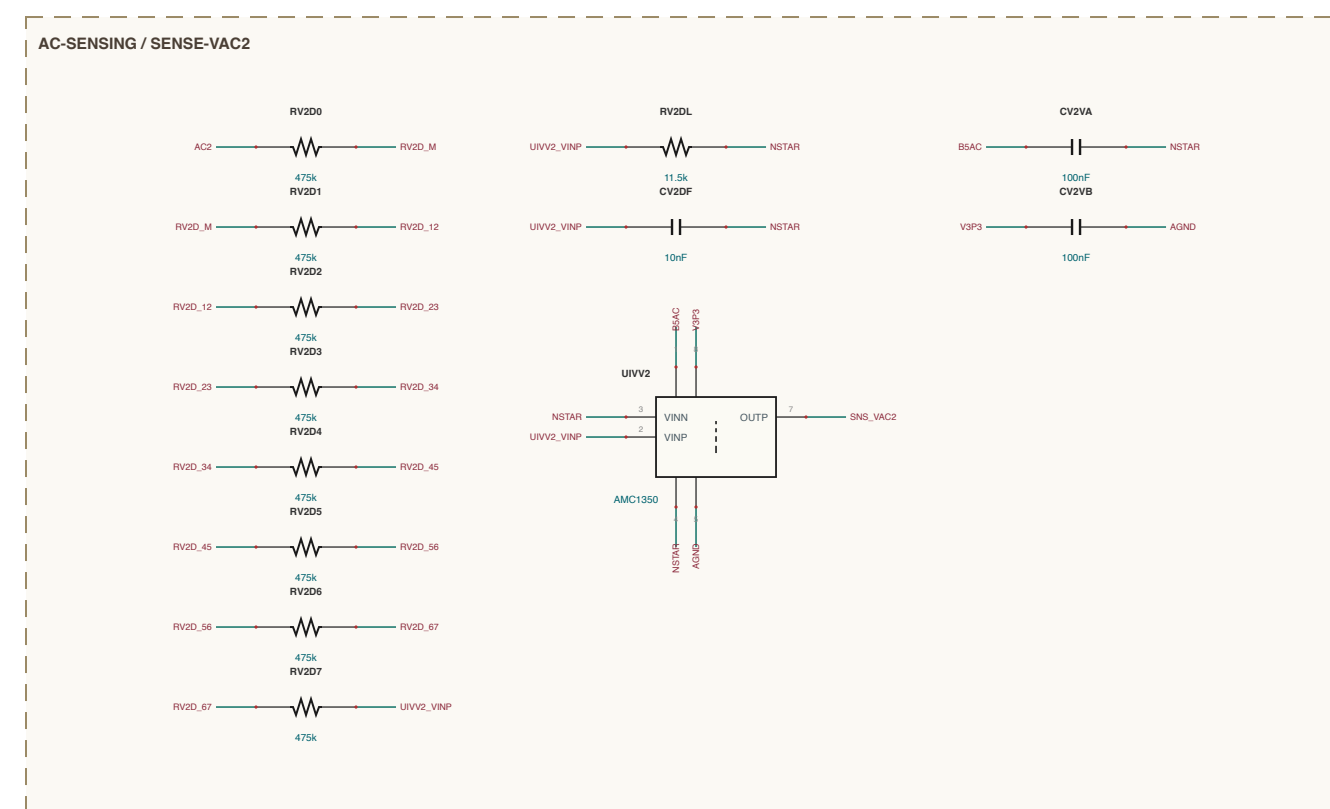
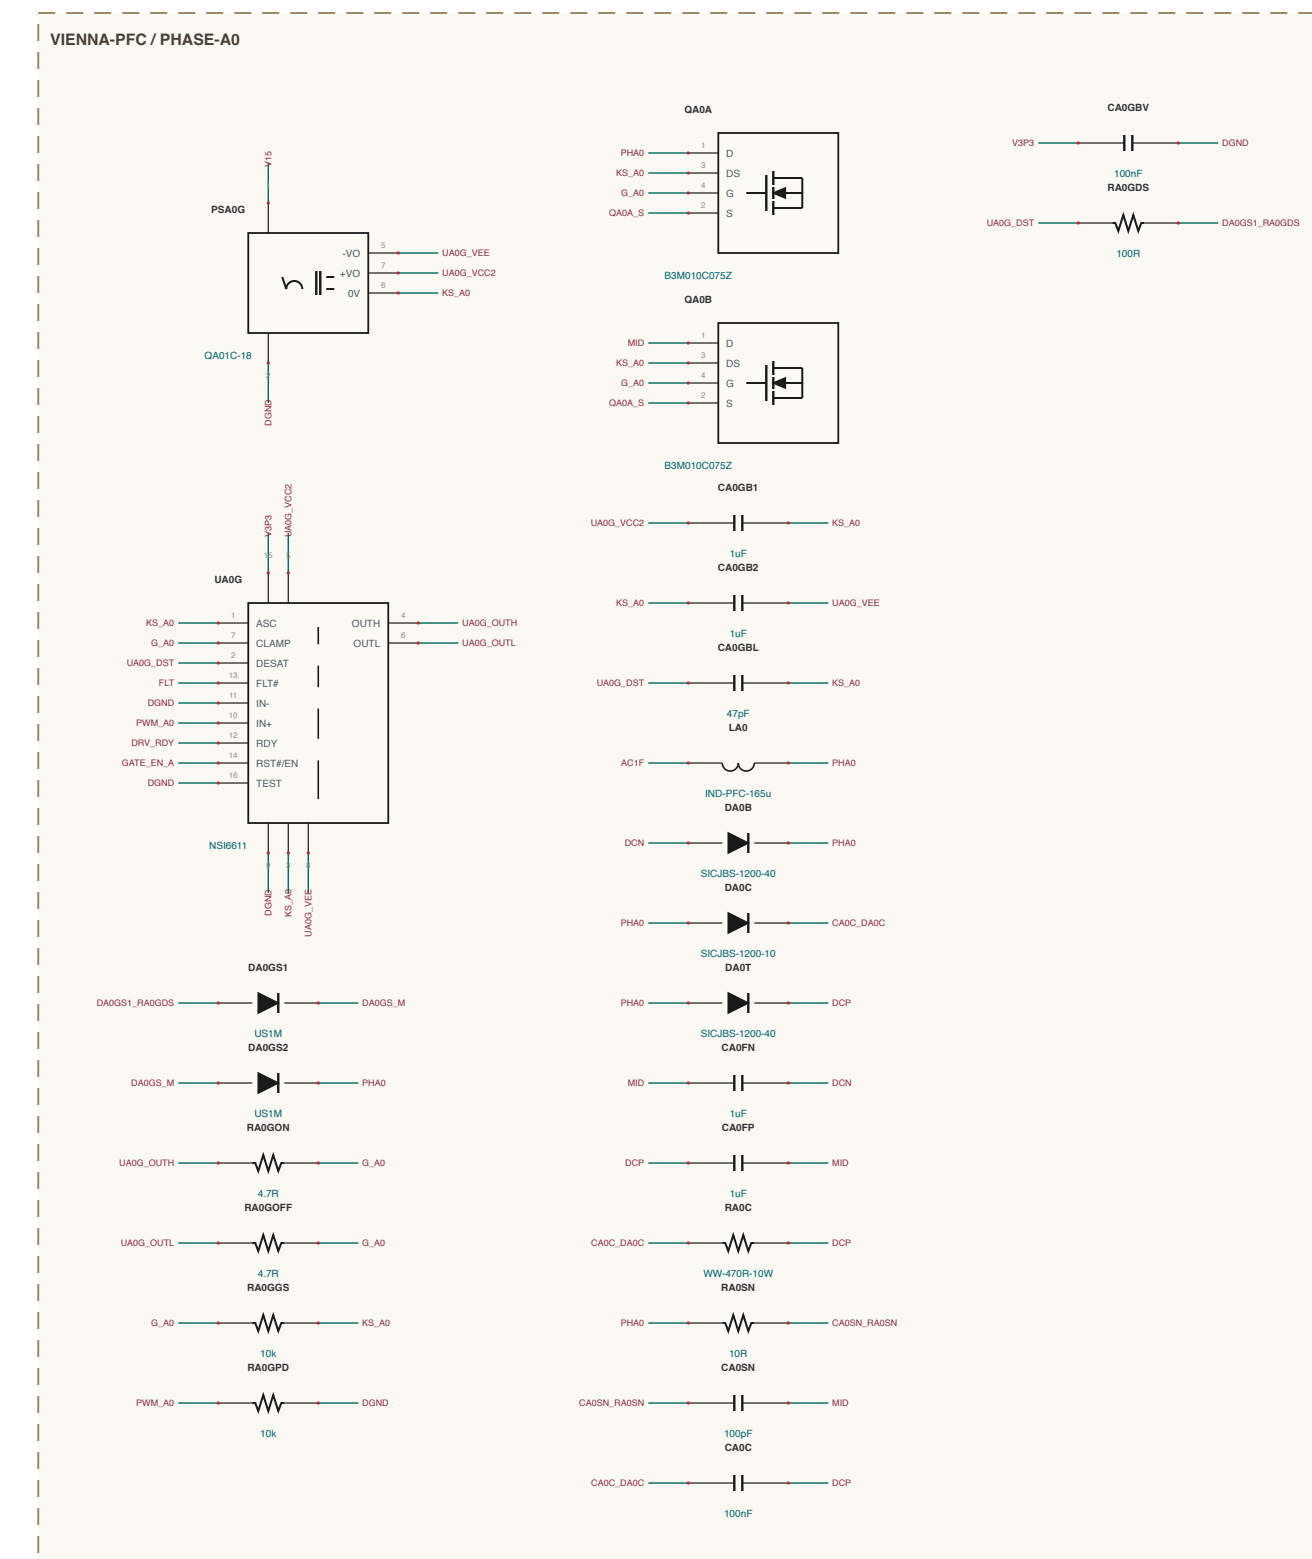
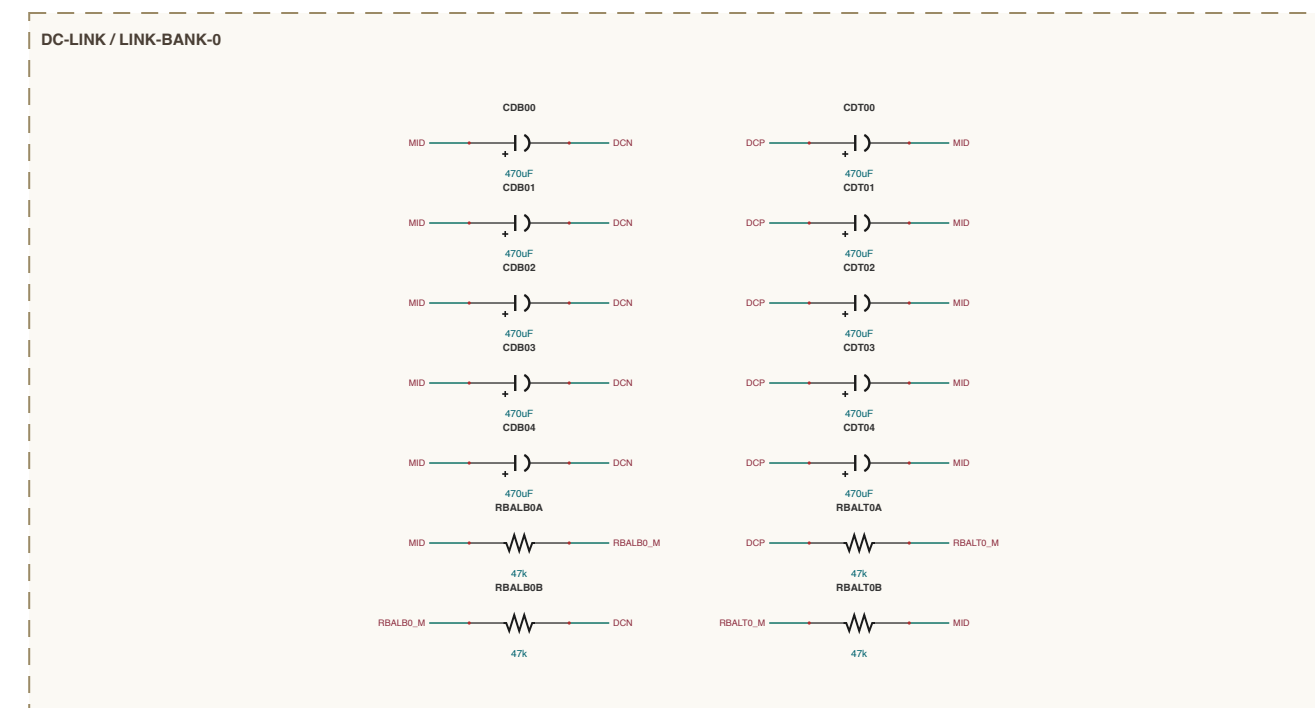
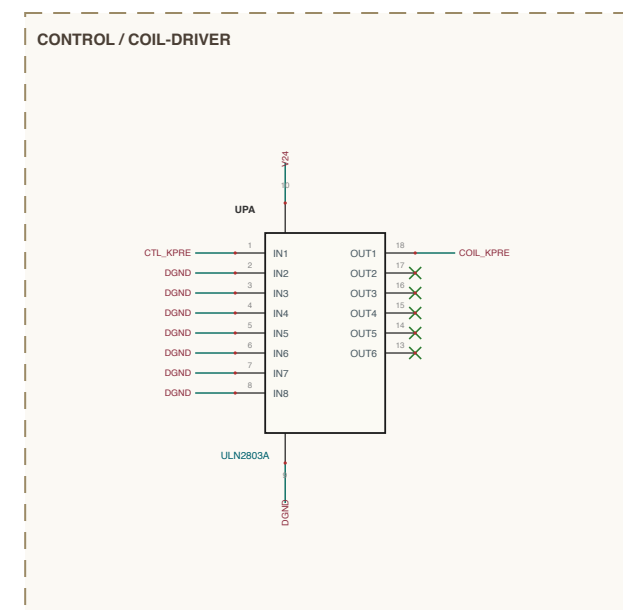
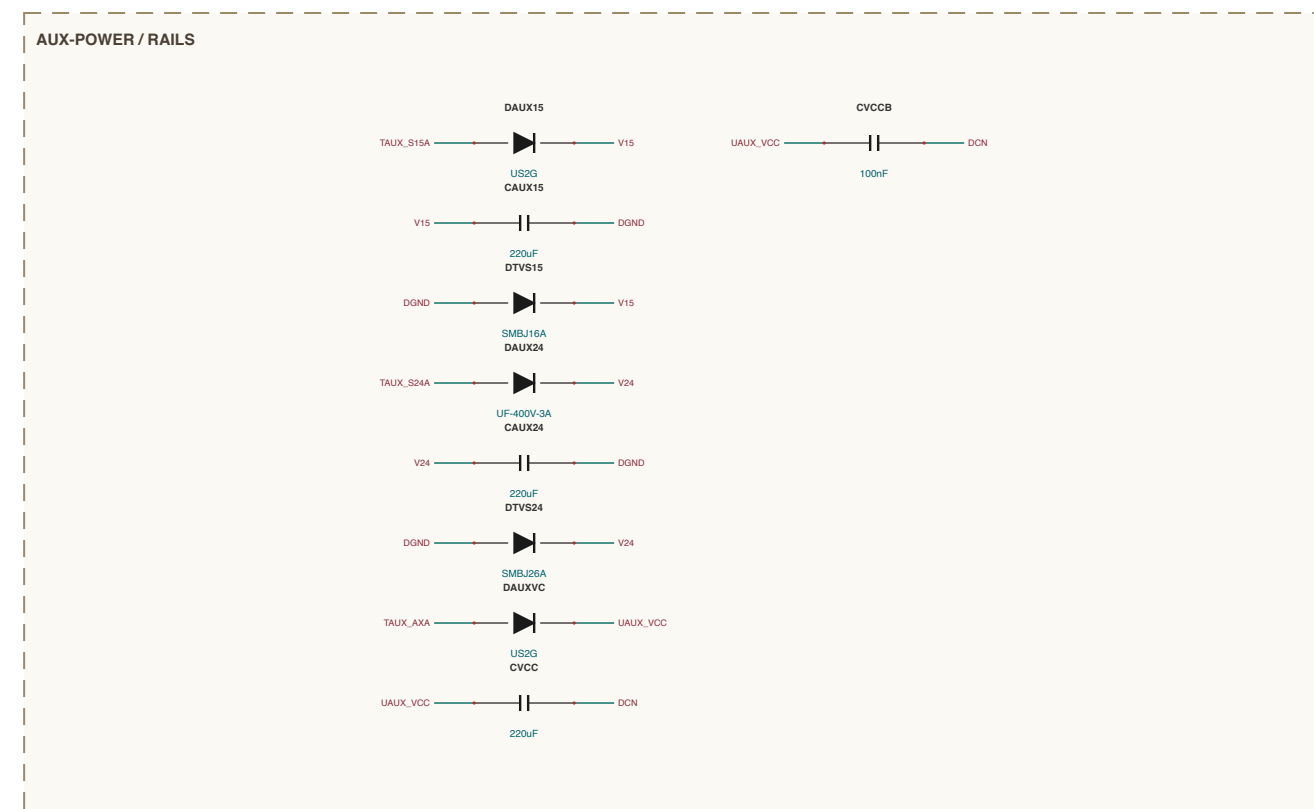
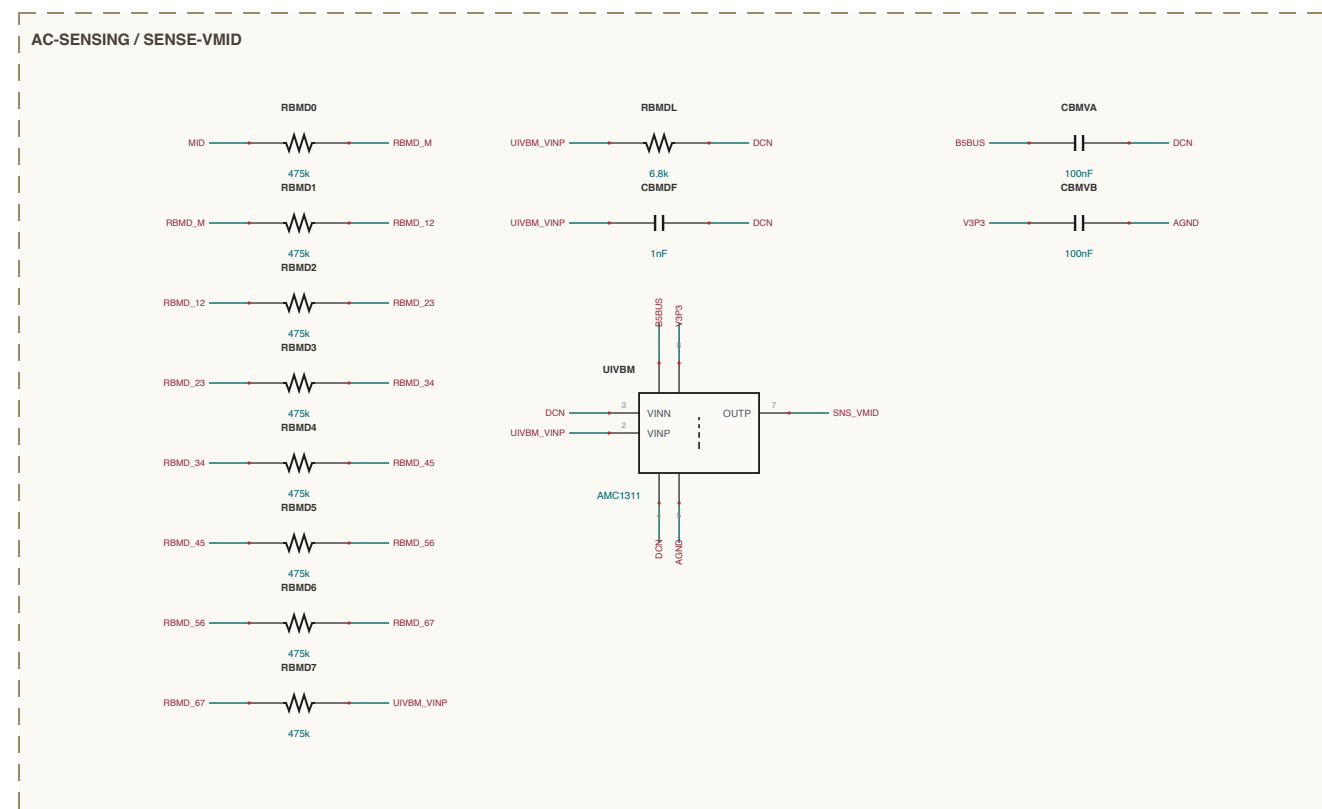


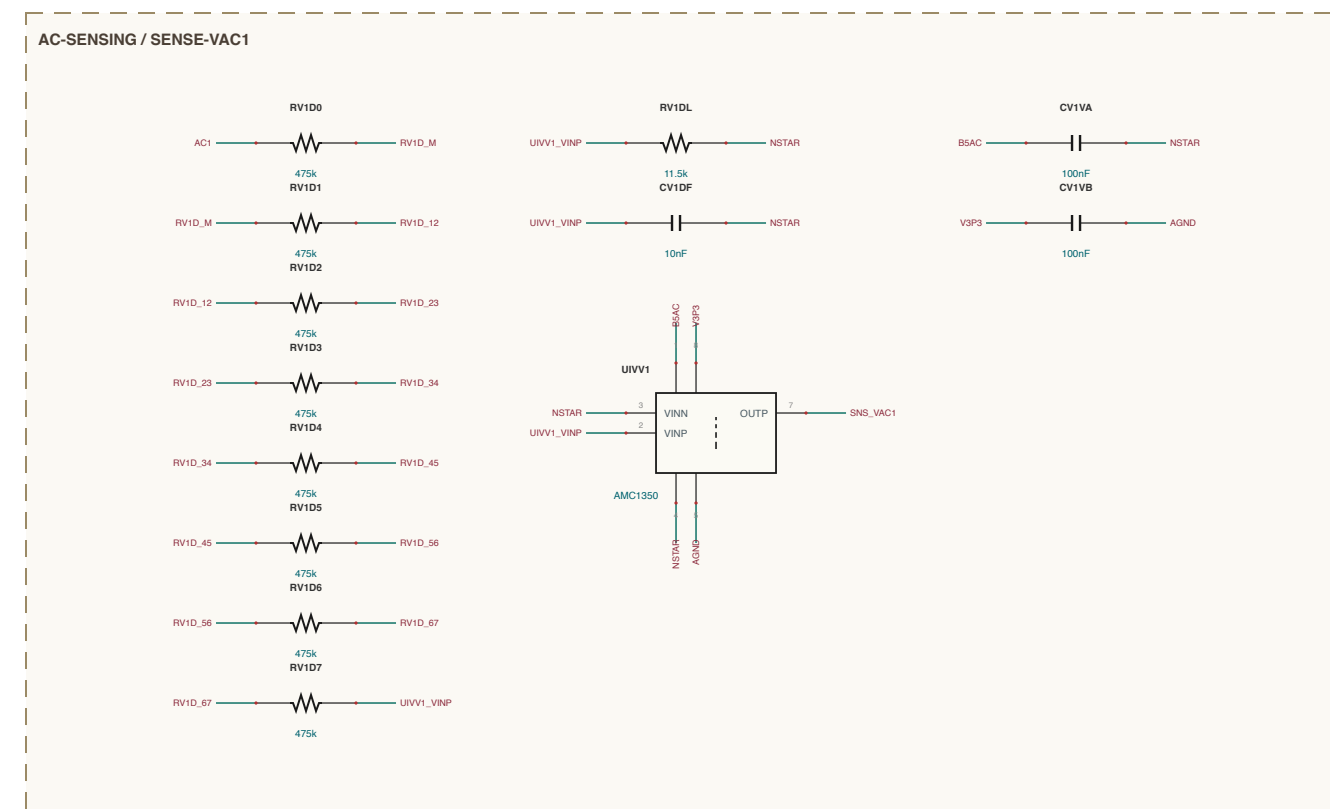

```
SHEET INDEX
|
| 30 MAY AC Panel - 1 of 2
|
|
| AC RENDING - 9 sections
|
| AUB-POWER - 6 sections
|
| CONTROL - 4 sections
|
| INPUTS - 4 sections
|
| DC LINK - 3 sections
|
| VIBRA PFC - 3 sections
|
|
|
|
| nu DLT - 8B sections - 788 components
```

NET NAMING

Internal junctions are named for what they join

Greasy: offets made at that C pin e.g. `UPVGA_VDDP`

Routerin_M midpoint of a series pair e.g. `ROUTERIN_M`

Routerin_vmos top between Routerin and e.g. `ROUTIN_01`

all others are english design notes

MAGNETICS CONSTRUCTION

Identify part characteristics and design, gage, fix, acceptance lines (see Note)

DR L&L/CIS to 80779847 Assembly, 0-03 (a-1) M4 3-in, 5/16-11mm (lead) = 1.0 150hr, =174hr 155A ga. (354852 value governs 150hr/15p rated)

DR L&L/CIS to 24 748 80A, 0-07, 0-08 200002 = 7.400 155A ga. (3504 7.400)

Note: L = 150 = measured after leakage (30s COMEGATE leakage spread) at 740K sections