
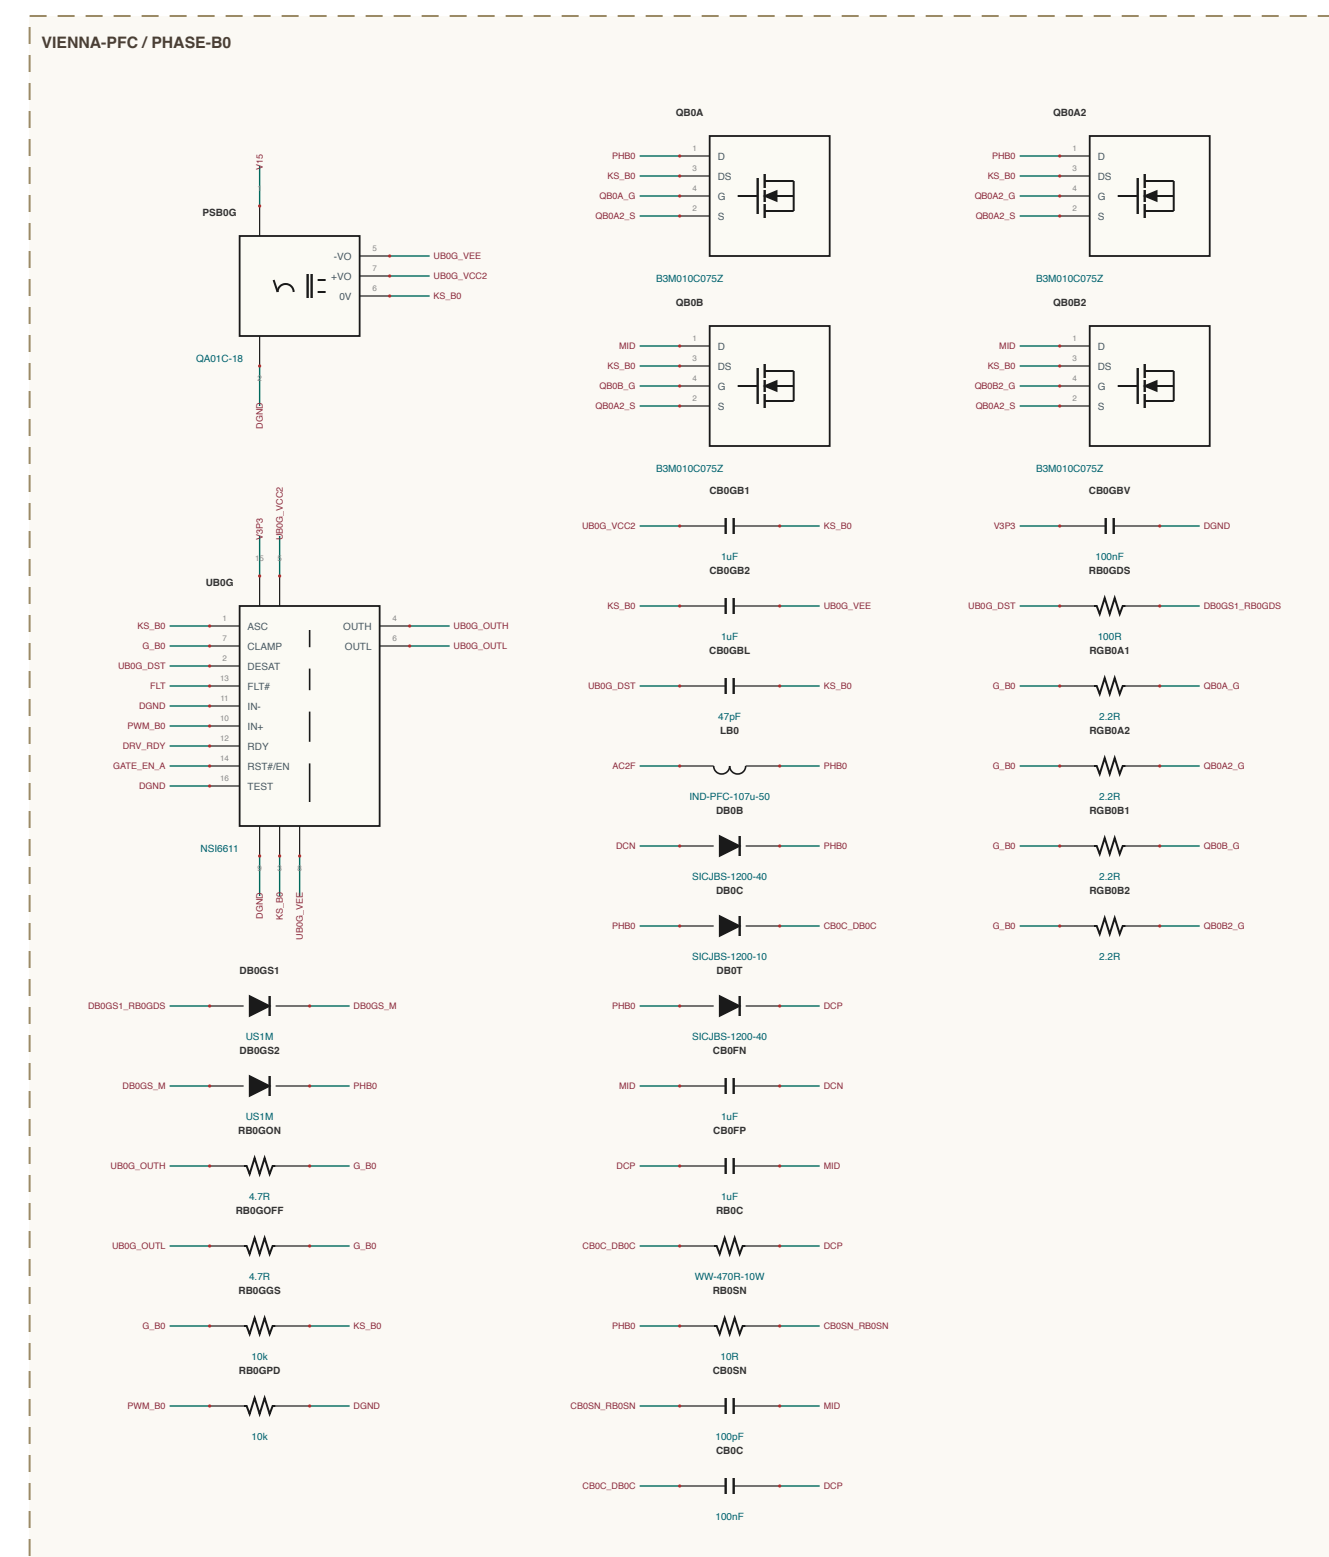
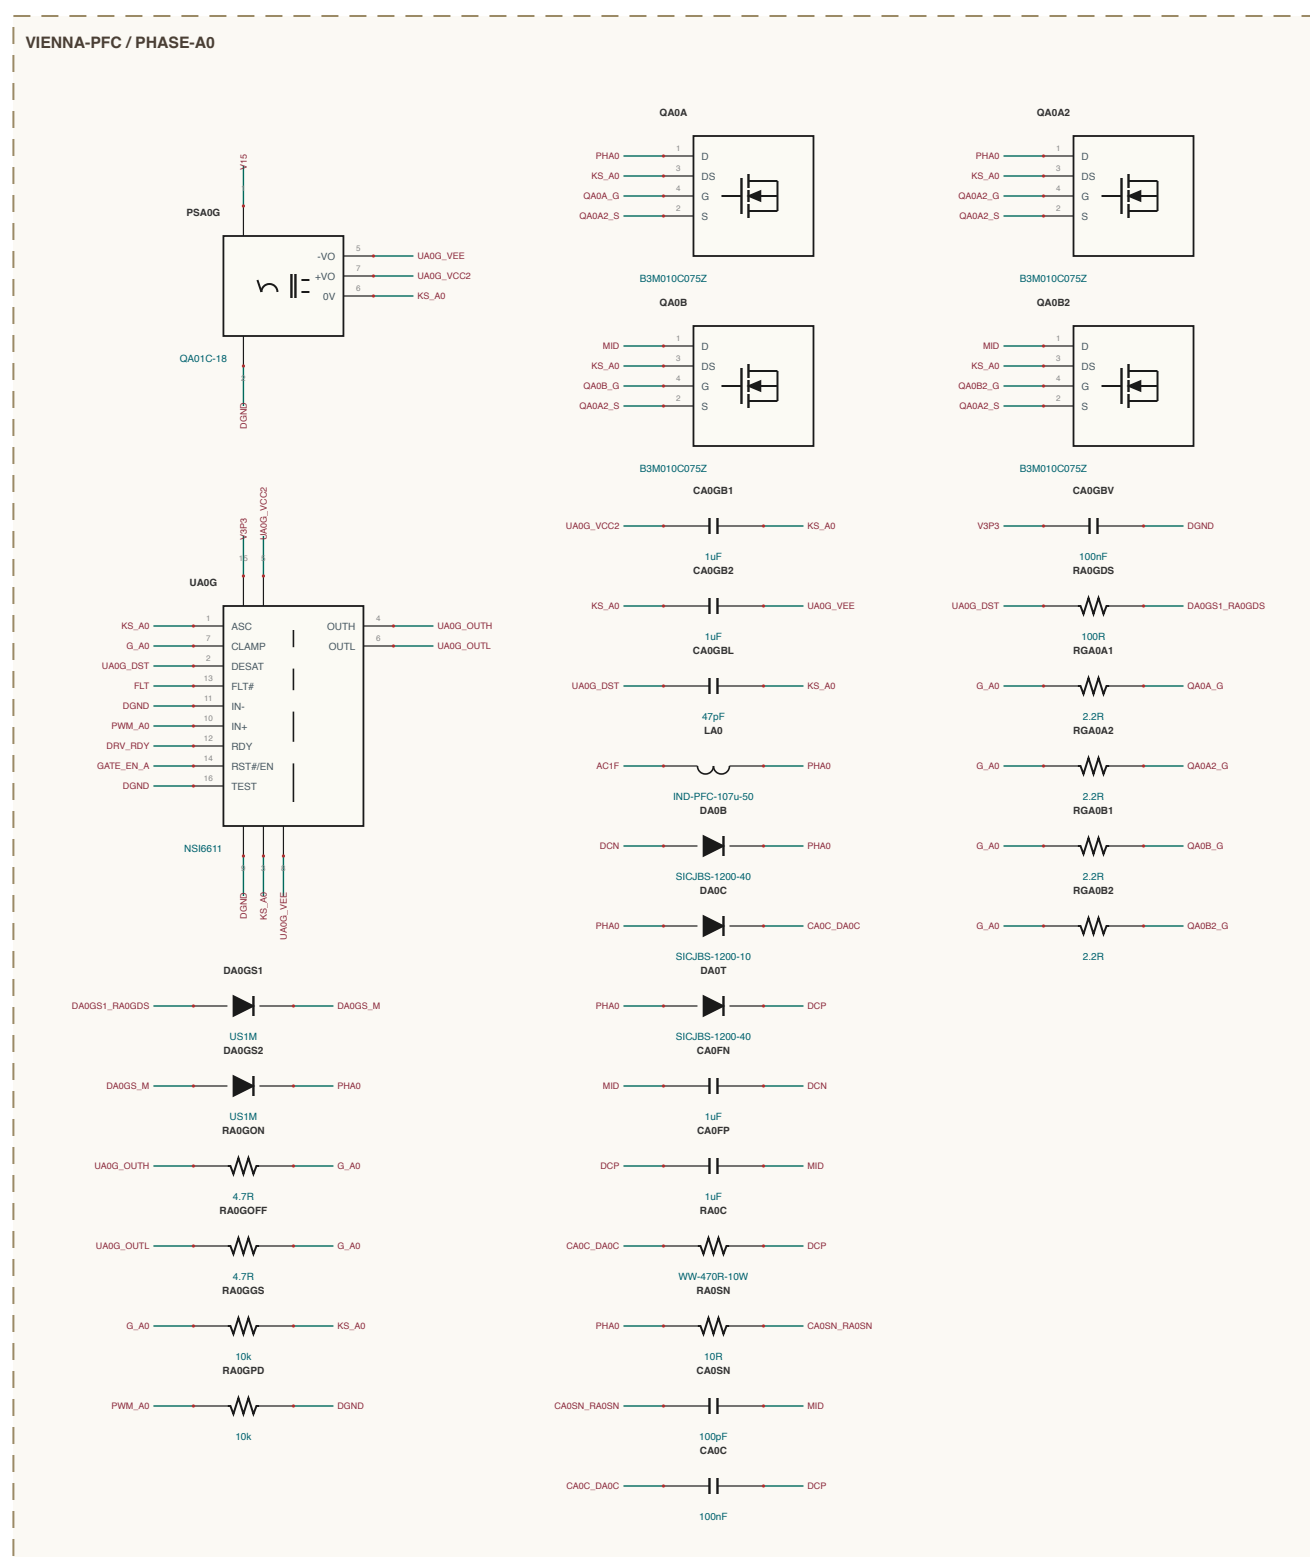
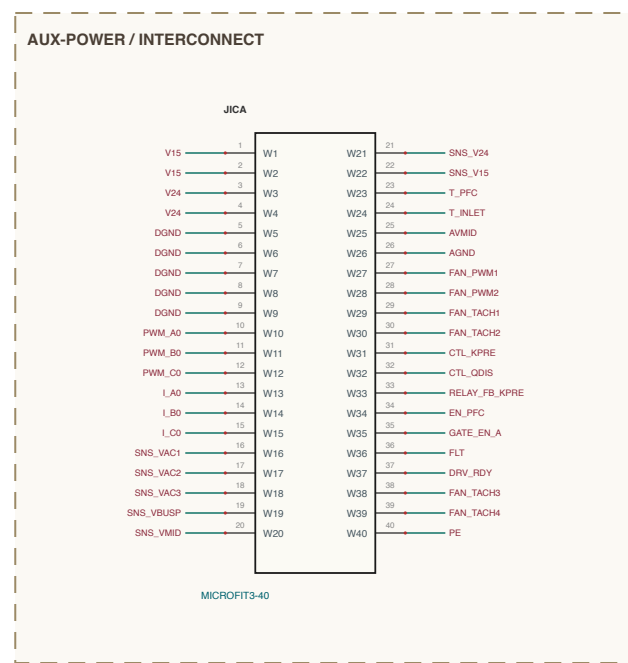
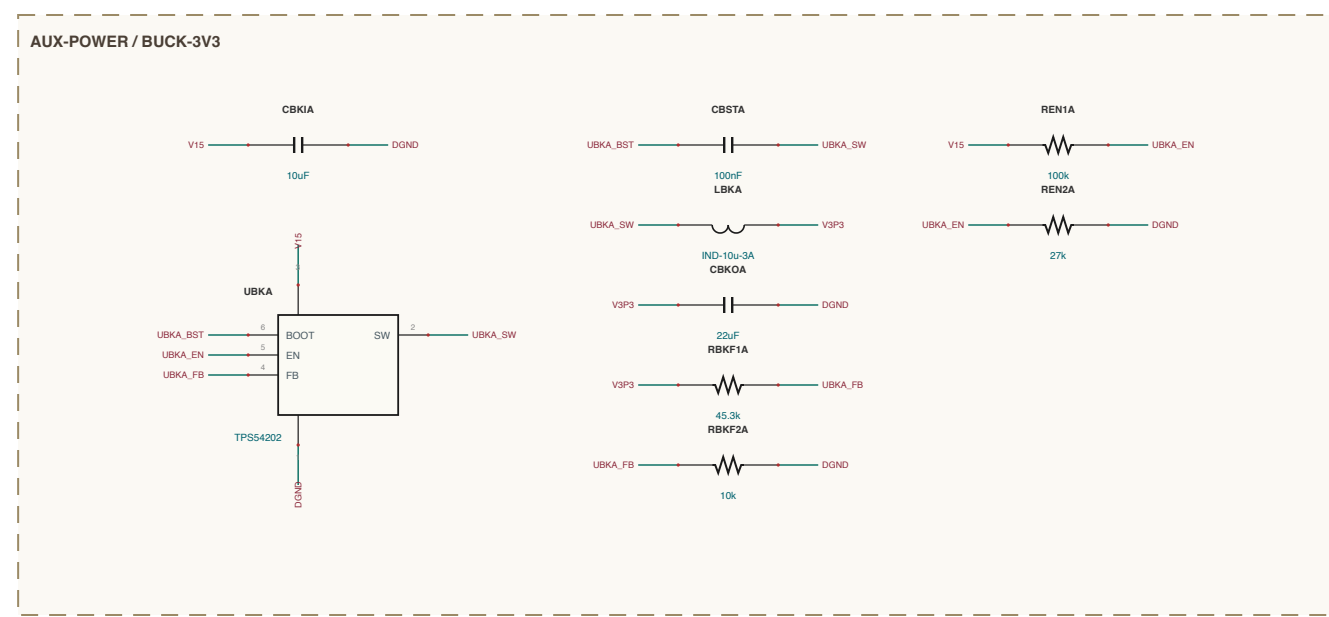
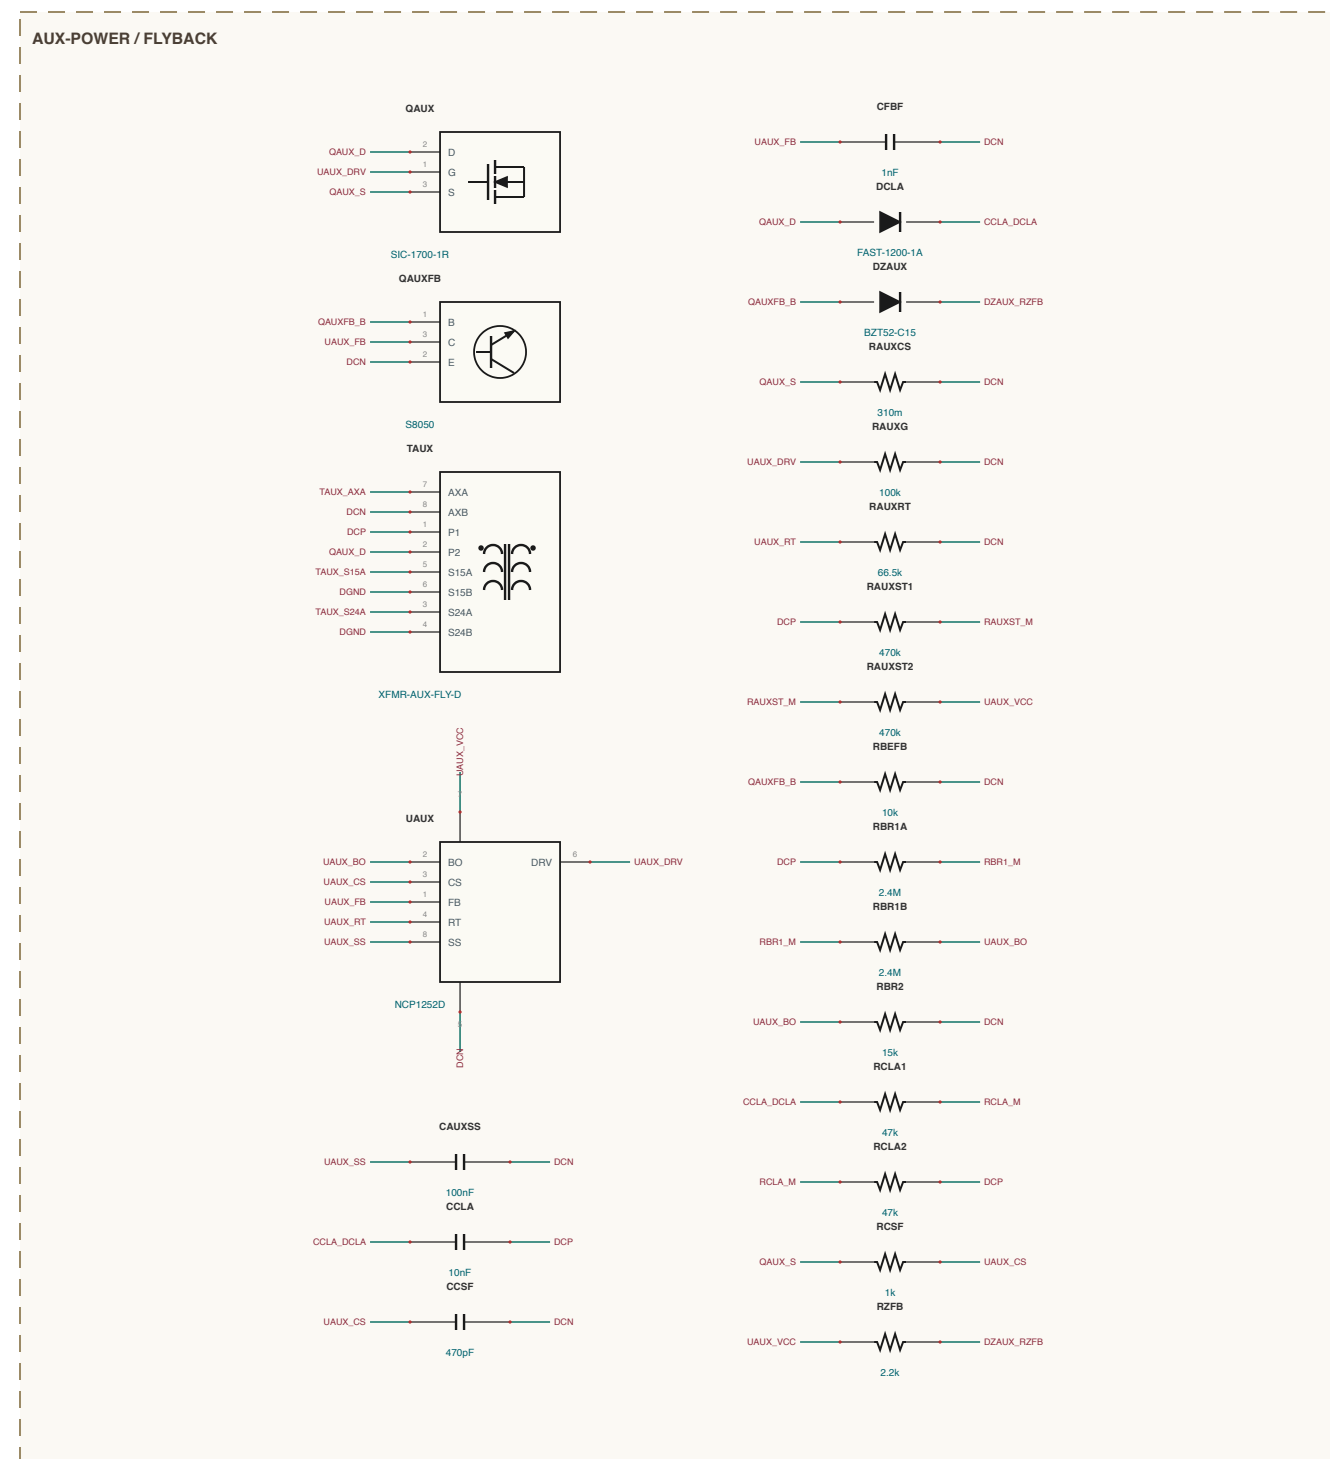
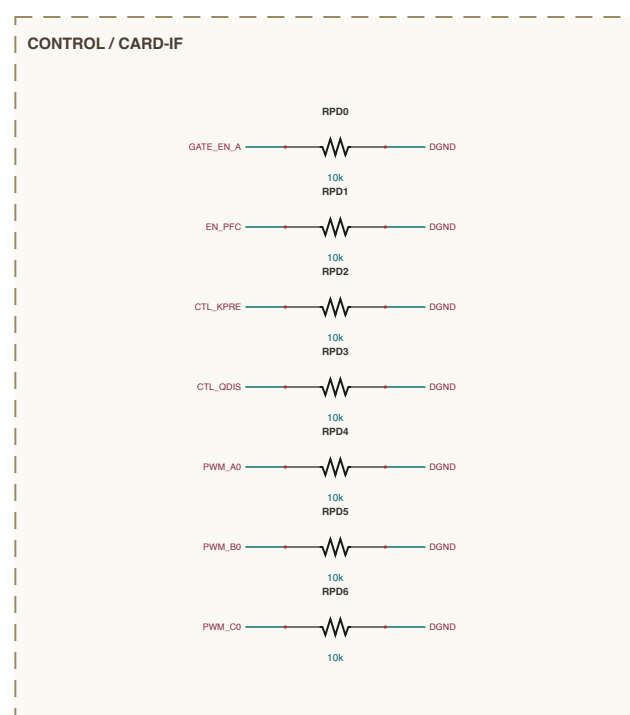
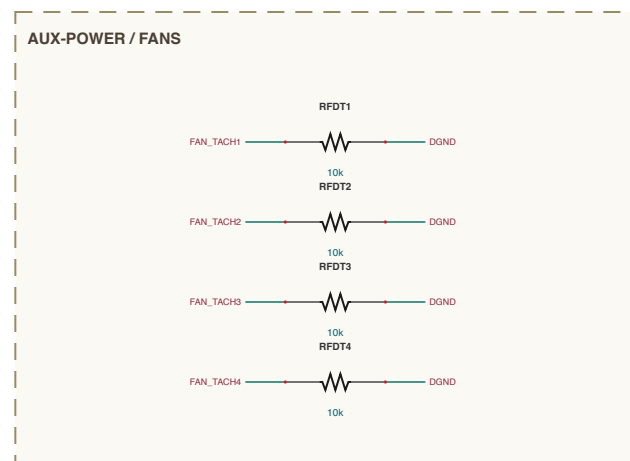
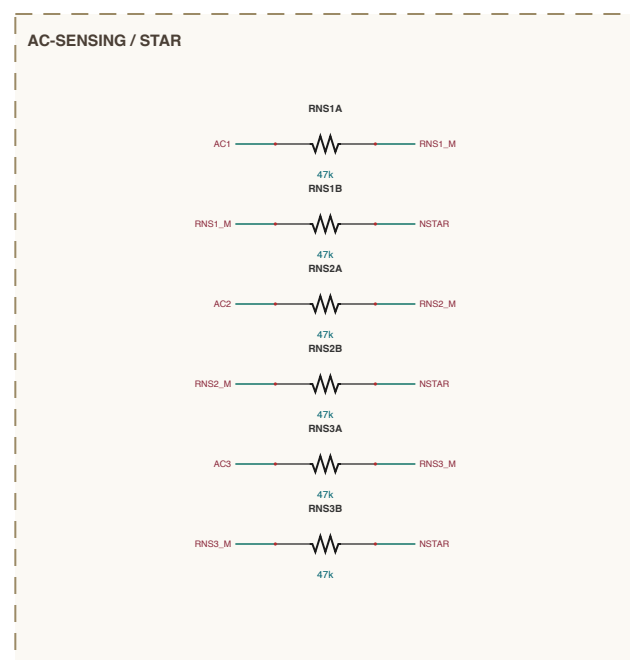
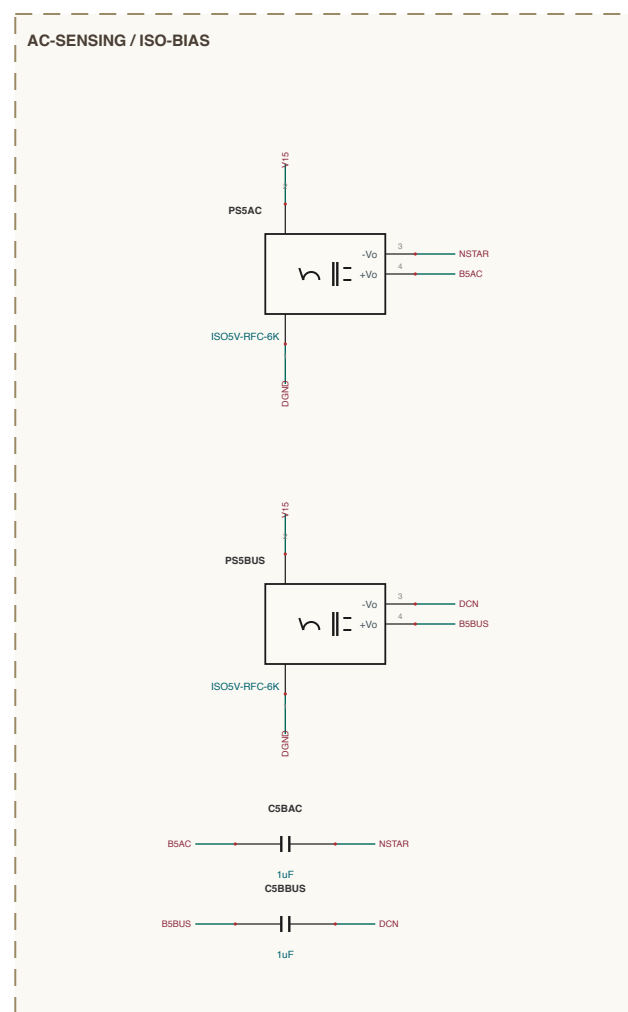
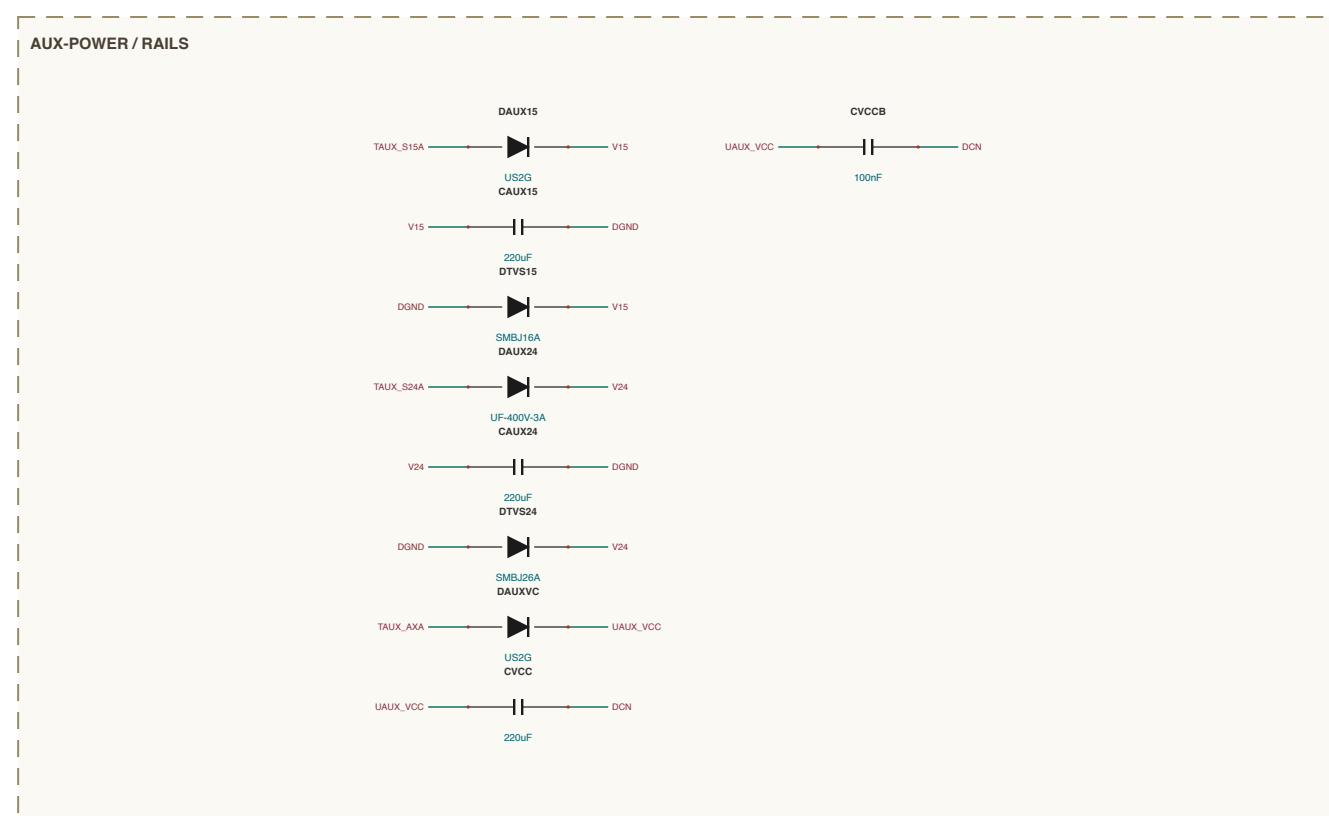
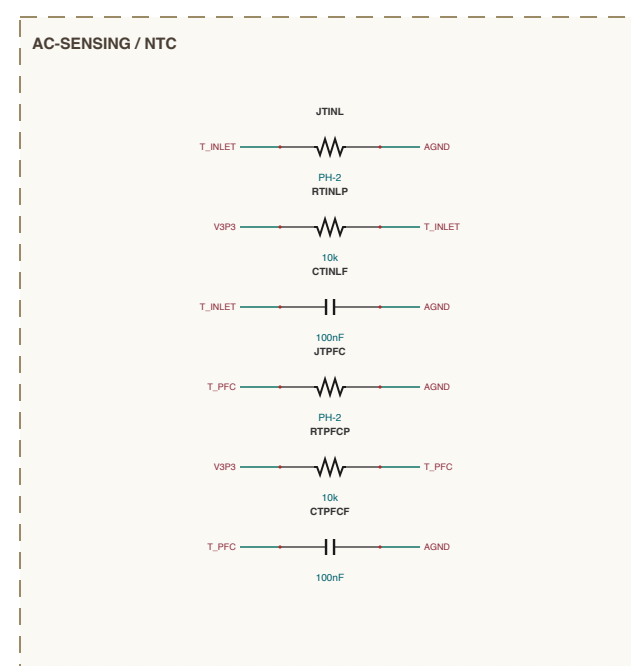
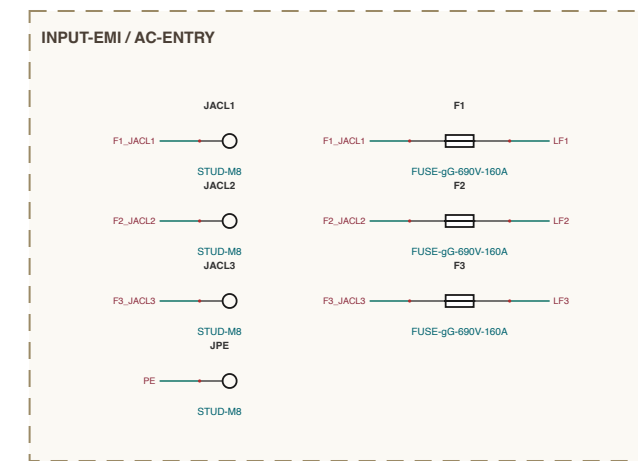
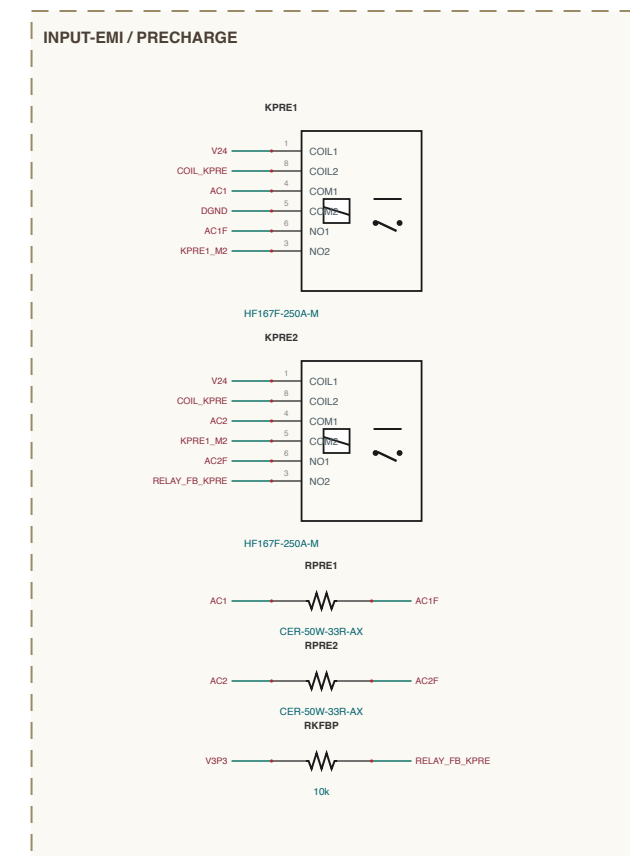
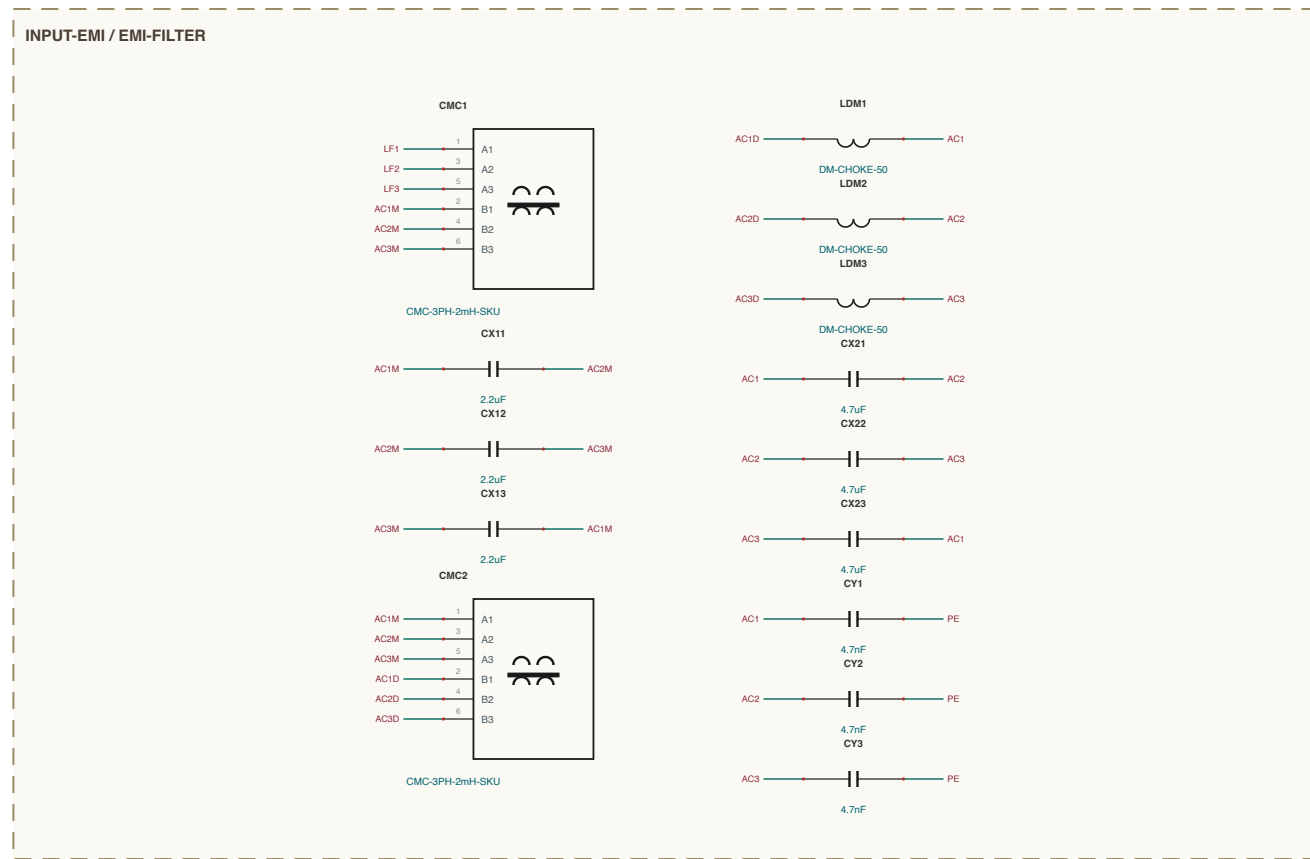
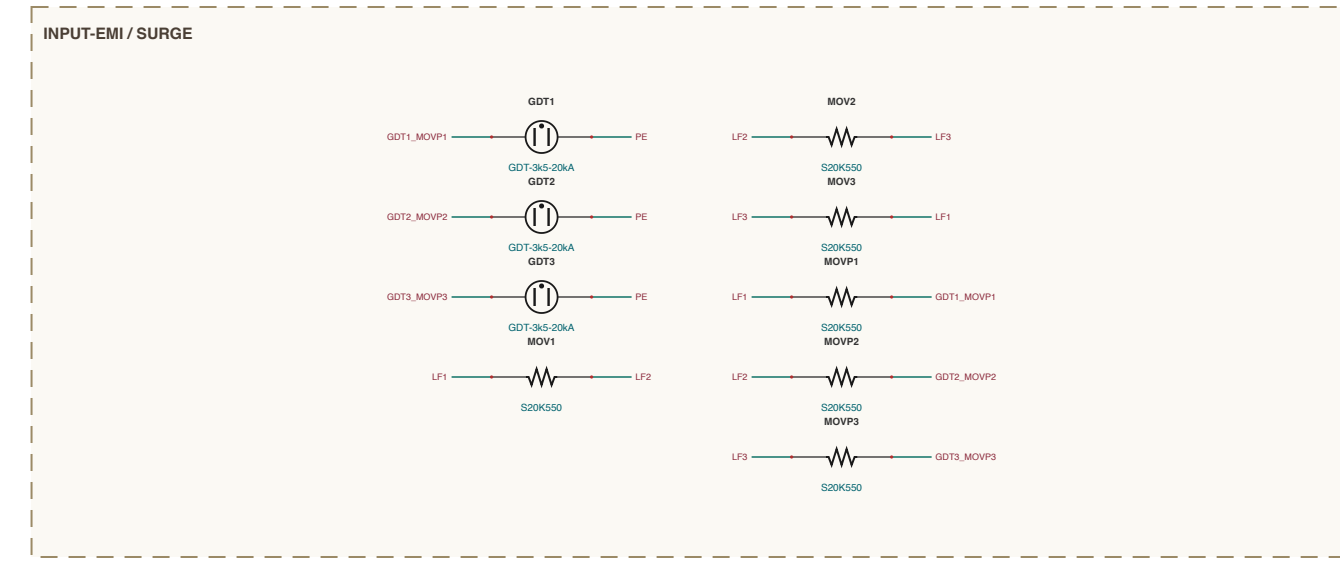
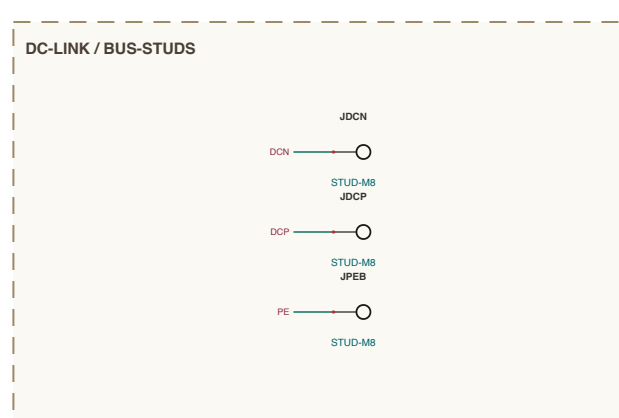
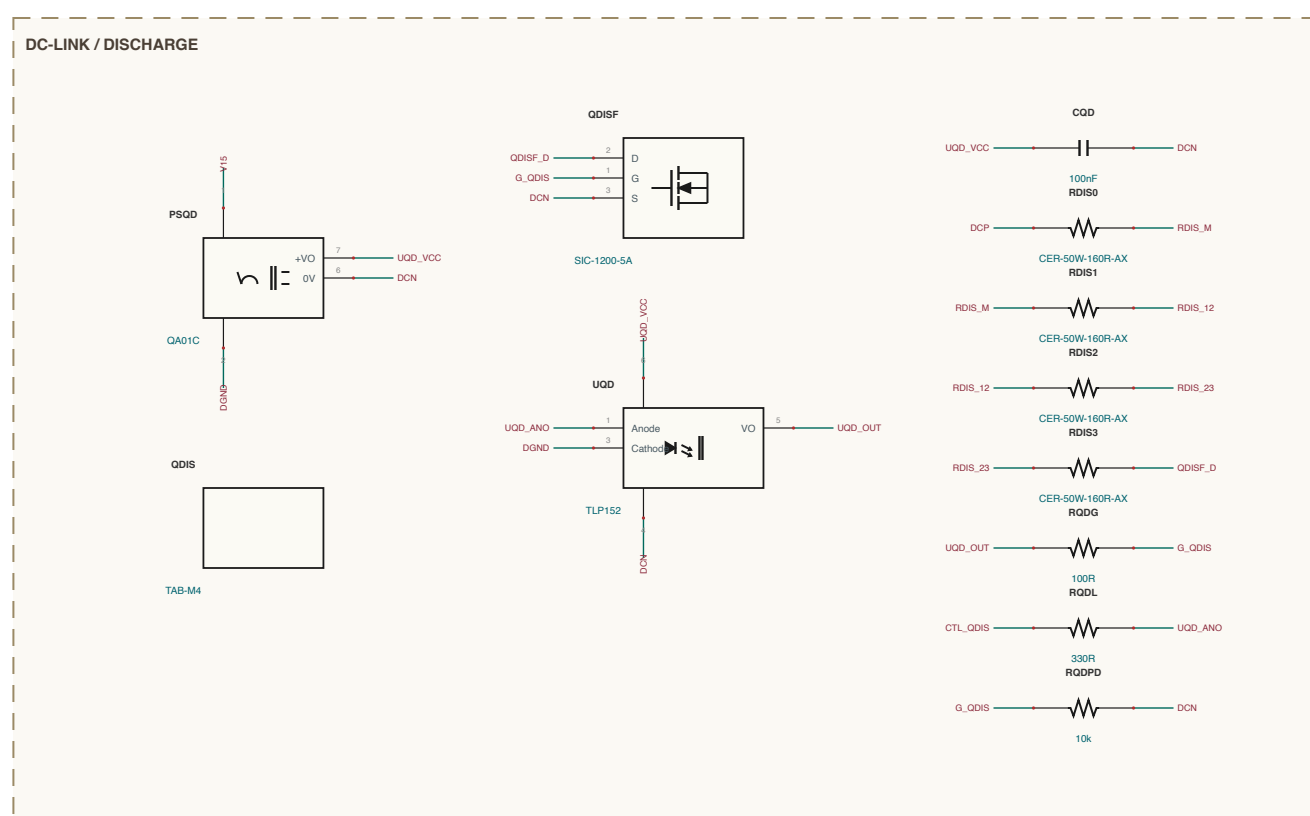
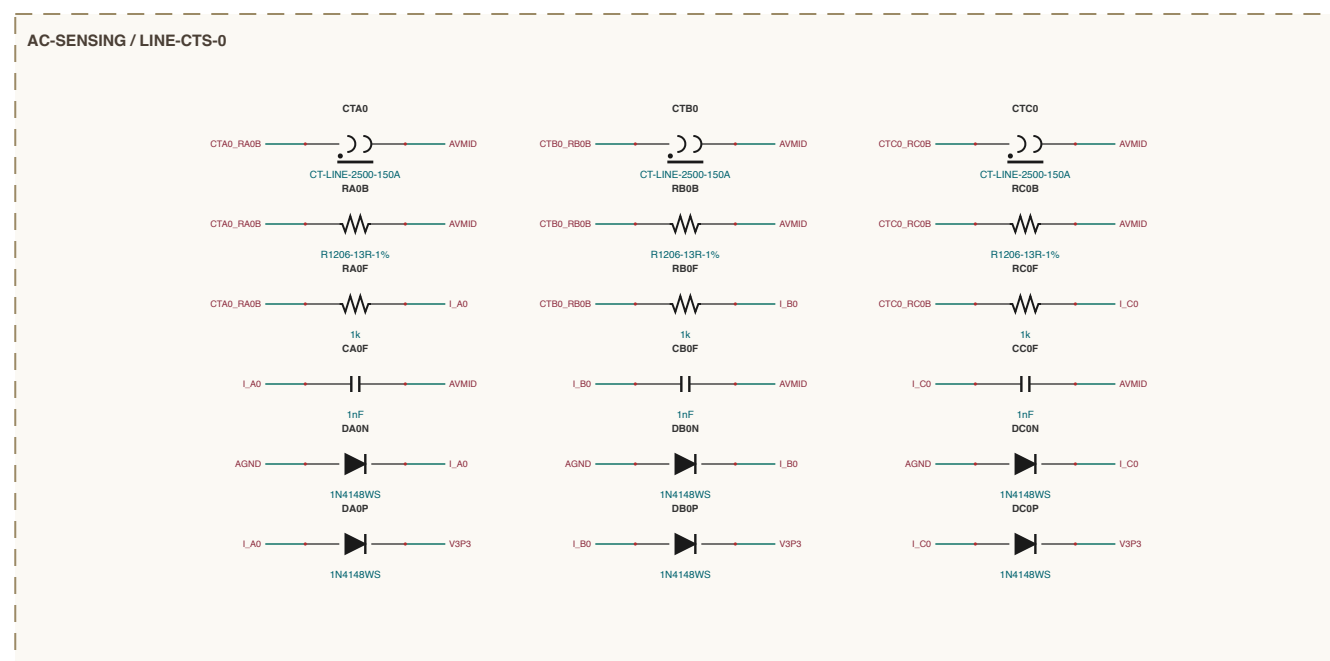
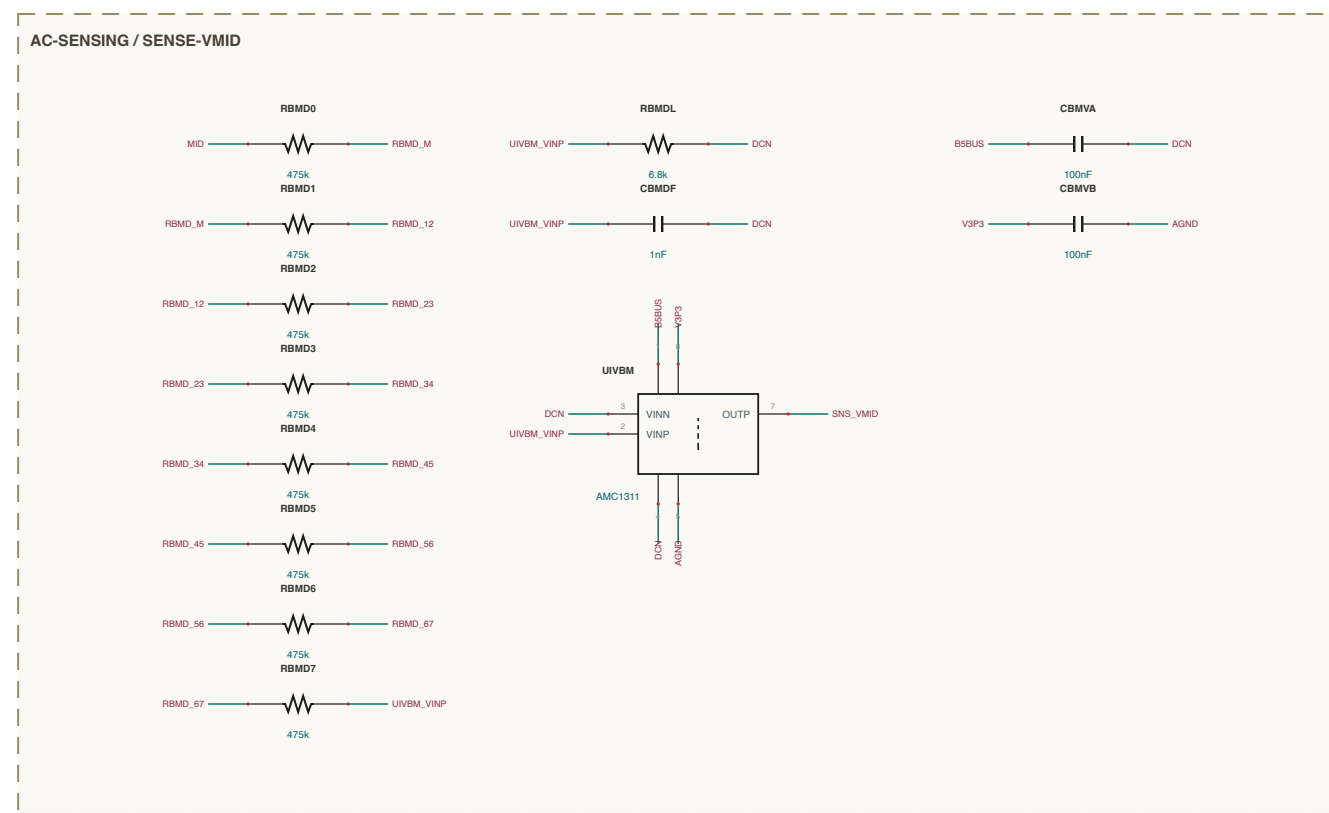
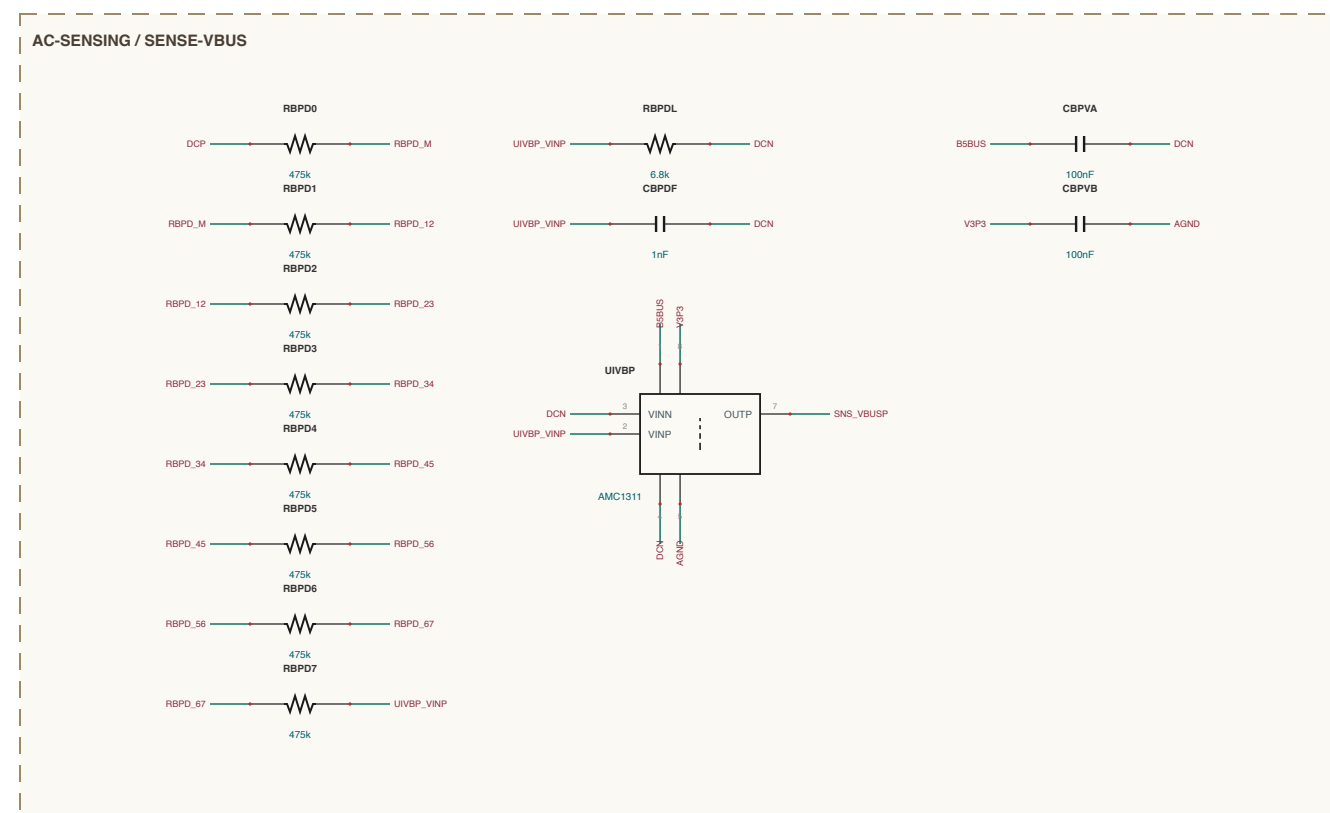
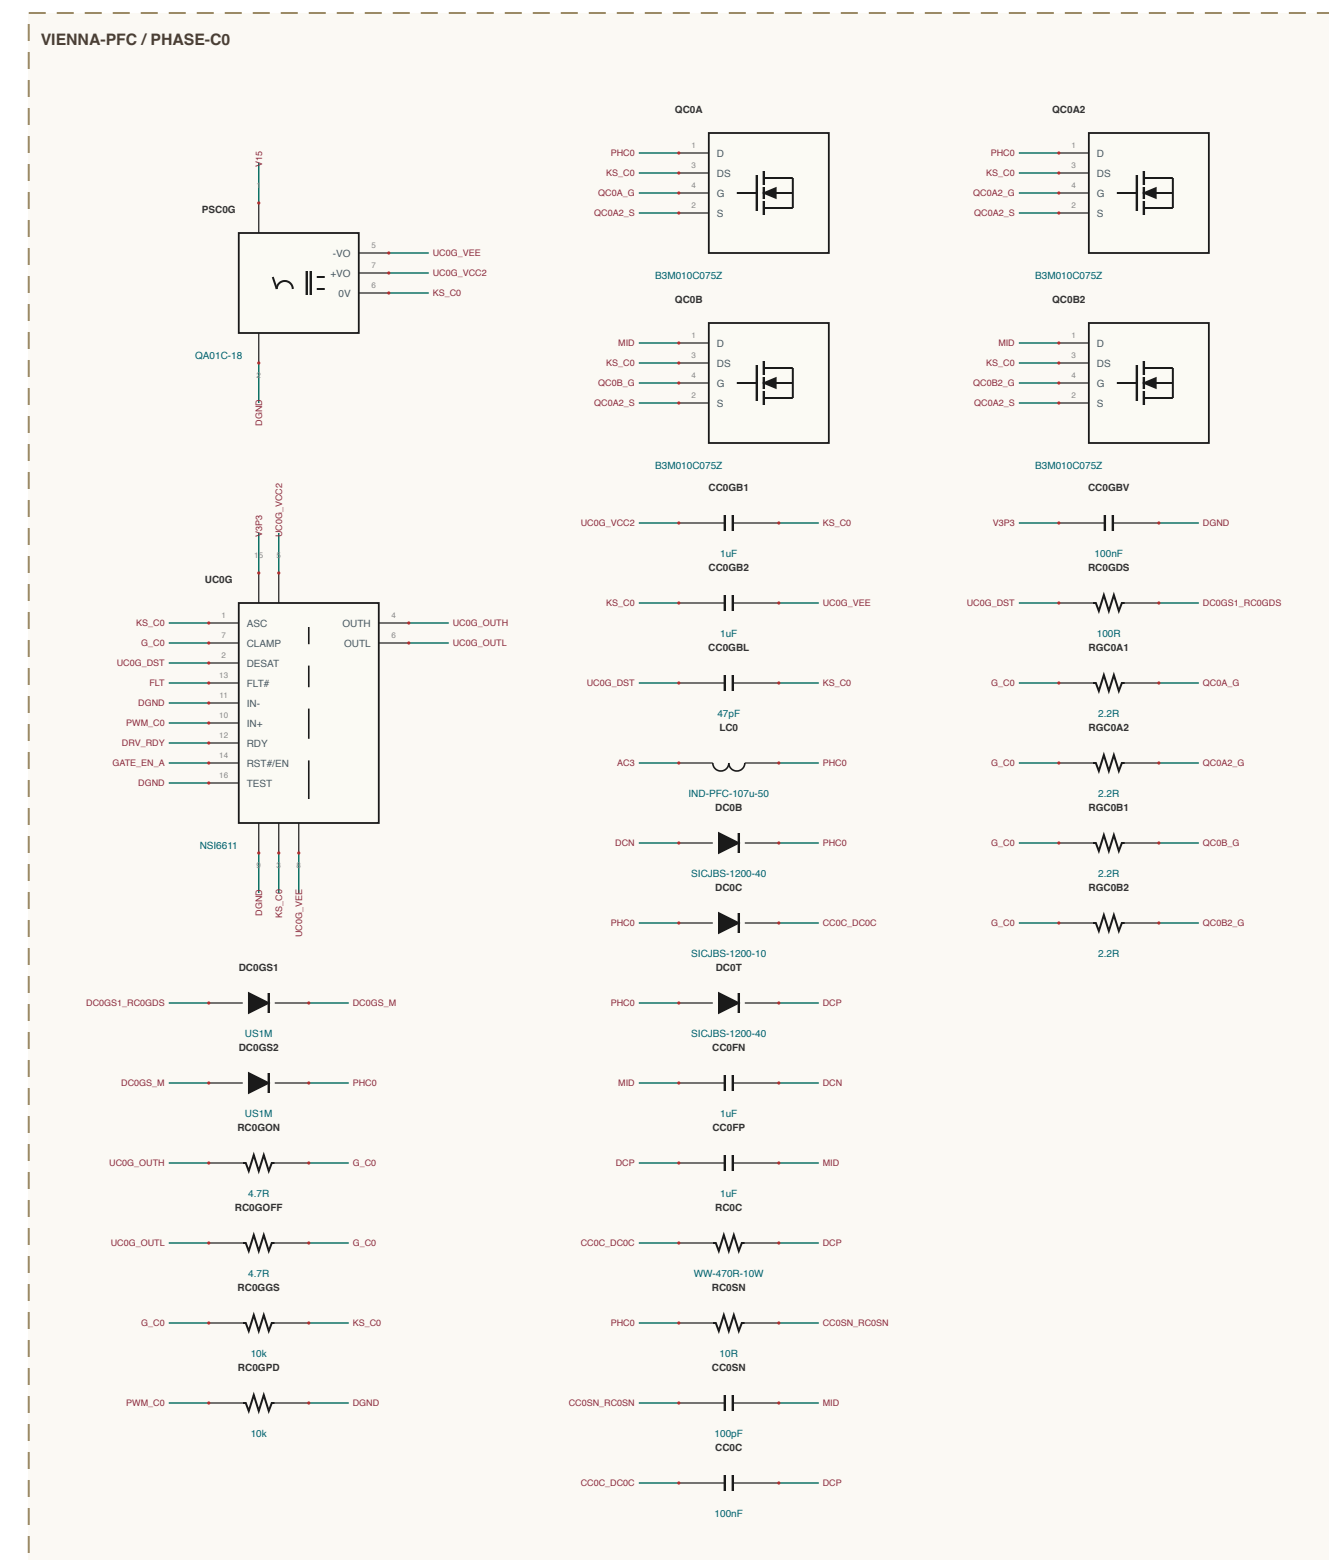
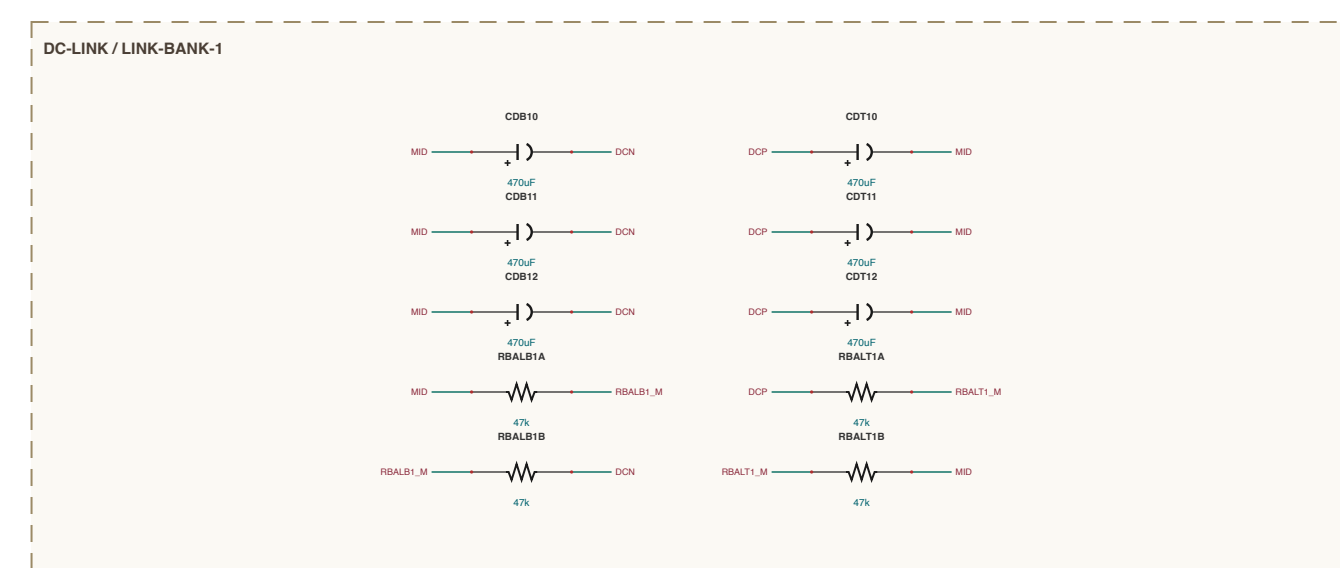
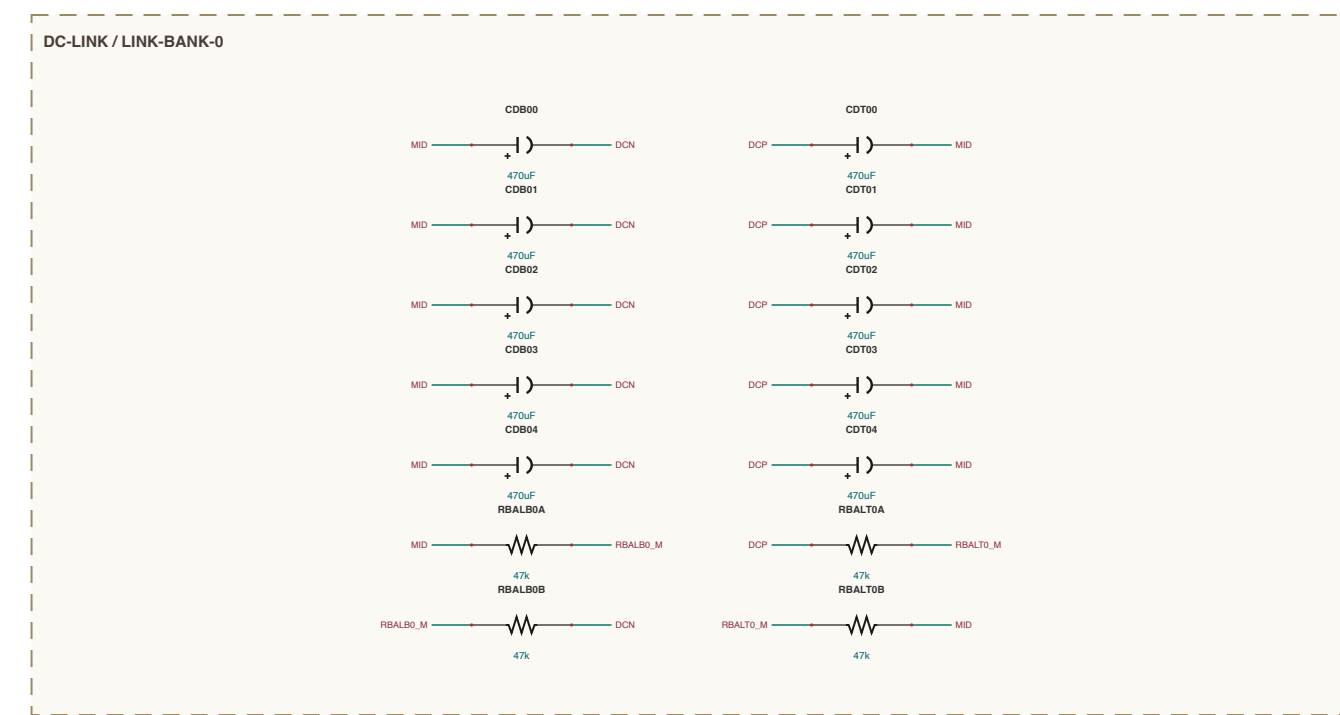
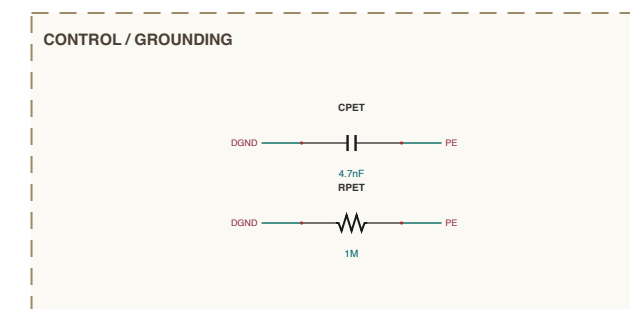
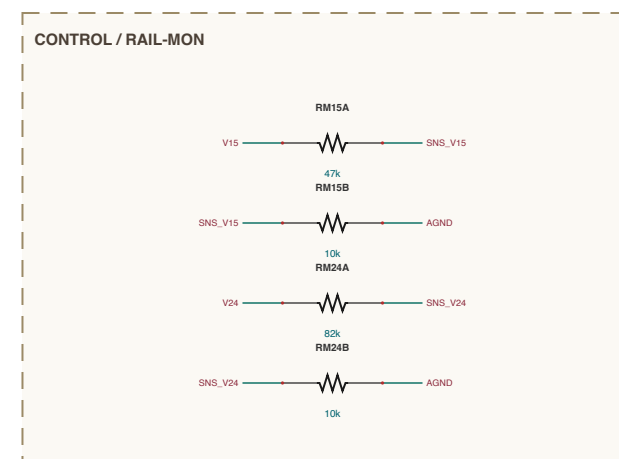
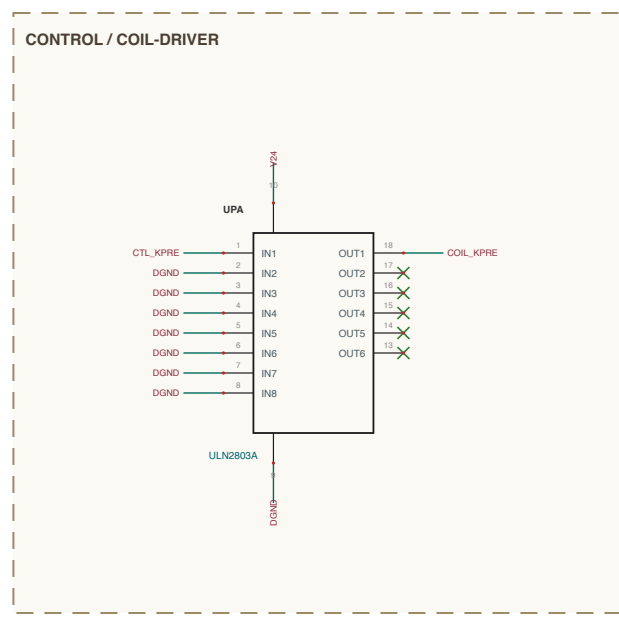
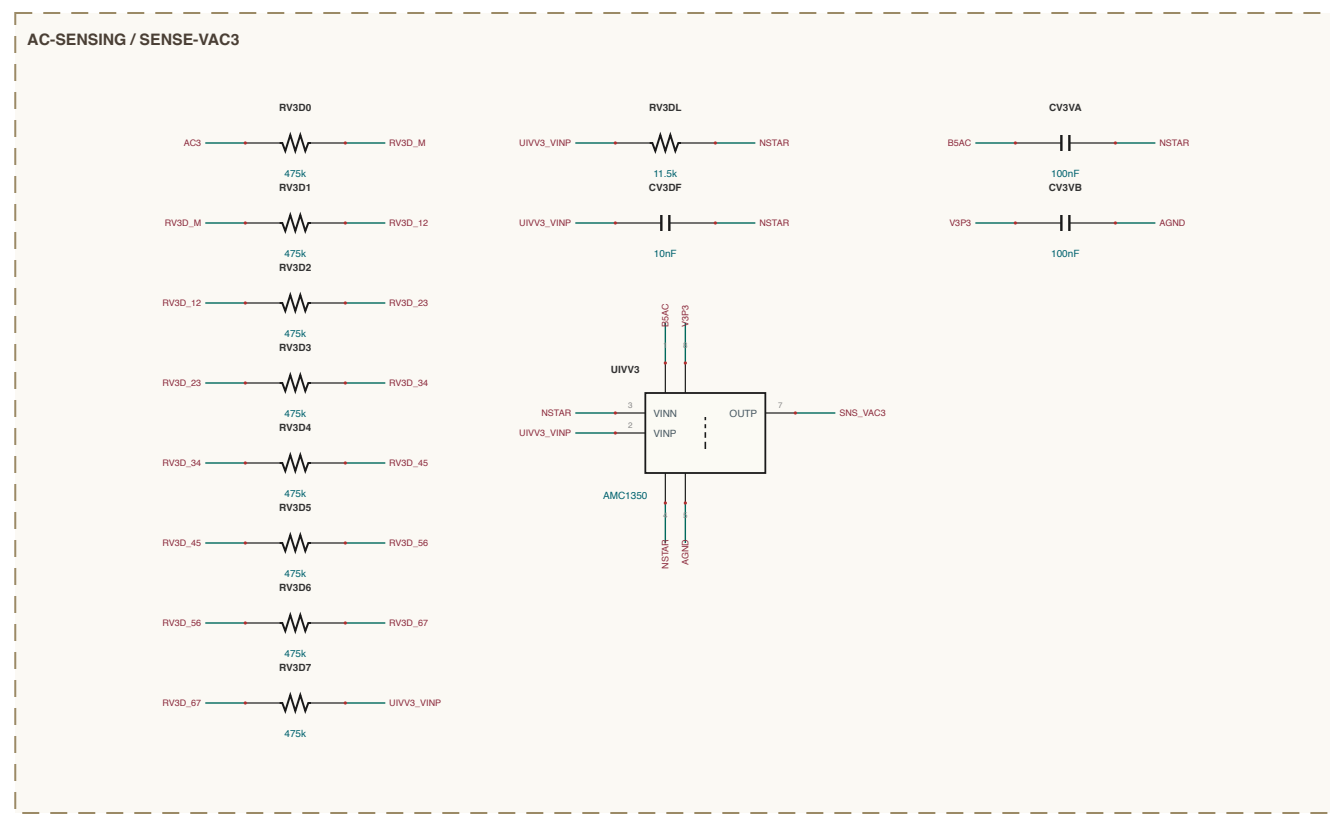
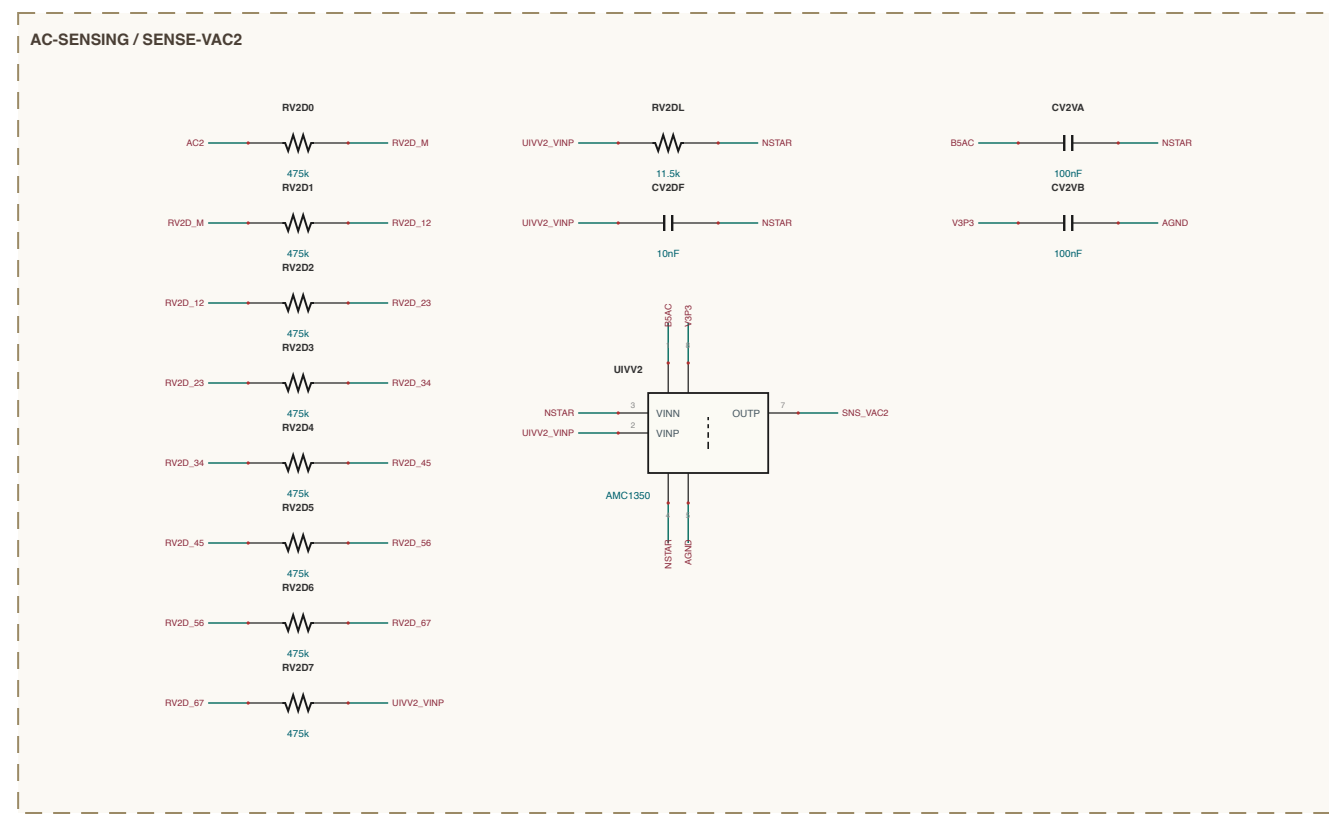


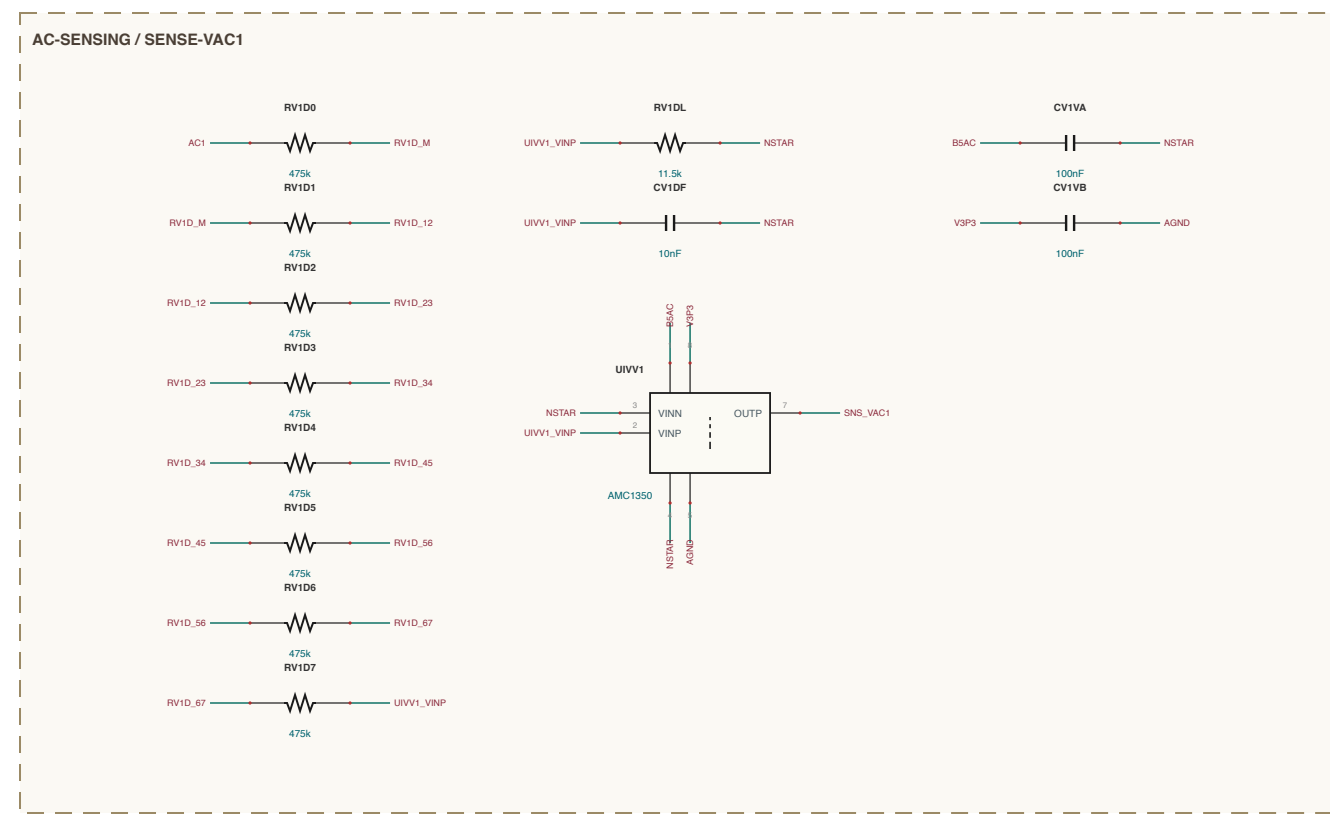

SHEET INDEX	
3	SA VR 7 - 7 of 2
4	
5	AC SENSING - 8 sections
6	
7	AIR POWER - 5 sections
8	
9	CONTROL - 6 sections
10	
11	DC LINK - 4 sections
12	
13	EMPHYT-EM - 6 sections
14	
15	VEHICLE.PC - 2 sections
16	
17	
18	
19	SA D-1 - 19 sections - 159 components

NET NAMING

Internal junctions are named for what they join

Usual: α Plts make at that C₂ join e.g. UFWD, VSD

Protein: 30 residues of a series pair e.g. RBA12, M

Protein: series log between Rndsteinin e.g. RW12, G1

all others are explicit design notes

MAGNETICS CONSTRUCTION

Identify your data/analysis and derive, graph, fit, extrapolation lines from them

D1 L44-L26 to T79 30c/sheet (CATALOG AL375, fit/24 + fit trim = L4 10V/4u, +offset 61126.5A ps (E51)

DE L2691-2 to T07 30c/s, fit/6, 20.0mm/2 = 12.0uV 0.150A ps (Short 11.4uV, E51 residual basis 11 - 8mm)

Total L + trim = measured after leakage from COMPENSATE leakage approx. Or in TACK sections