
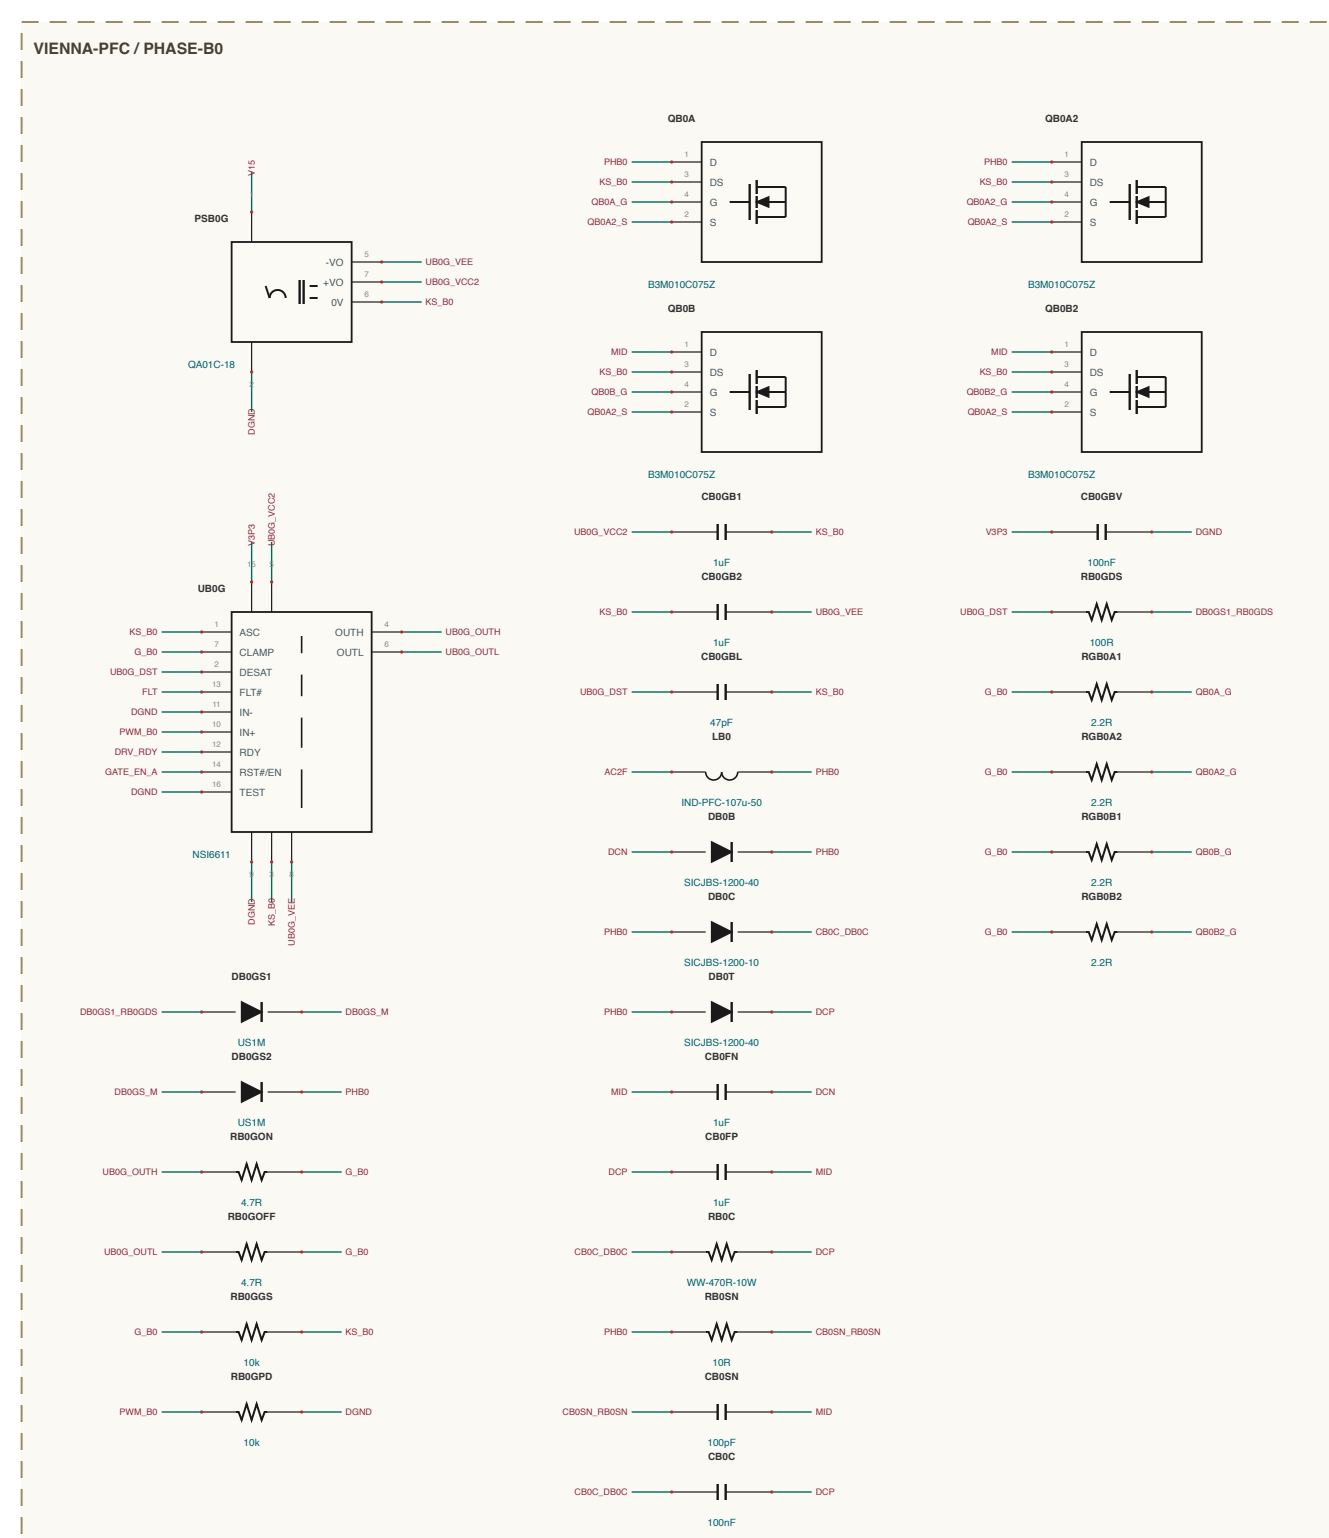
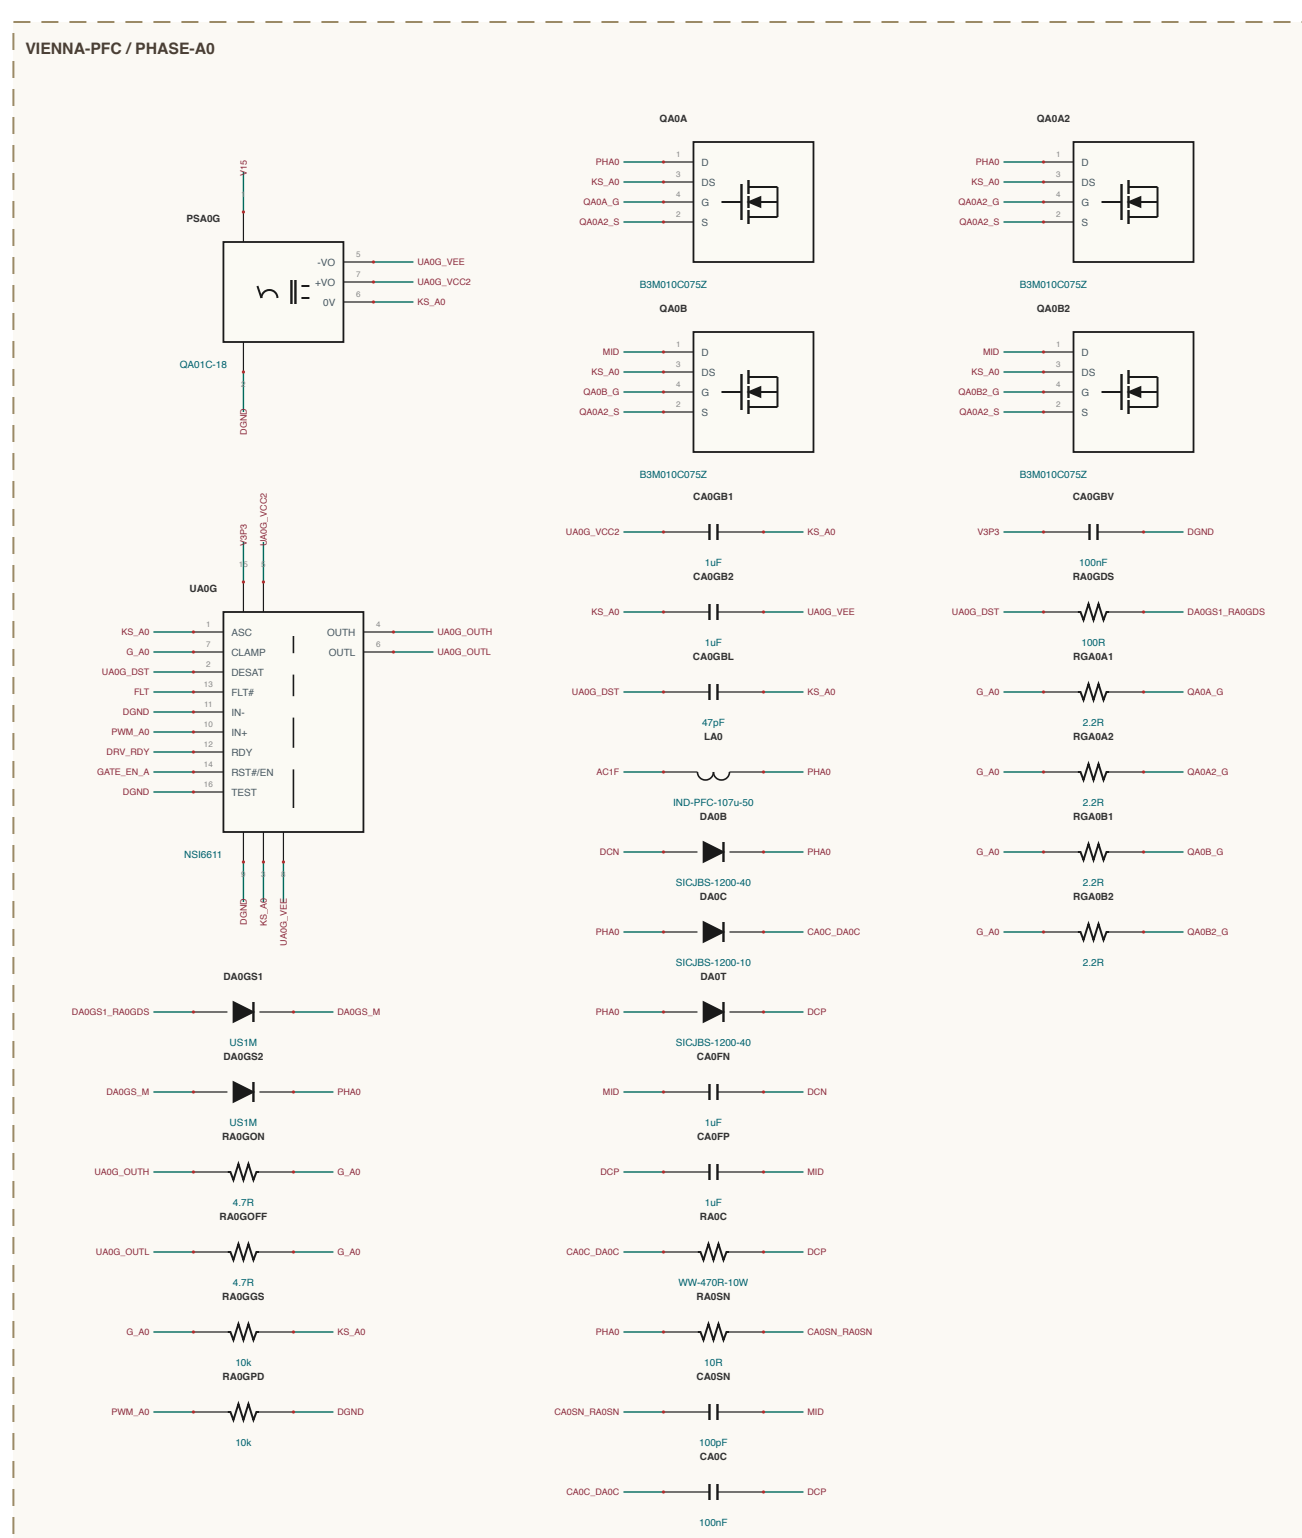
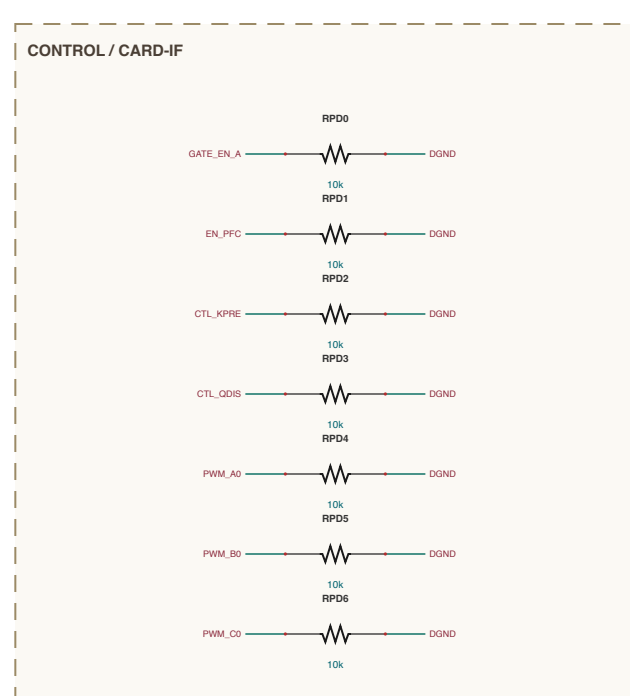
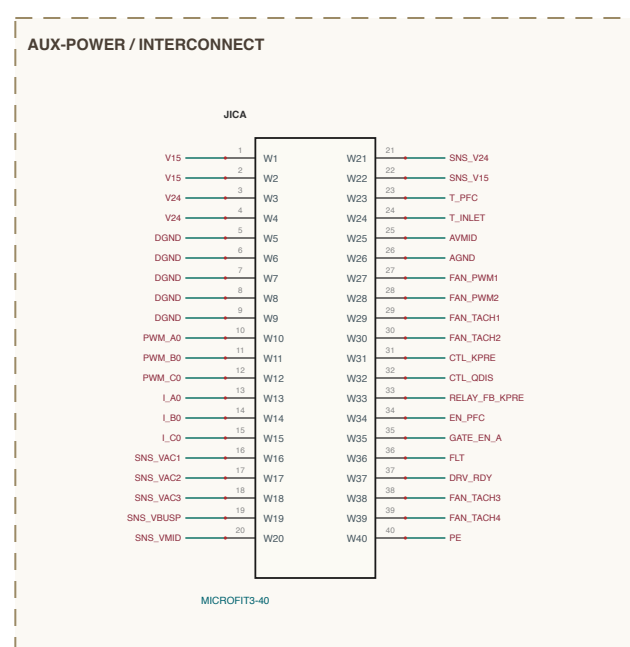
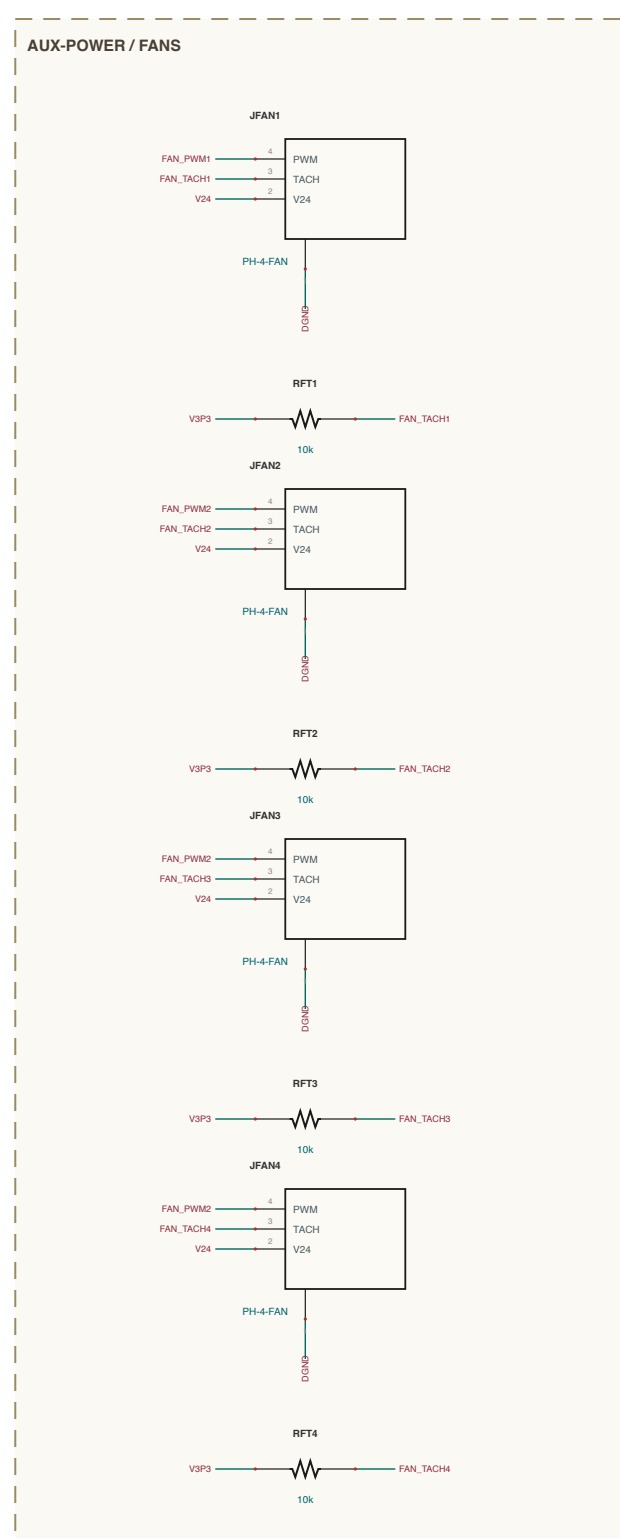
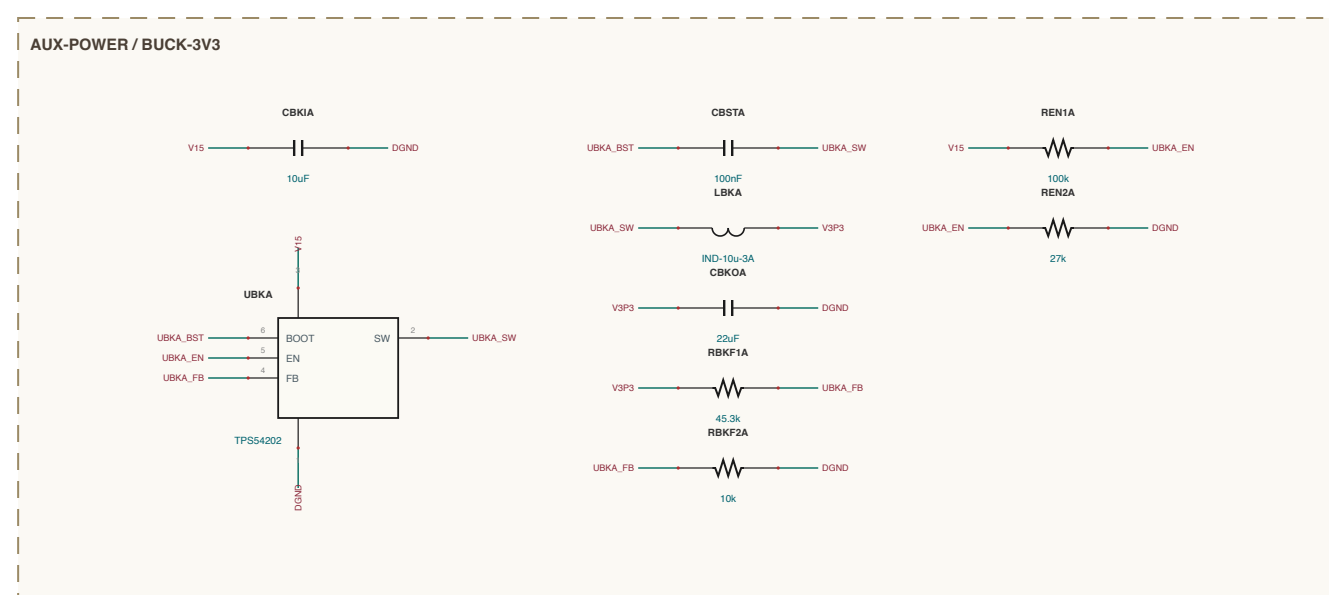
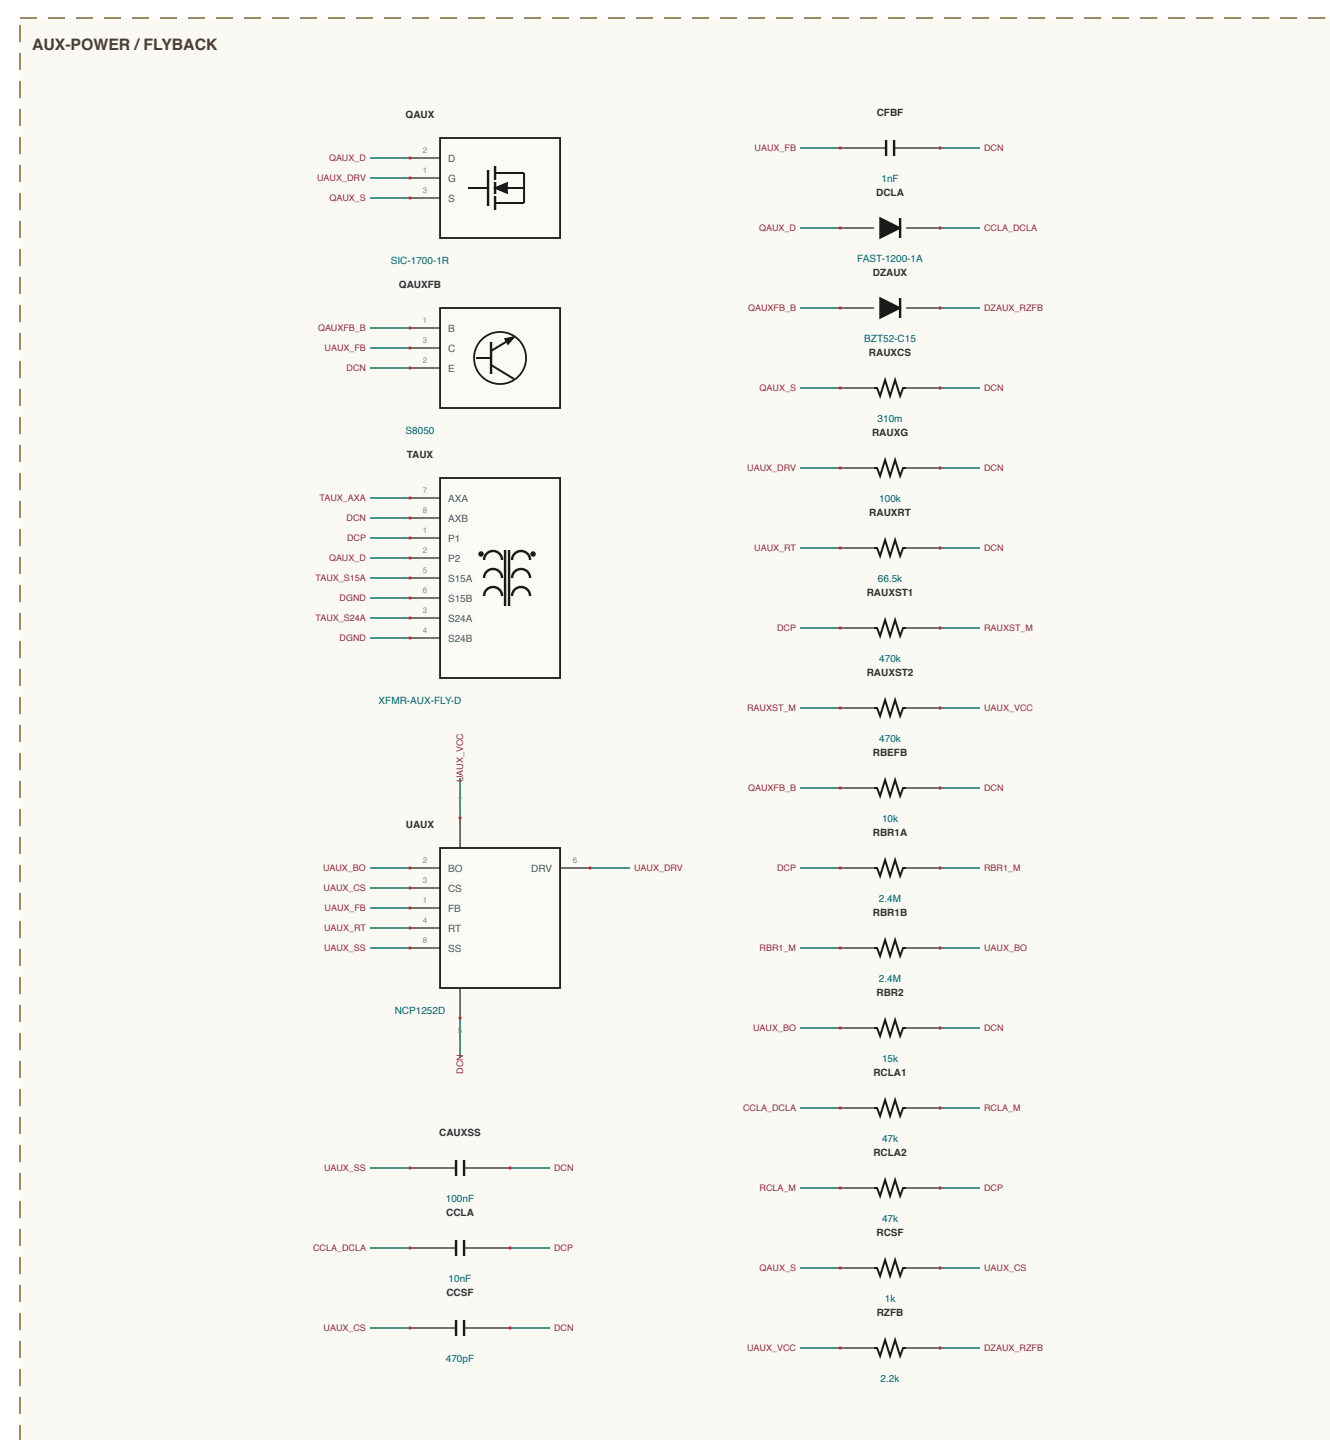
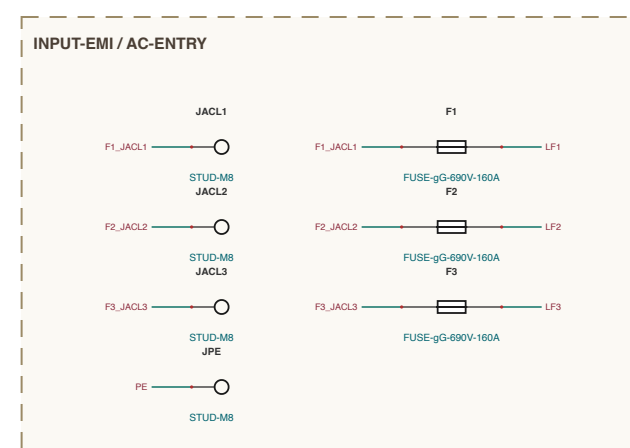
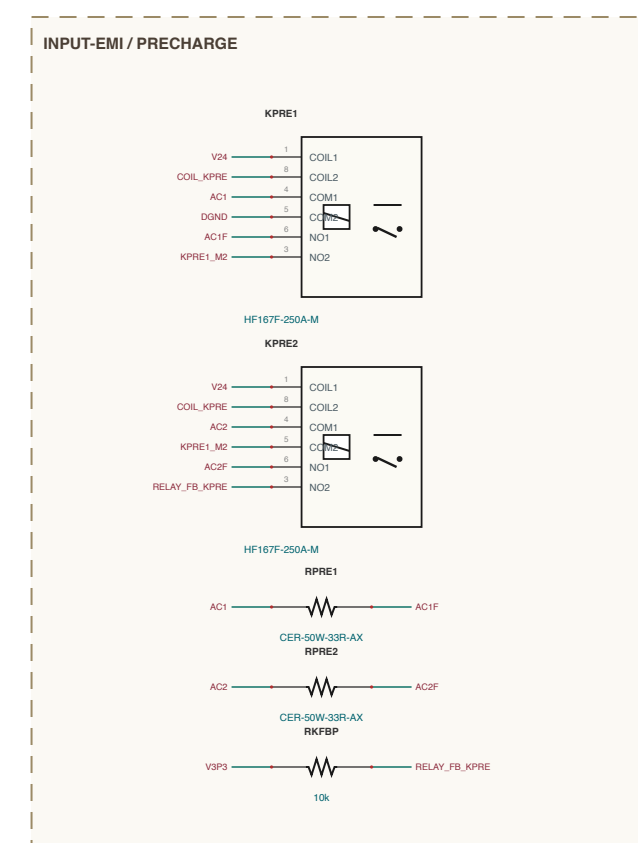
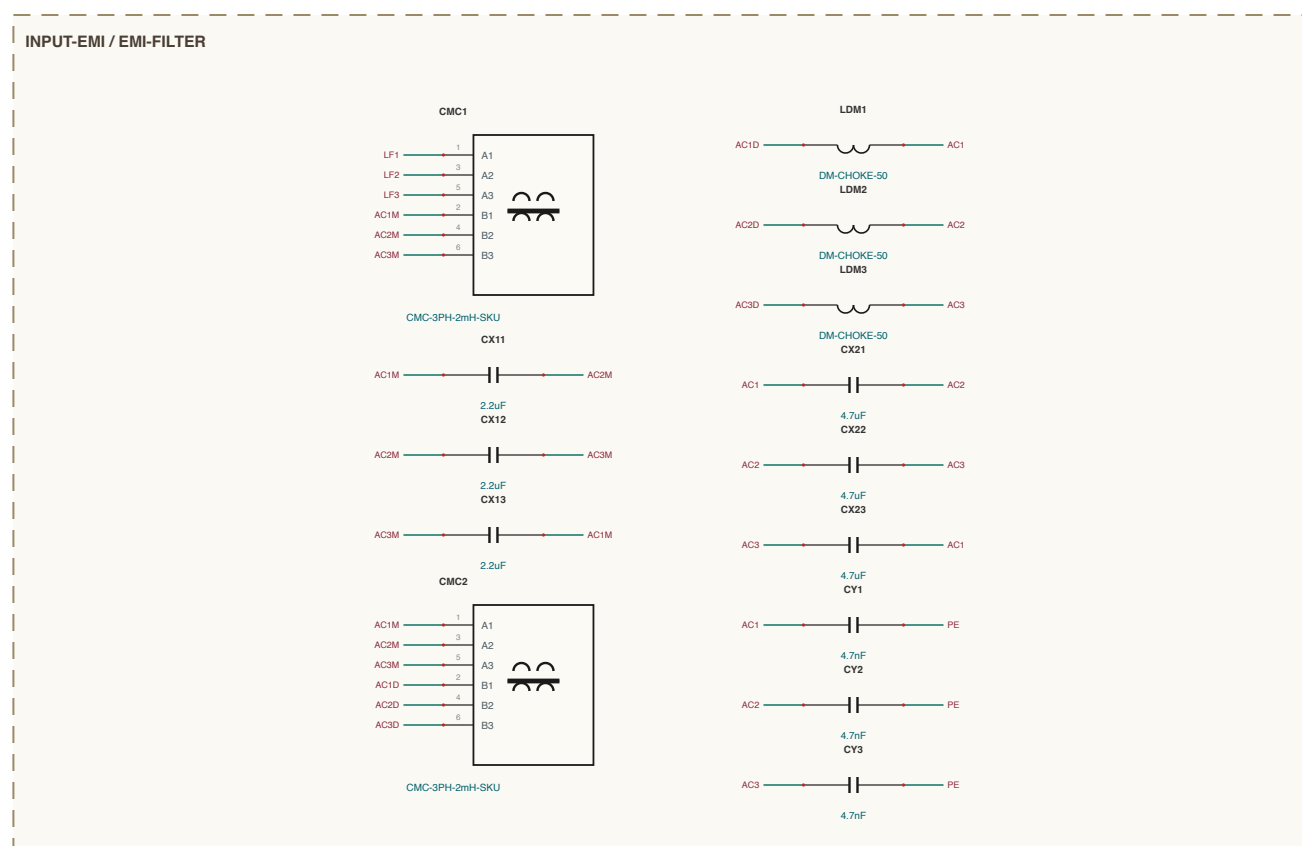
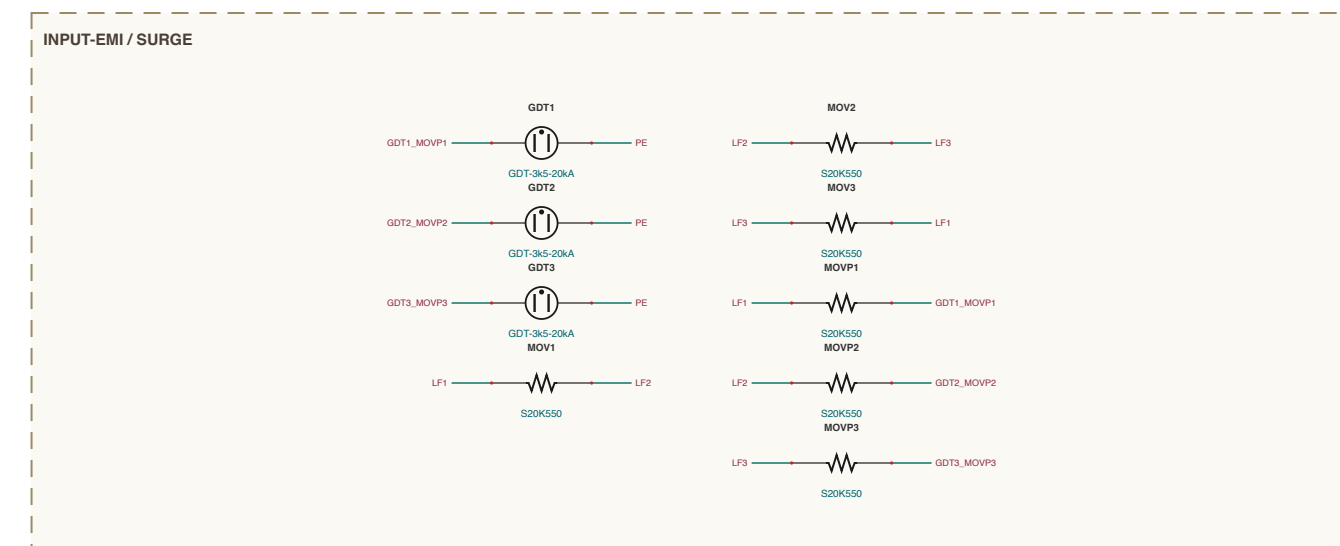
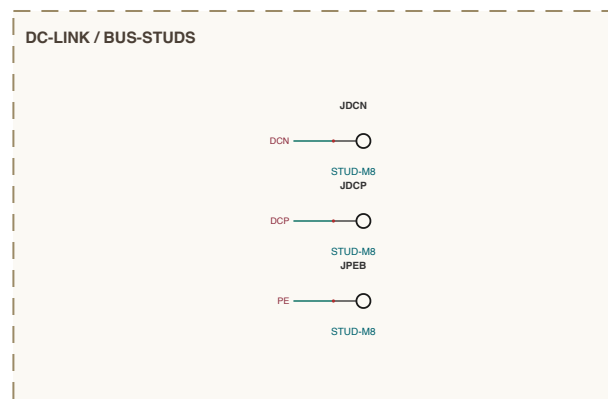
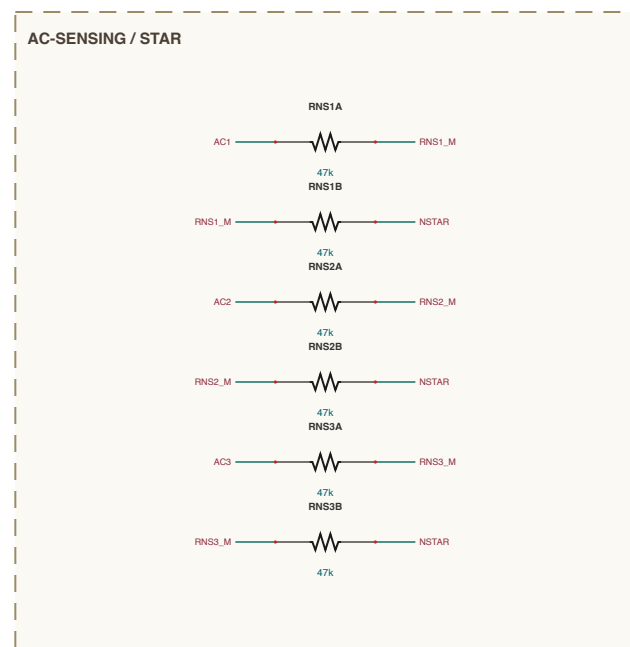
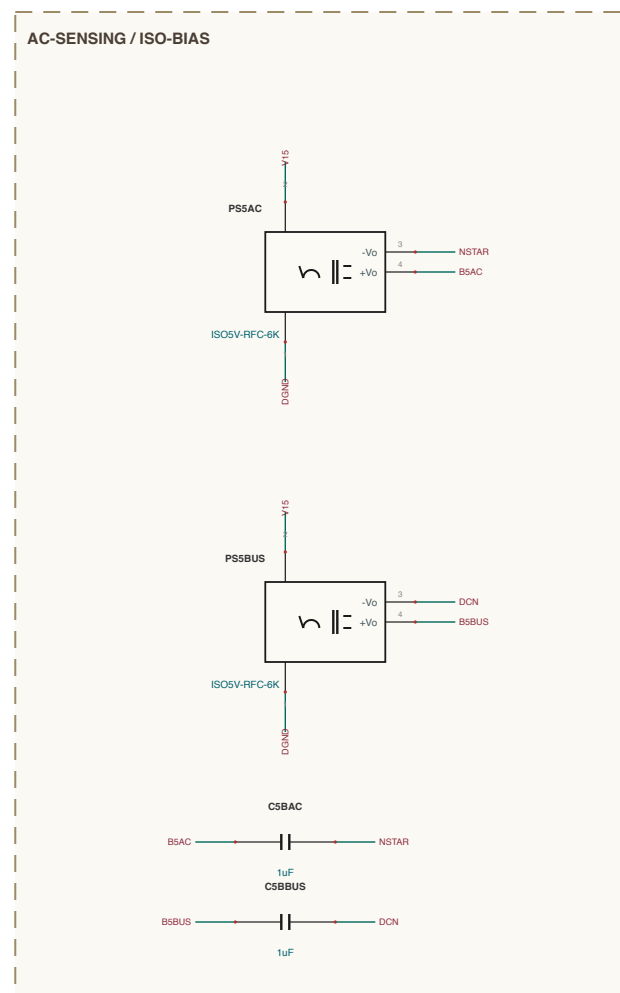
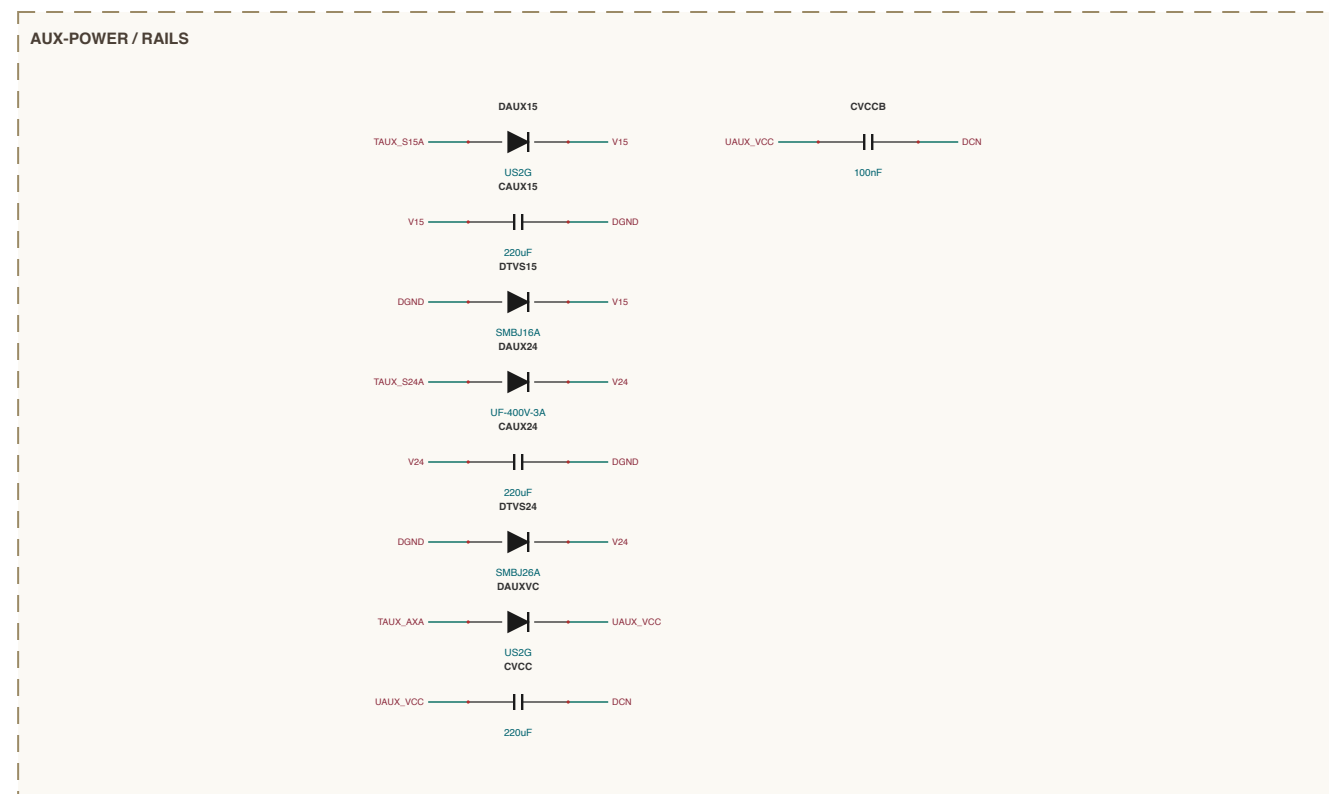
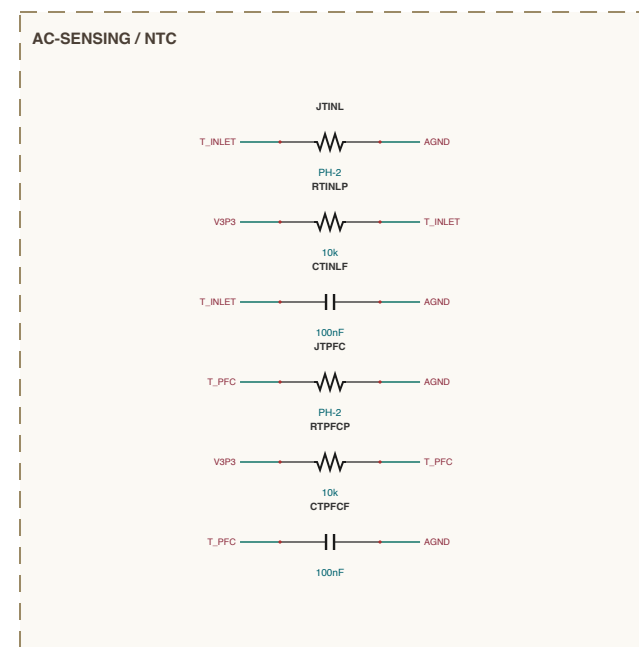
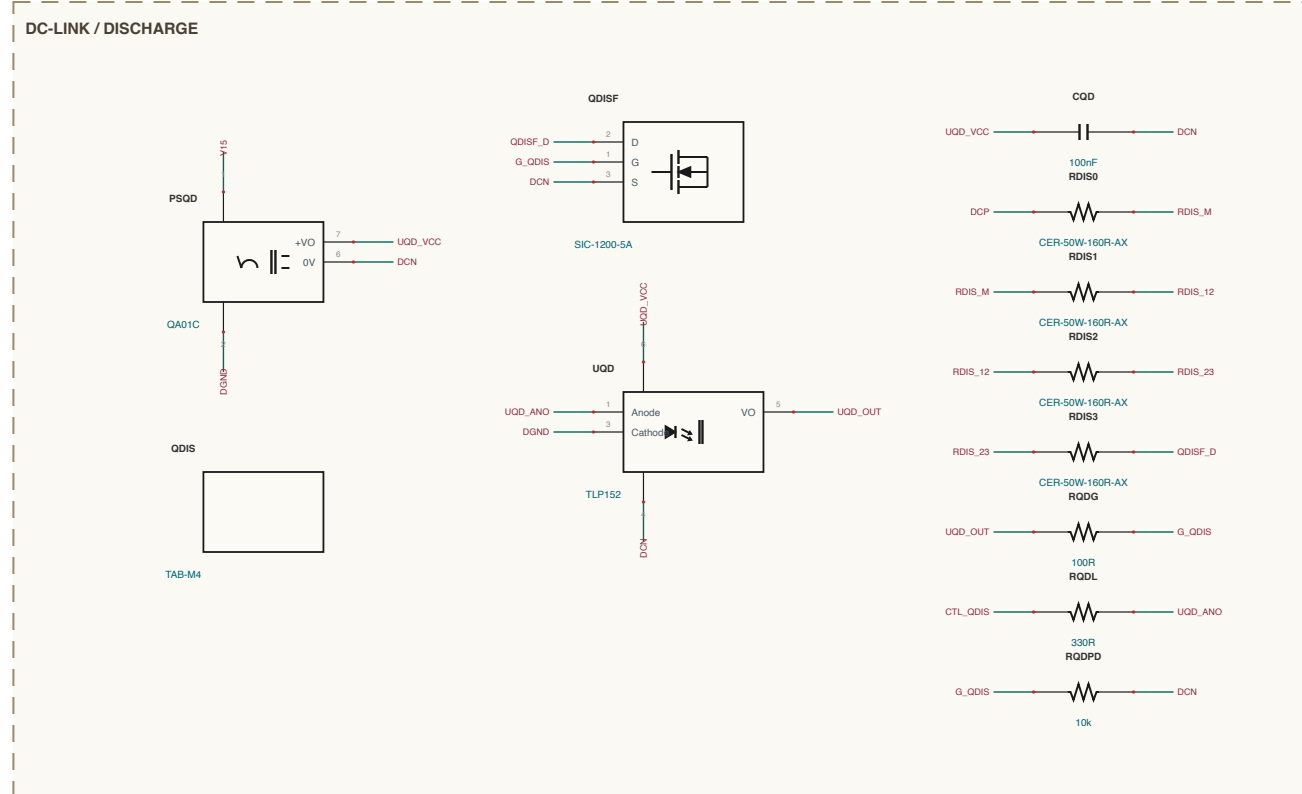
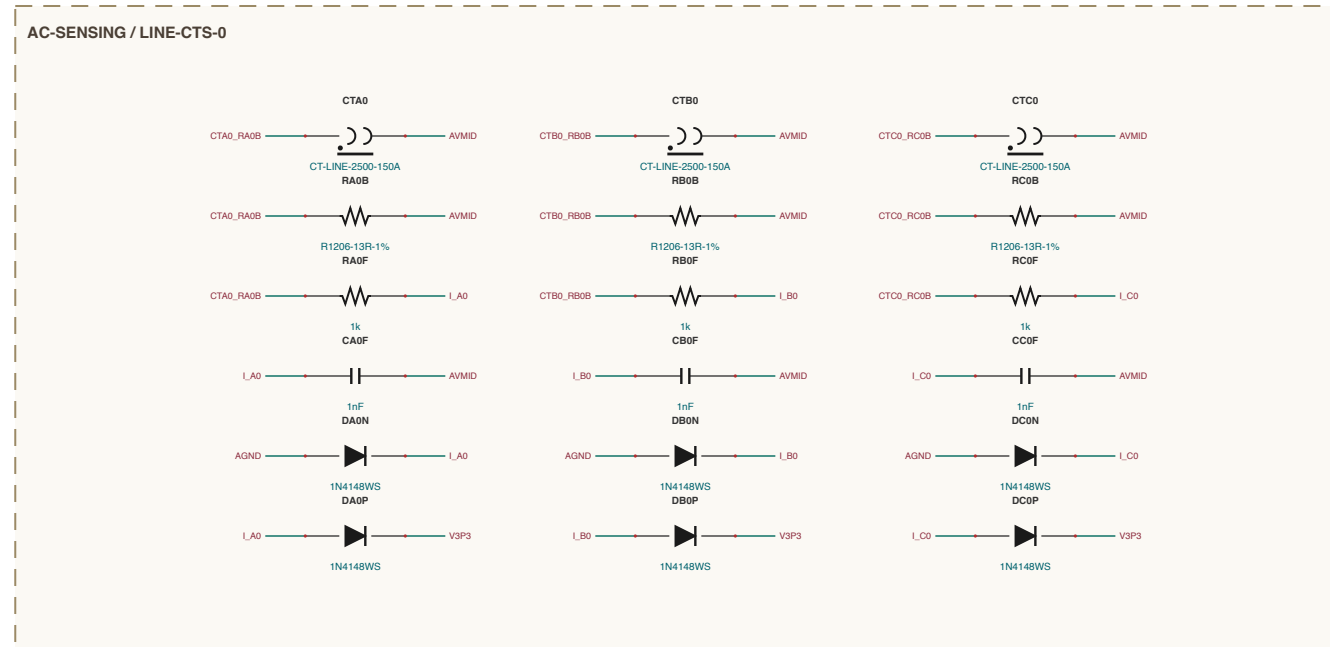
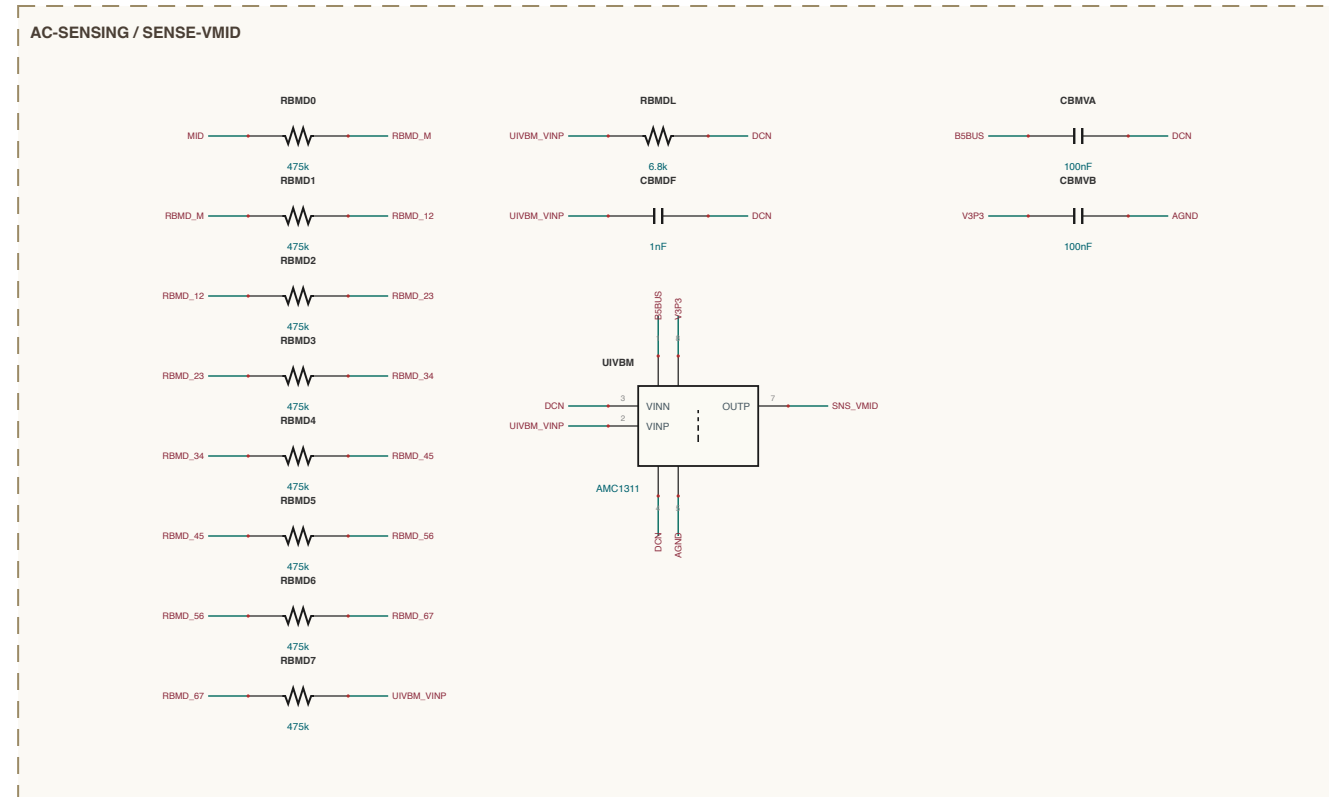
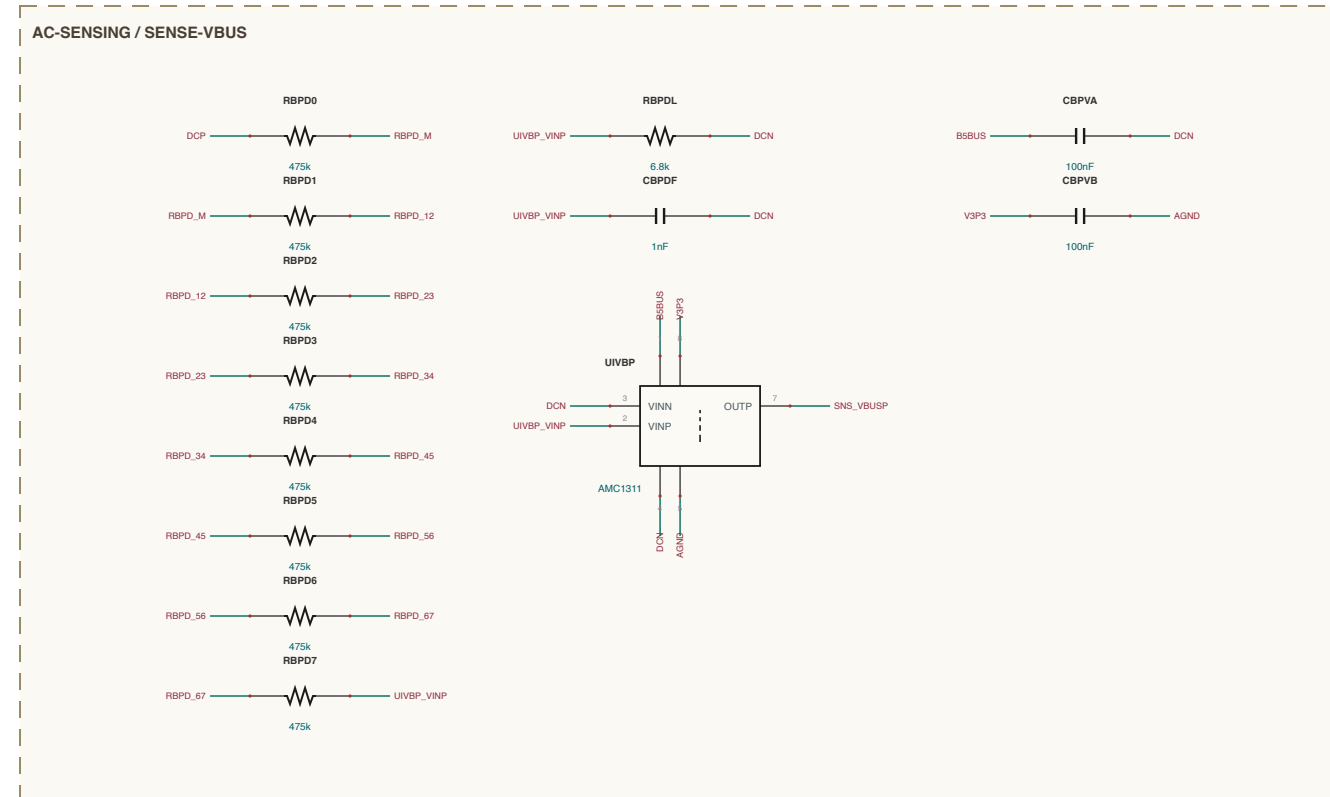
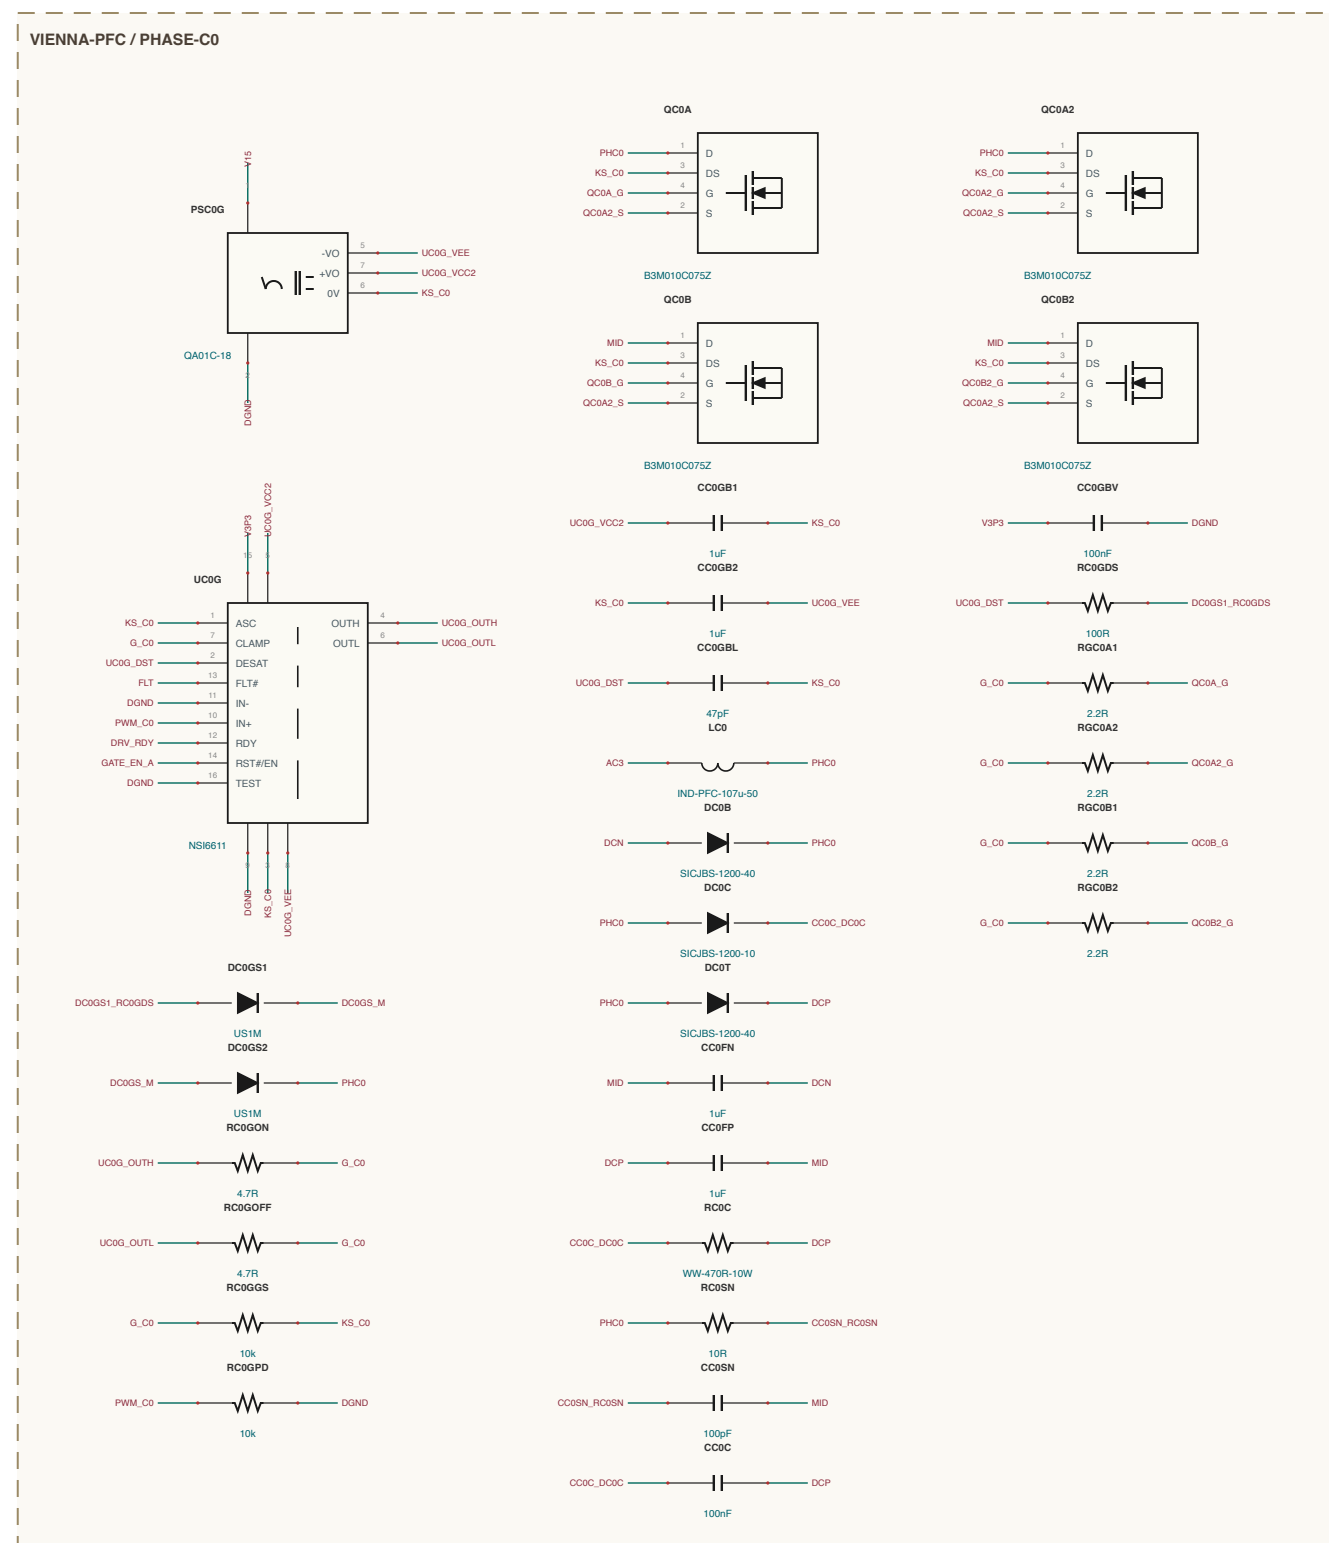
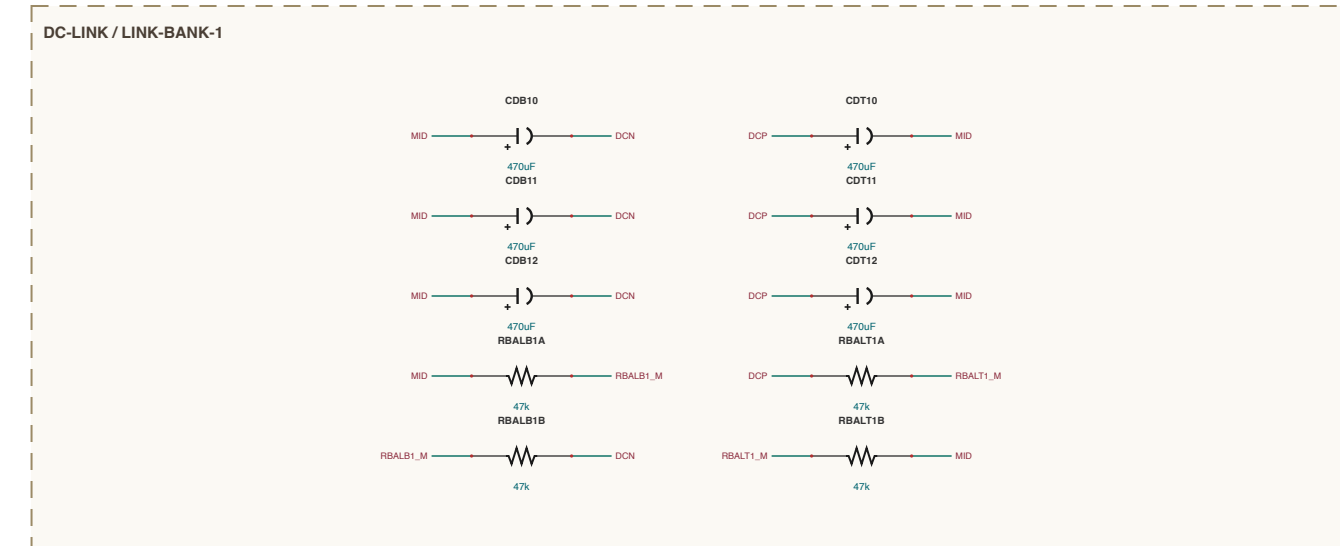
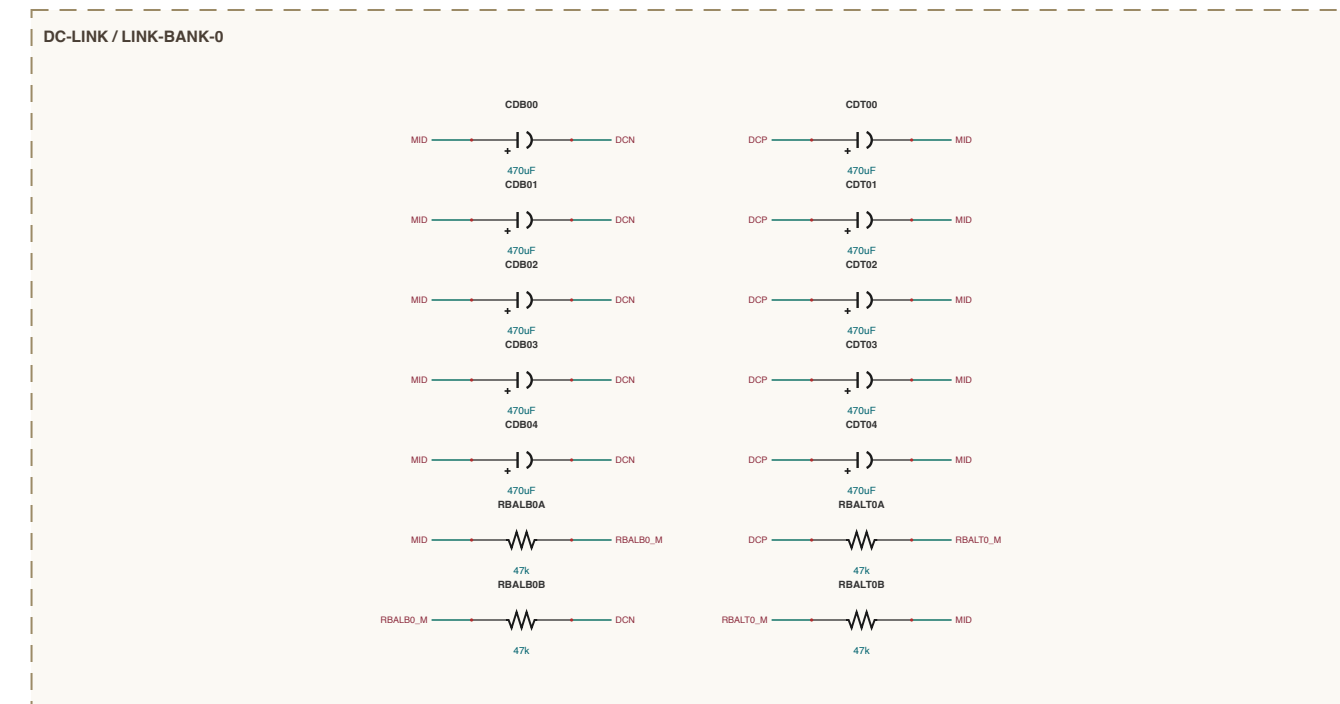
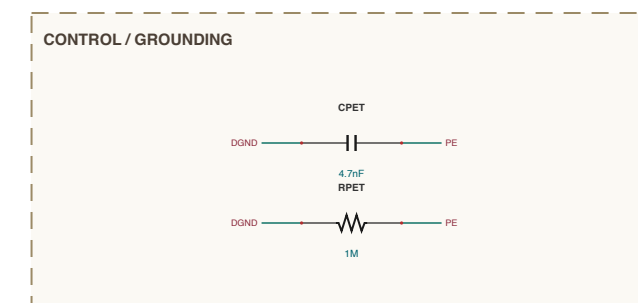
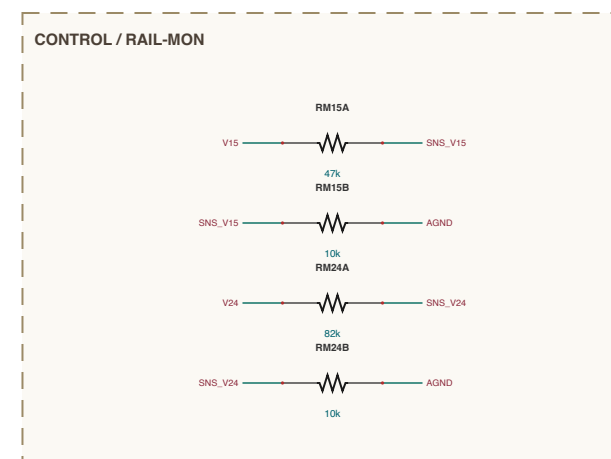
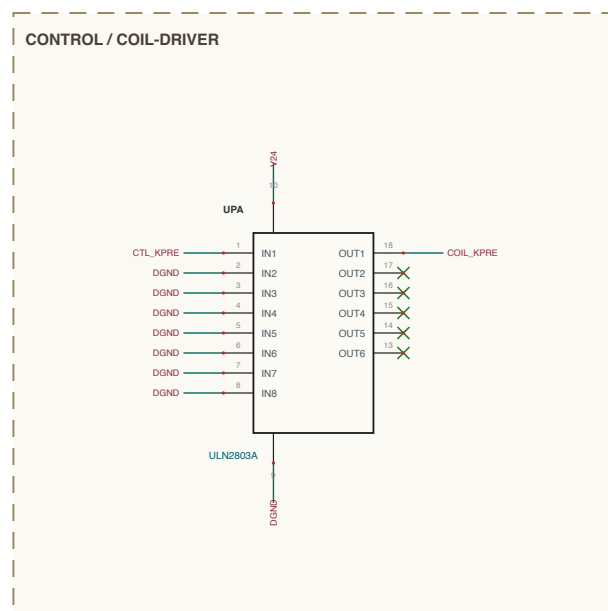
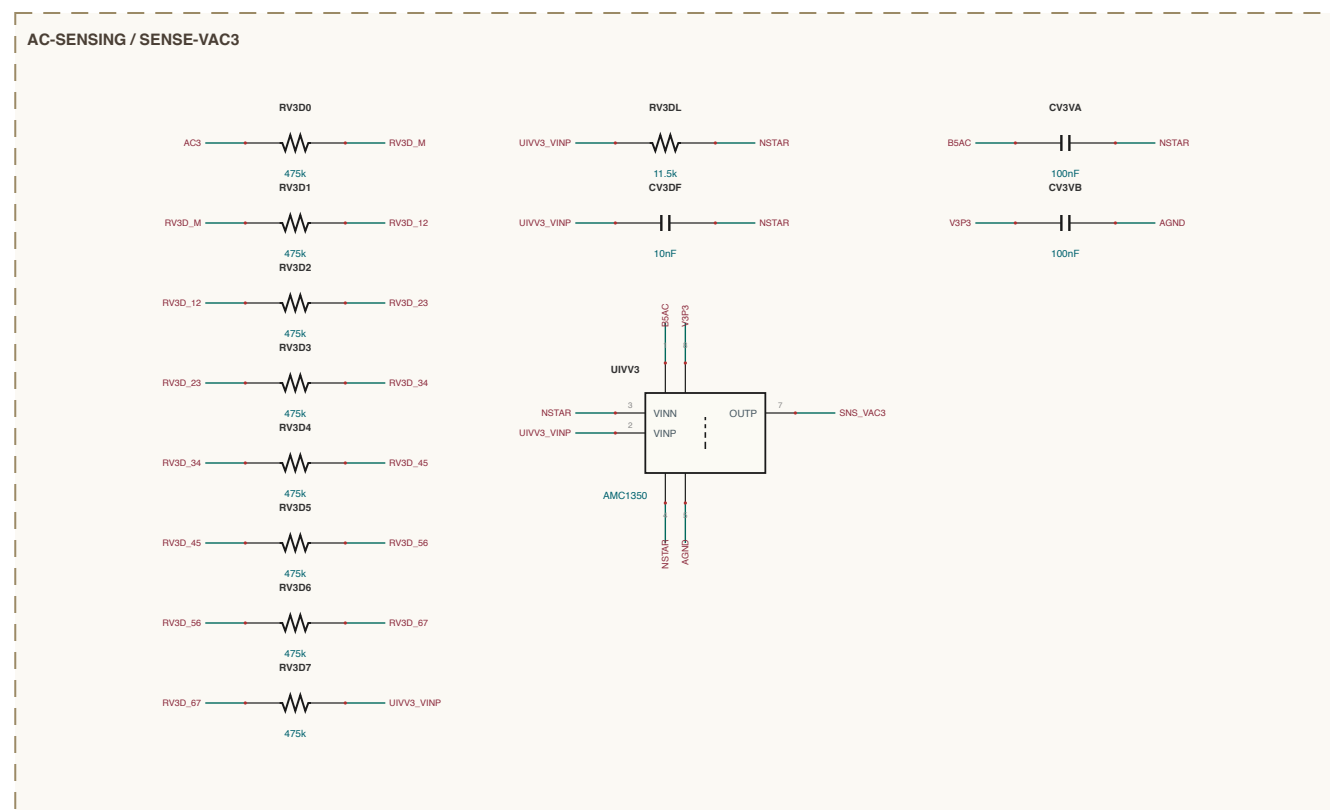
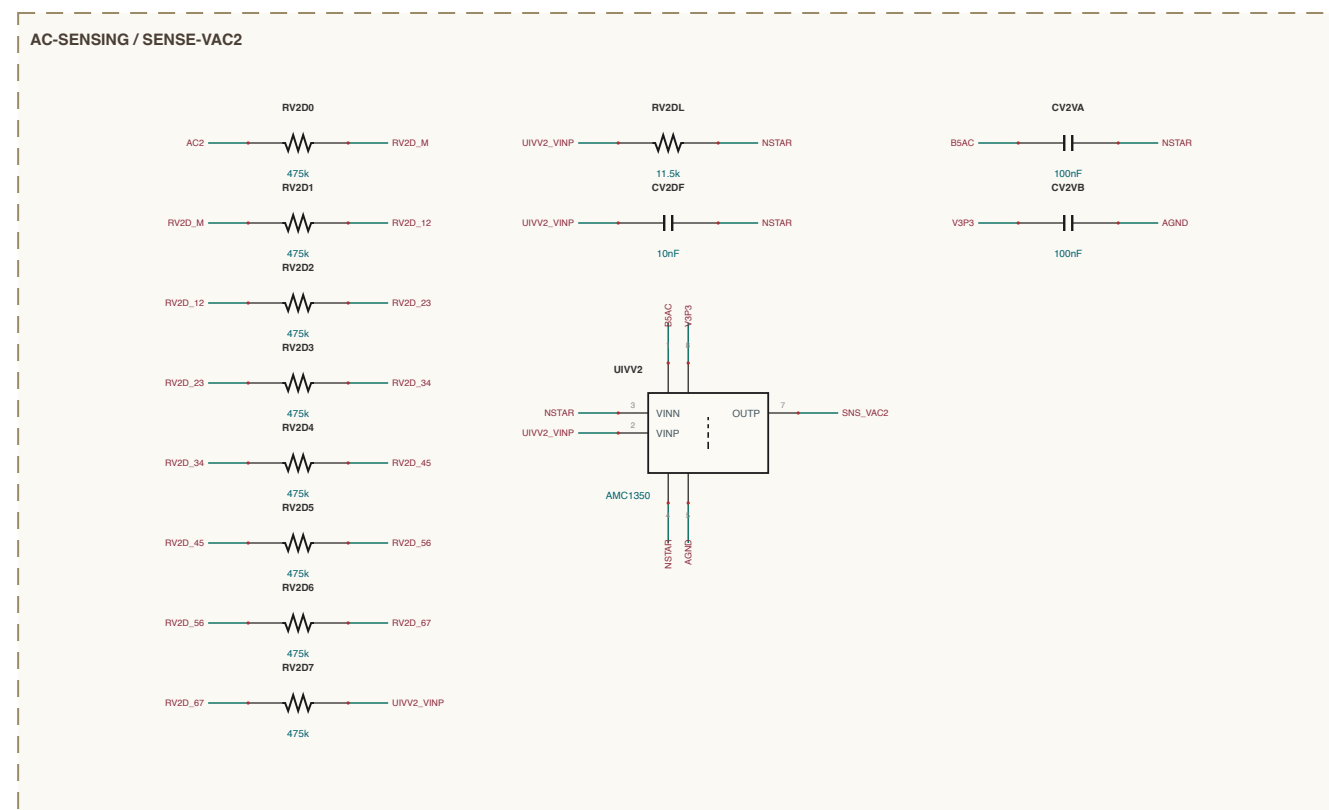


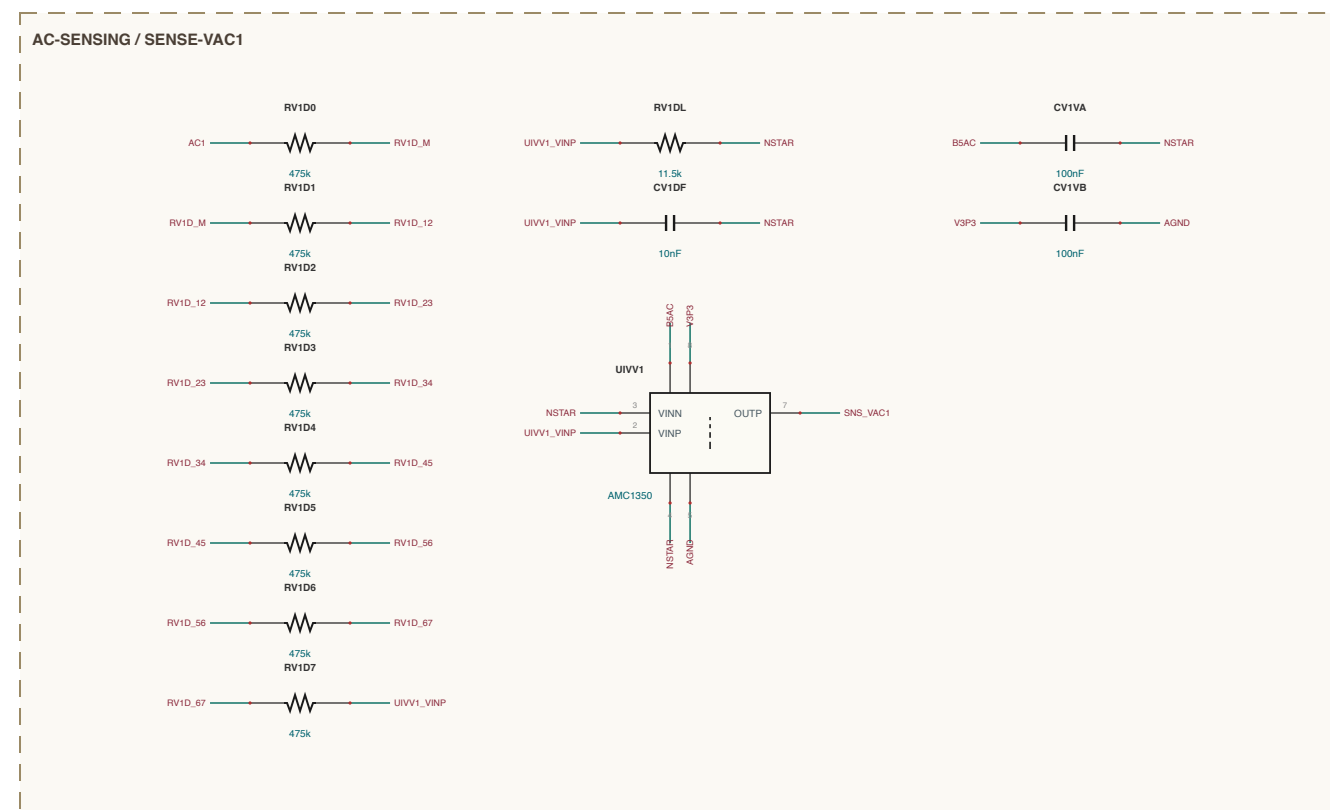

SHEET INDEX

SA 30 3 - 7 of 2

|

AC 4830SD - 3 sections

|

AD3 P00SD - 3 sections

|

CONTRX - 1 section

|

BC 10C - 4 sections

|

W0700B - 4 sections

|

VENNA-PTC - 3 sections

|

see 0.4 - 10 sections - 200 subpanels

NET NAMING

internal functions are named for what they *do*

Unions: `__PVec` mode at that IC pin e.g. `UPVGA_VBPP`

Registers: 30 subtypes of a series pair e.g. `RRAL75_M`

Registers: `write` tag between `ReadersWrite` e.g. `RWV0_01`

all others are explicit design notes

MAGNETICS CONSTRUCTION

Identify your data/magnetics and (for us, gpg, hls, acceptance fees from Eternit)

D1 L49-L29, 3x T70 20s standard (J470A/05 AL37), No.4 at 1st time $\rightarrow$ L8-107V₁ $\rightarrow$ G40T / 0120.5A pA (E51)

DE L2601-01 3x T07 60s, No.6, (N4.0m) $\rightarrow$ L3.60T / 0136A pA (D10 1st 4.4s), E51 resisted beads 11.8 - med)

total L₁ x time + measured after leakage (30s COMPENSATE leakage spread), Cr at TANK sections