
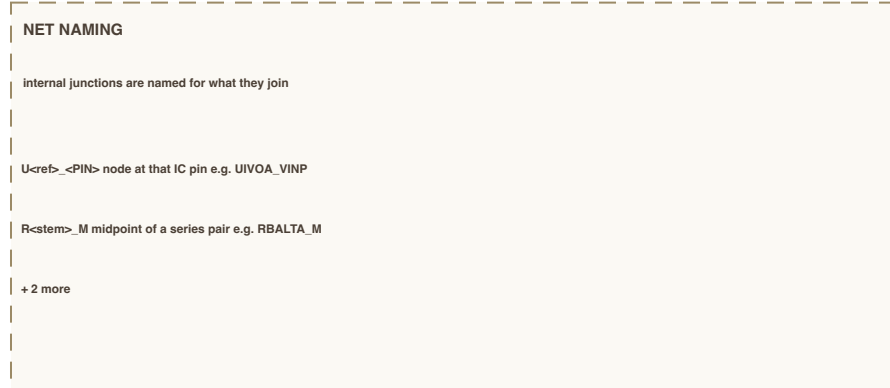
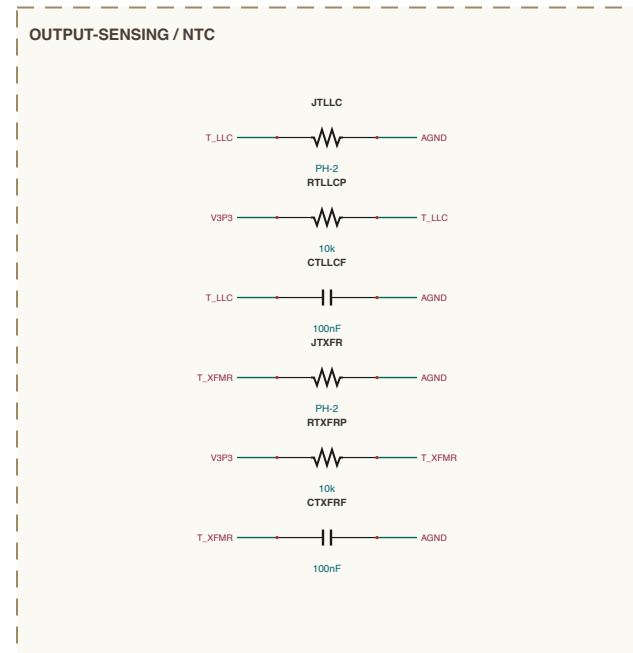
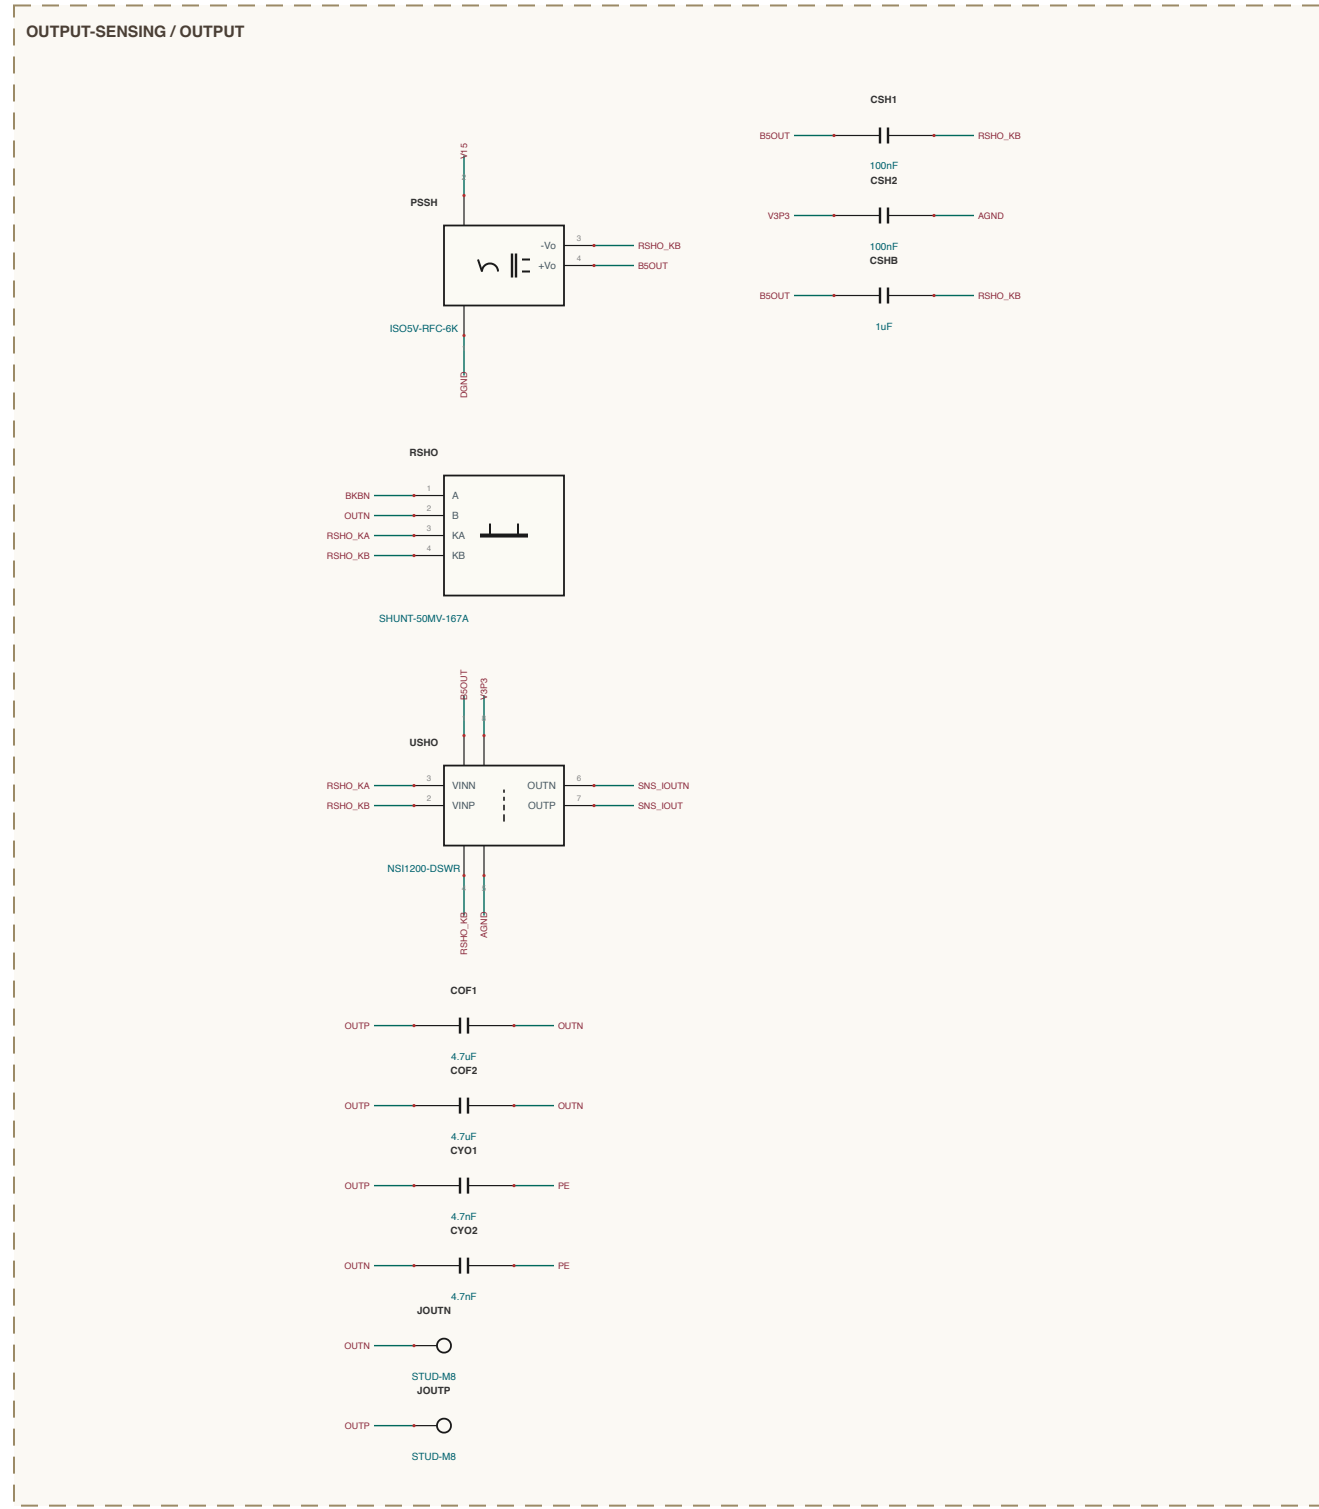
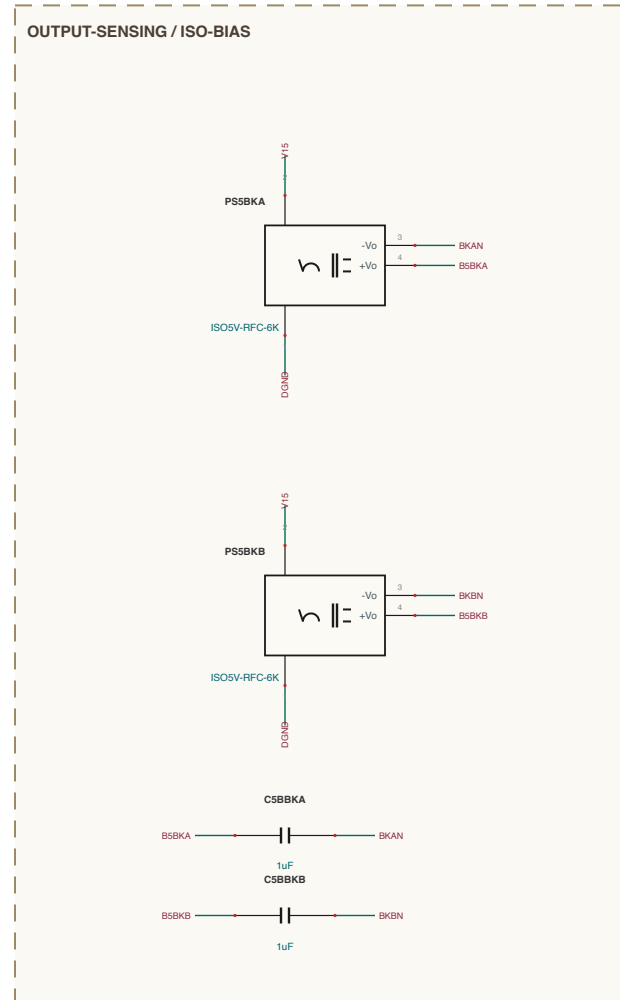
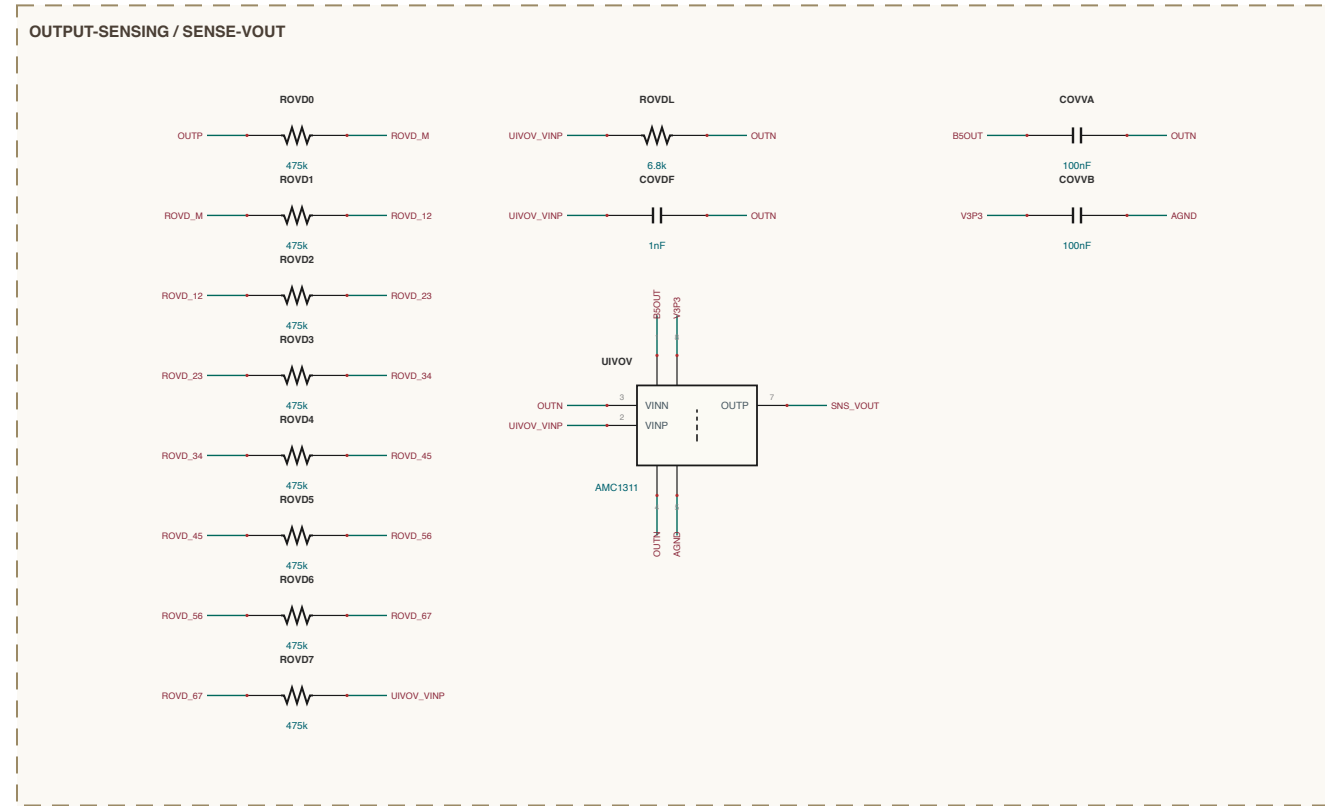
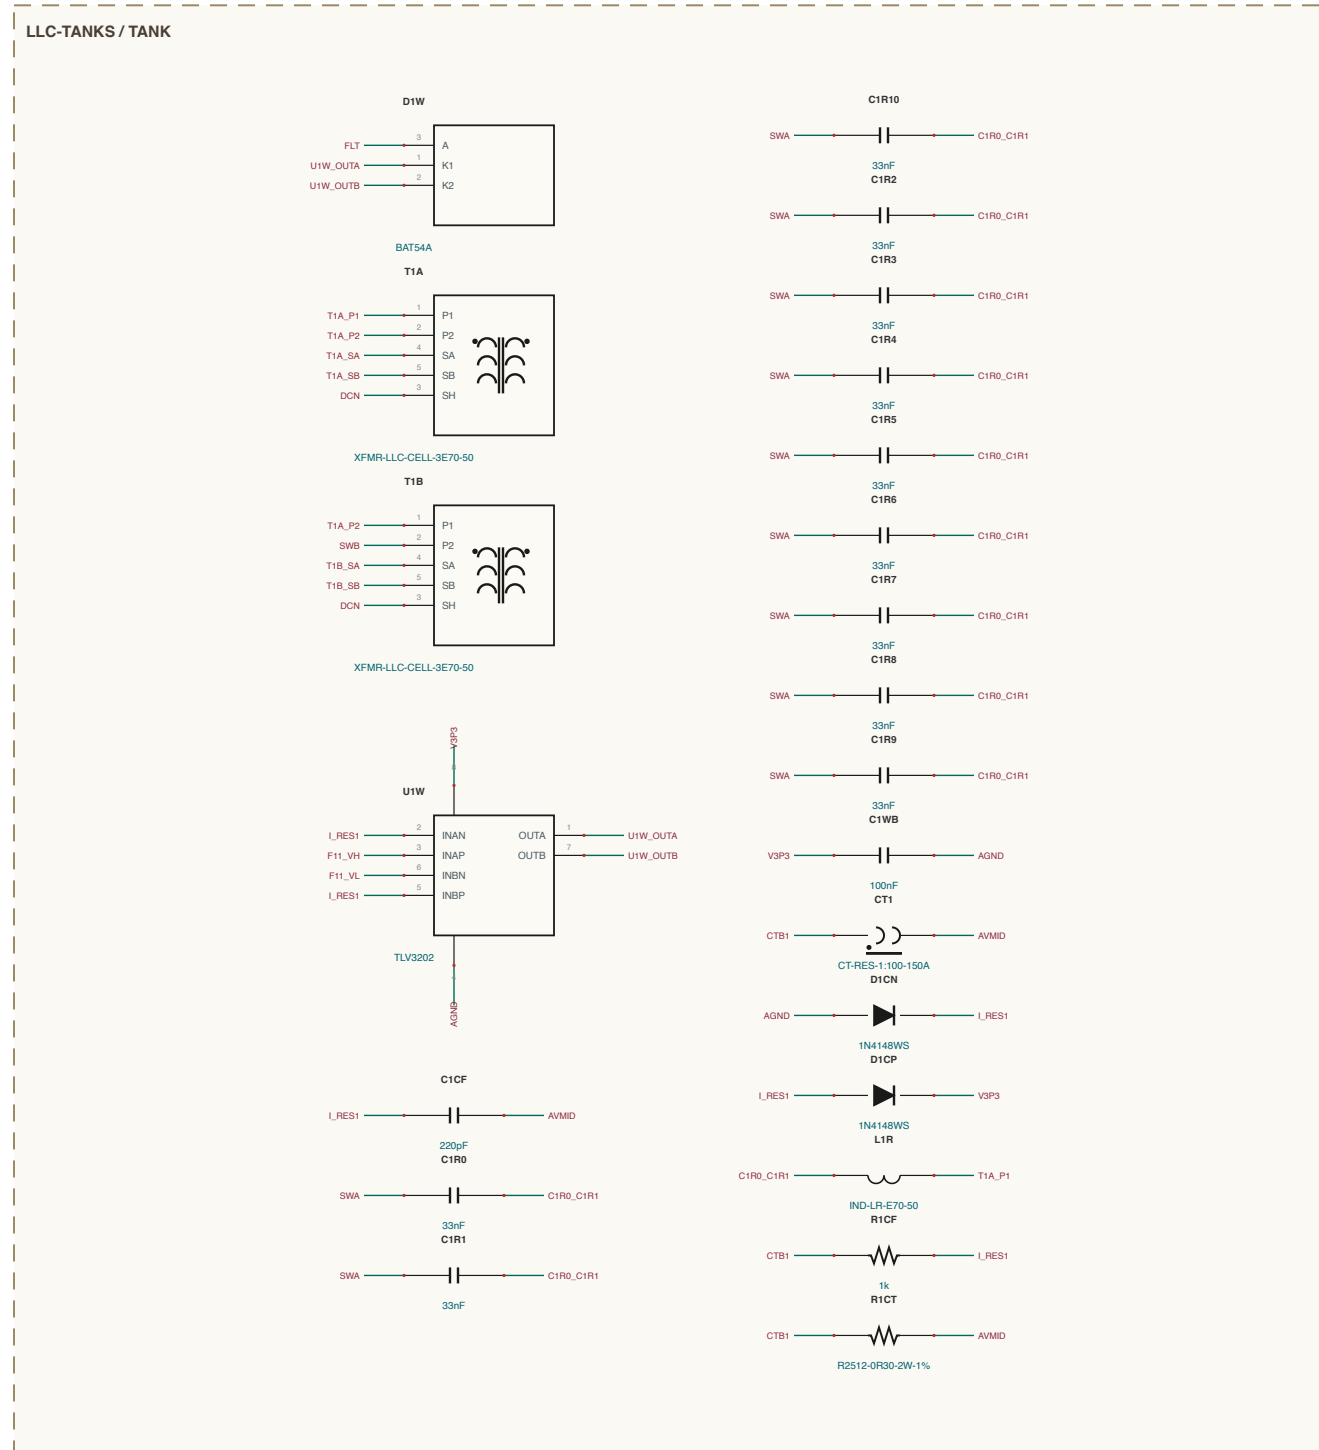
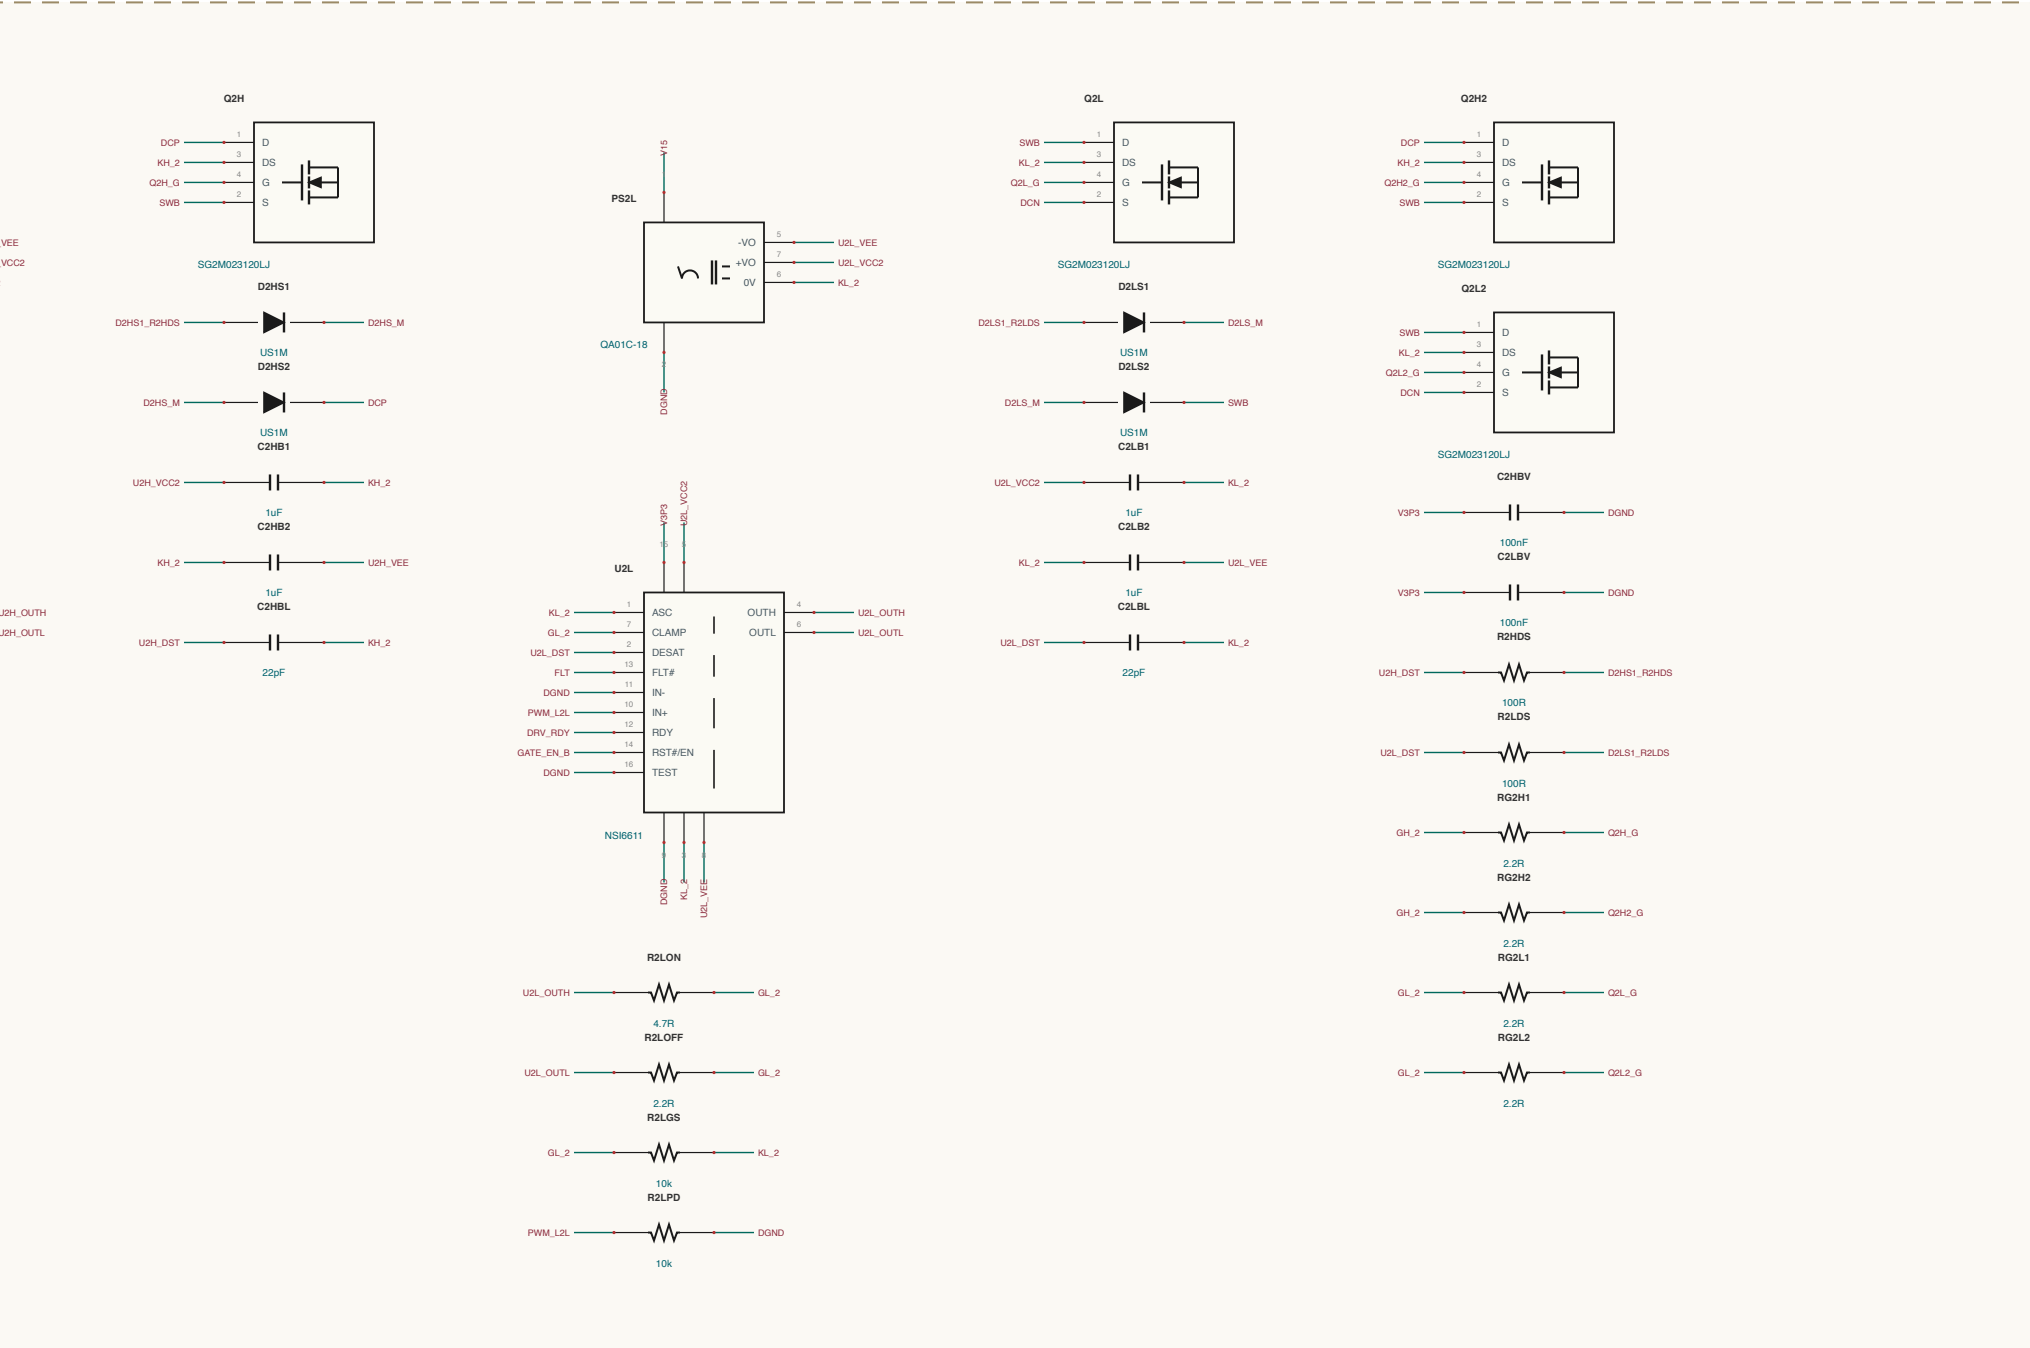
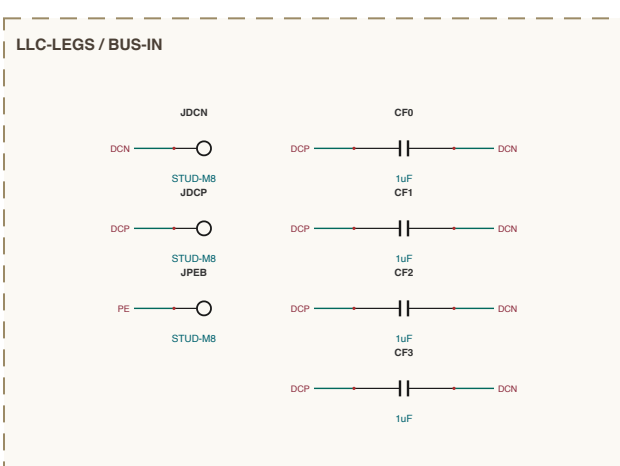
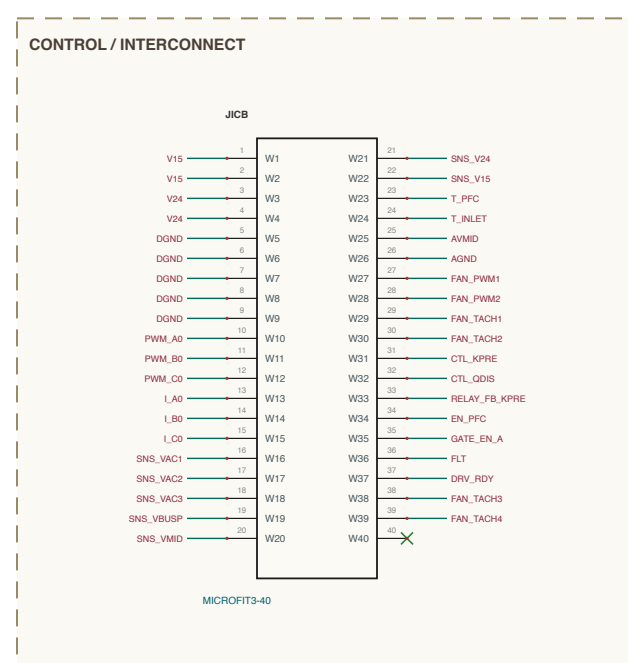
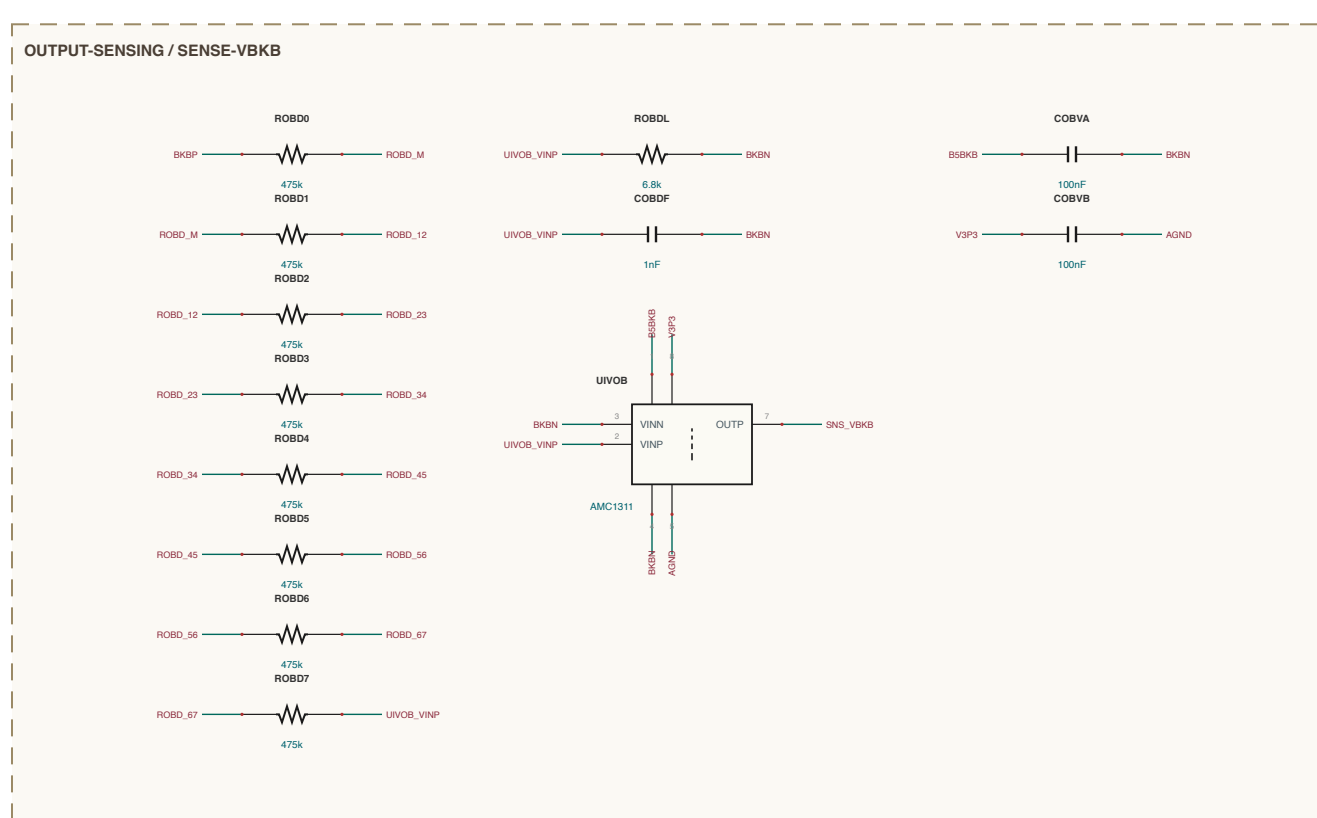
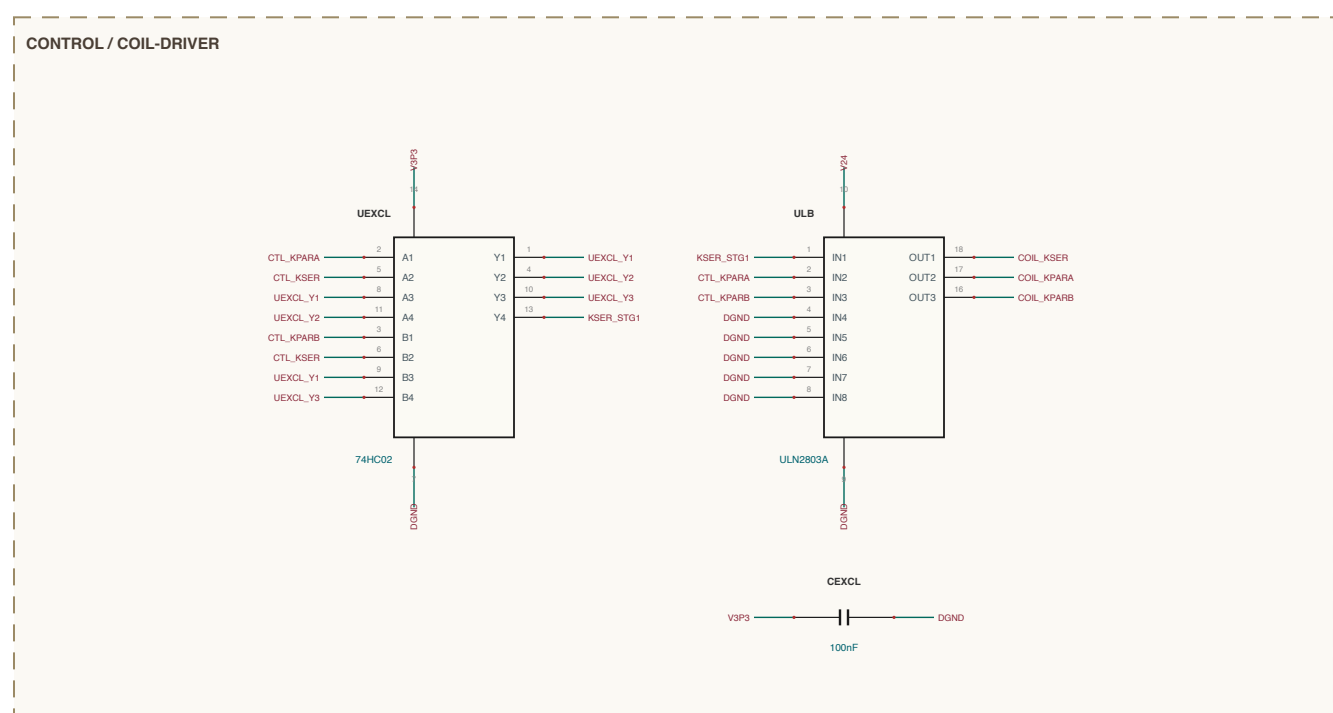
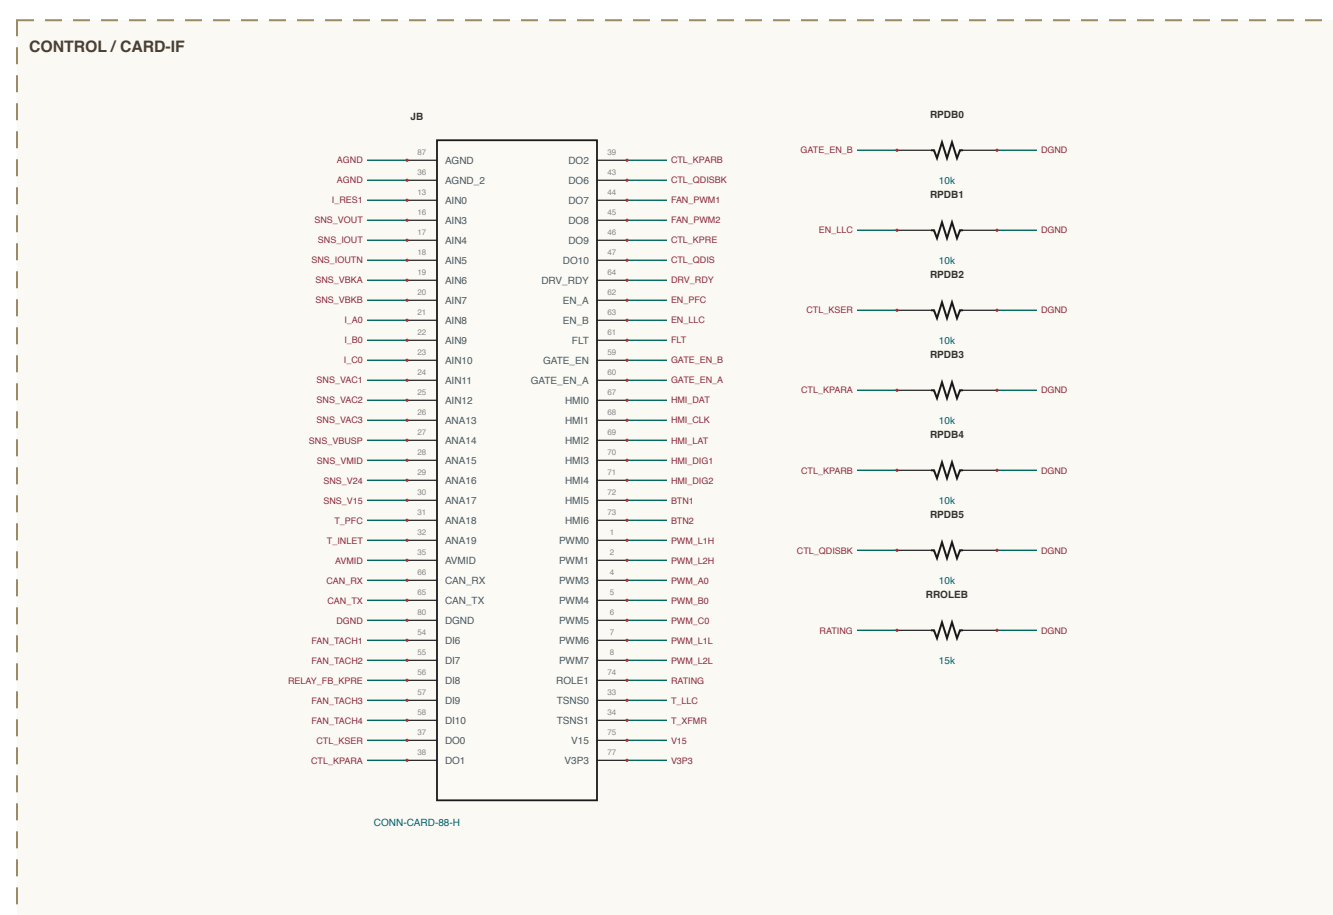
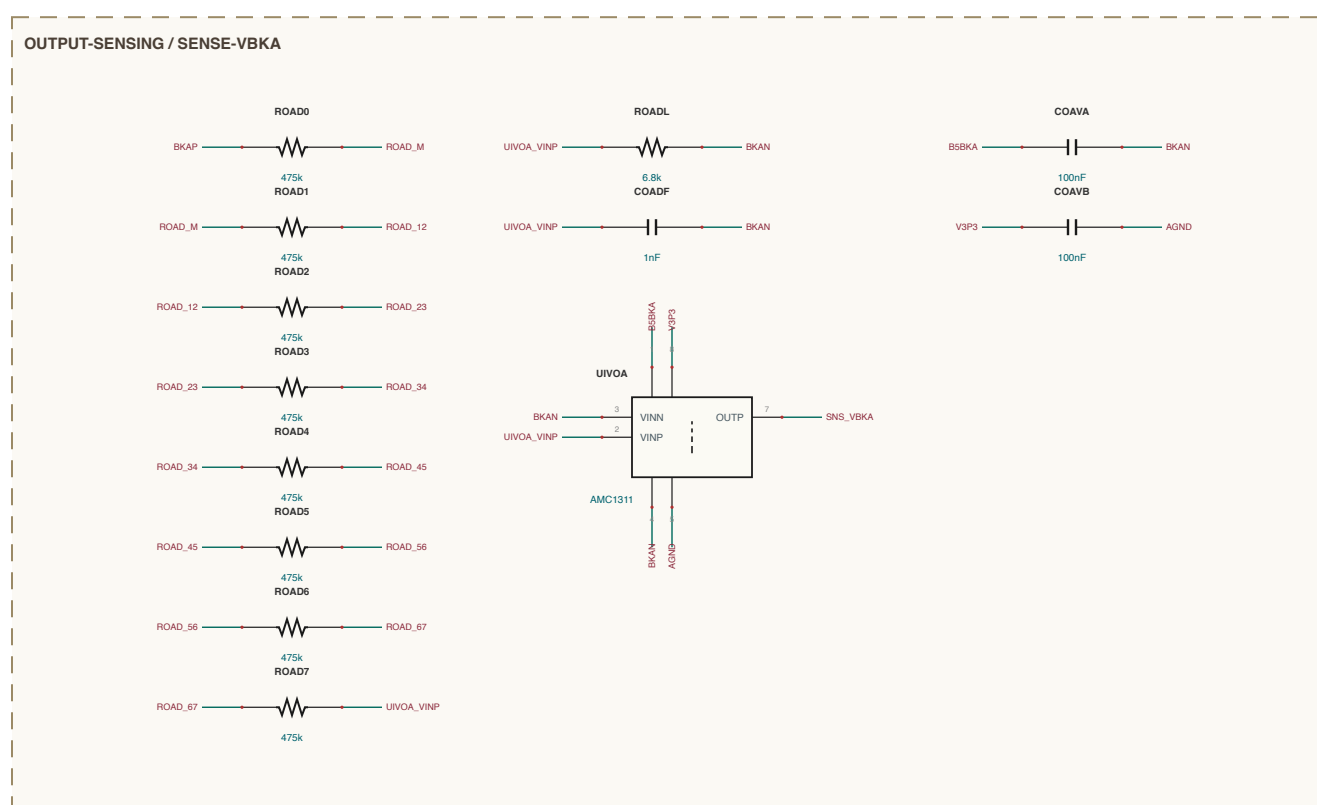
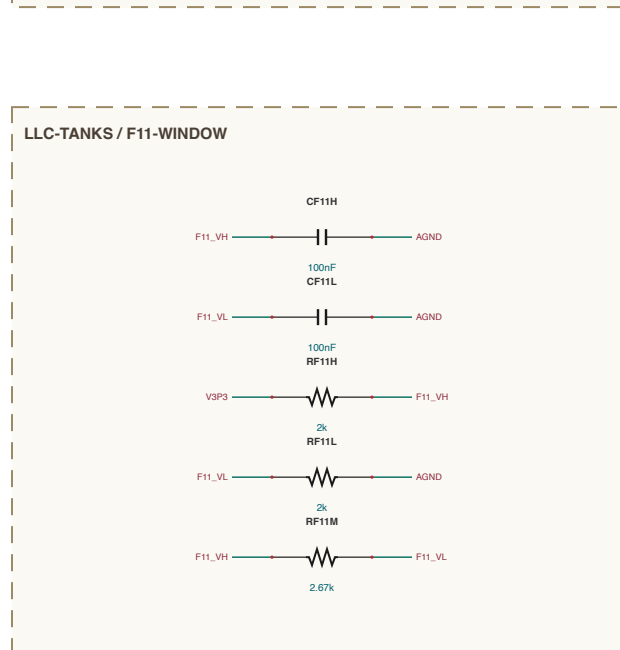
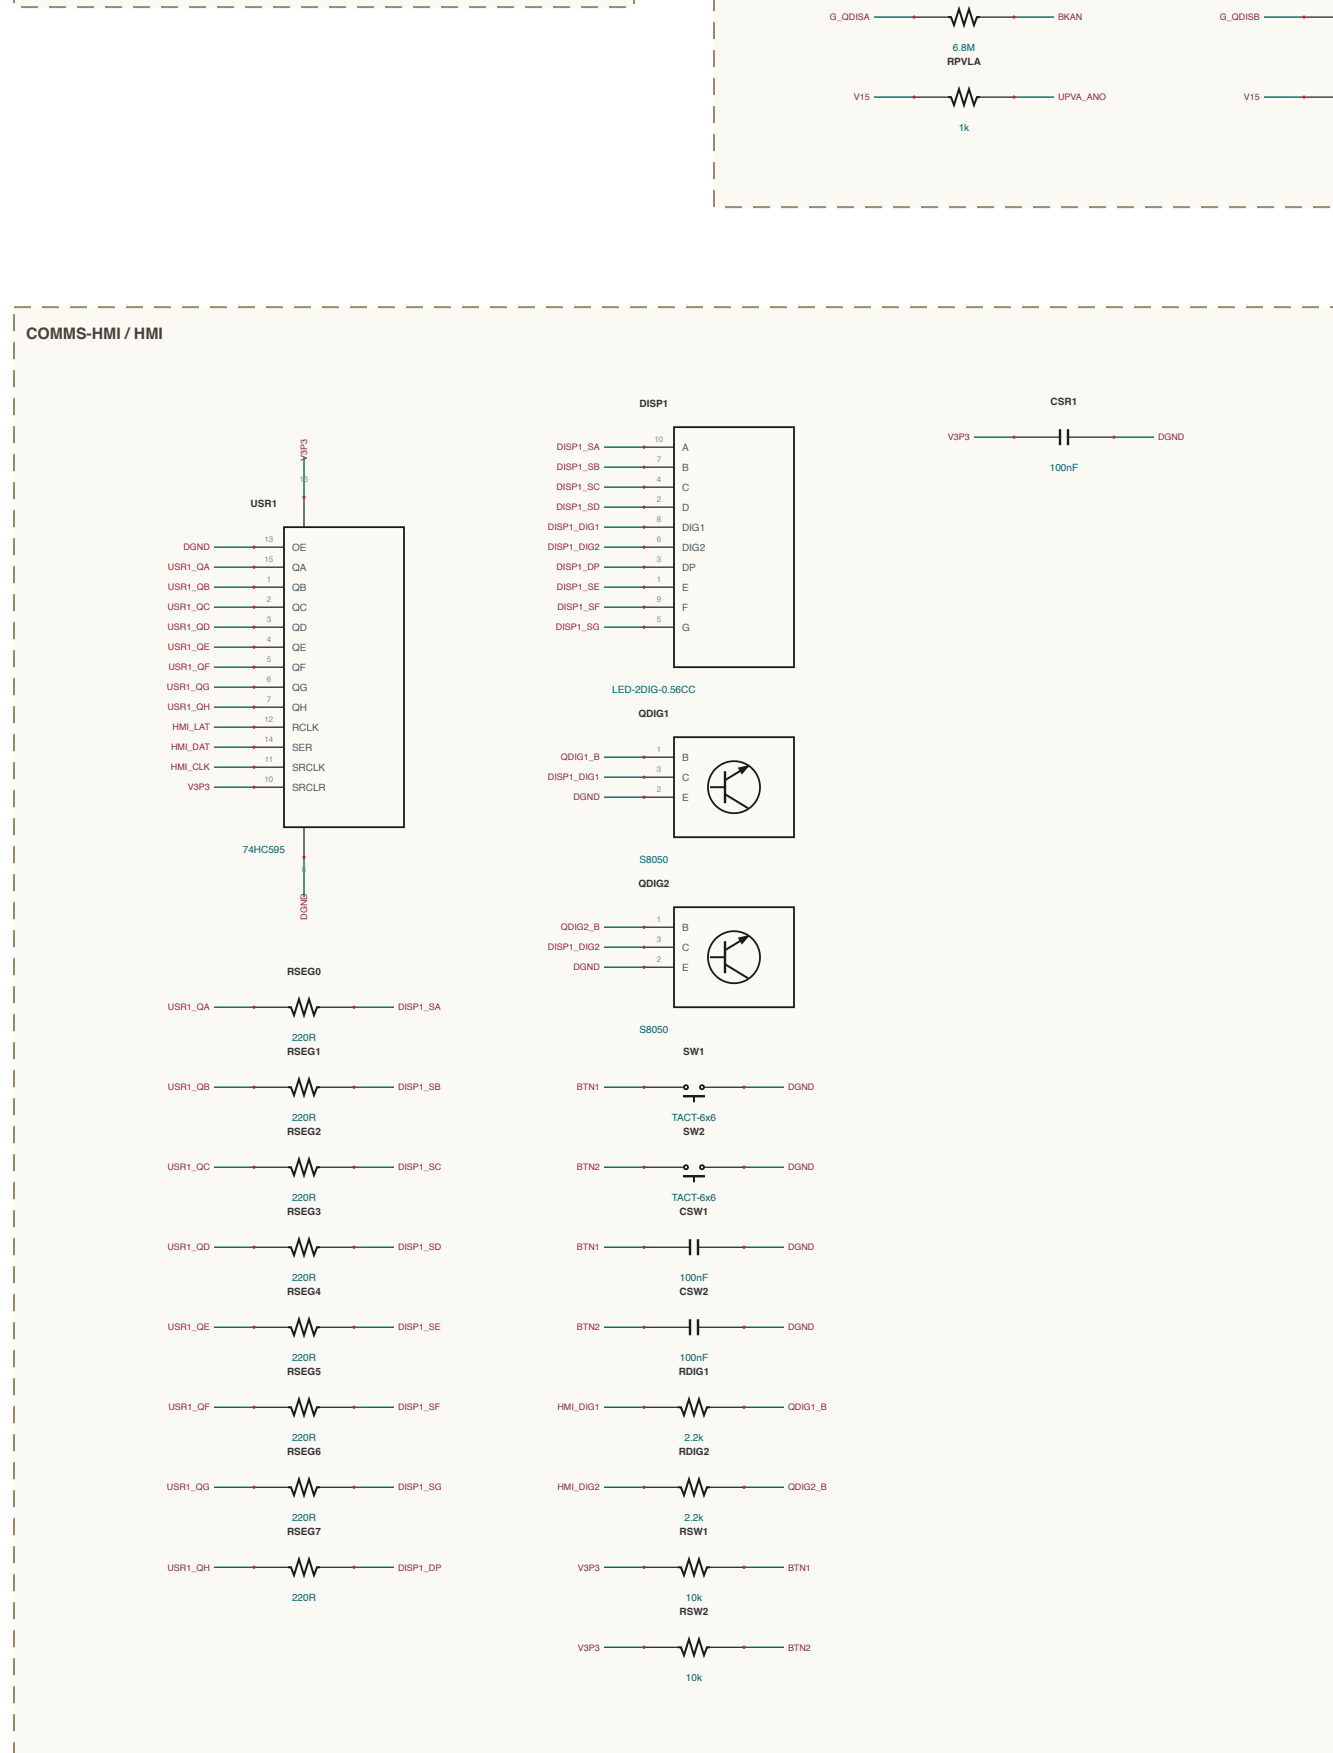
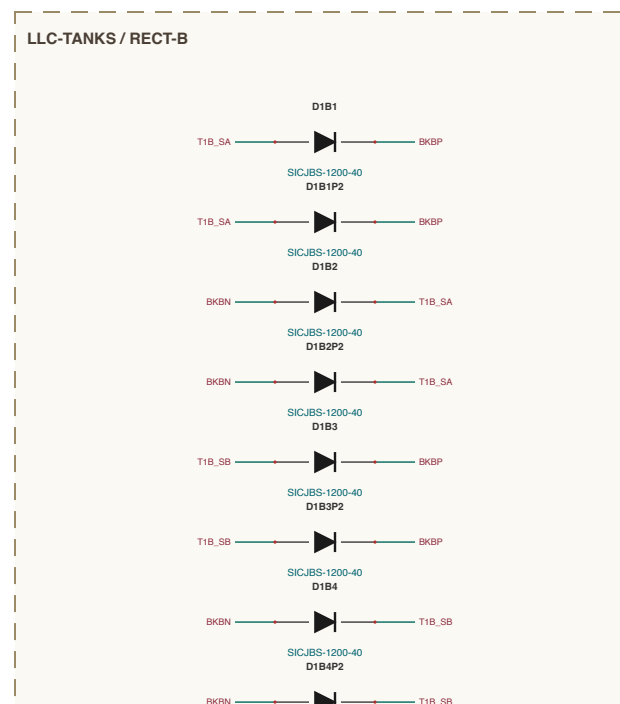
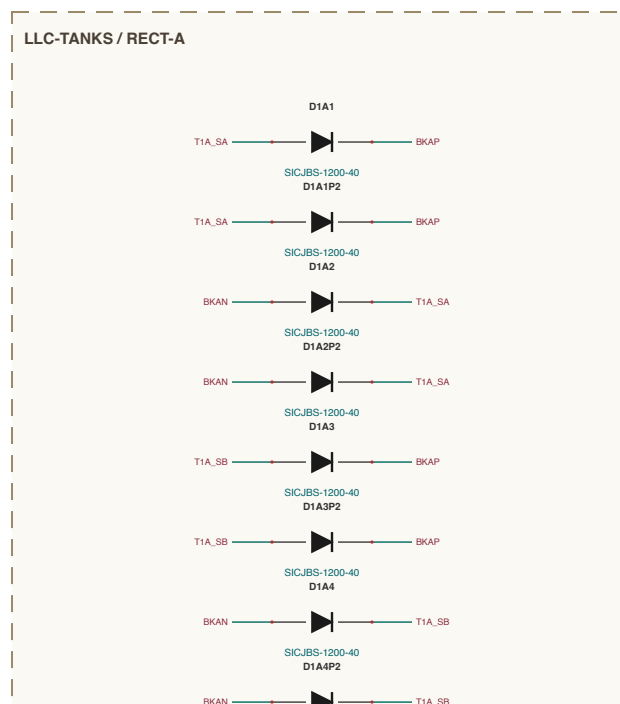
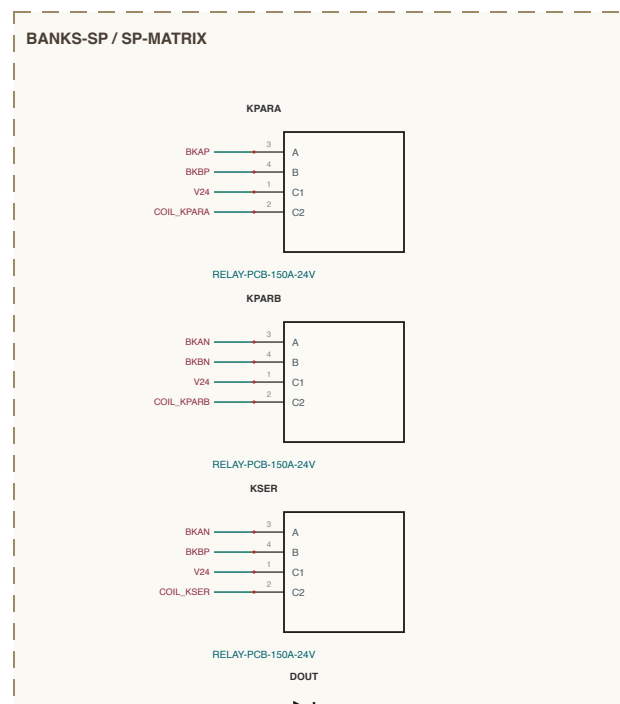


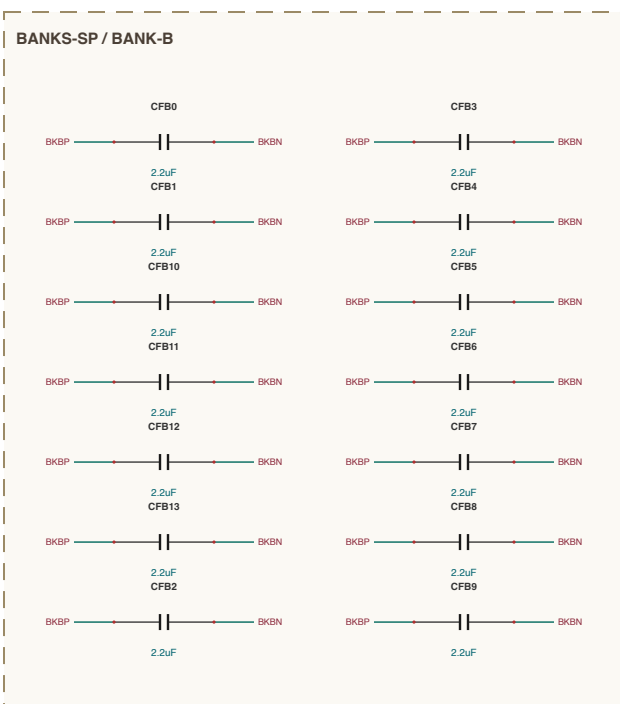

MAGNETICS CONSTRUCTION	
(identify per documentation below for forms, gaps, etc., acceptance issues flow there)	
QID 714718 (JST ref) Co: 2, pellets, particles in section = n=2, each Zn 9793333 (not thermal), 4,431; pin 833648-077 +, seal; Zn ball 436428 bottom, Zn 17,484 (heat = 7%, Rsp, 100% ⁺ , 100% ⁺)	QID 714718 (JST ref) Co: 2, pellets, particles in section = n=2, each Zn 9793333 (not thermal), 4,431; pin 833648-077 +, seal; Zn ball 436428 bottom, Zn 17,484 (heat = 7%, Rsp, 100% ⁺ , 100% ⁺)
QID LMR (JST ref) external Zn 1.264H ± 0.7%, Zn 9793333, No, the 100000±, distributed gap, bonded	QID LMR (JST ref) external Zn 1.264H ± 0.7%, Zn 9793333, No, the 100000±, distributed gap, bonded
MSL Zn 1.2 ± 0.2 ± 0.2 self leakage compliance < 100%; ± 0.4M long = 0.1% dissipated, Co at NMN	MSL Zn 1.2 ± 0.2 ± 0.2 self leakage compliance < 100%; ± 0.4M long = 0.1% dissipated, Co at NMN
(based lines screened by the EOS, bonded thermal seal [7_7PBM NTC min at heat load, 65C])	