
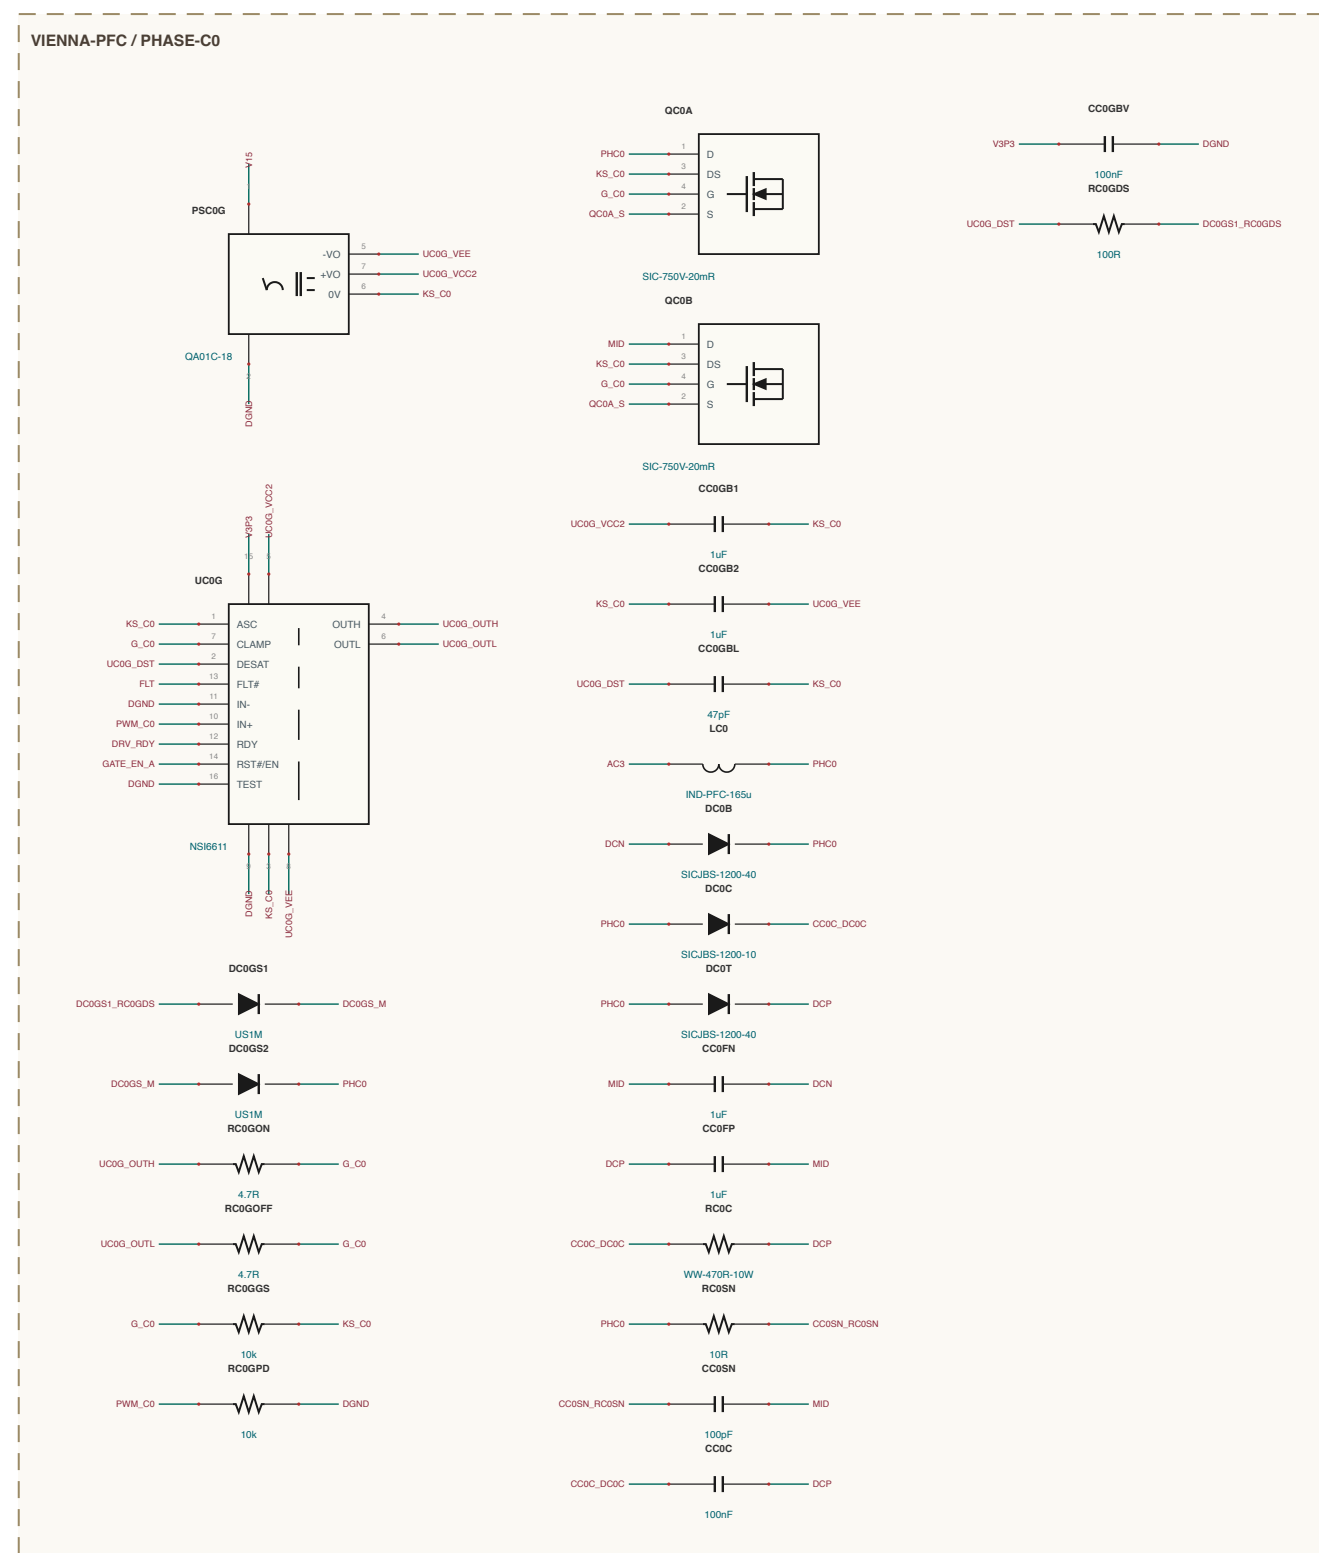
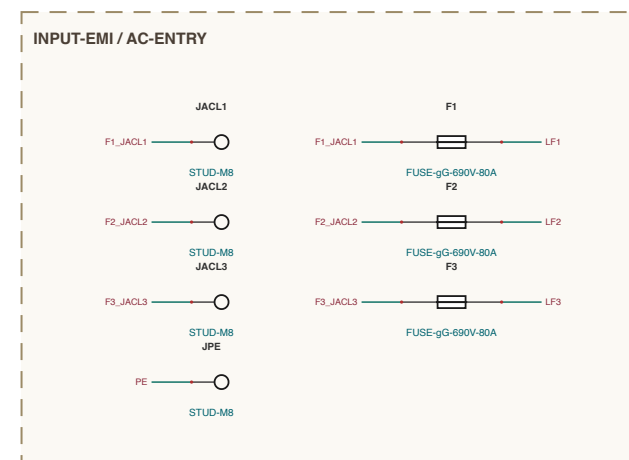
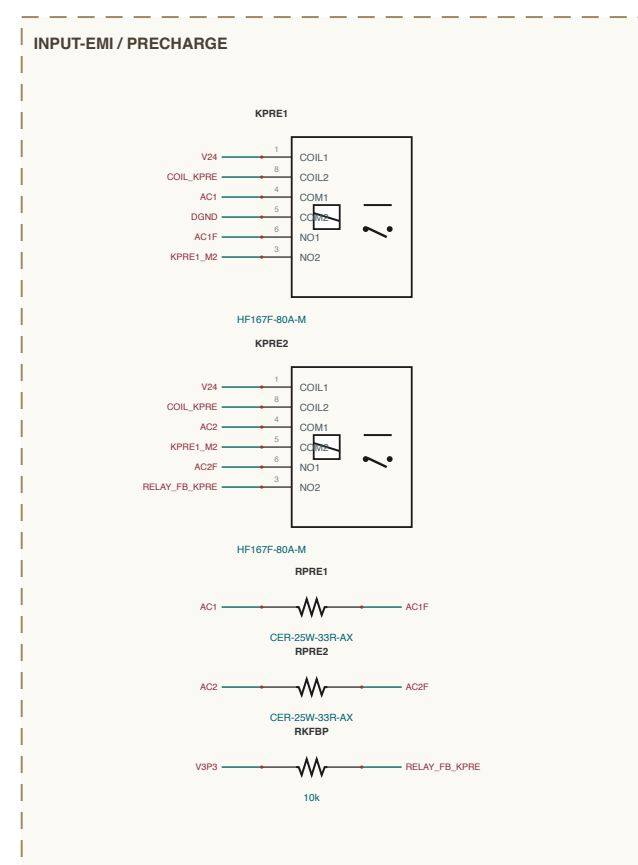
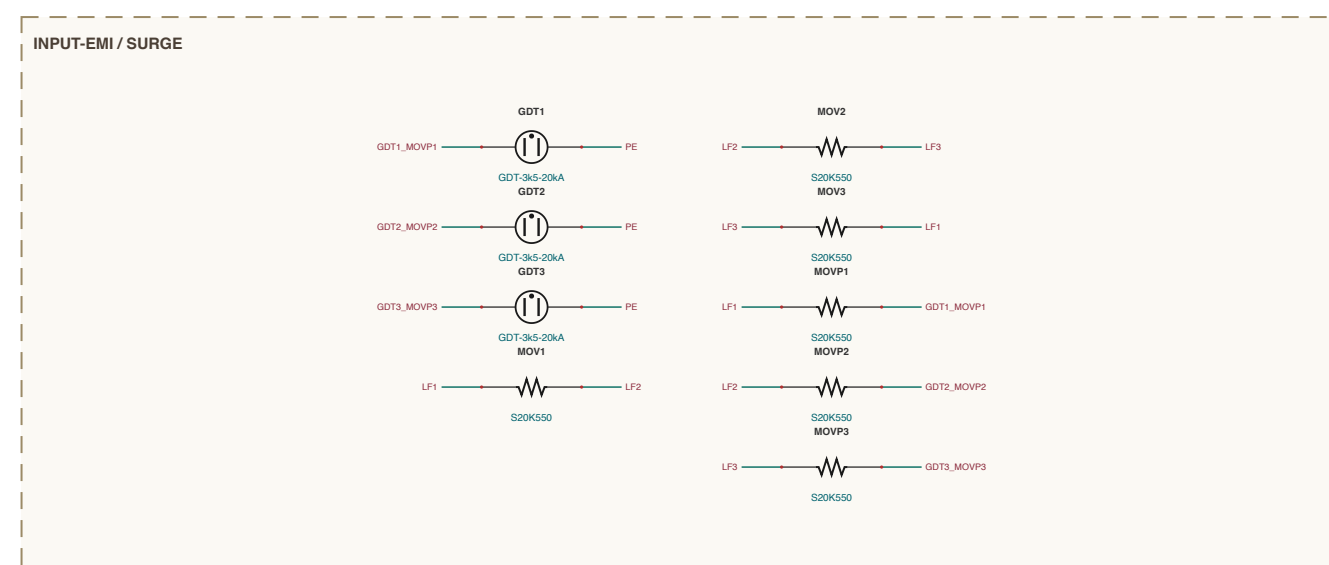
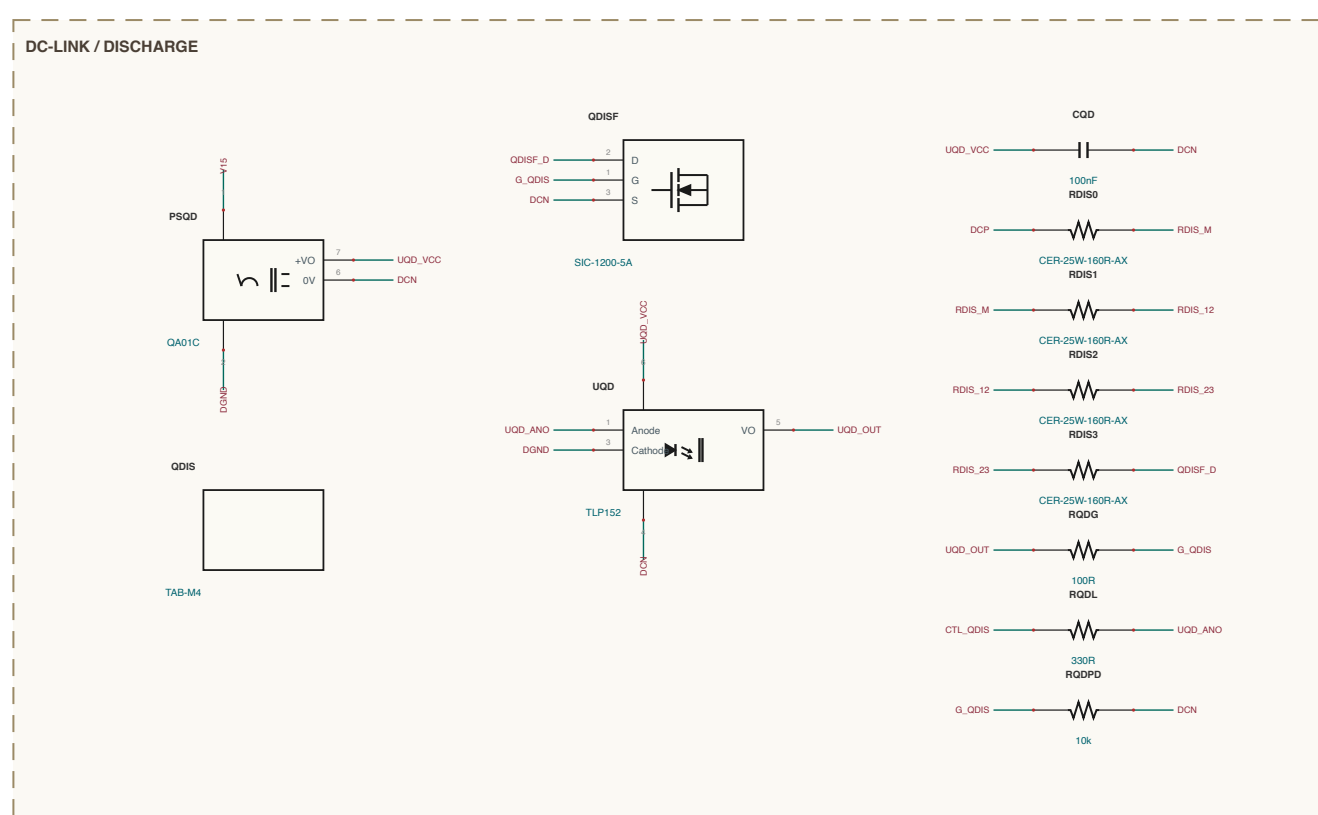
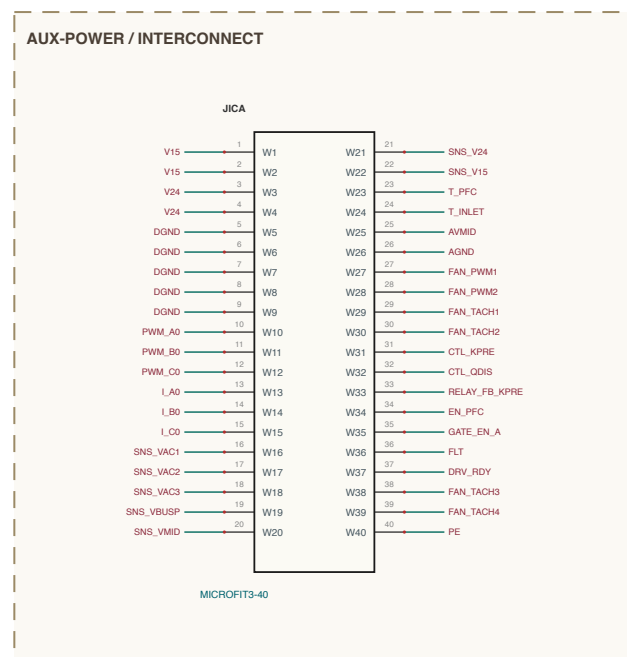
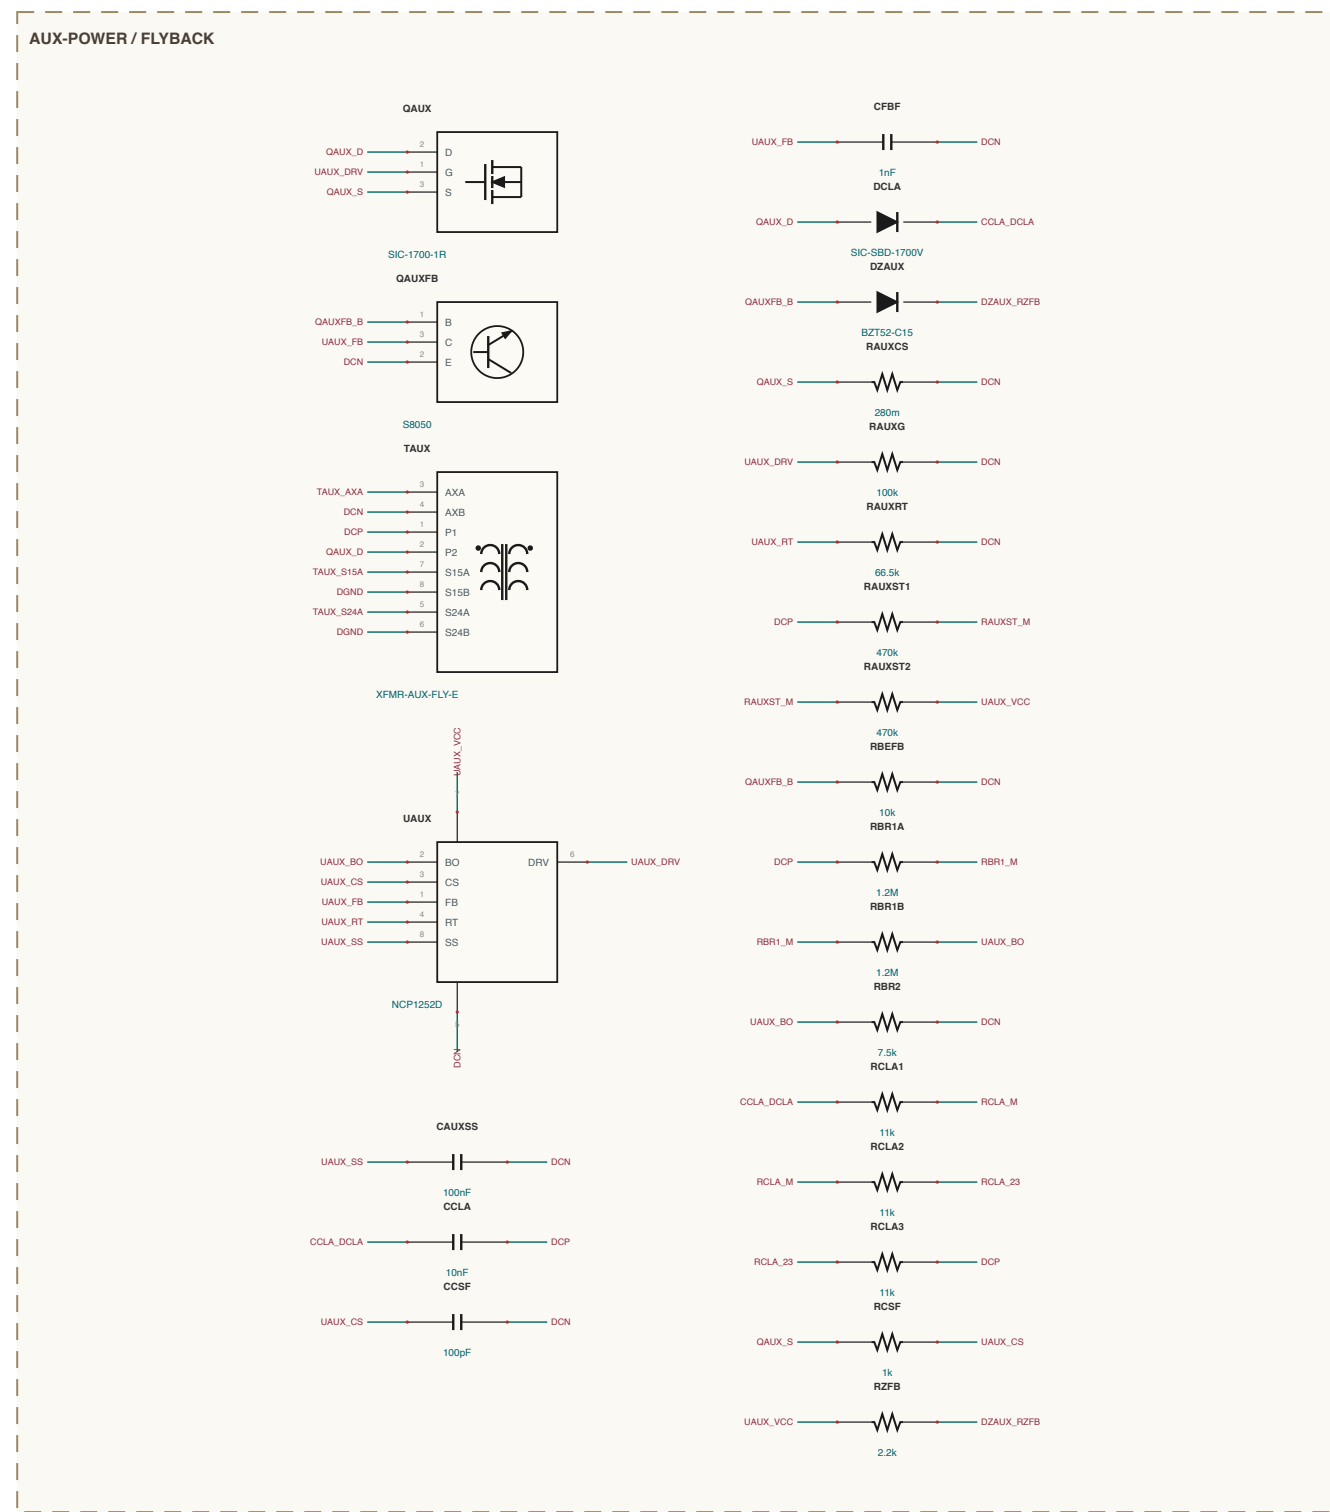
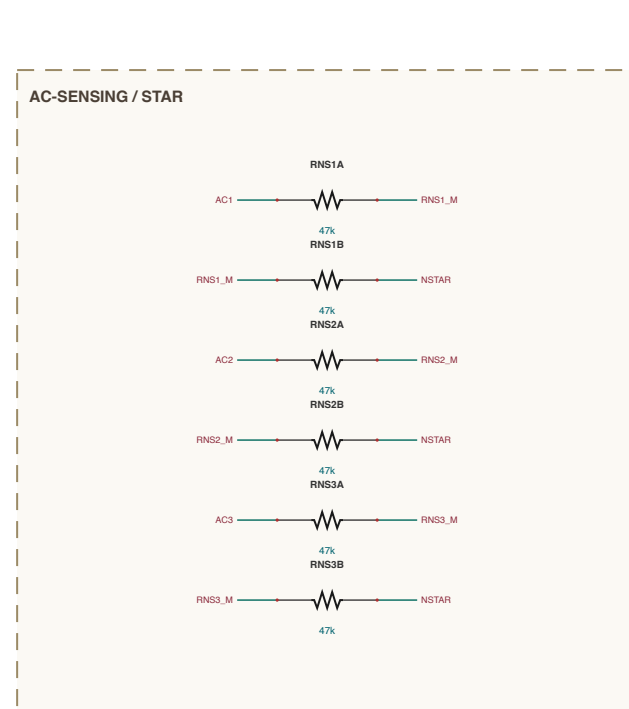
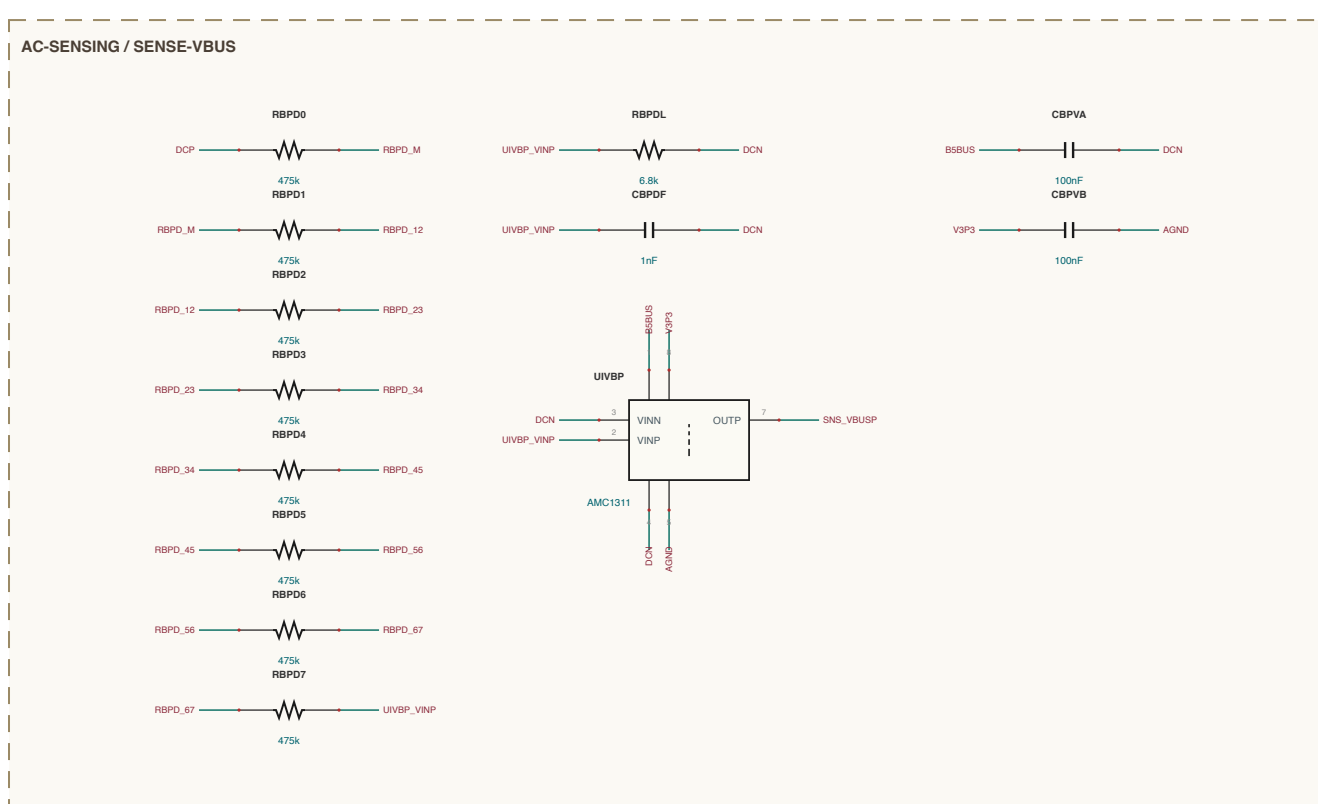
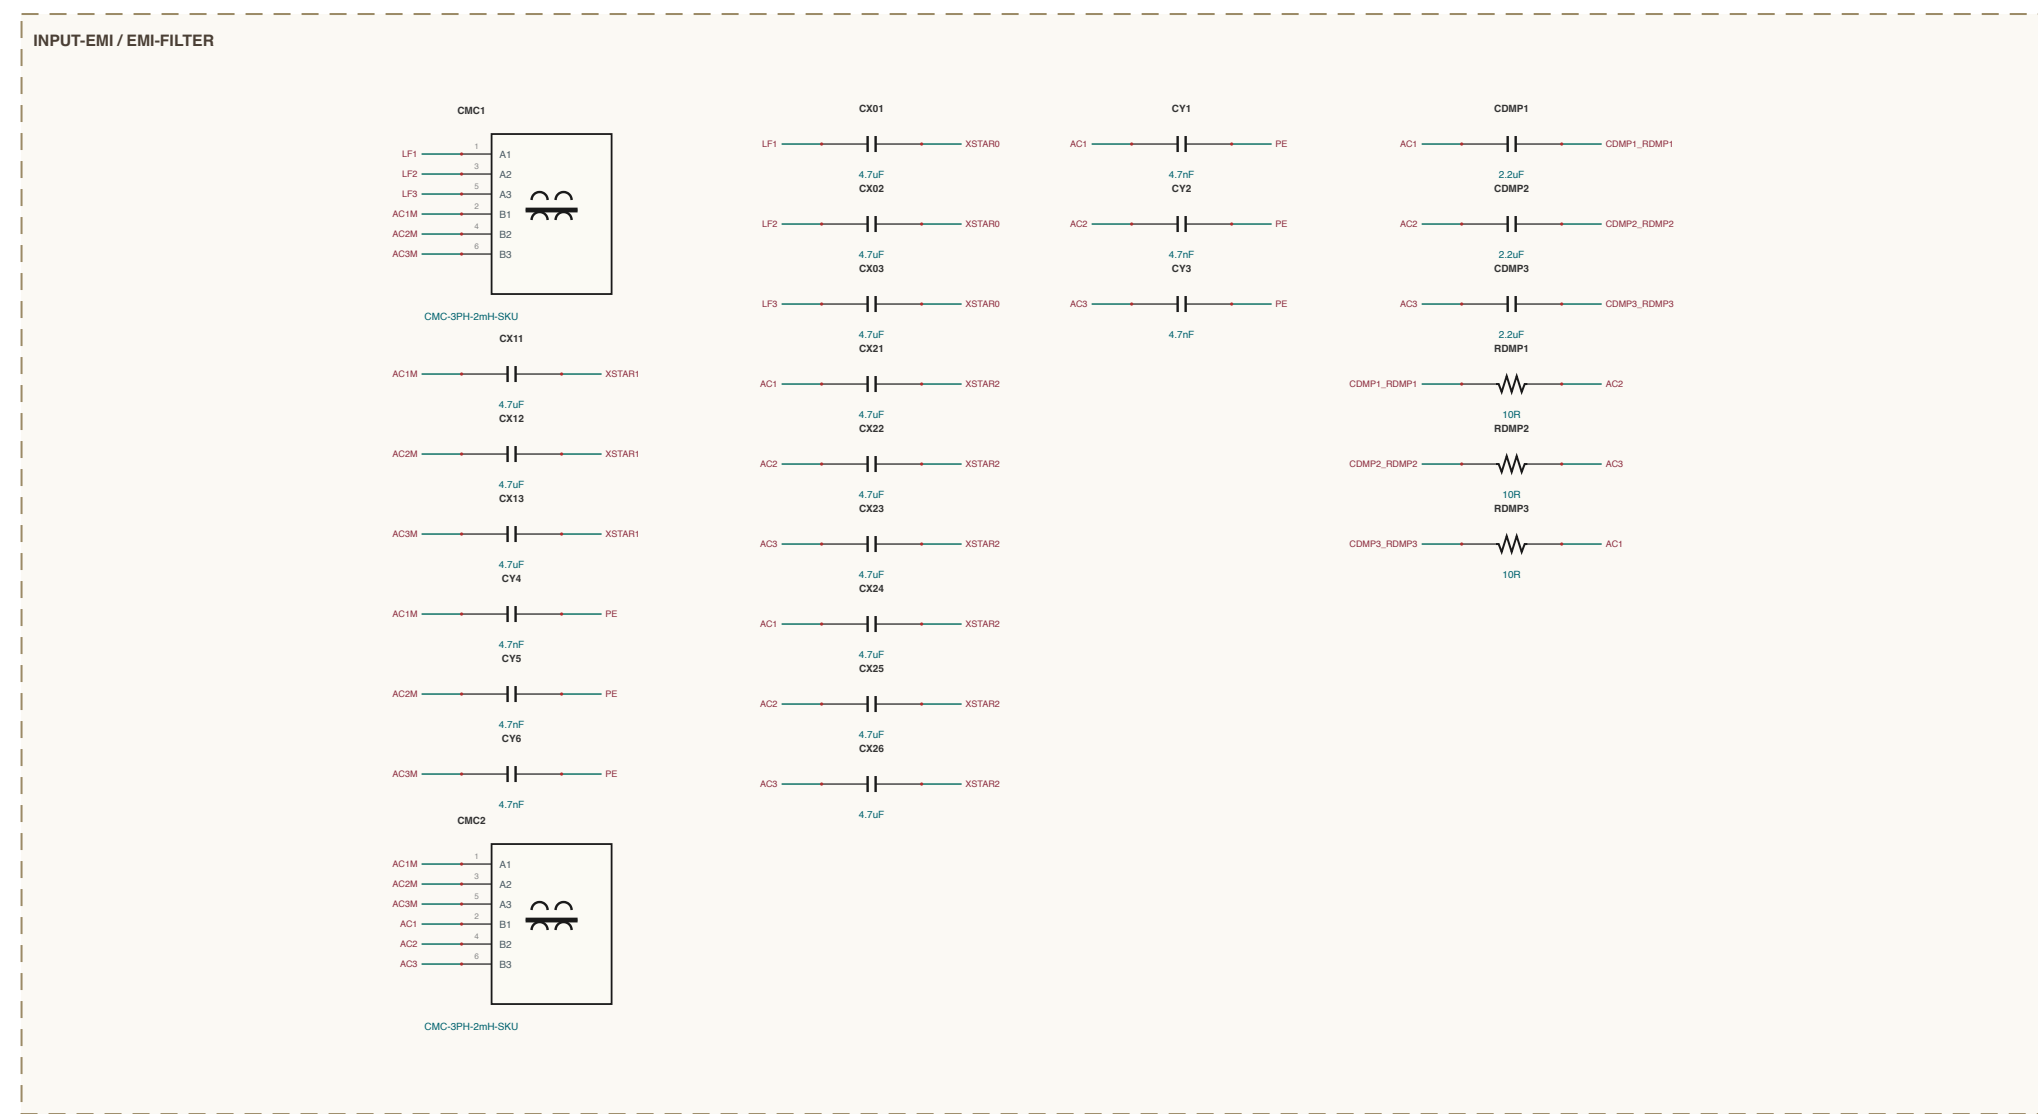
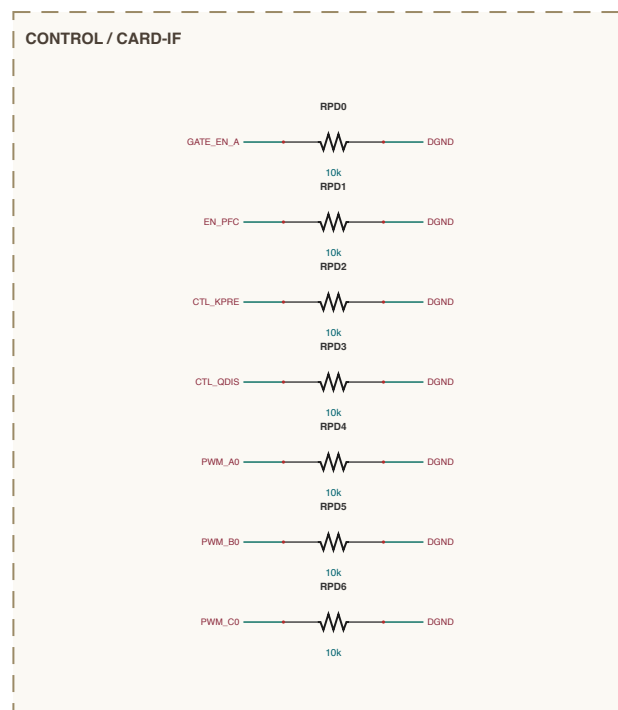
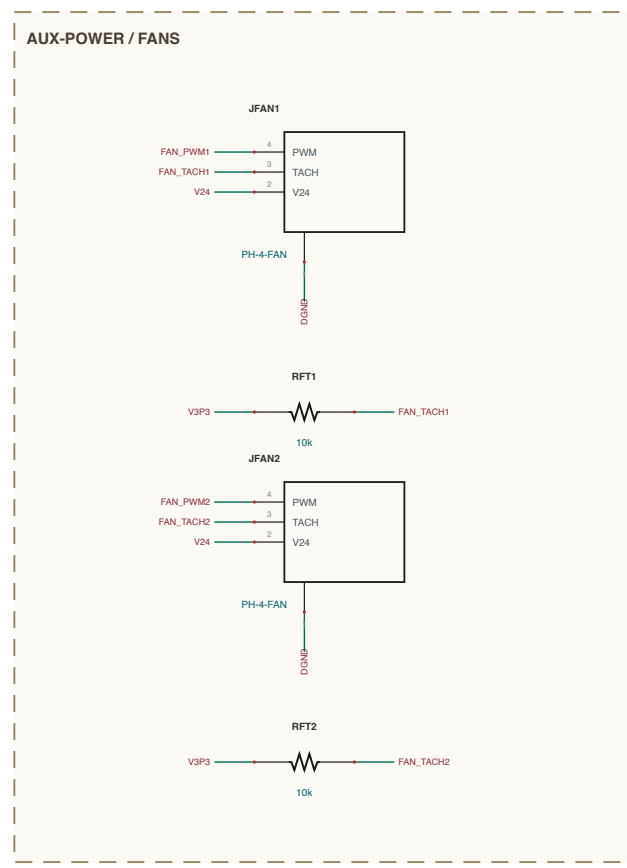
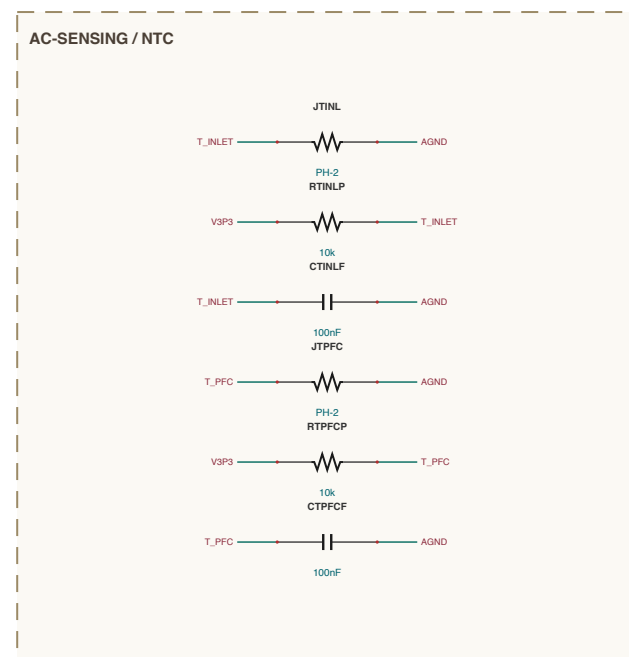
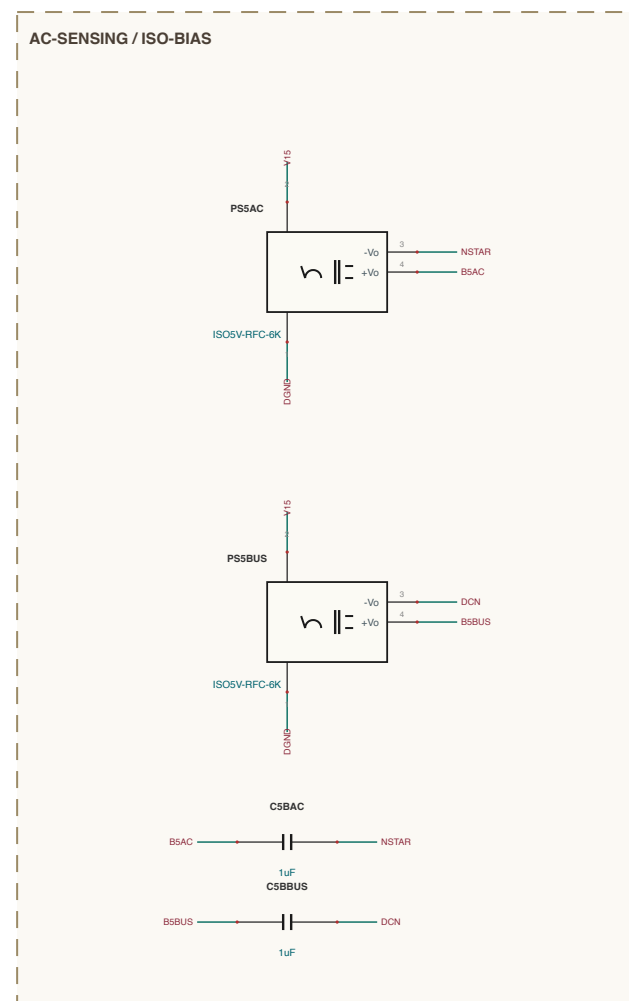
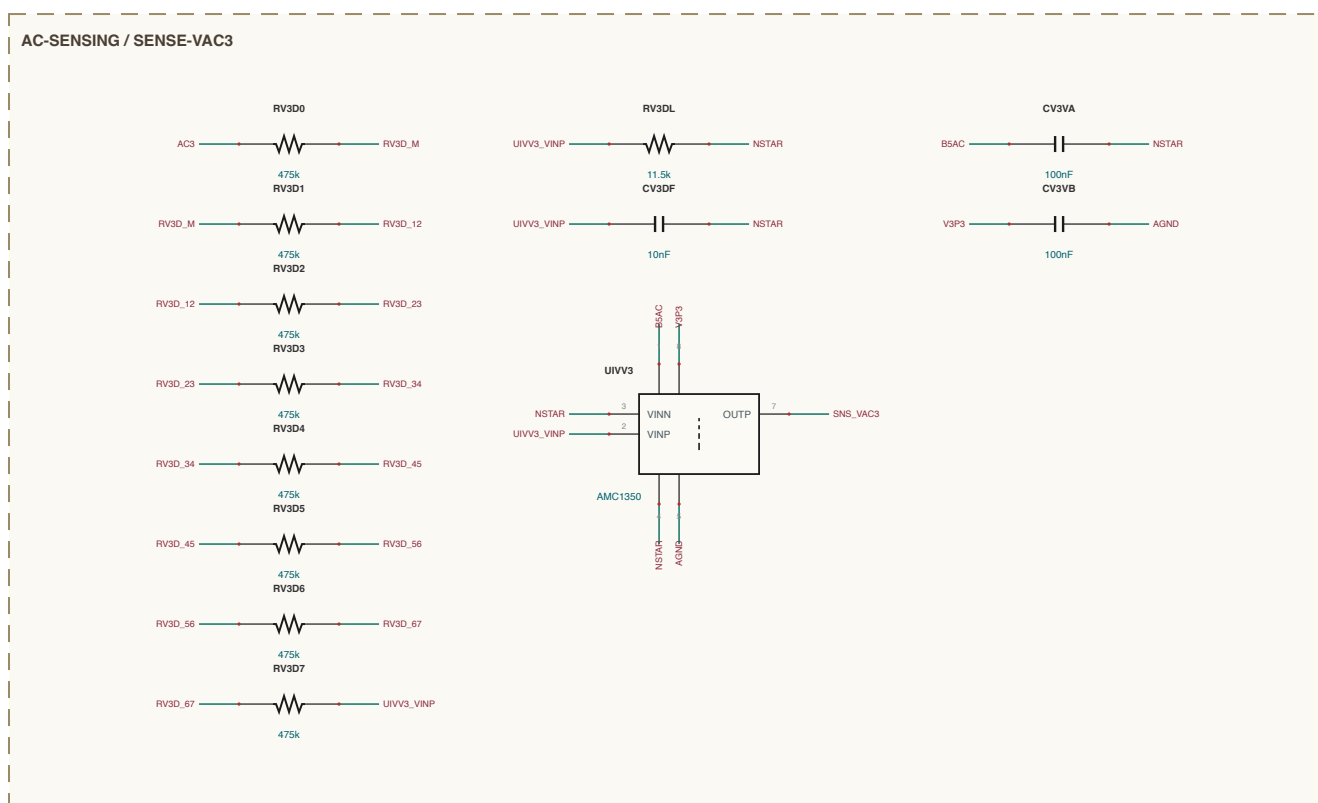
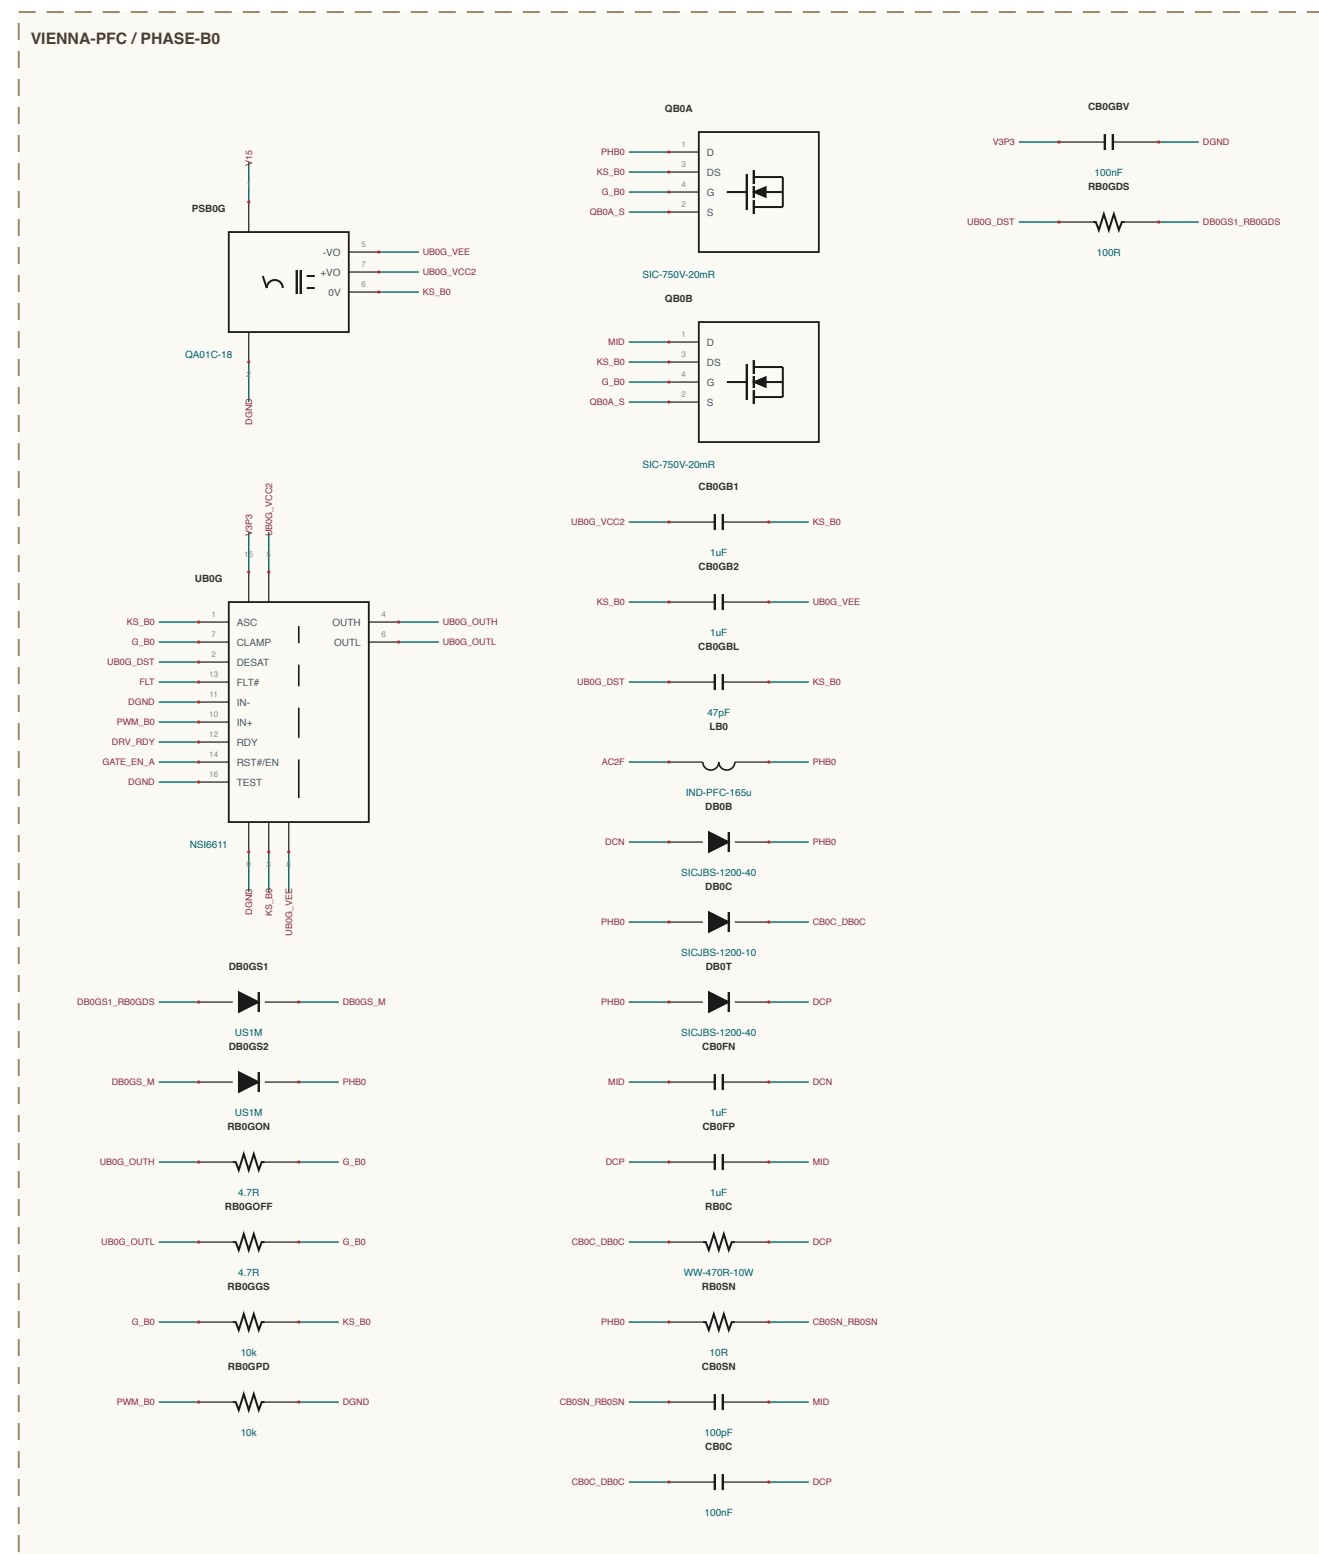
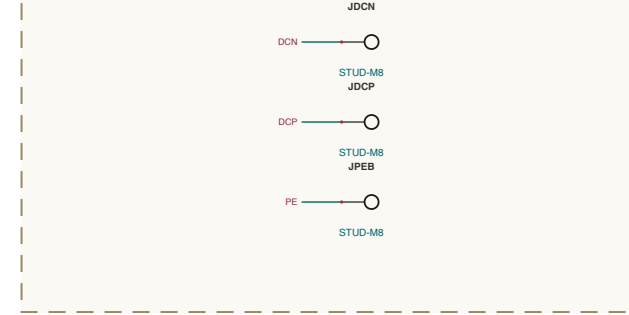
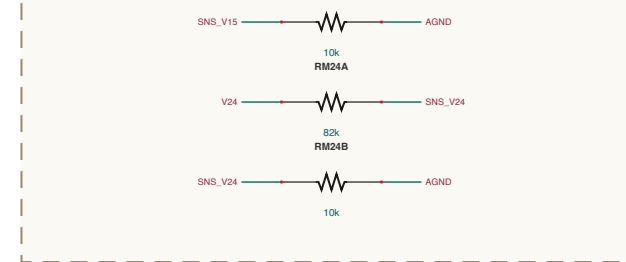
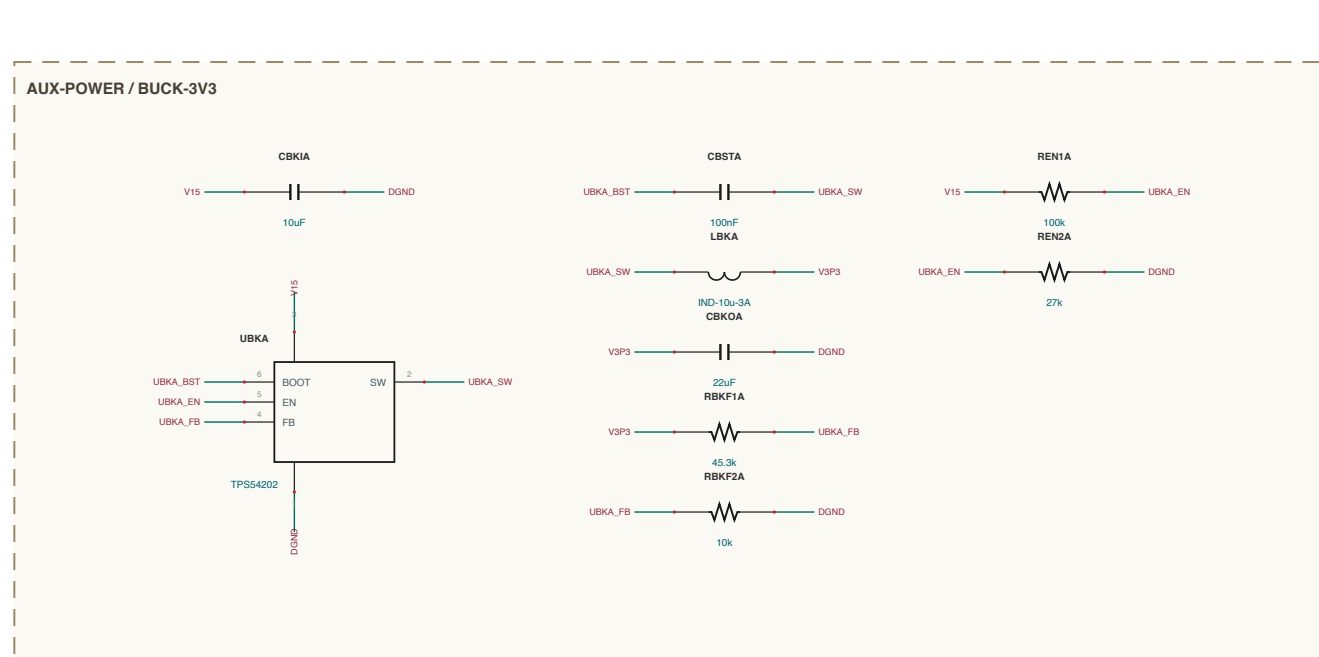
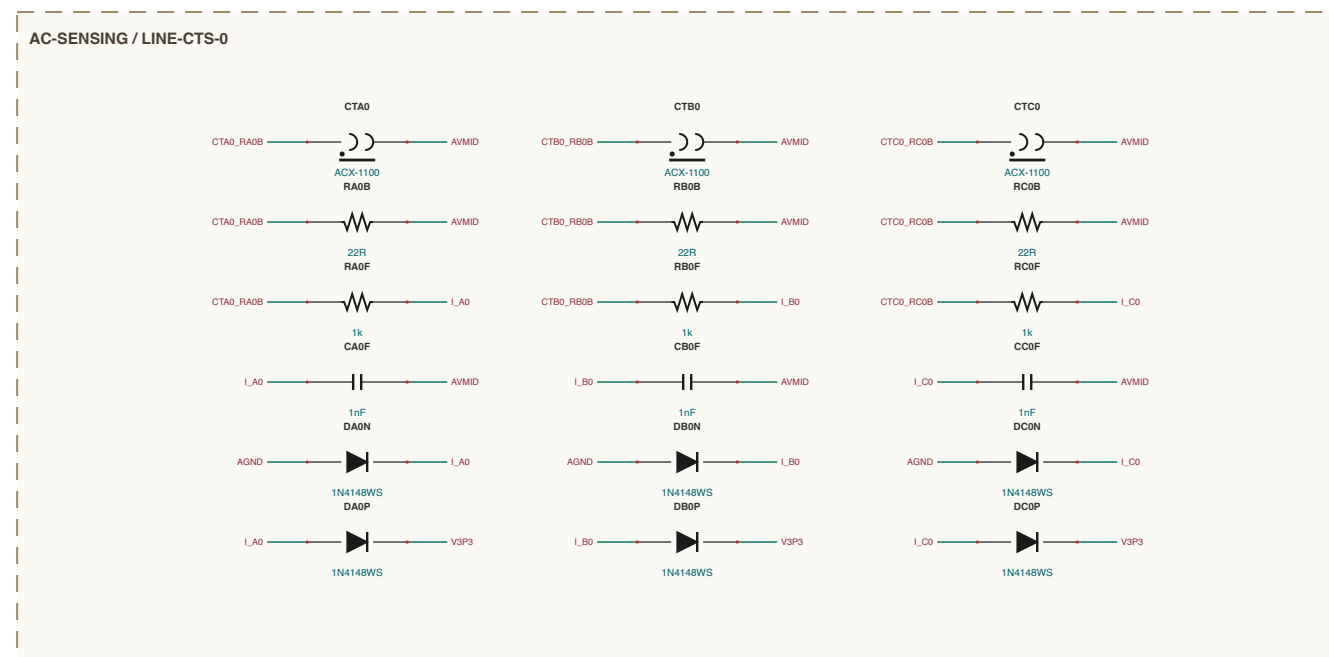
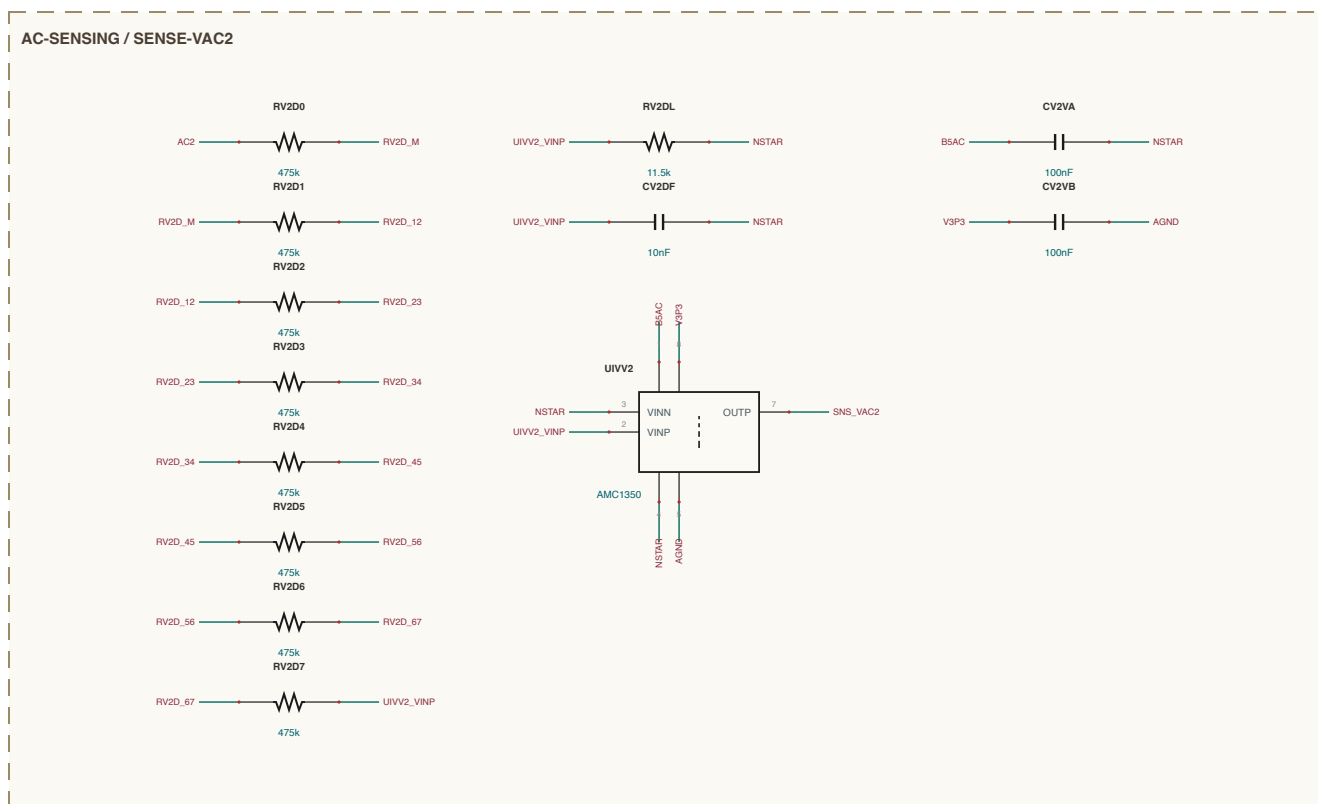
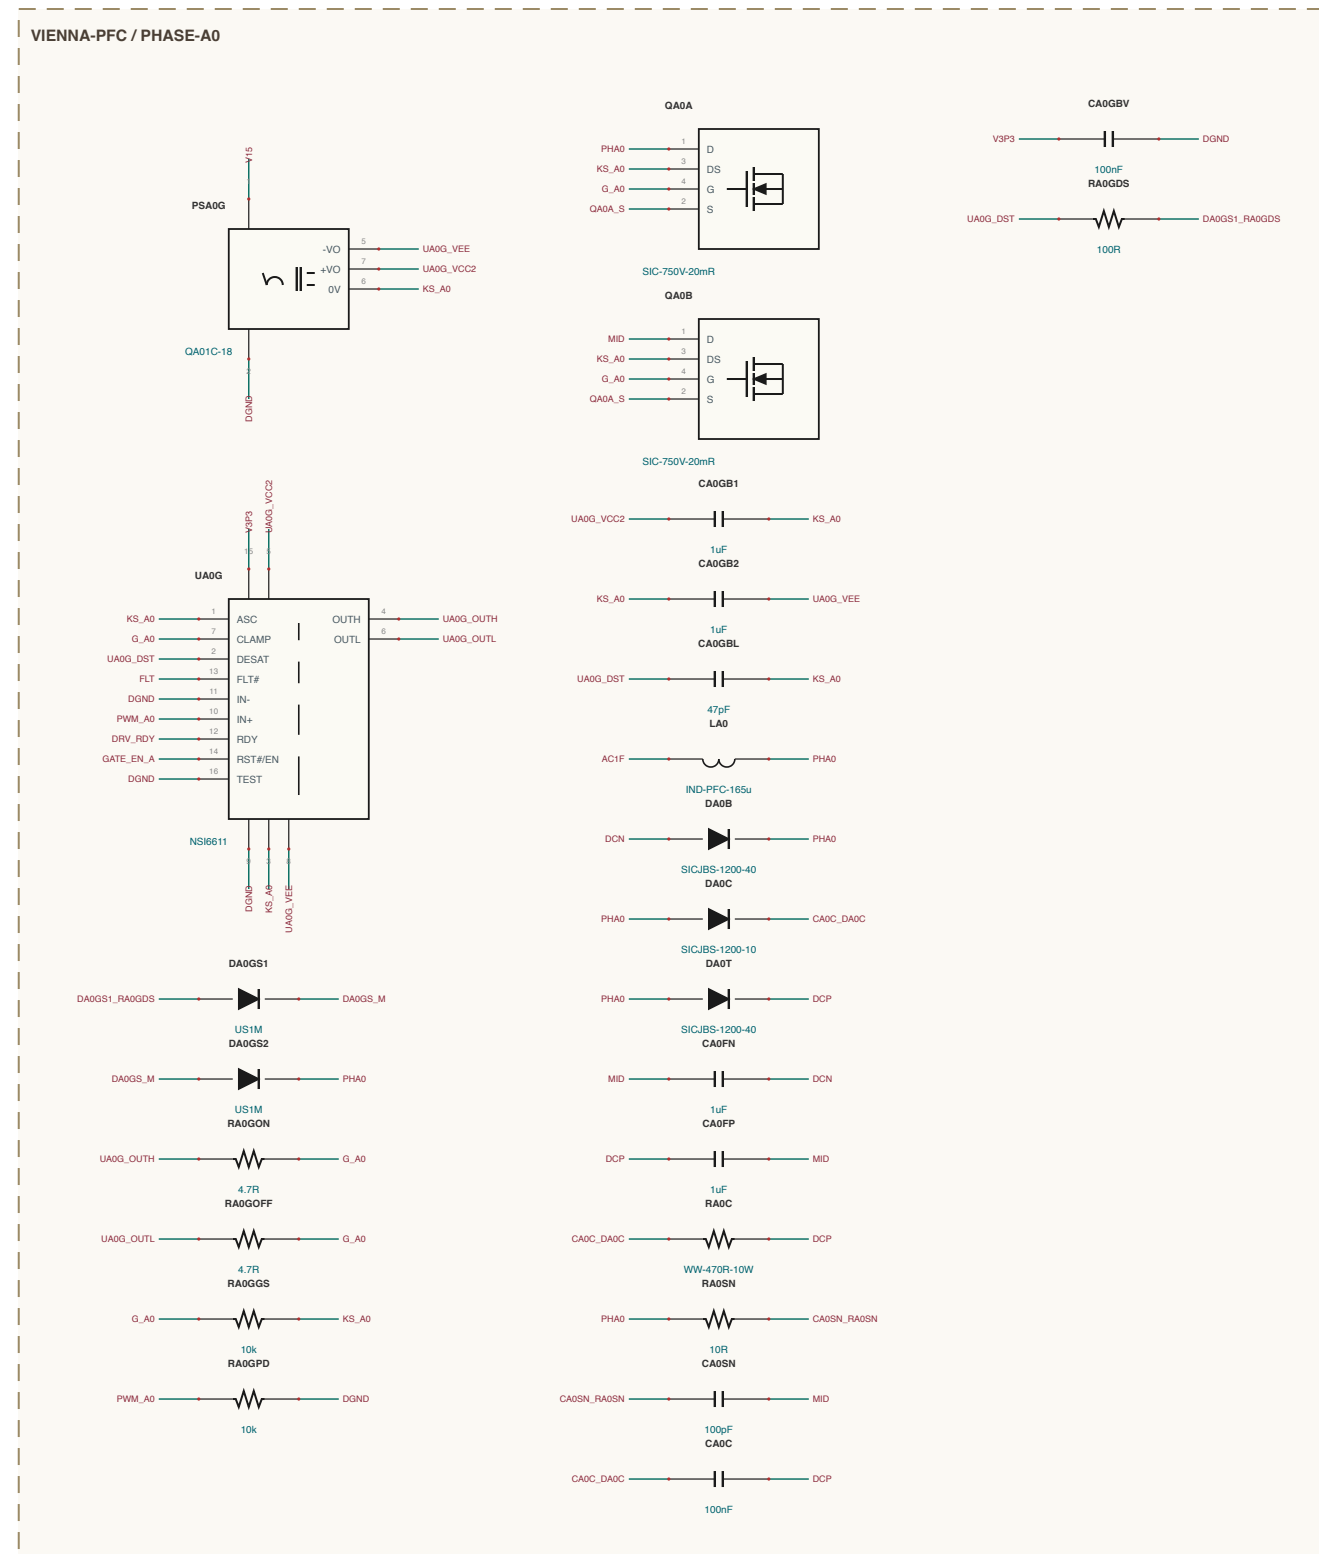
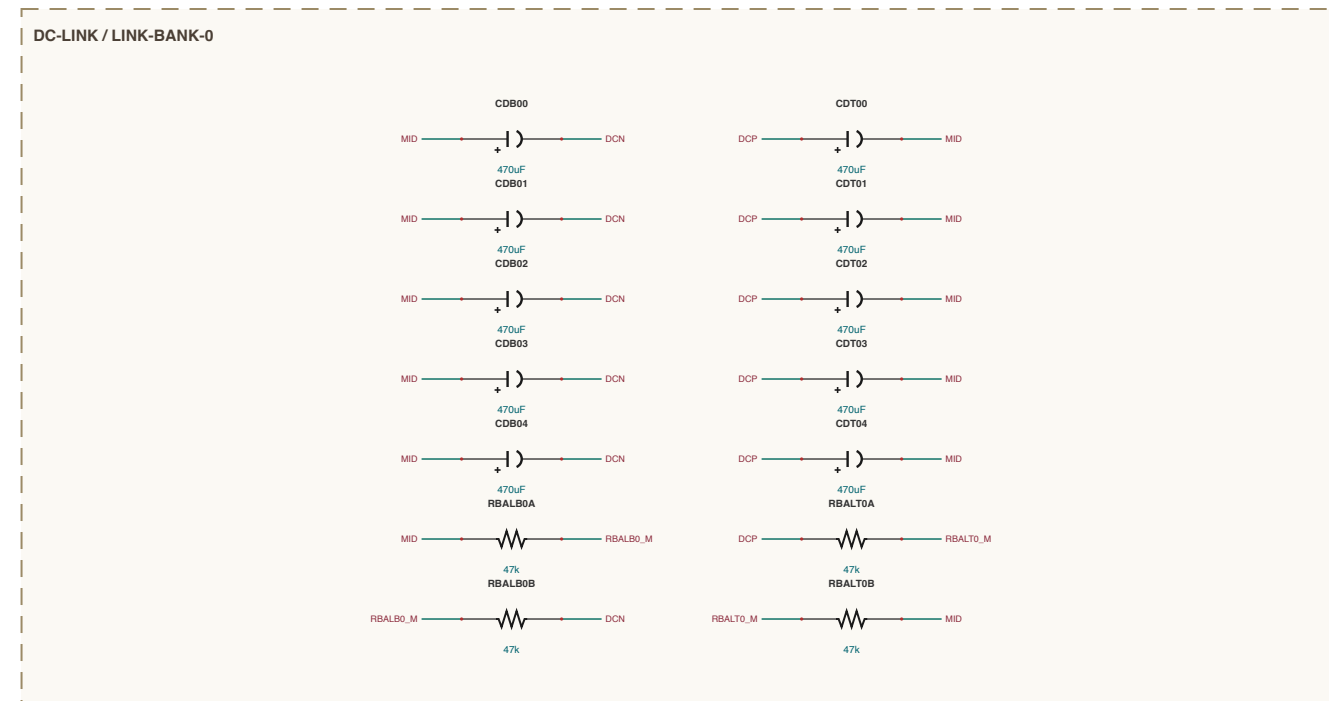
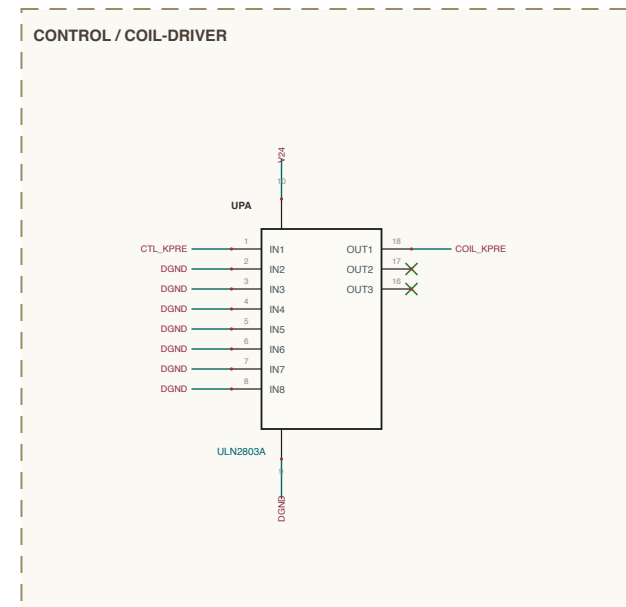
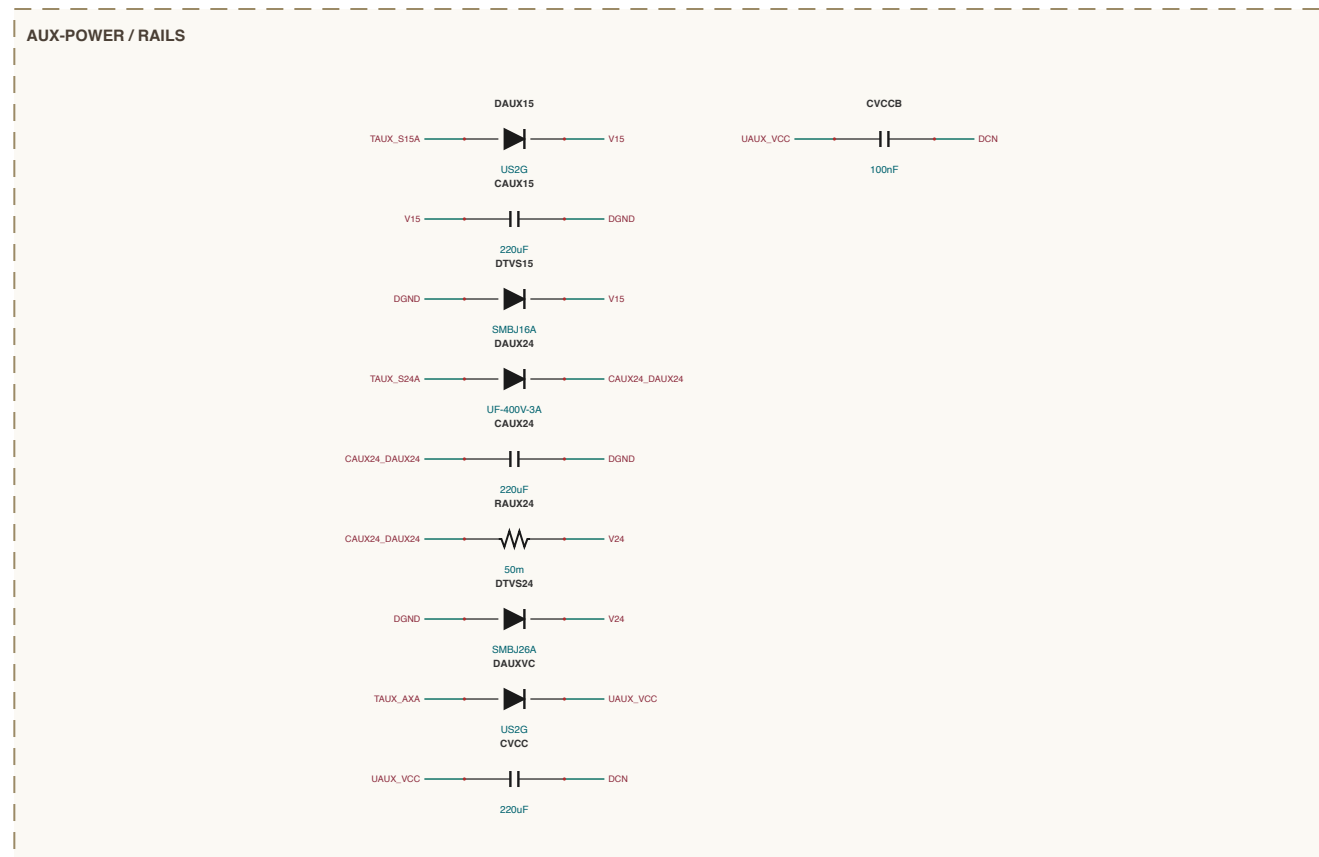
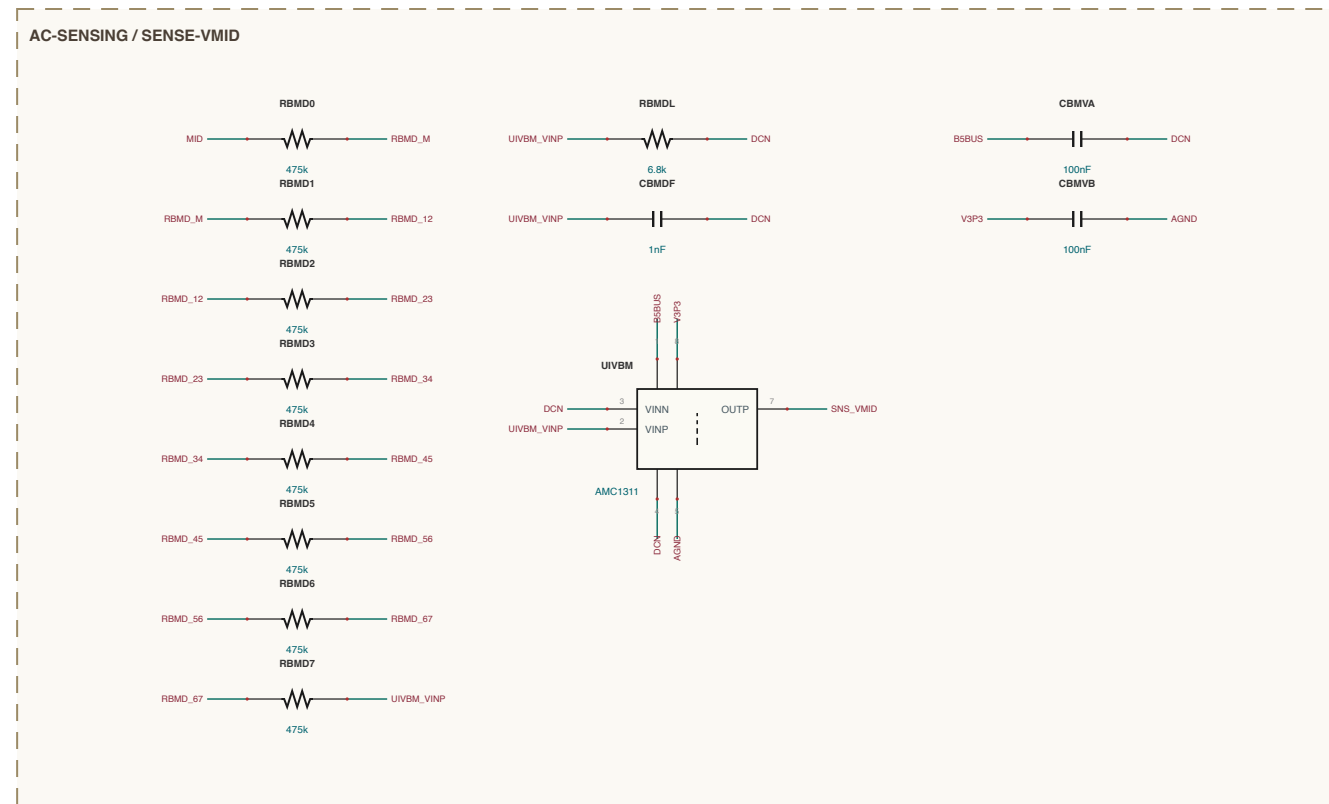


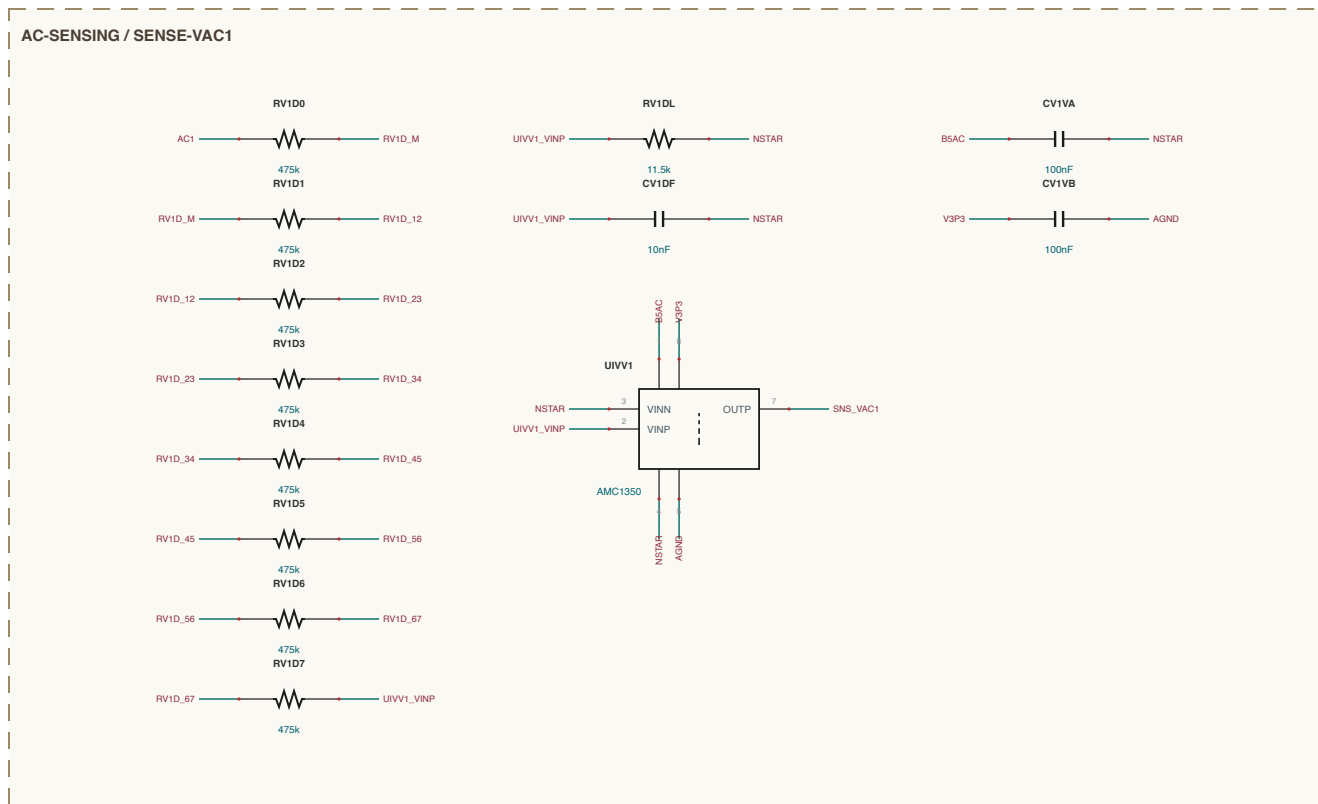

SHEET INDEX

3D MAX CAD (Covers: 1 up 3)
A/C HEATING - 8 sections
A/C POWERED - 3 sections
CONTROL - 4 sections
HVAC UNIT - 4 sections
R/C LINE - 3 sections
THERMATIC - 3 sections
UP D.A. DRILLING - 123 subparts

NET NAMING

Other practices are named for what they are

Usually, `__FILE__` inside of that EC pin e.g. `VFIO_VPM`

Register: 32 independent of a device pair e.g. `IOVA32N_0`

Readouts, comes up before `Readouts` e.g. `VFIO_01`

All others are explicit design notes

MAGNETICS CONSTRUCTION

Identify your magnetization and J-axes, g-factors, acceptance (does this fit?)

1st LAD-LEC: 3x R0778667 Kaolinite, NaOH ($\times 1$ hot liquid), $\text{Zn}(\text{Ac})_2 \cdot 2\text{H}_2\text{O}$ 15mmol $\rightarrow$ 1:1 10%NaOH, $\text{m} = 70\text{H}$ 0.025 g (0.00355 vdw) various g-factors (gfp to x-axis)

ESR ESR: $\text{CHCl}_3 \times 125$ 3:1 4.7 $\mu\text{H} \rightarrow$ 3 atom spacing $\times \text{CHCl}_3 \times \text{RC}$ dampers, OI ESR chlorine detected

Cr at 54000 wavenumbers