
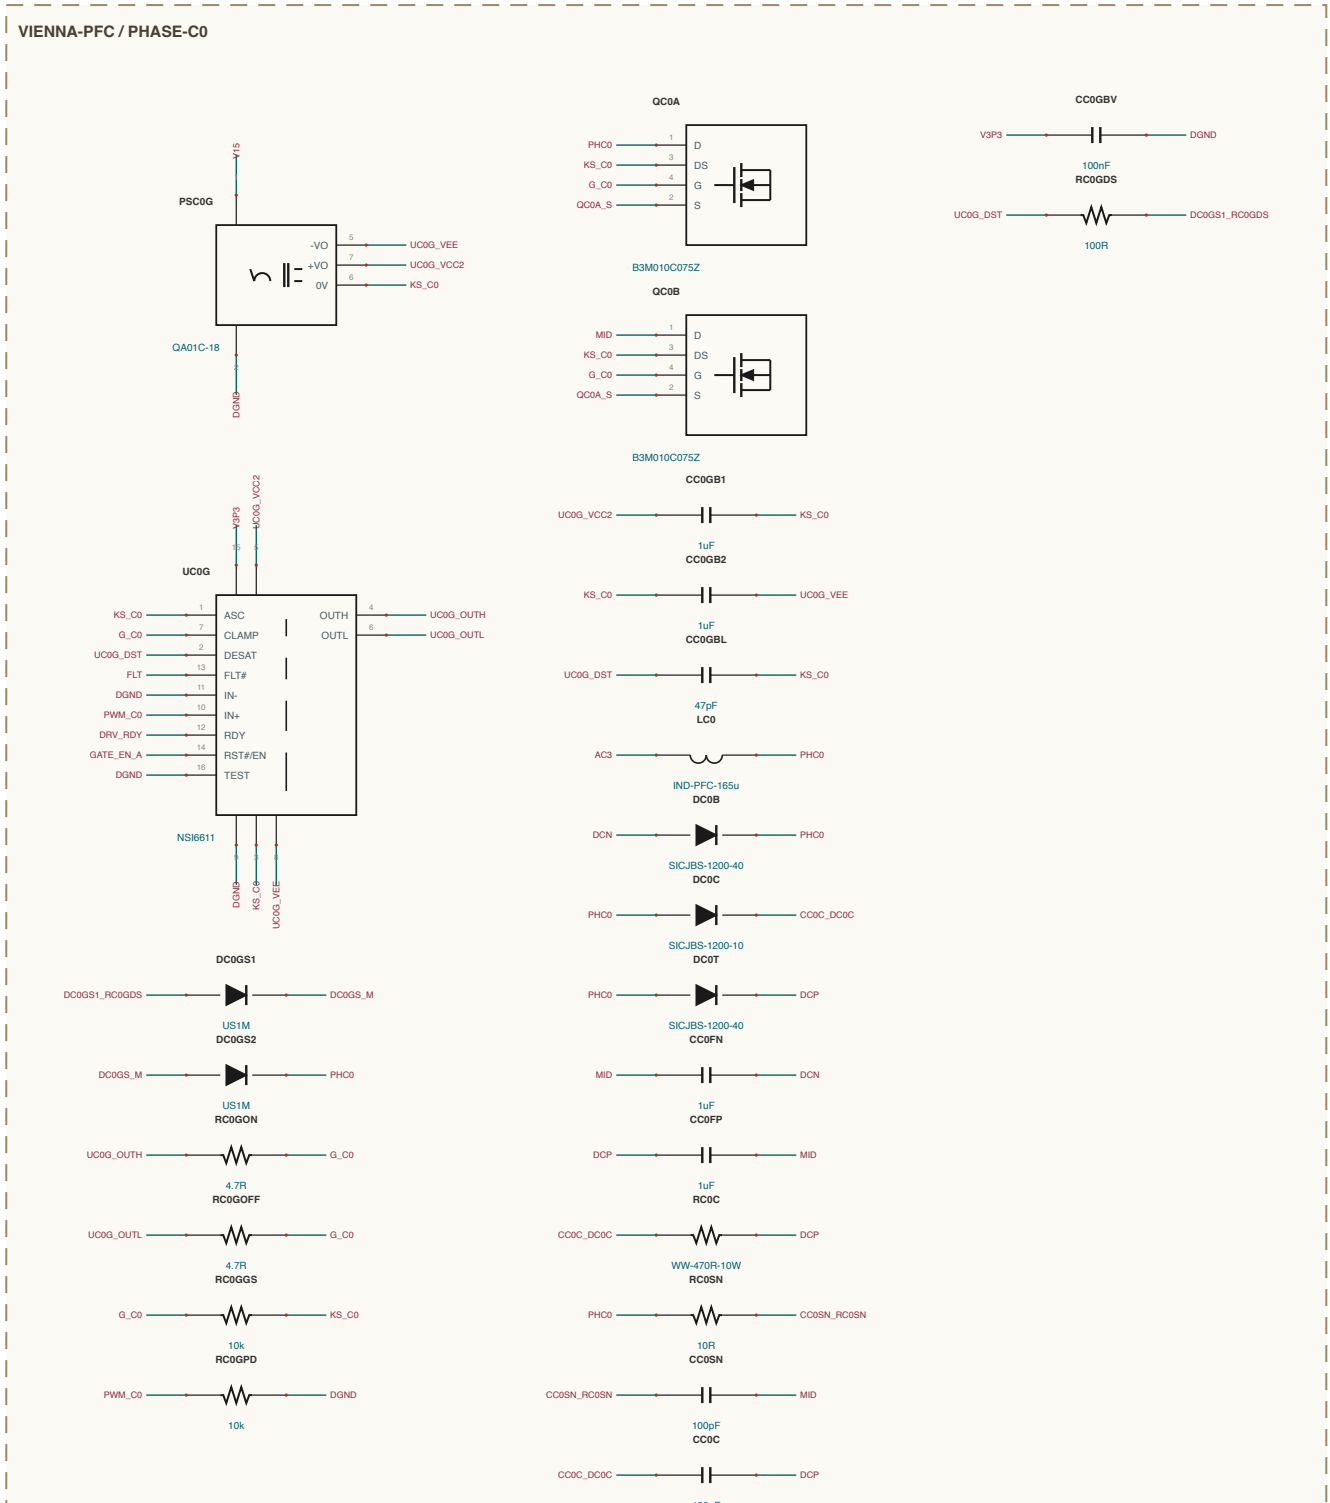
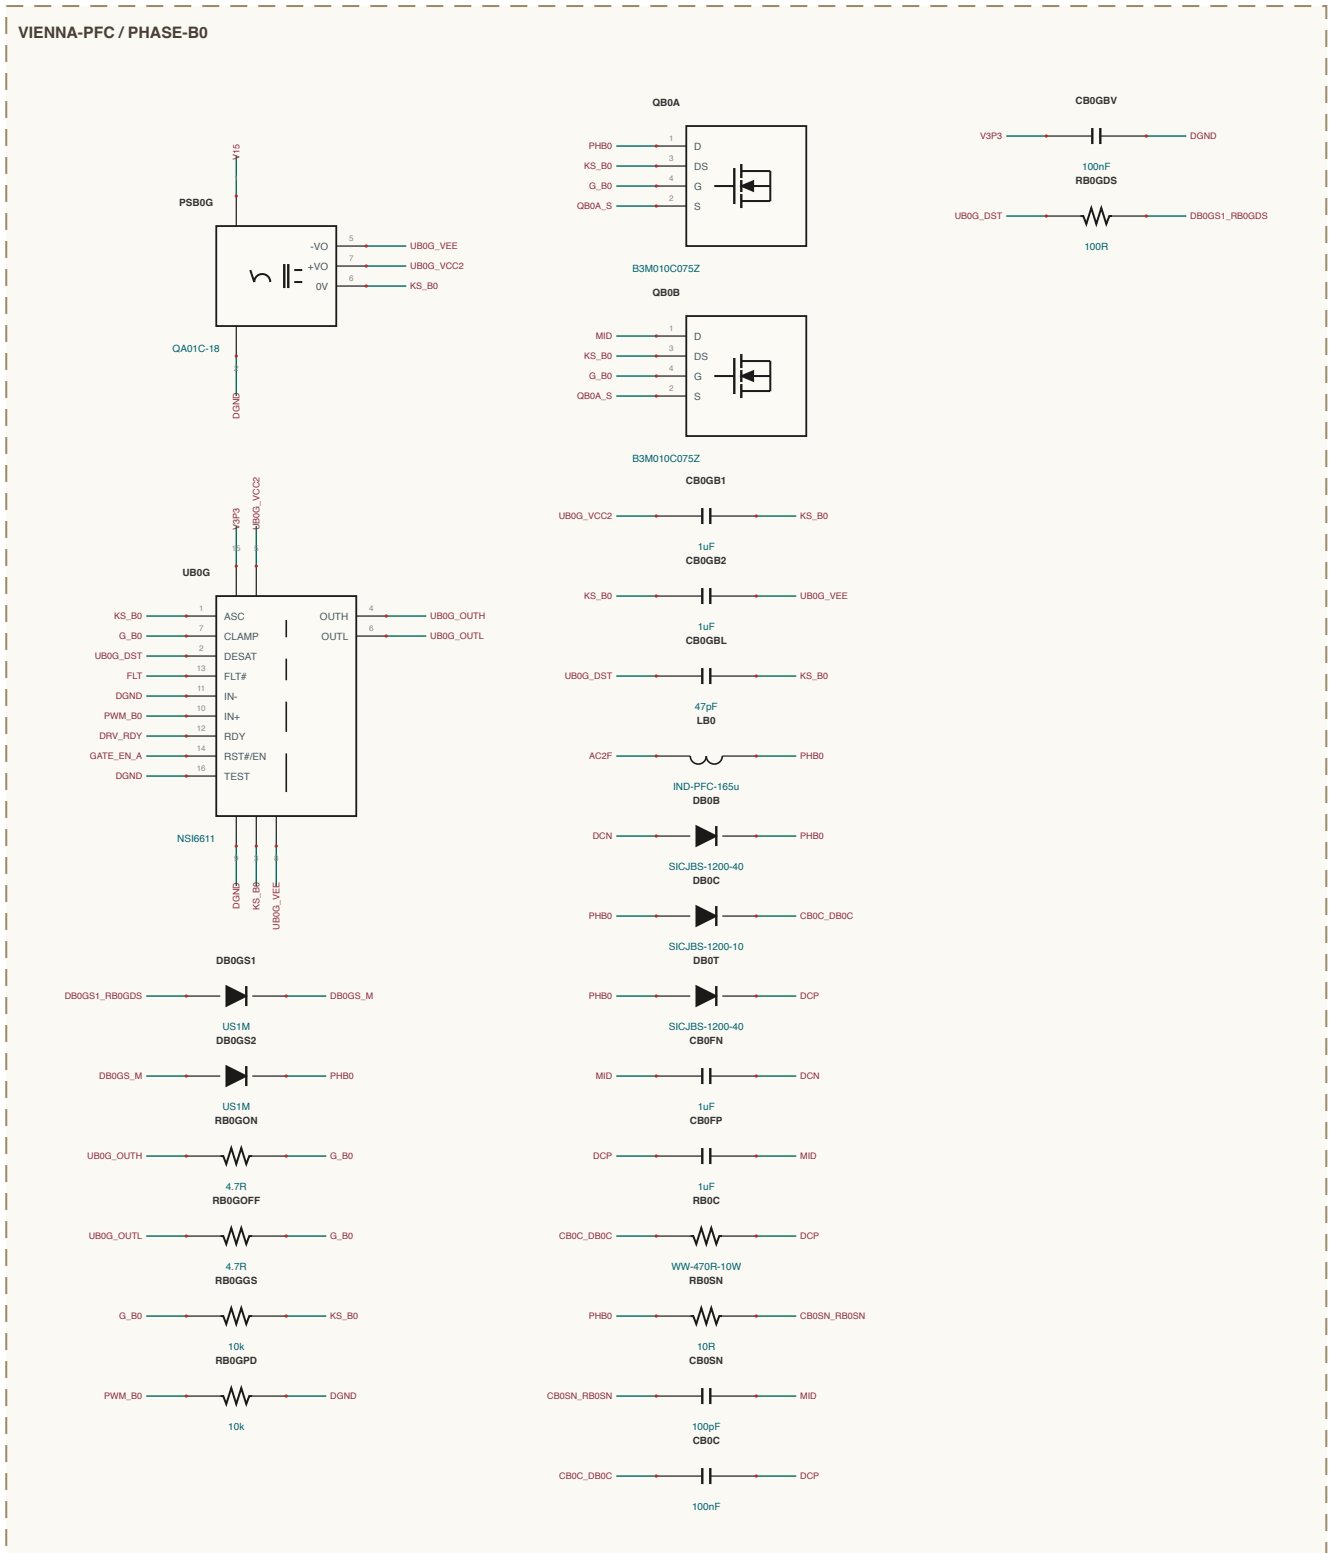
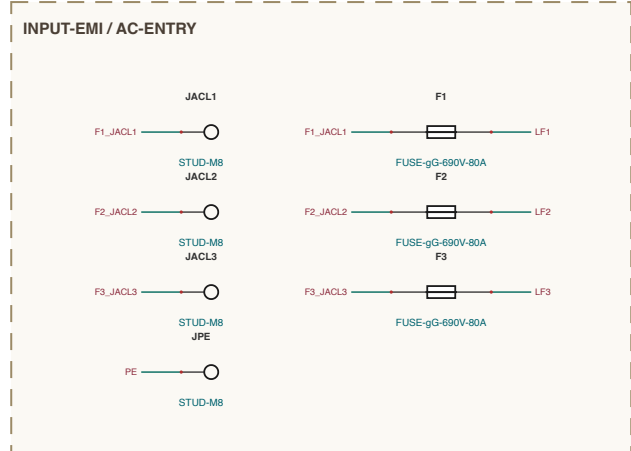
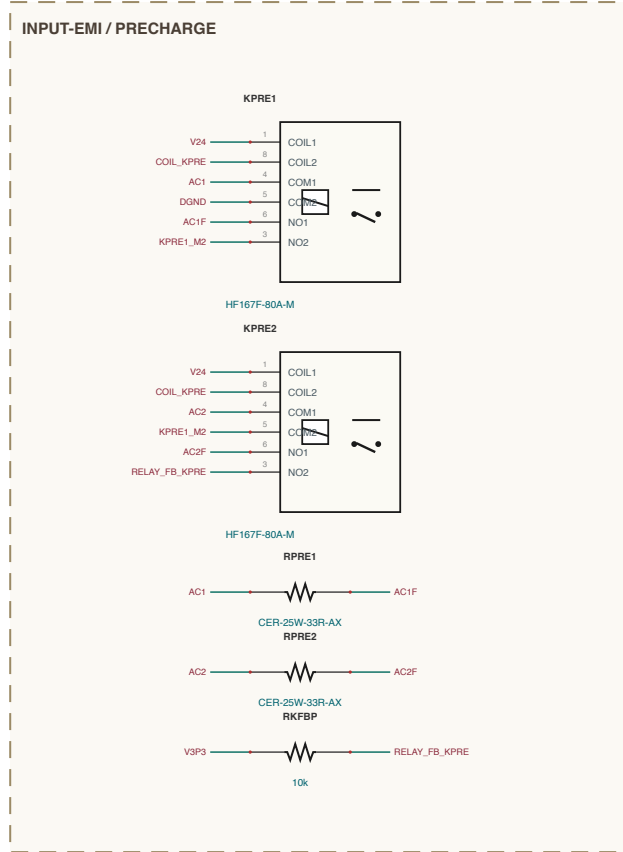
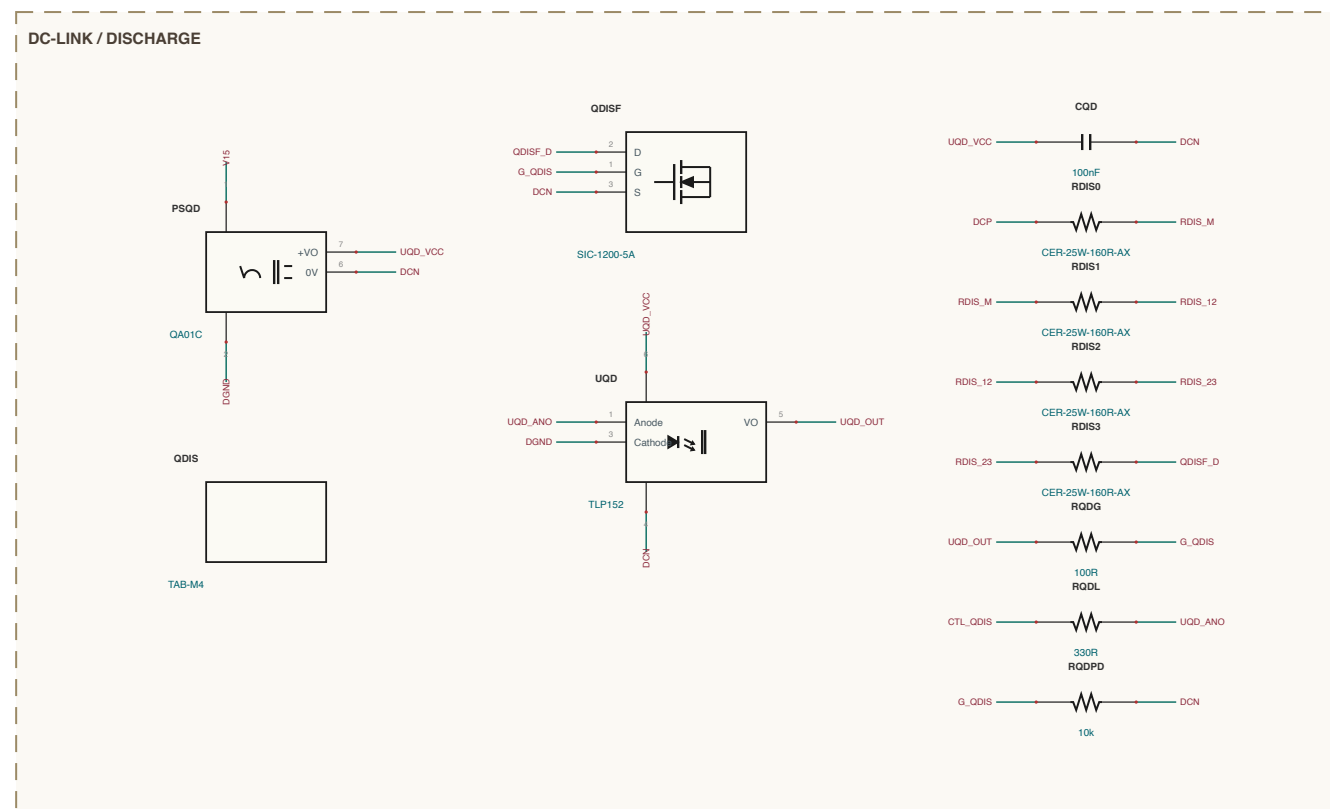
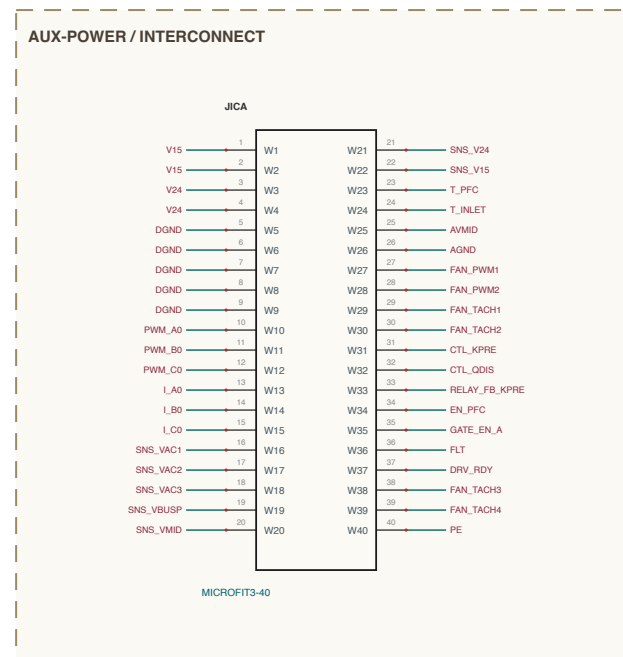
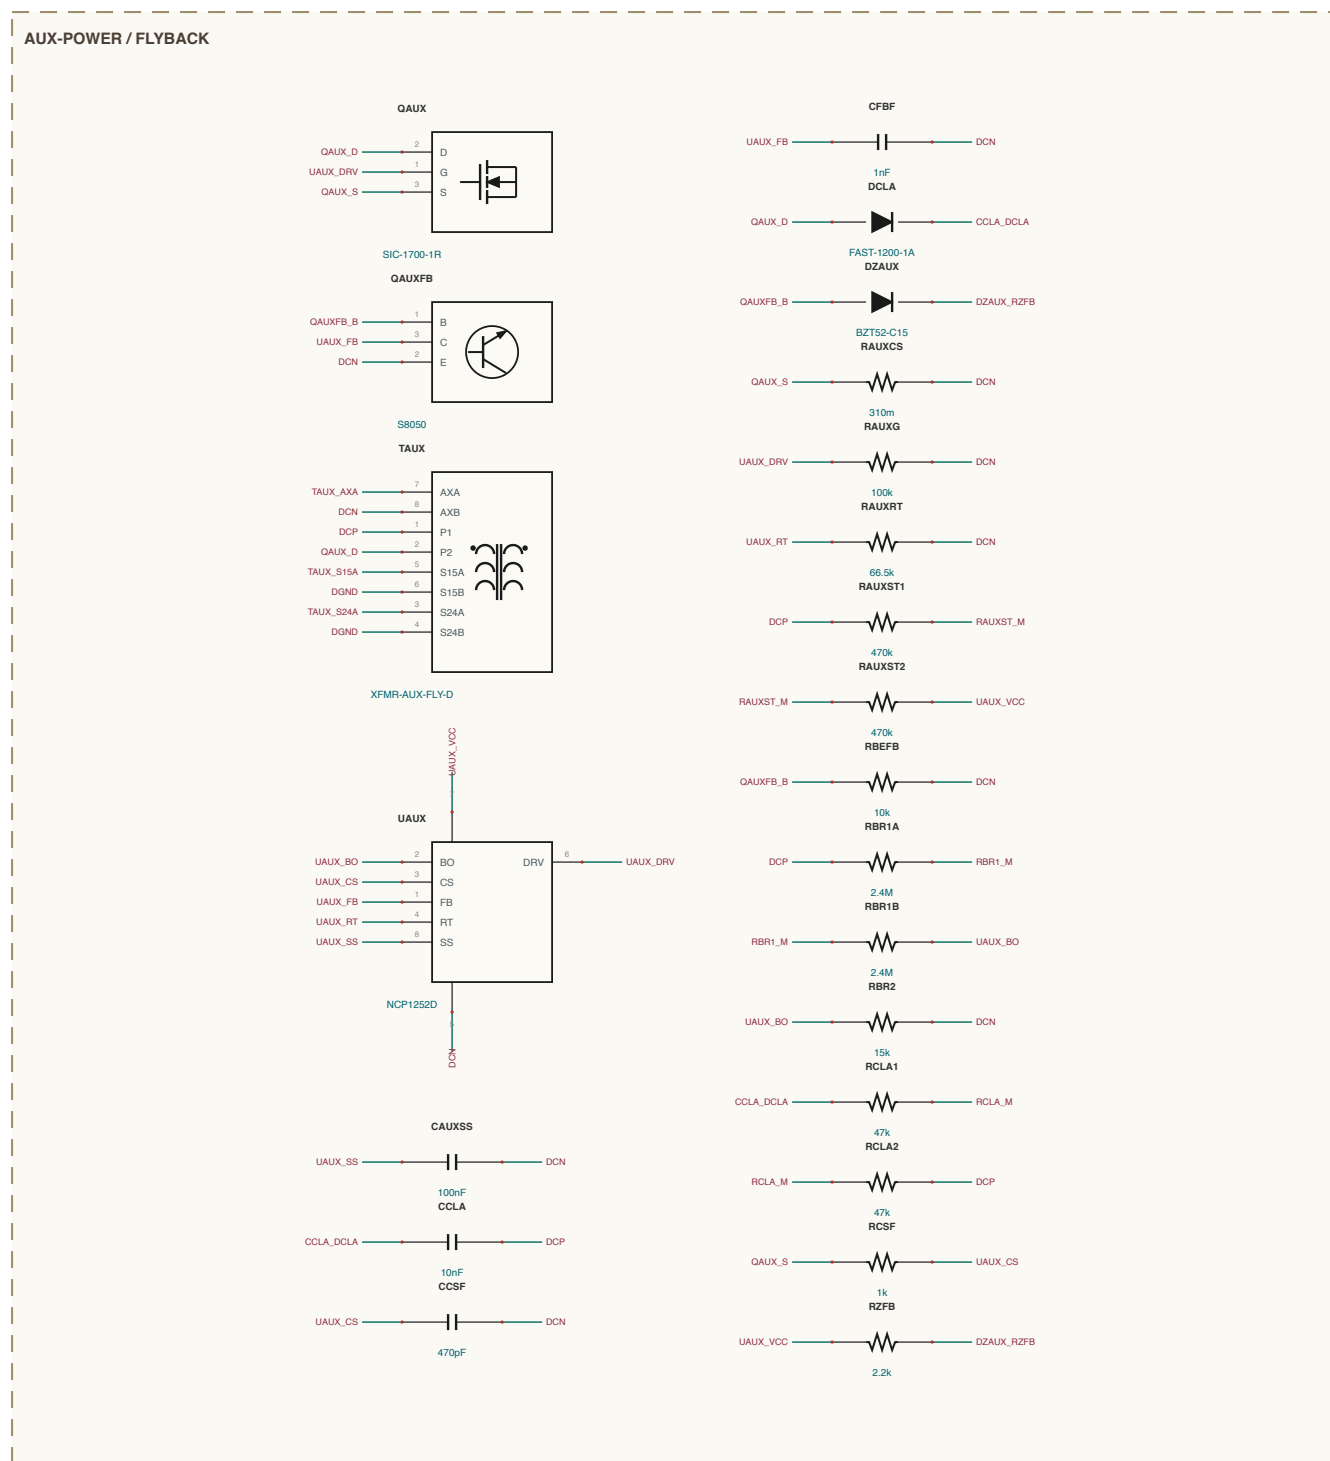
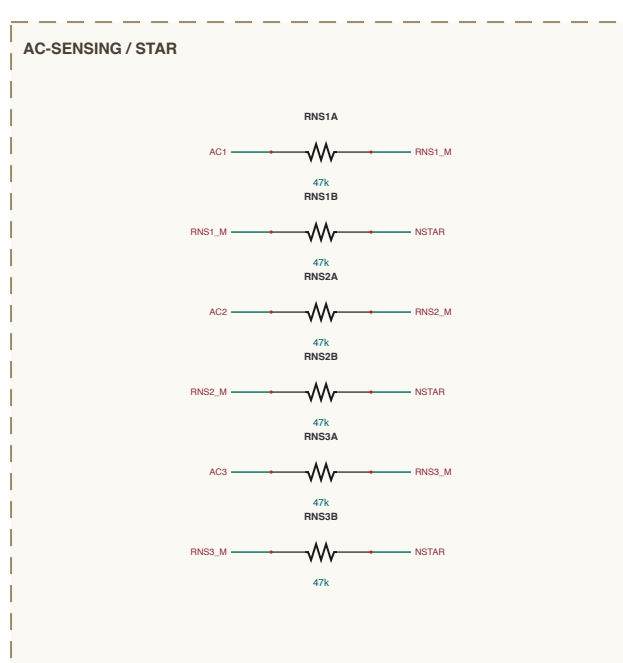
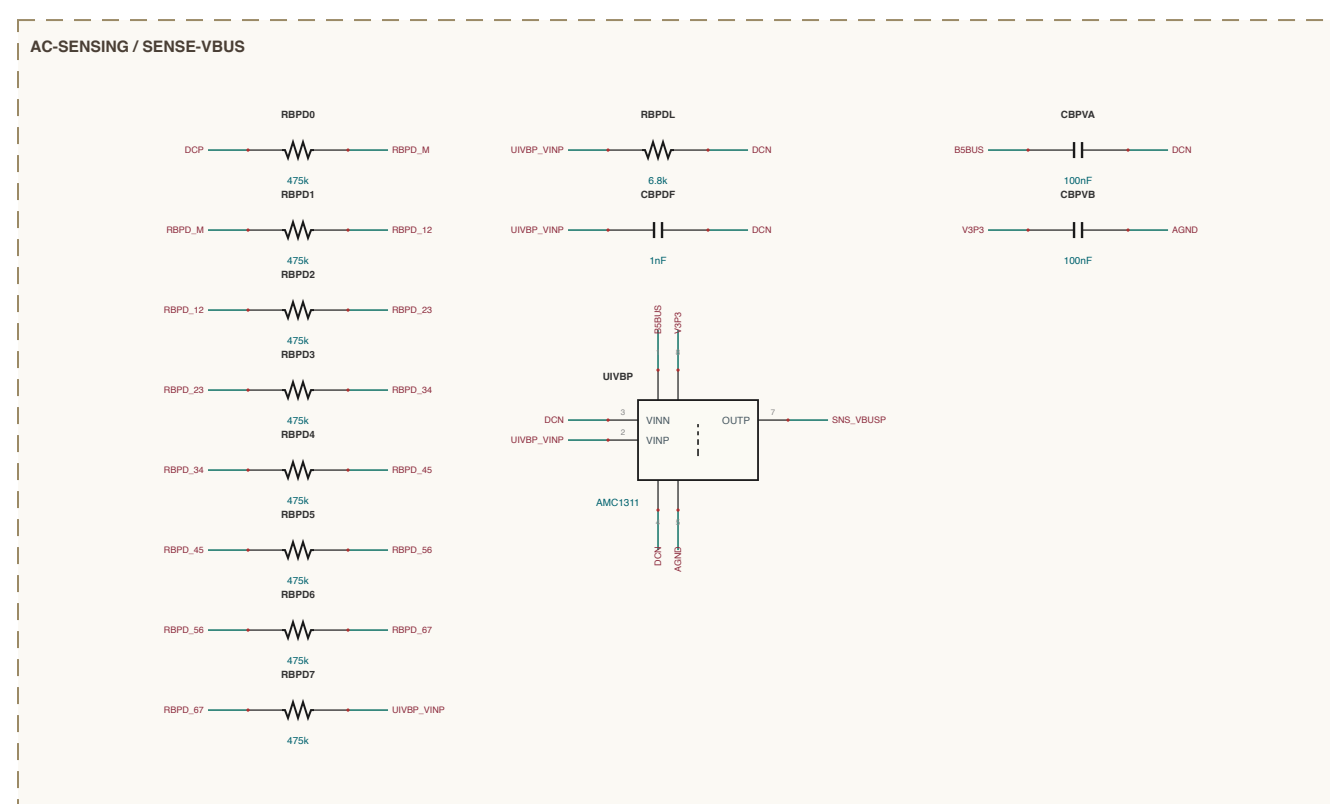
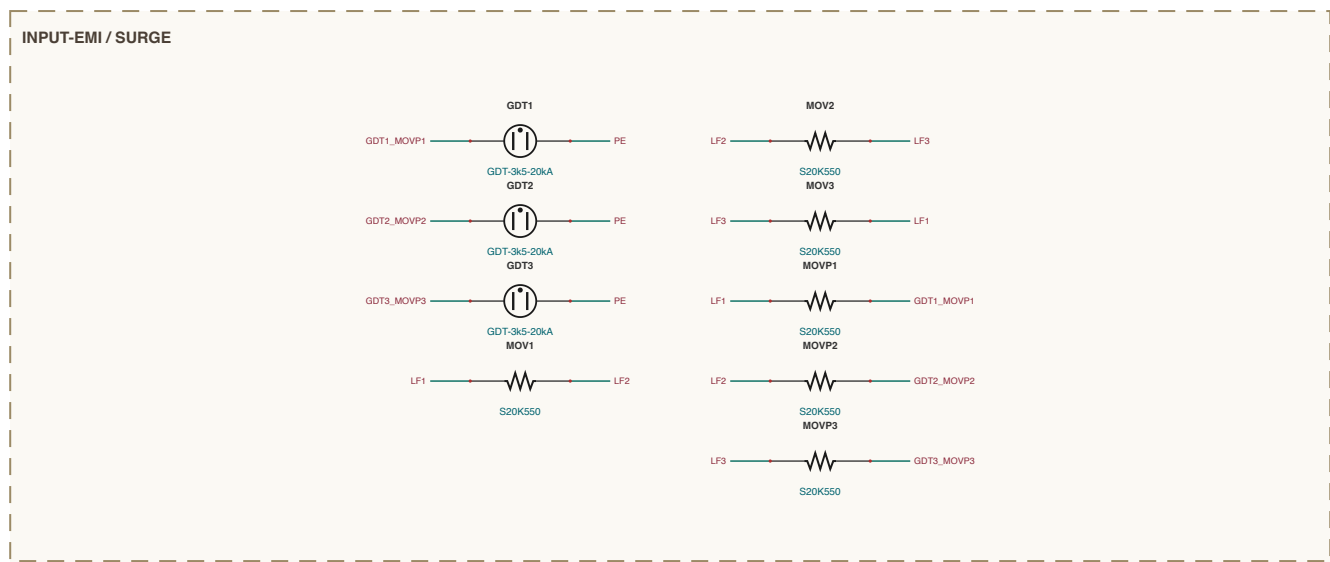
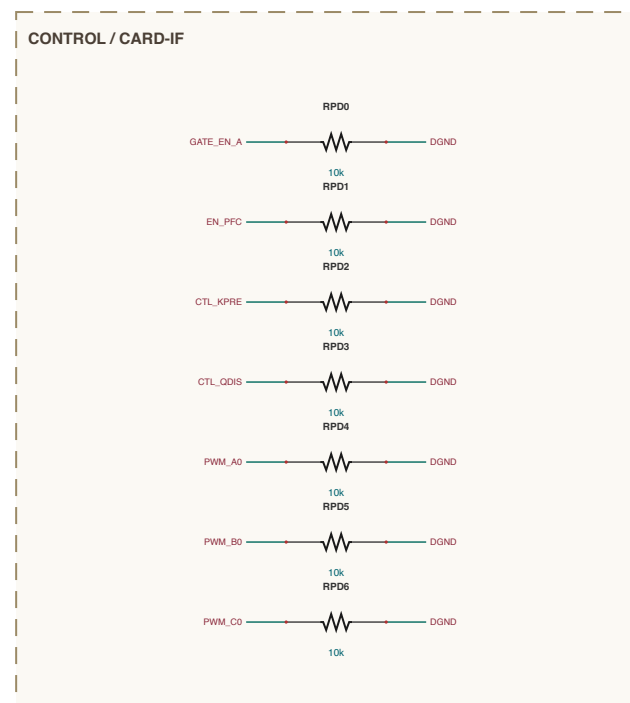
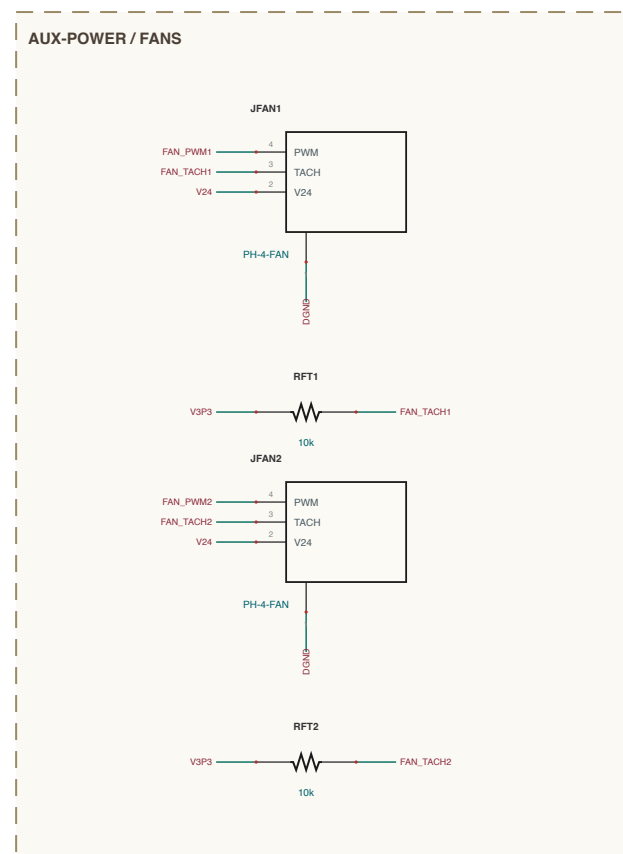
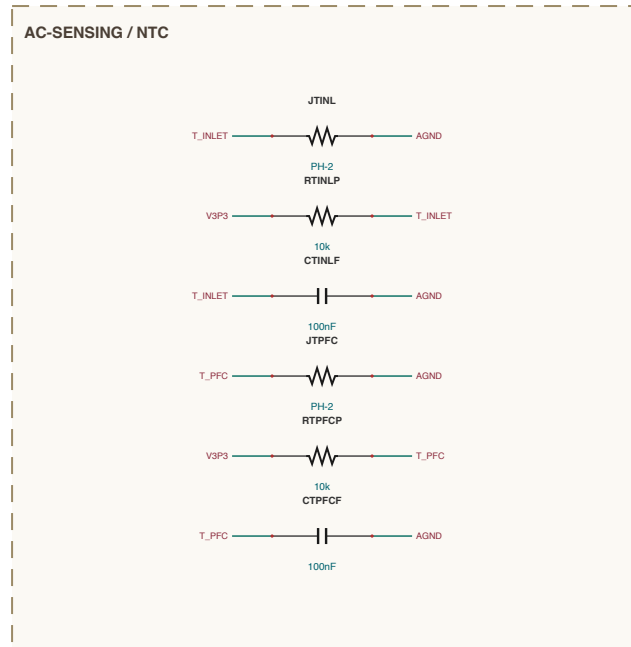
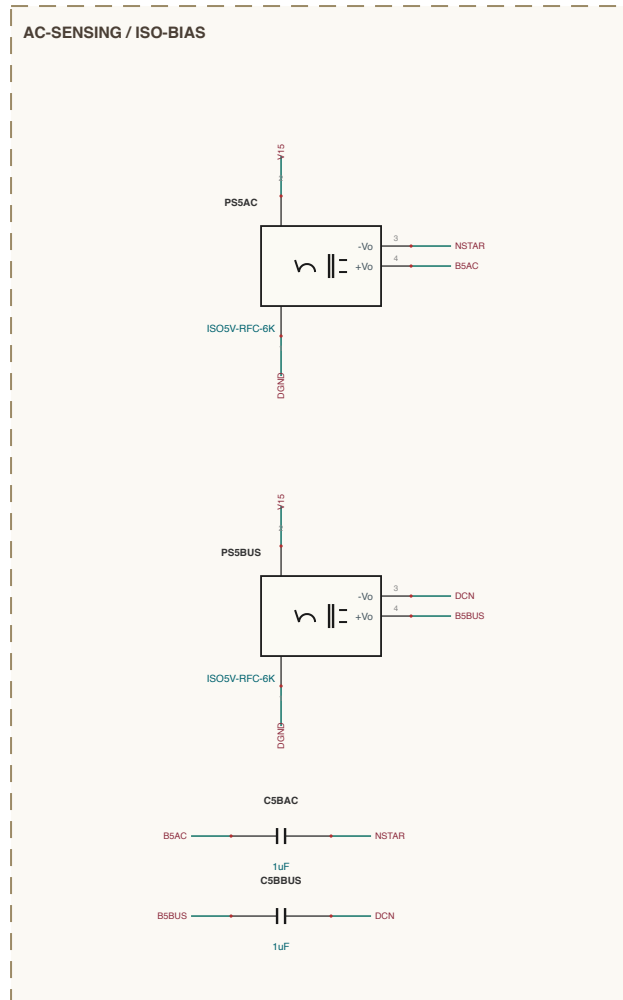
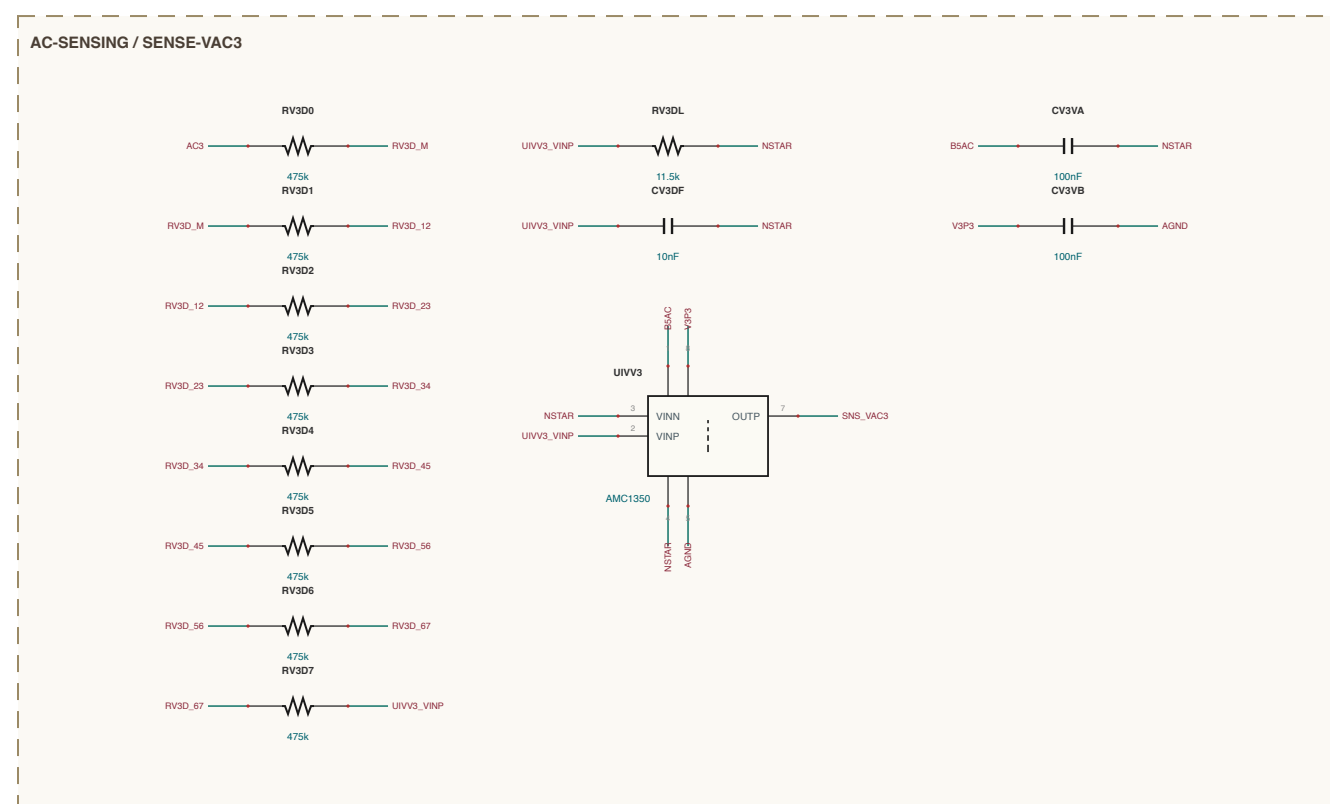
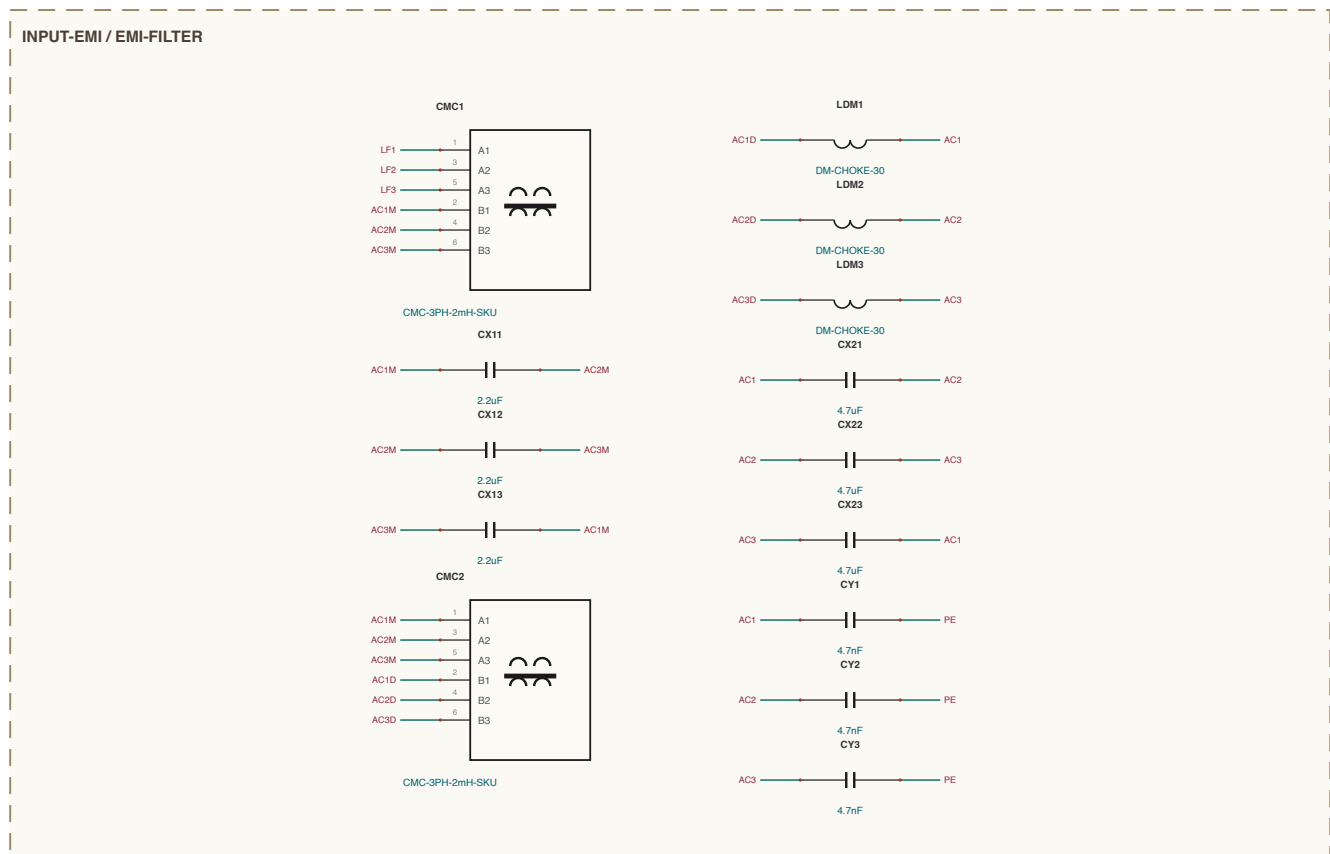
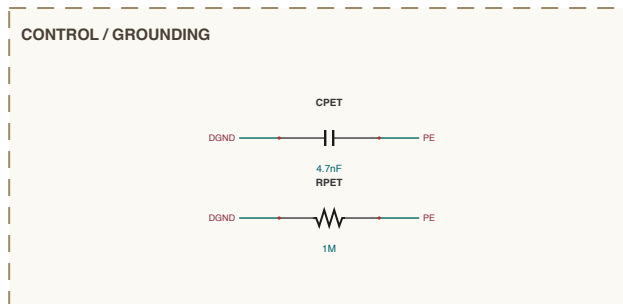
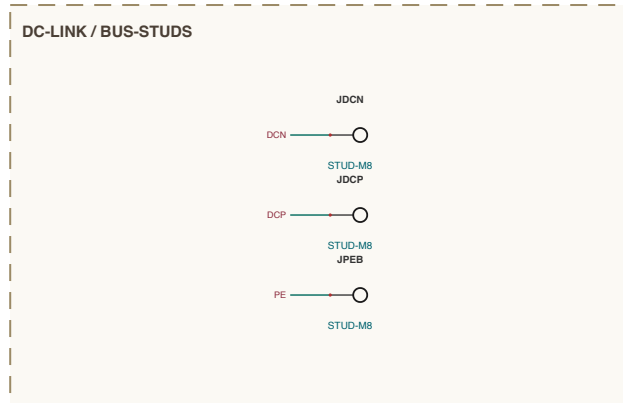
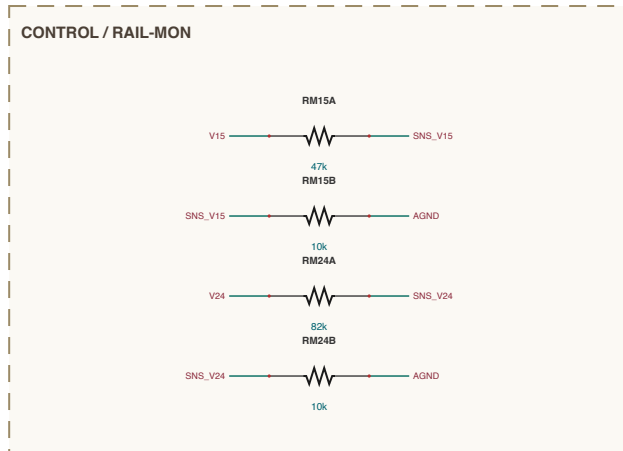
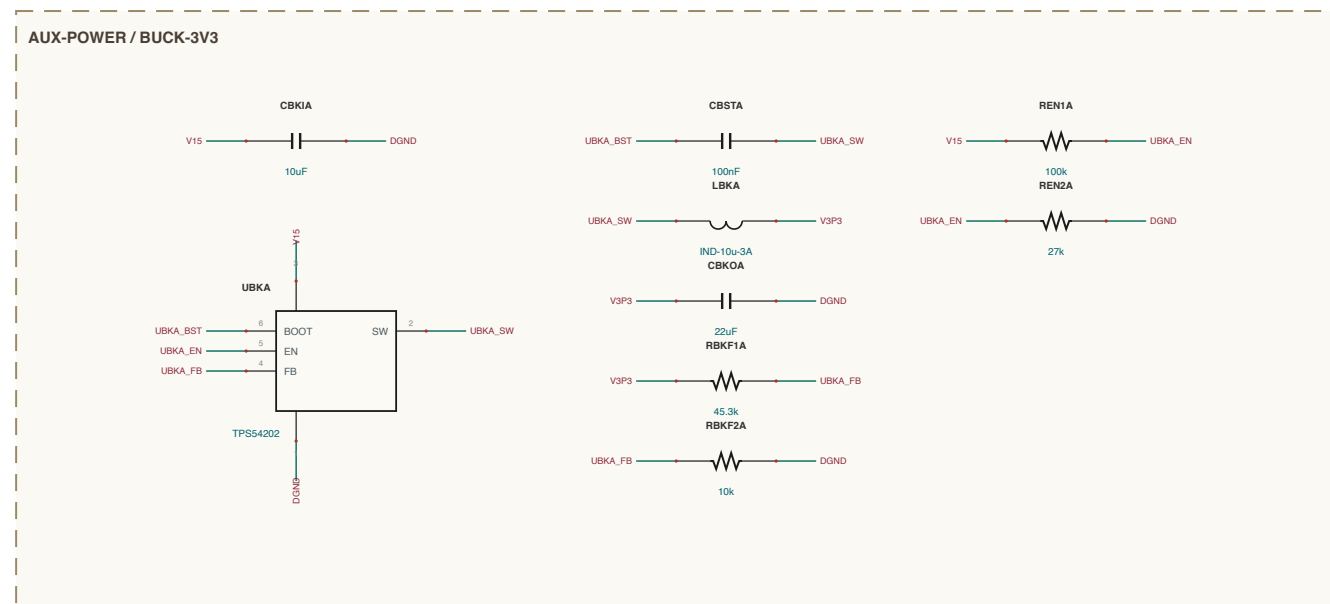
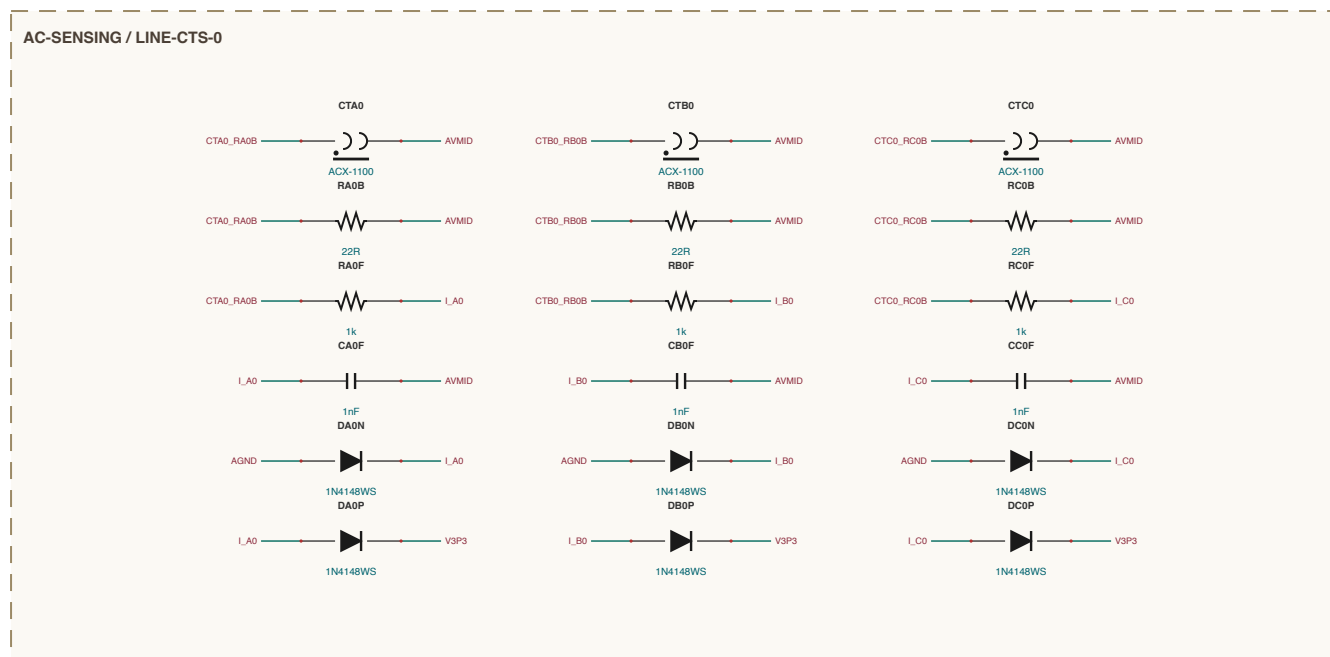
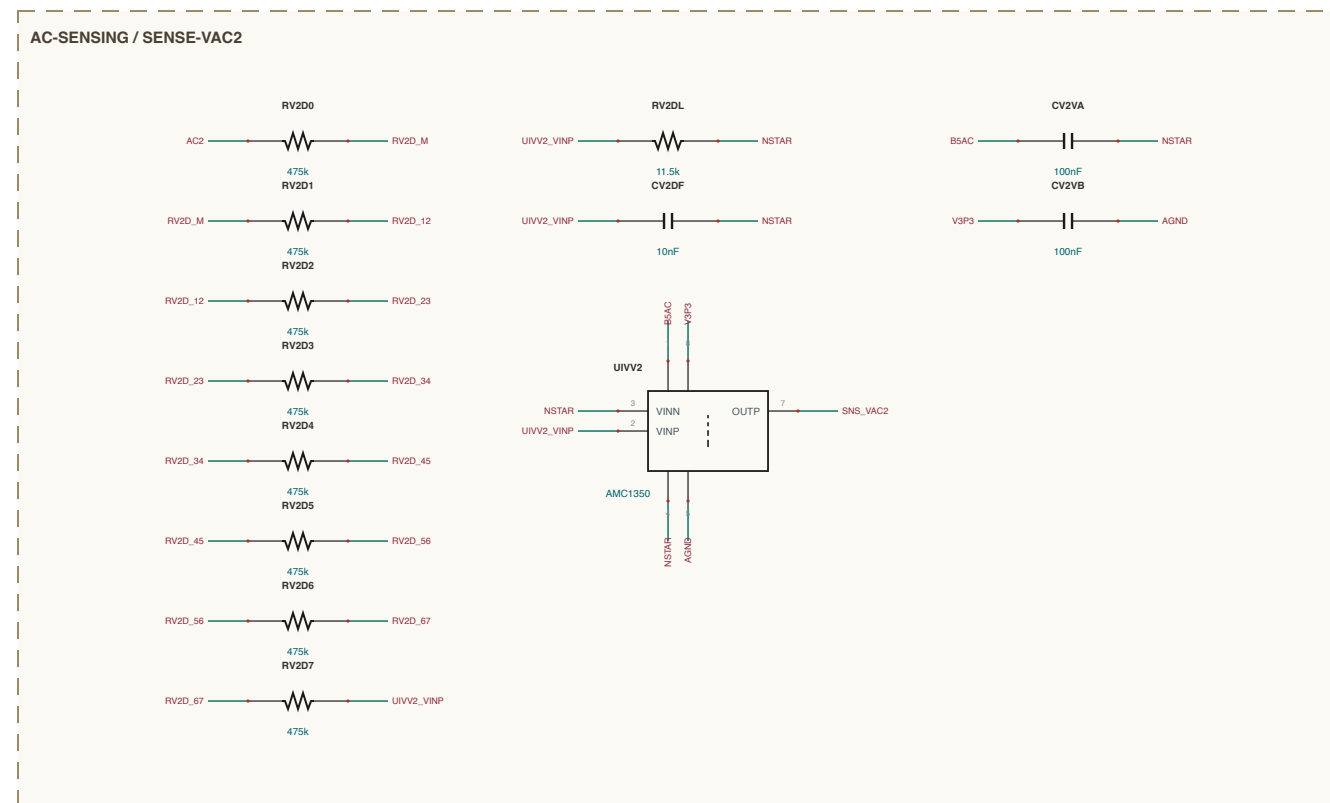
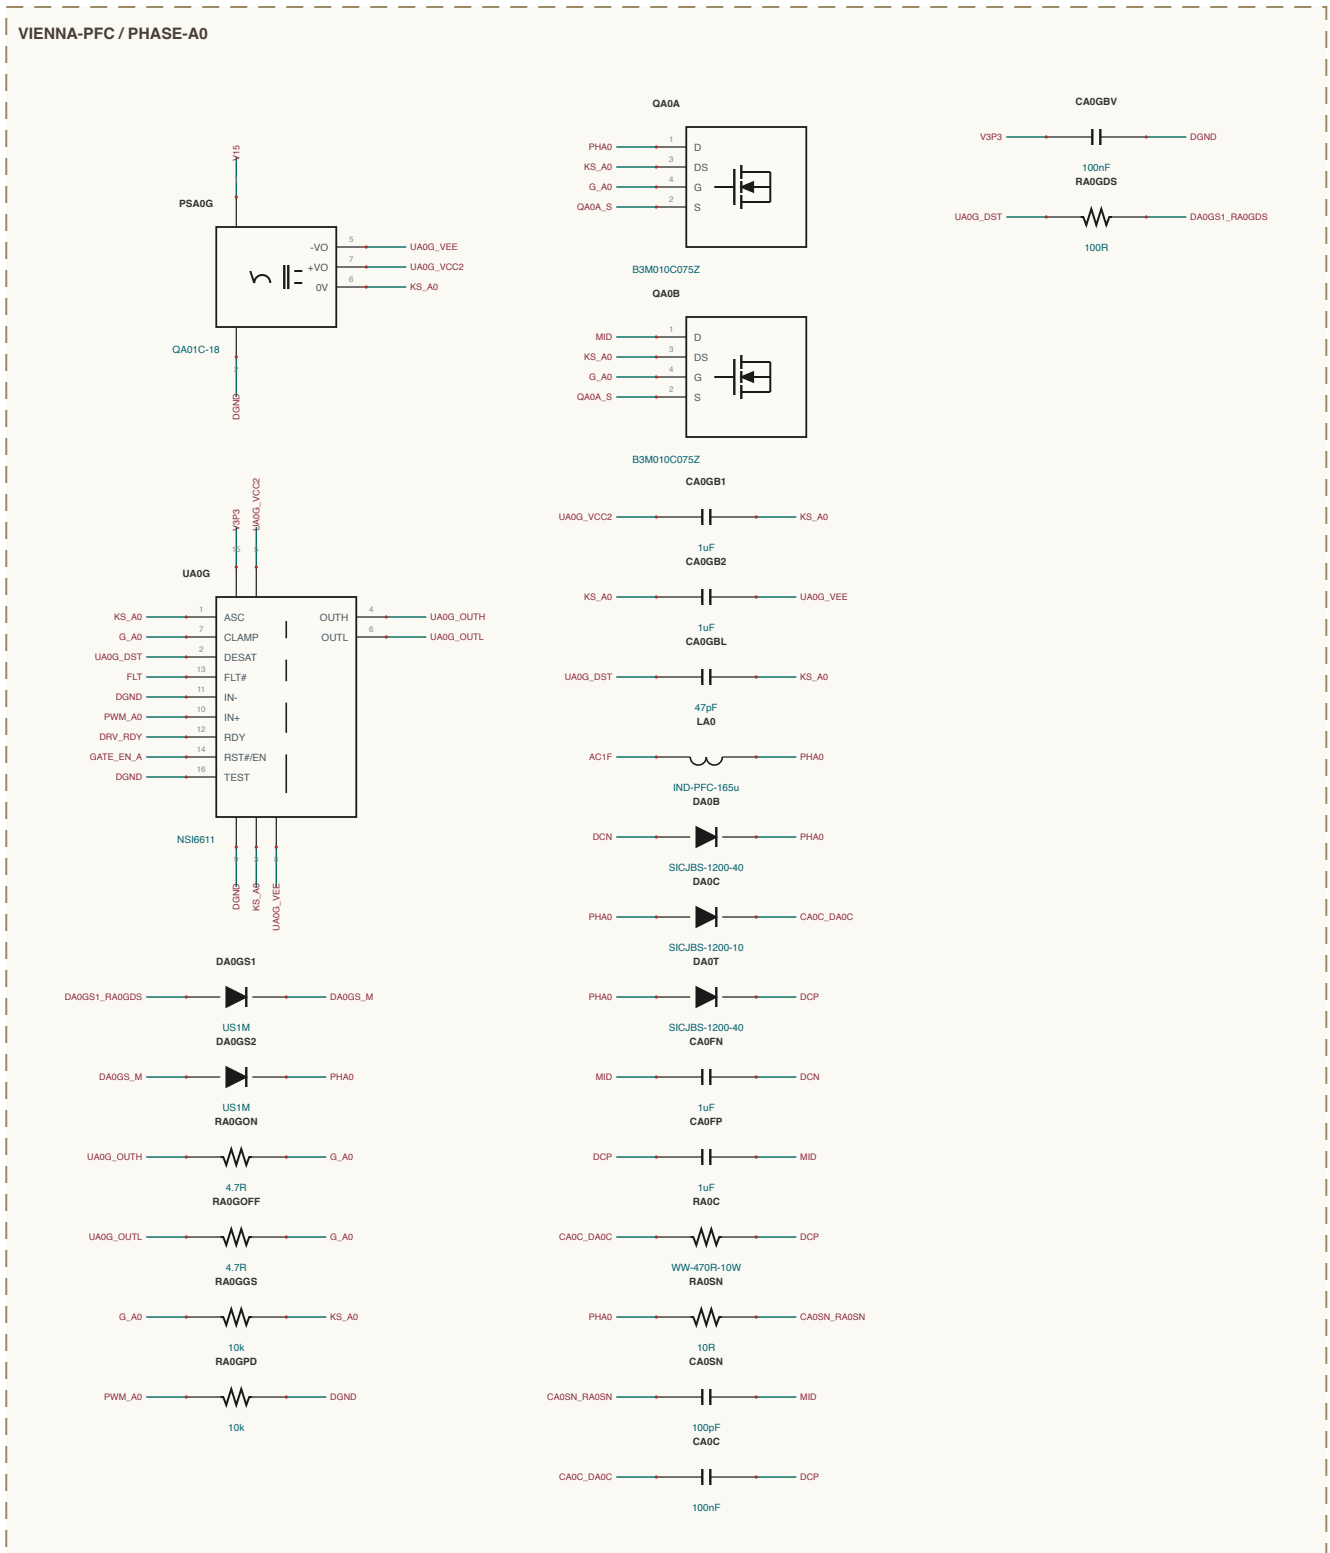
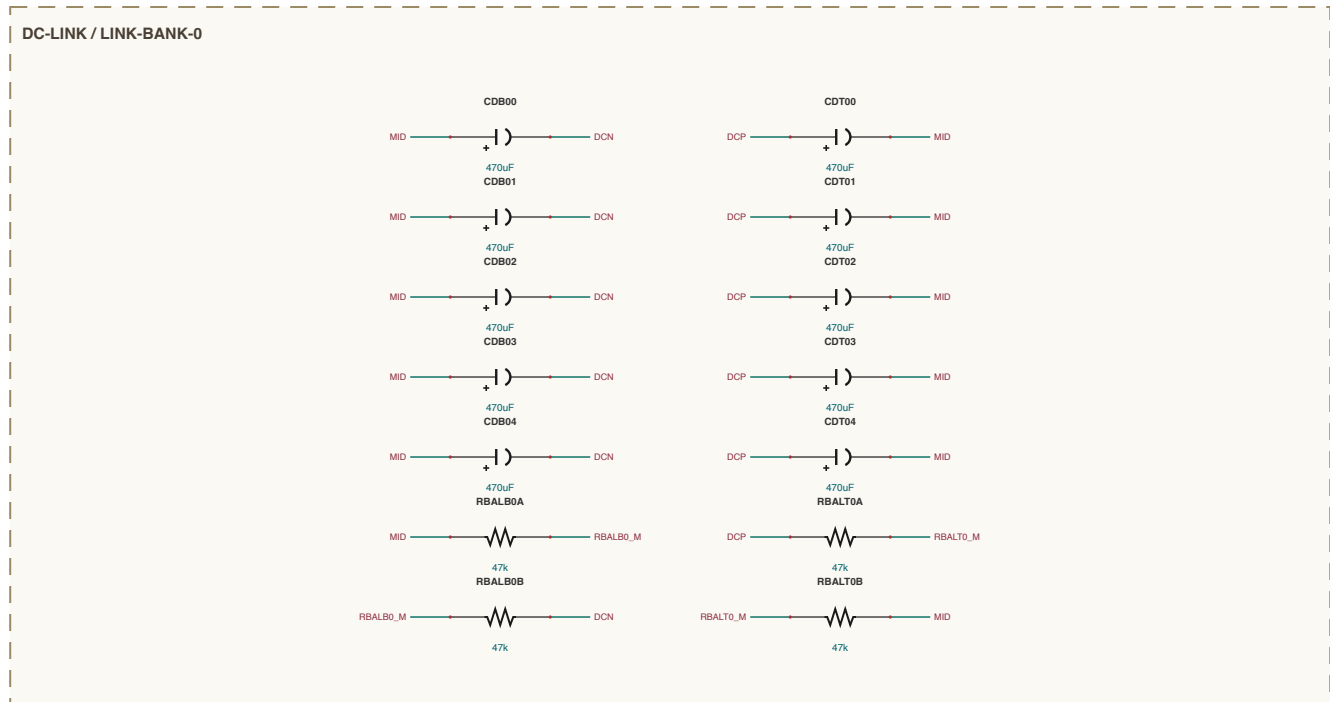
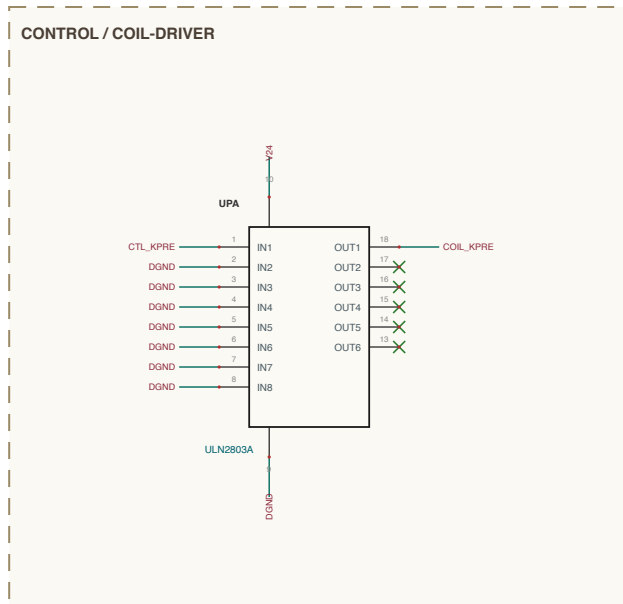
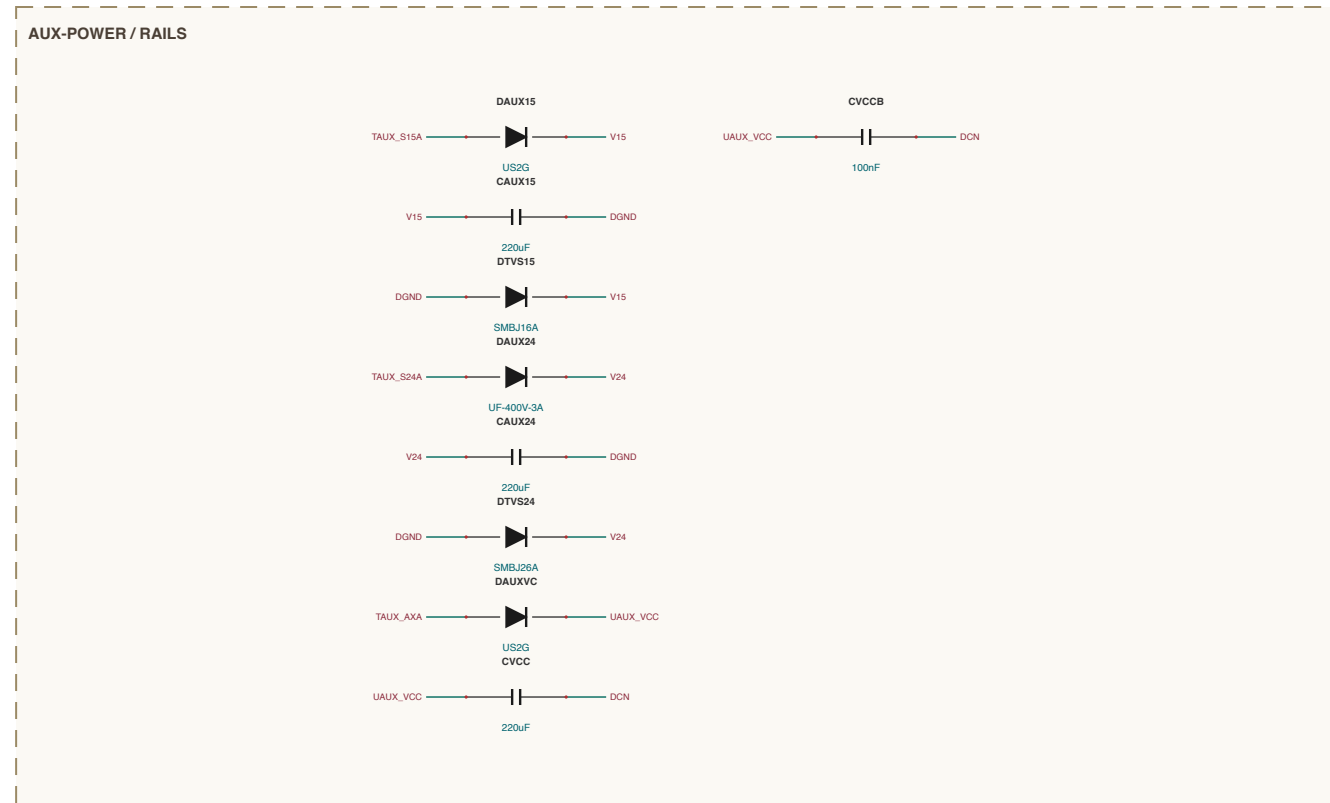
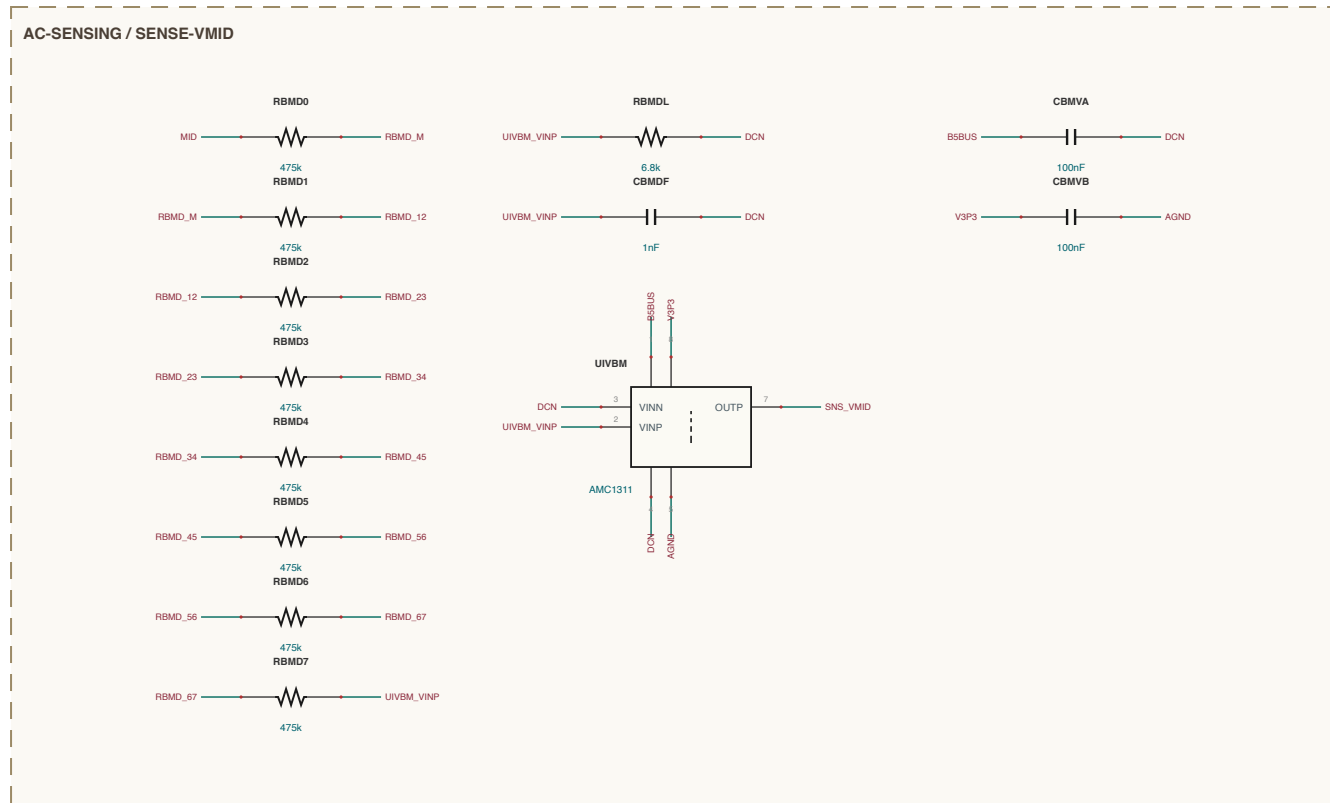


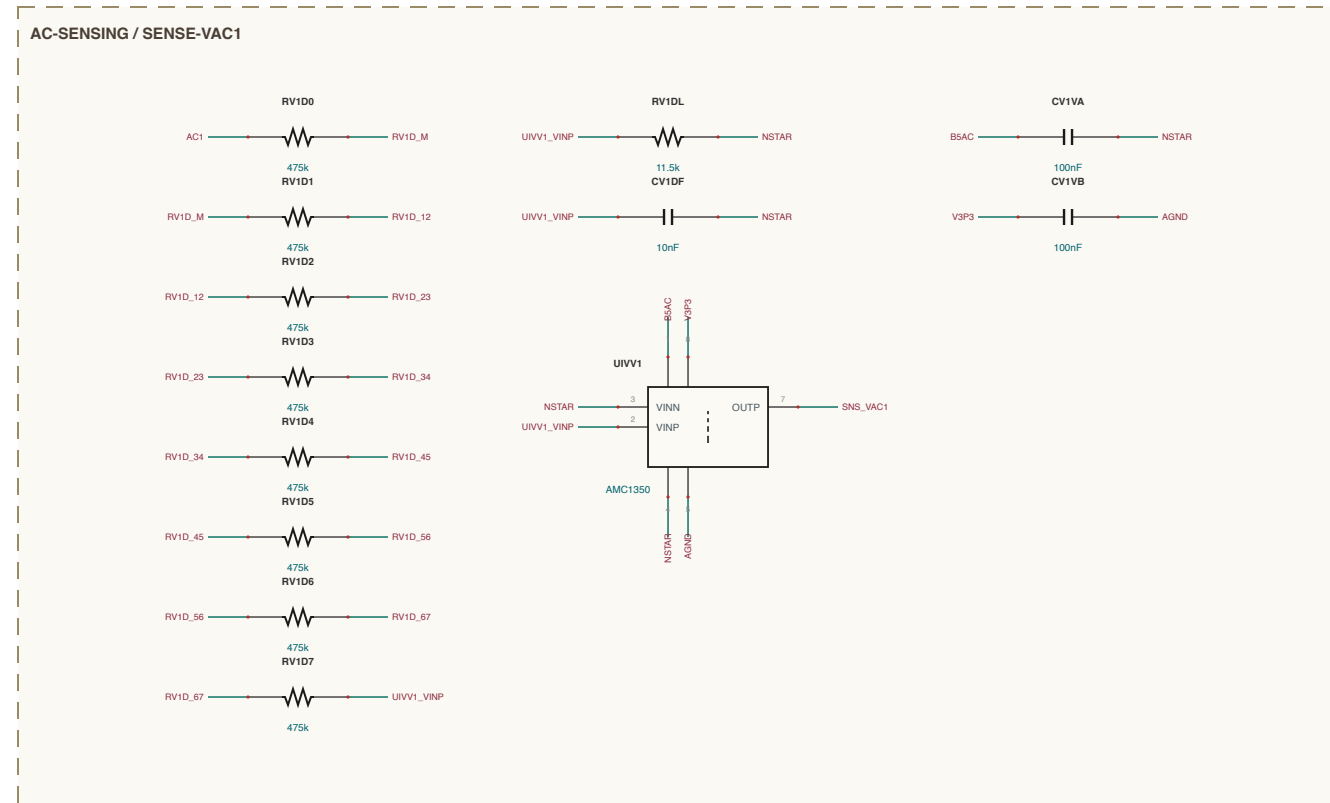

SHEET INDEX

ACWAKING (50 pages) - 1 of 3
ACWAKING - 5 sections
AIR POWER - 1 section
CONTROL - 1 section
IMPOTENCE - 1 sections
GLAREN - 3 sections
WIND-PTC - 3 sections
INCL: 30 sections - 786 components

NET NAMING

Internal junctions are named for what they join

Graphs: *affix*-node at that IC join e.g. UPGRA, VSP

Resistor: *IR* midpoint of a series pair e.g. *IR6A12A_H*

Resistor: *series* tag between ResistorNode e.g. *RT102_11*

[all others are explicit design nets

MAGNETICS CONSTRUCTION

density per dosimetric and (time, gap, 1/s, acceptance (line free time))

1: LADLO: Is 80770647 Koolids, Wu39 (u-1 ket, half(lens)) lden2 = L3 f8bu1, u=7047 0324 ps (BASED value governs depth/skip rates)

2: LADLO: Is 214 f8u, bu, f8 lden2 = 7.4u1 0324 ps (BASED value governs depth/skip rates)

(nd L = 91m x measured after leakage (3hrs COMPENSATE leakage appt) Cr at TANK sections