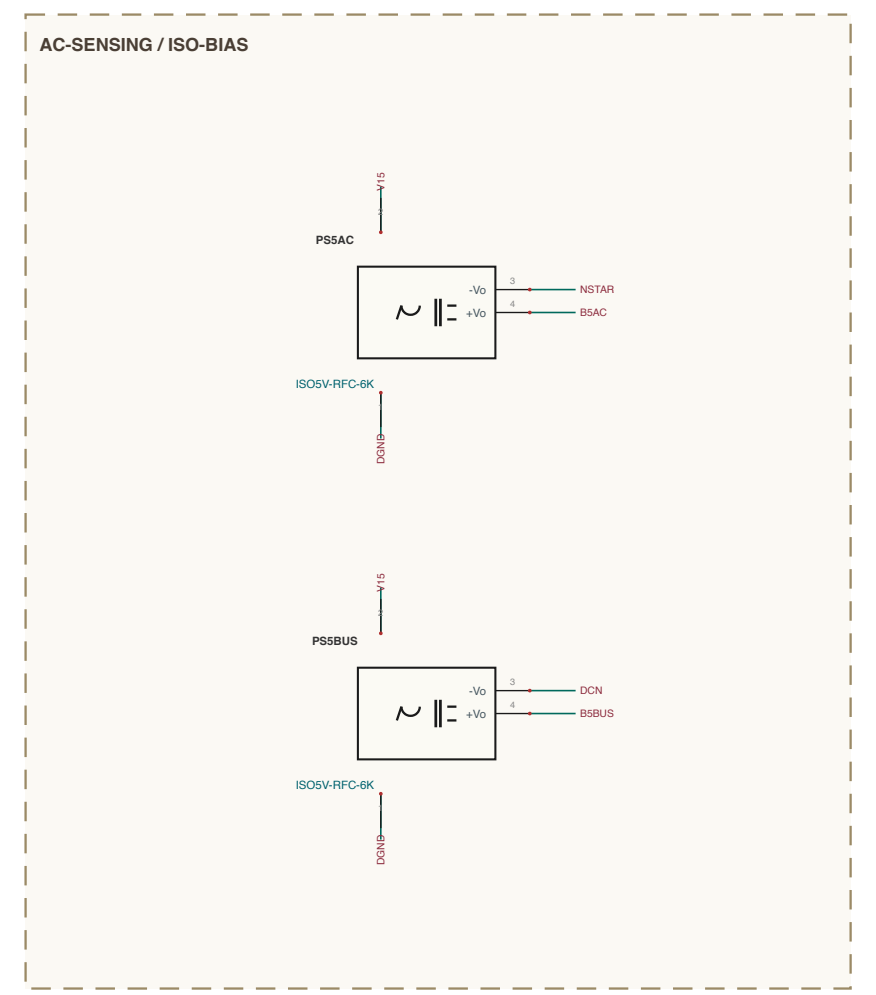
AC-SENSING / ISO-BIAS

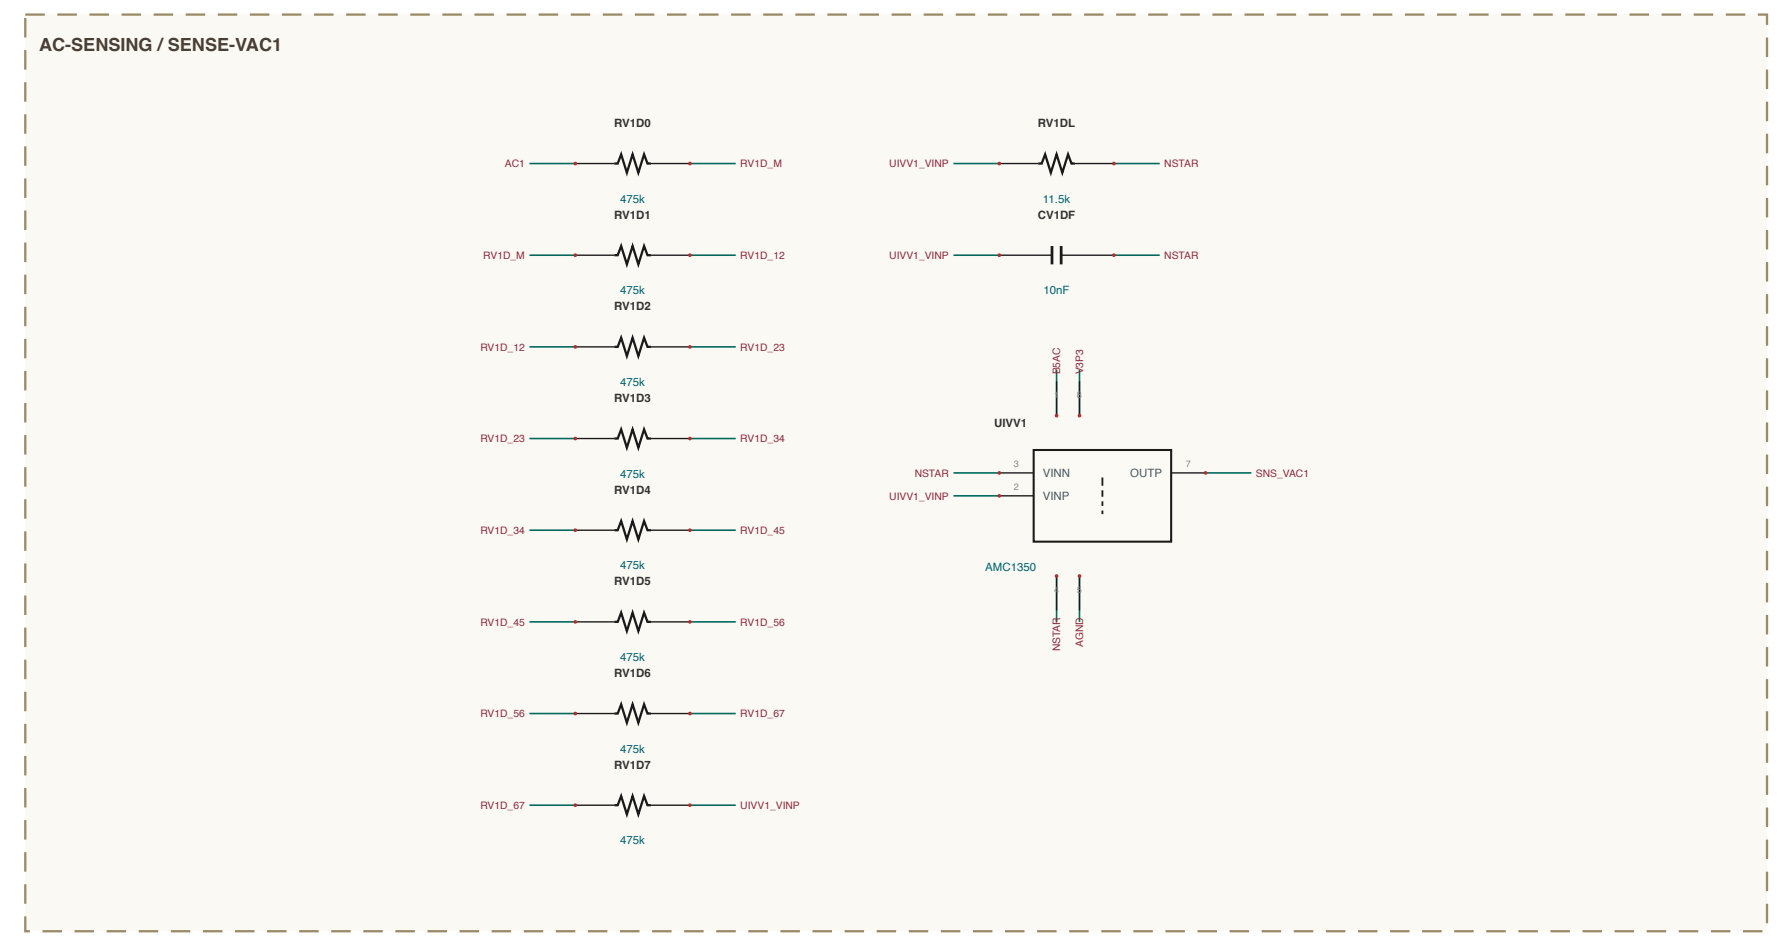
AC-SENSING / SENSE-VAC1

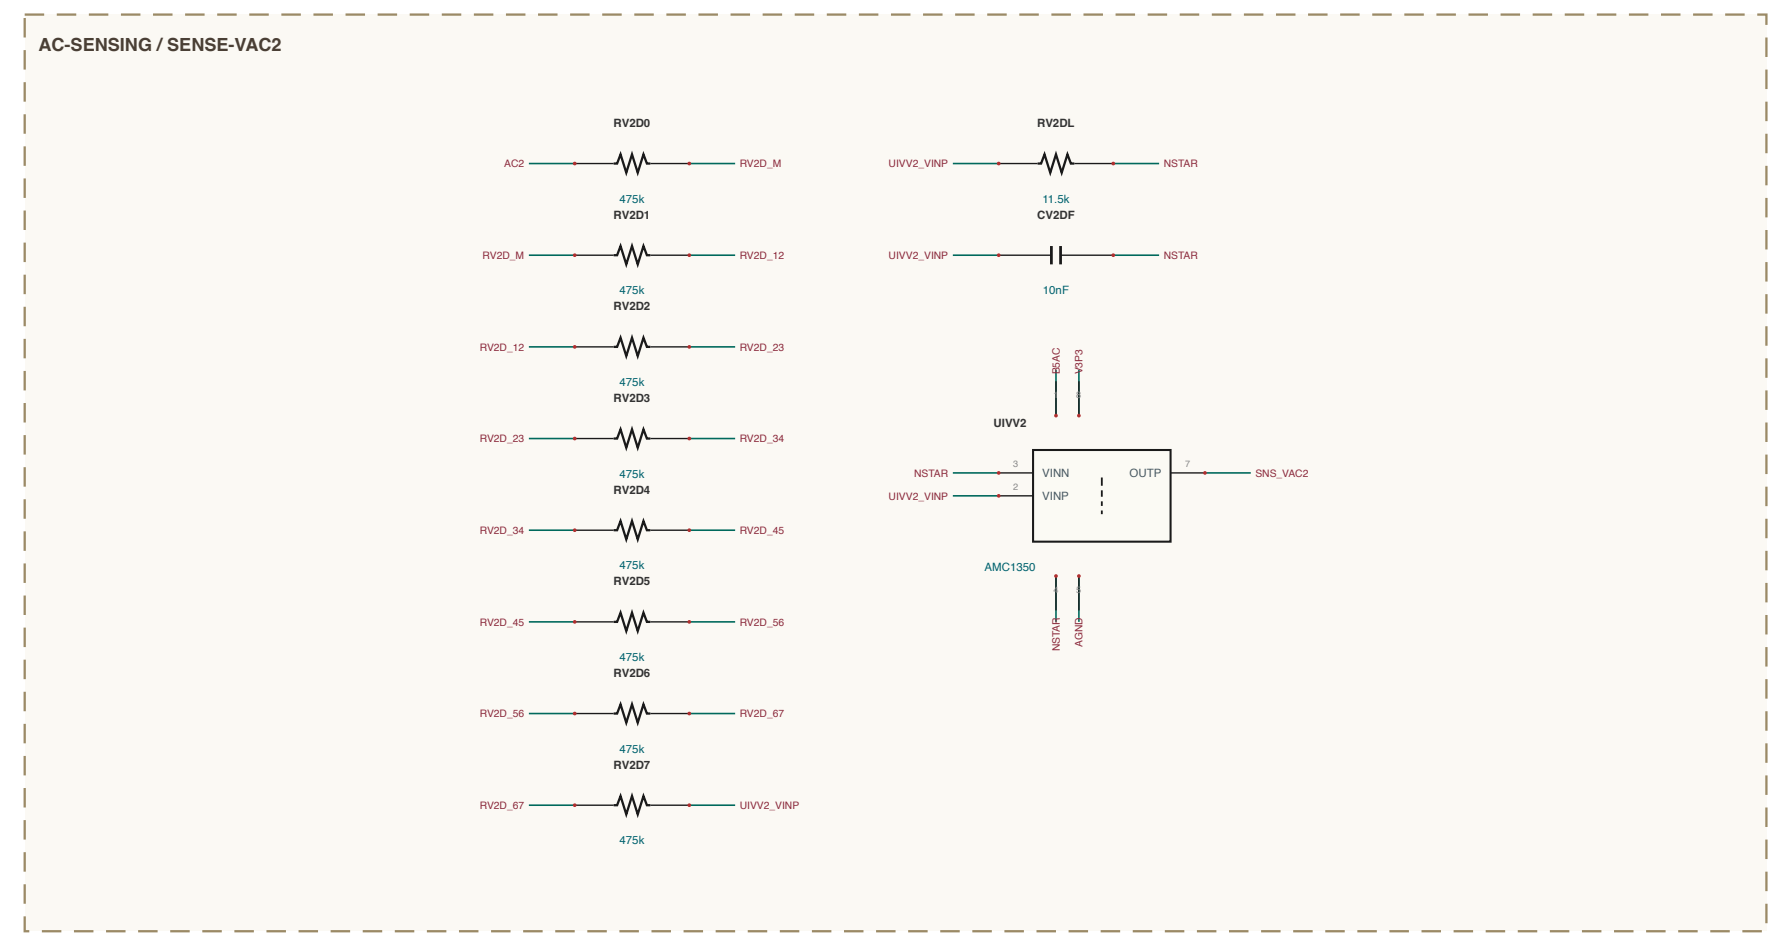
AC-SENSING / SENSE-VAC2

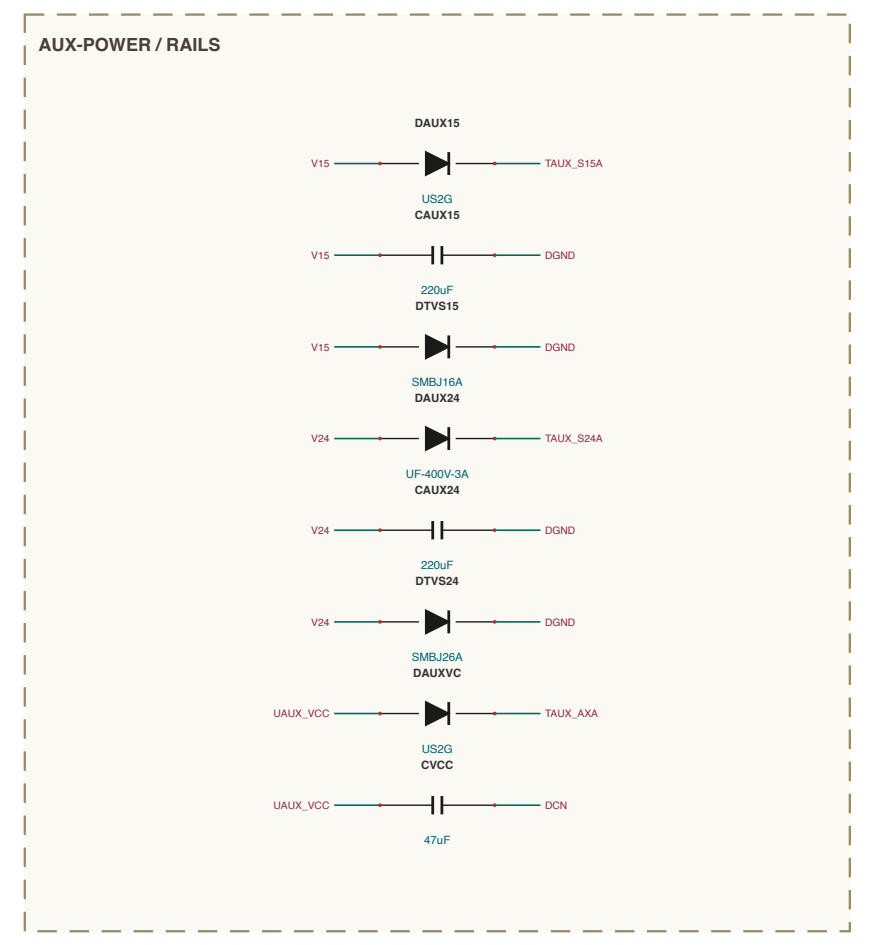
AUX-POWER / RAILS

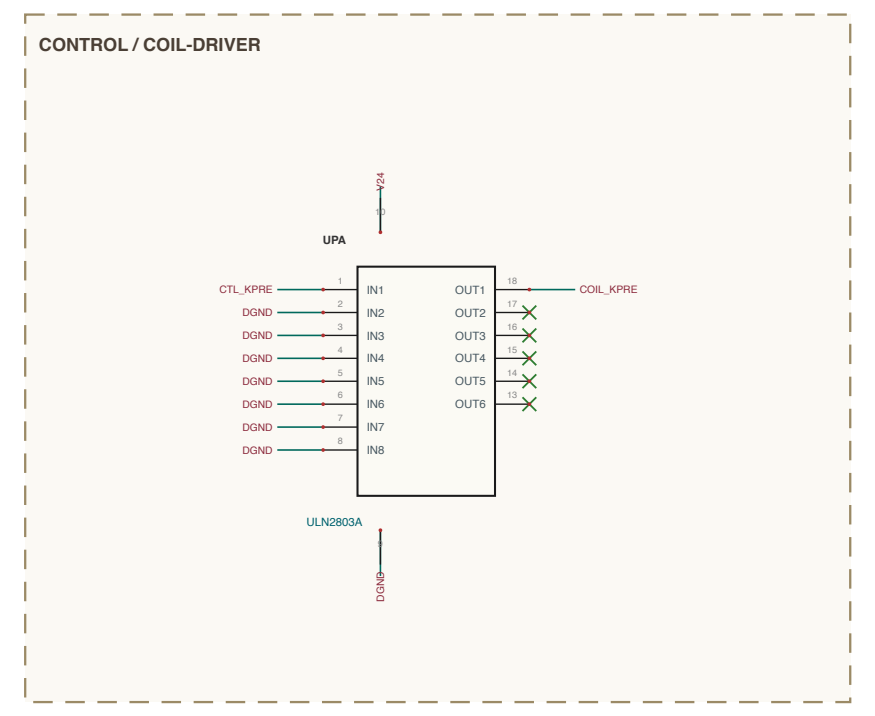
CONTROL / COIL-DRIVER

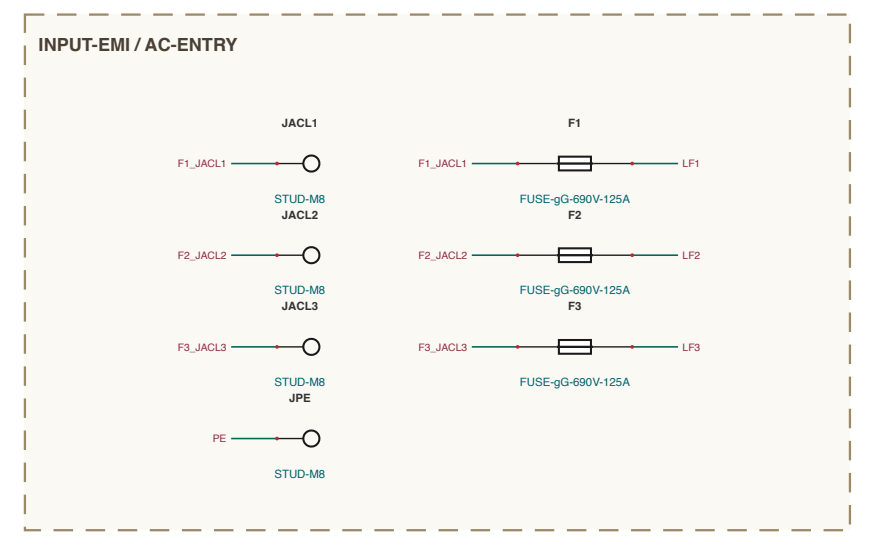
INPUT-EMI / AC-ENTRY

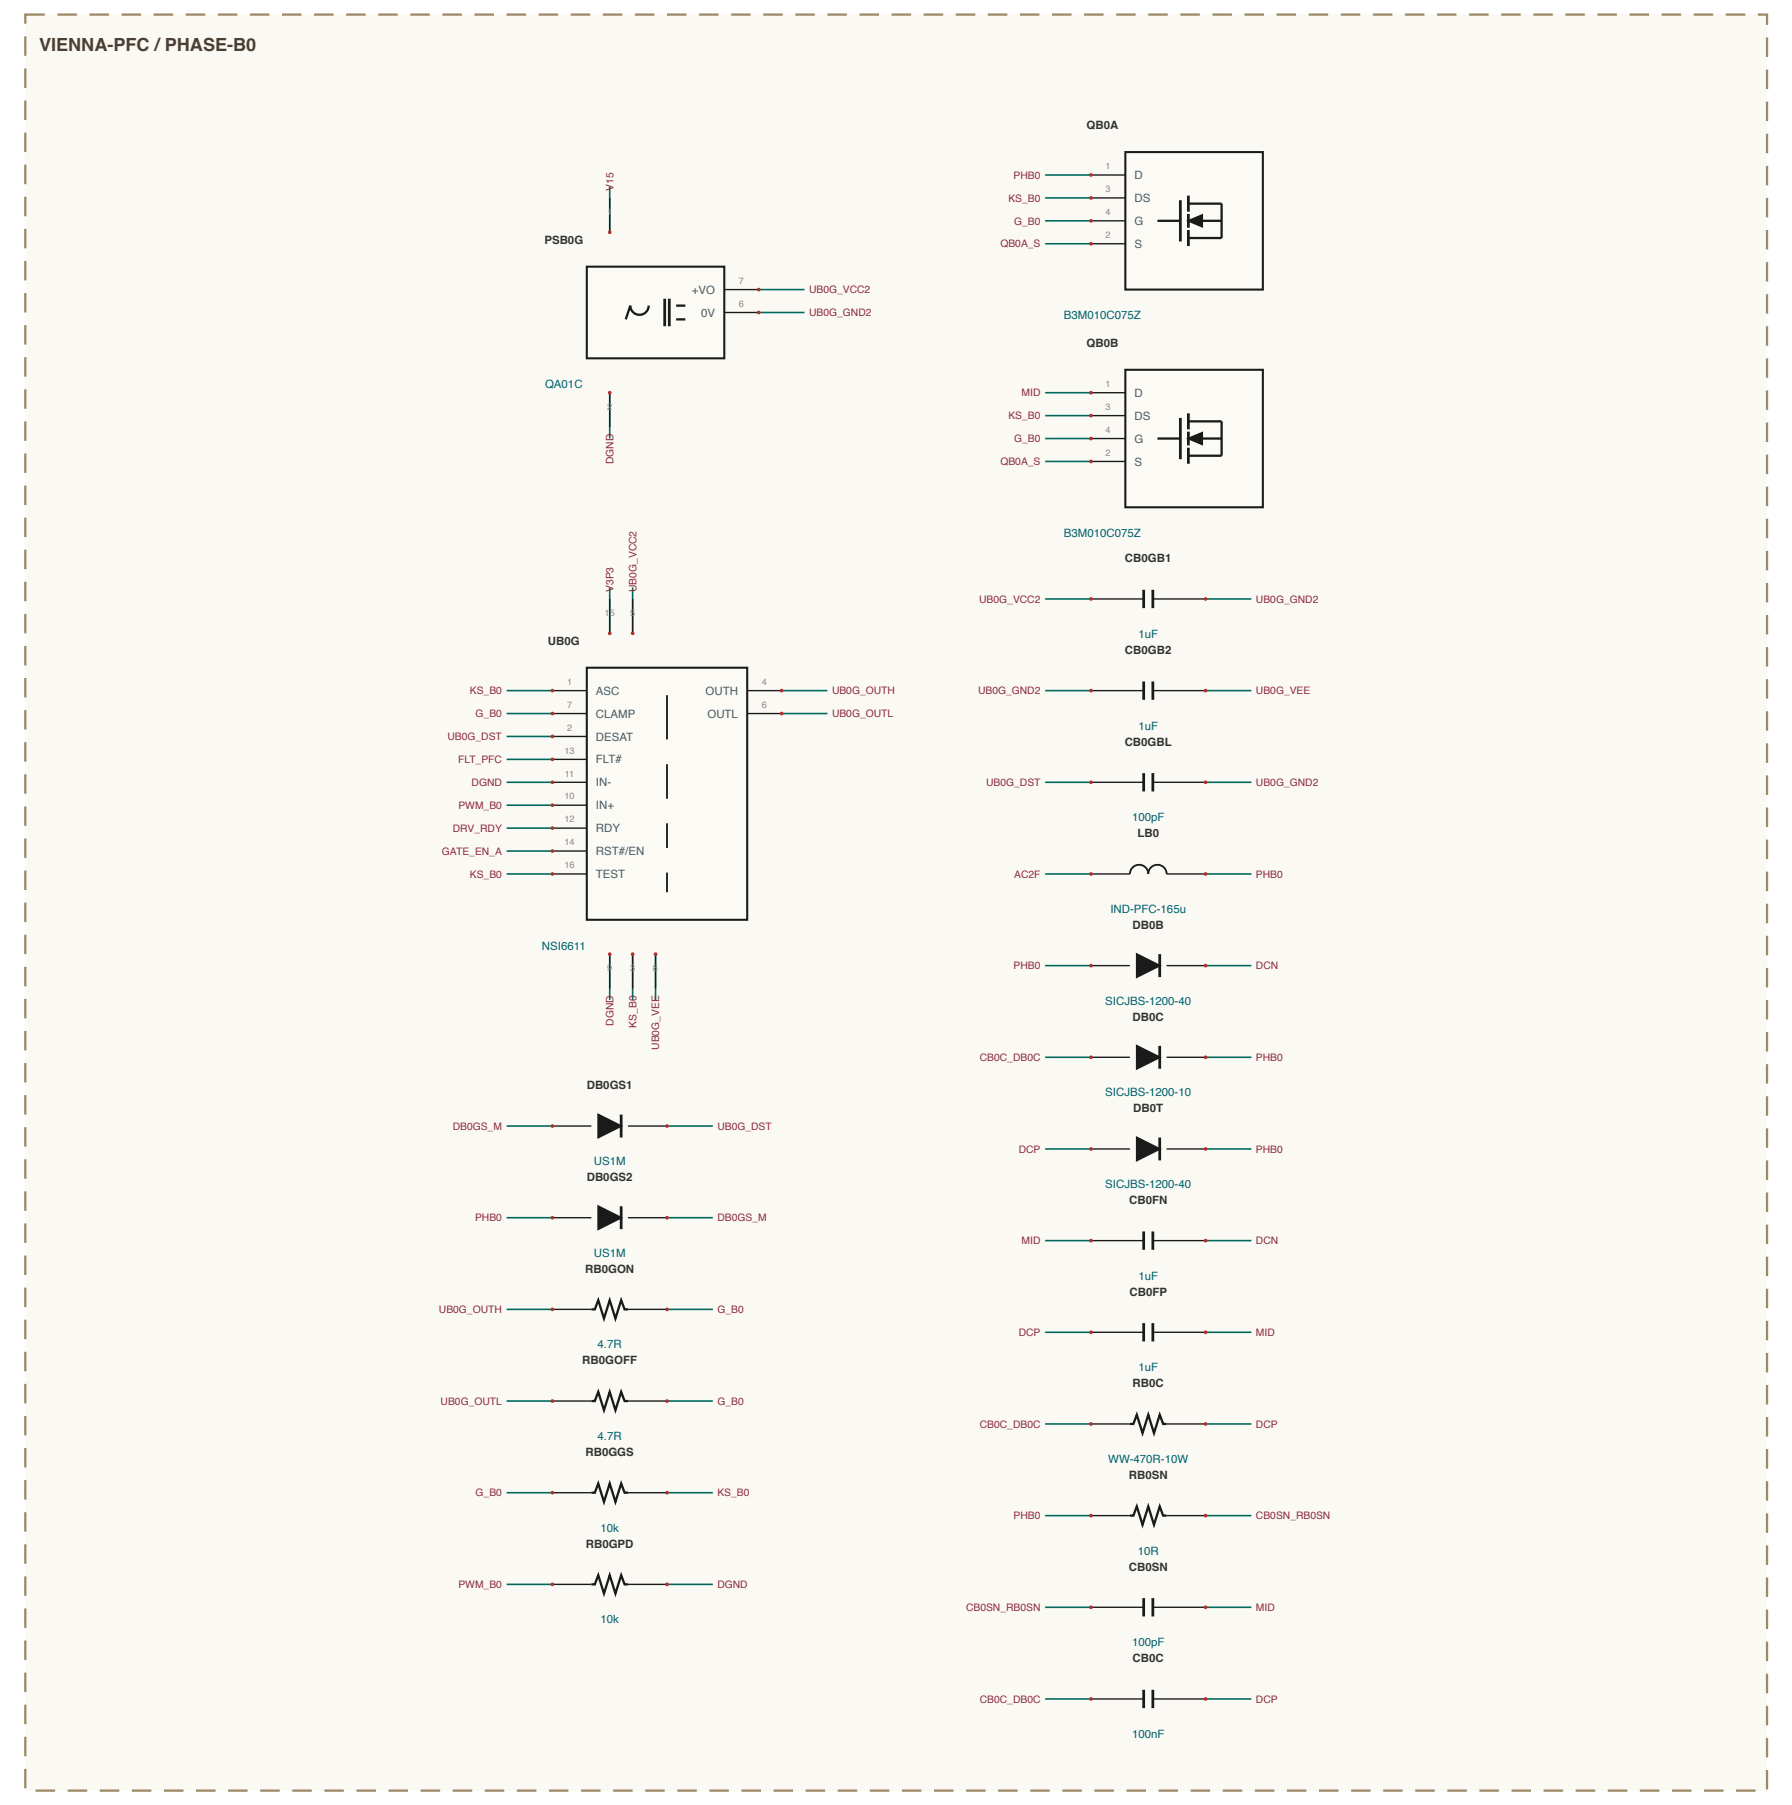
VIENNA-PFC / PHASE-B0

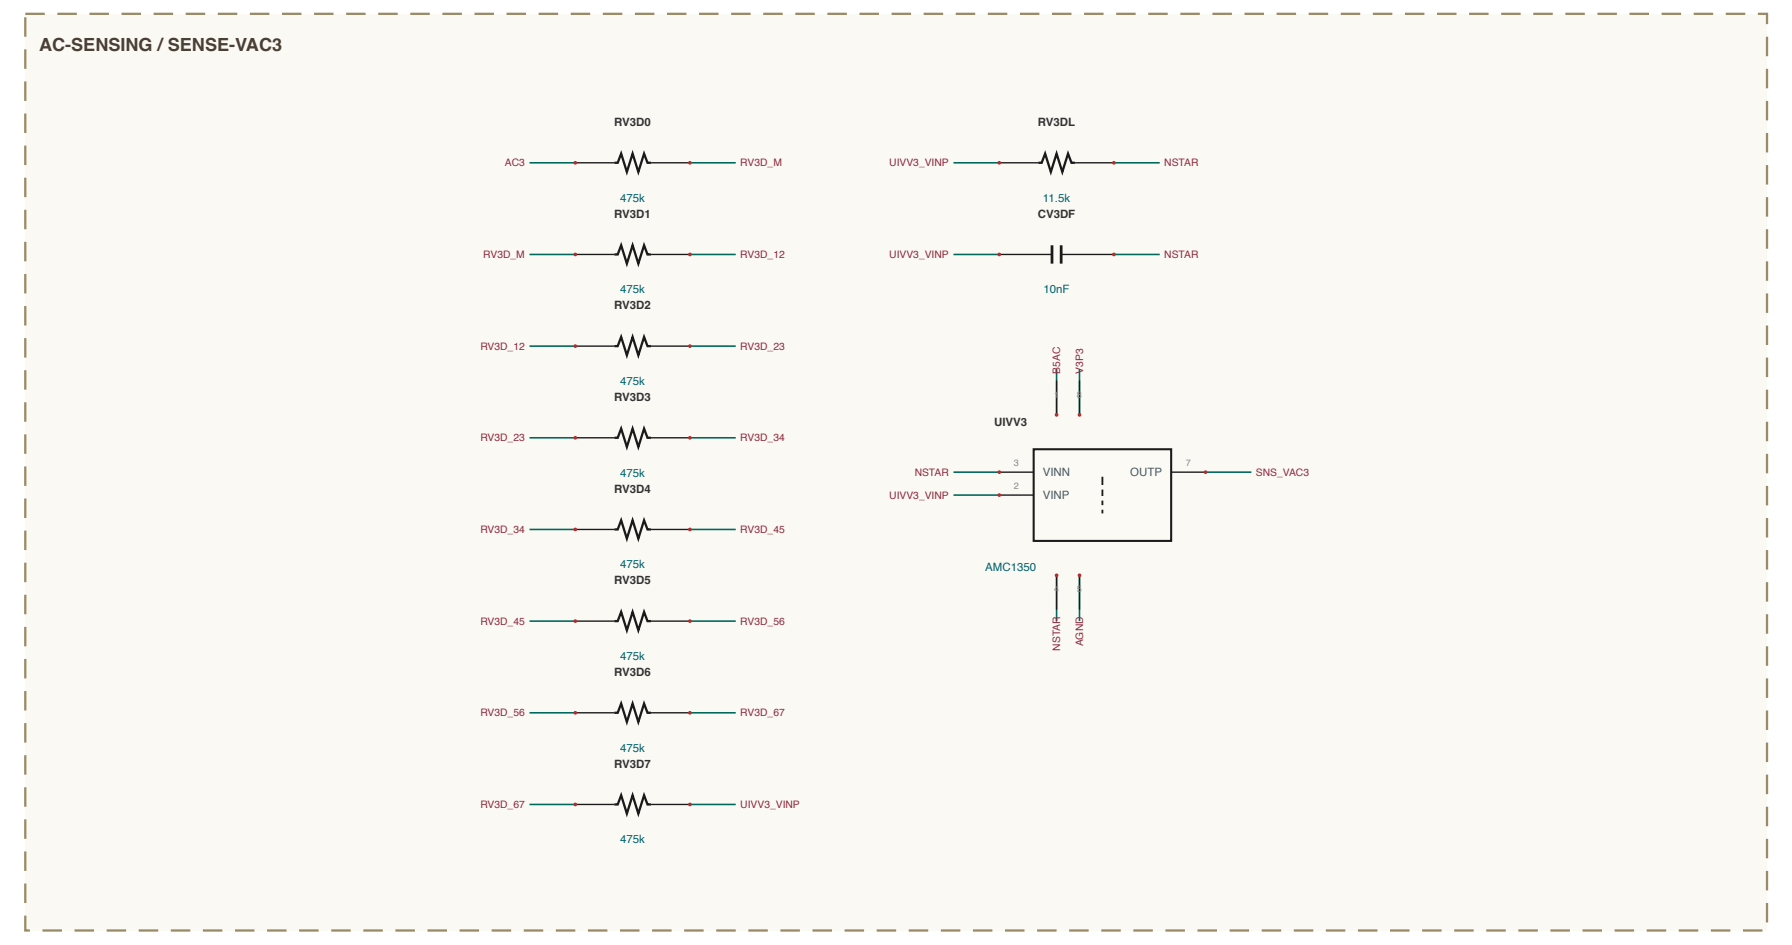
AC-SENSING / SENSE-VAC3

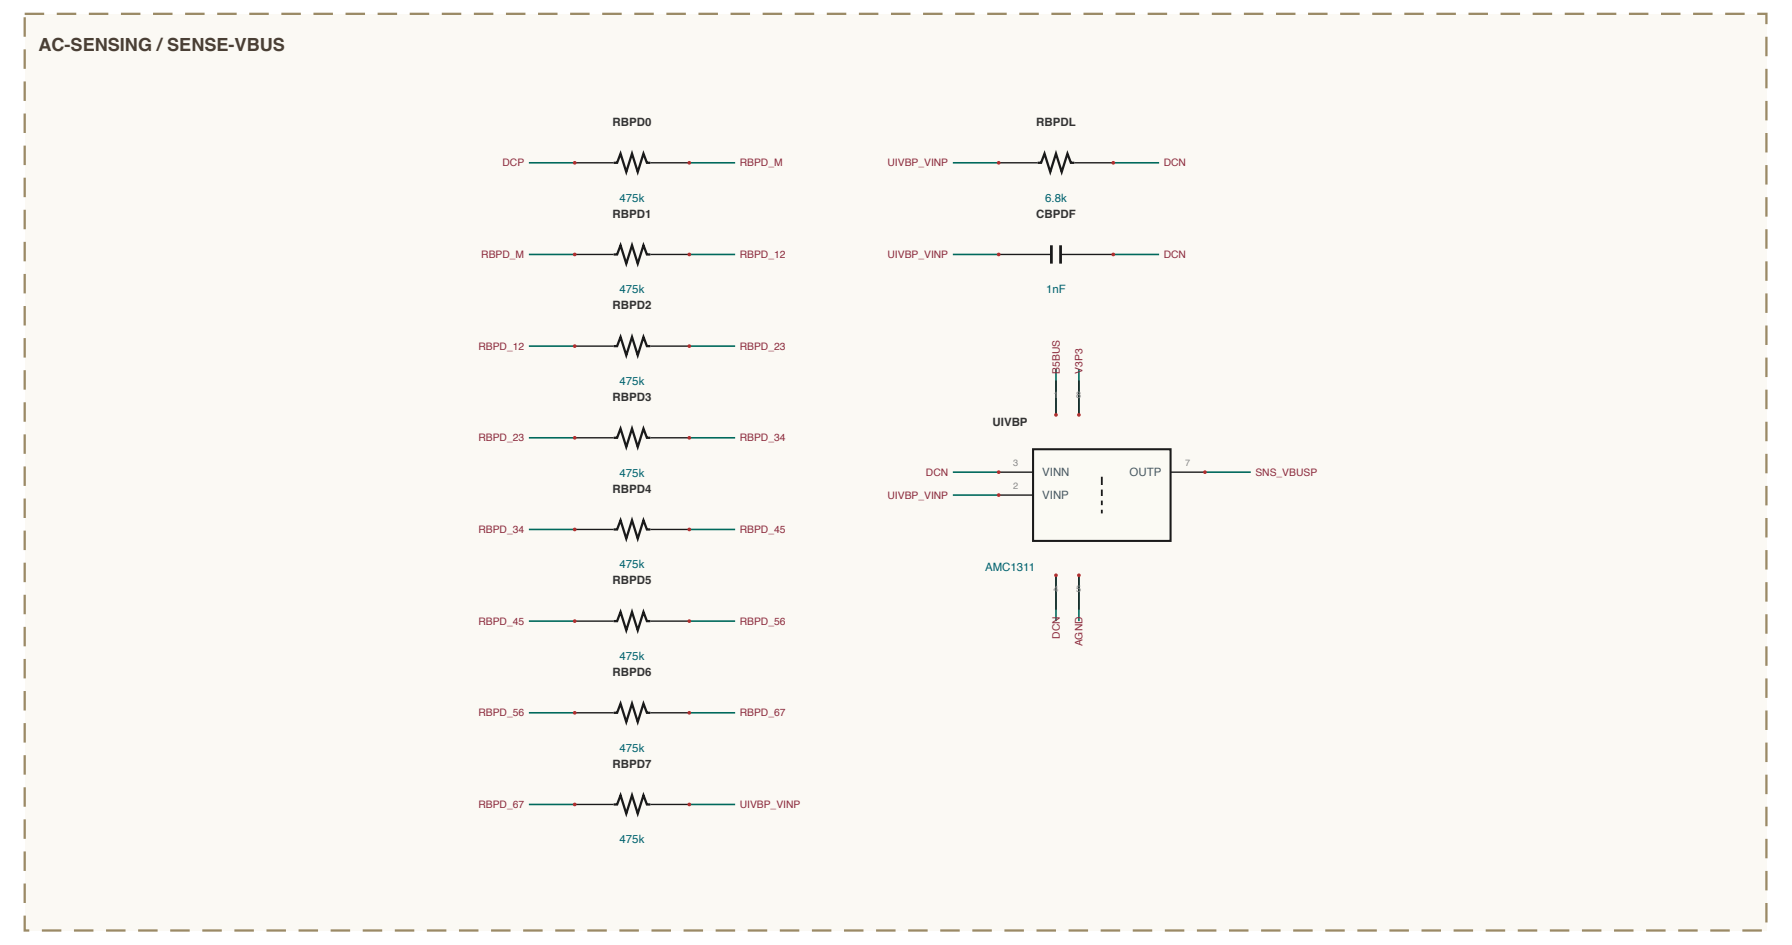
AC-SENSING / SENSE-VBUS

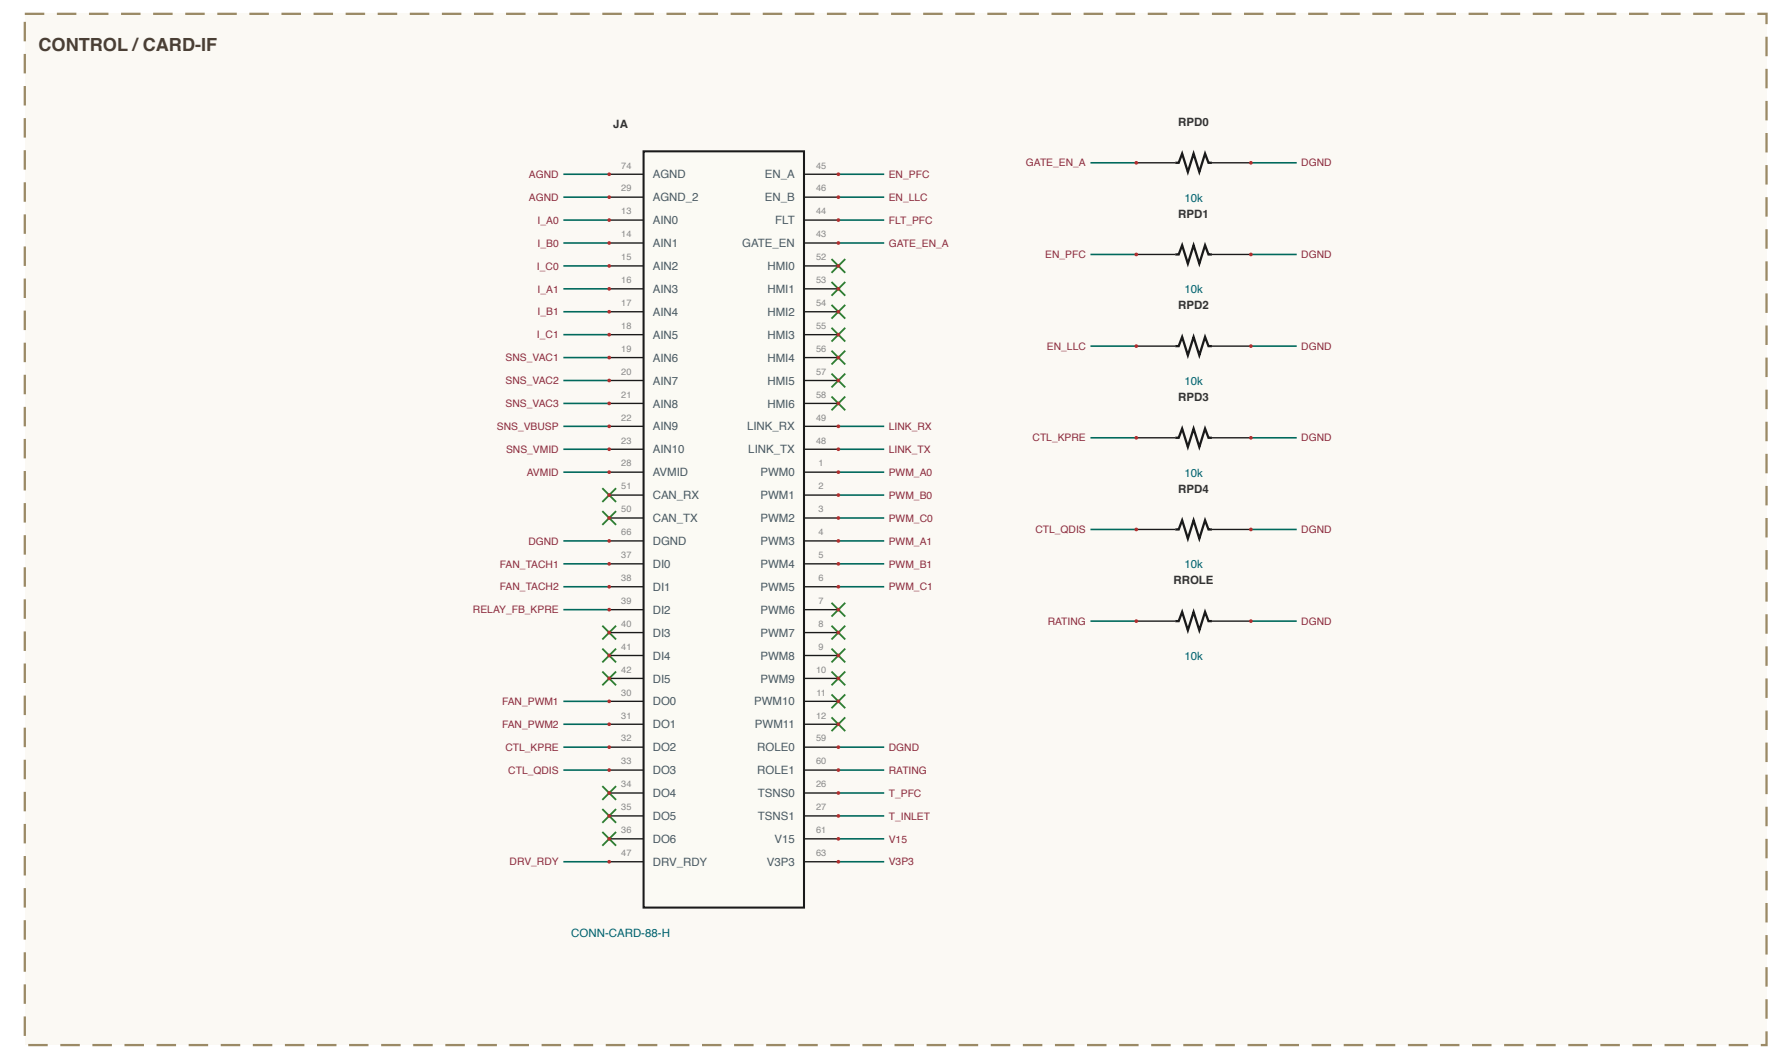
CONTROL / CARD-IF

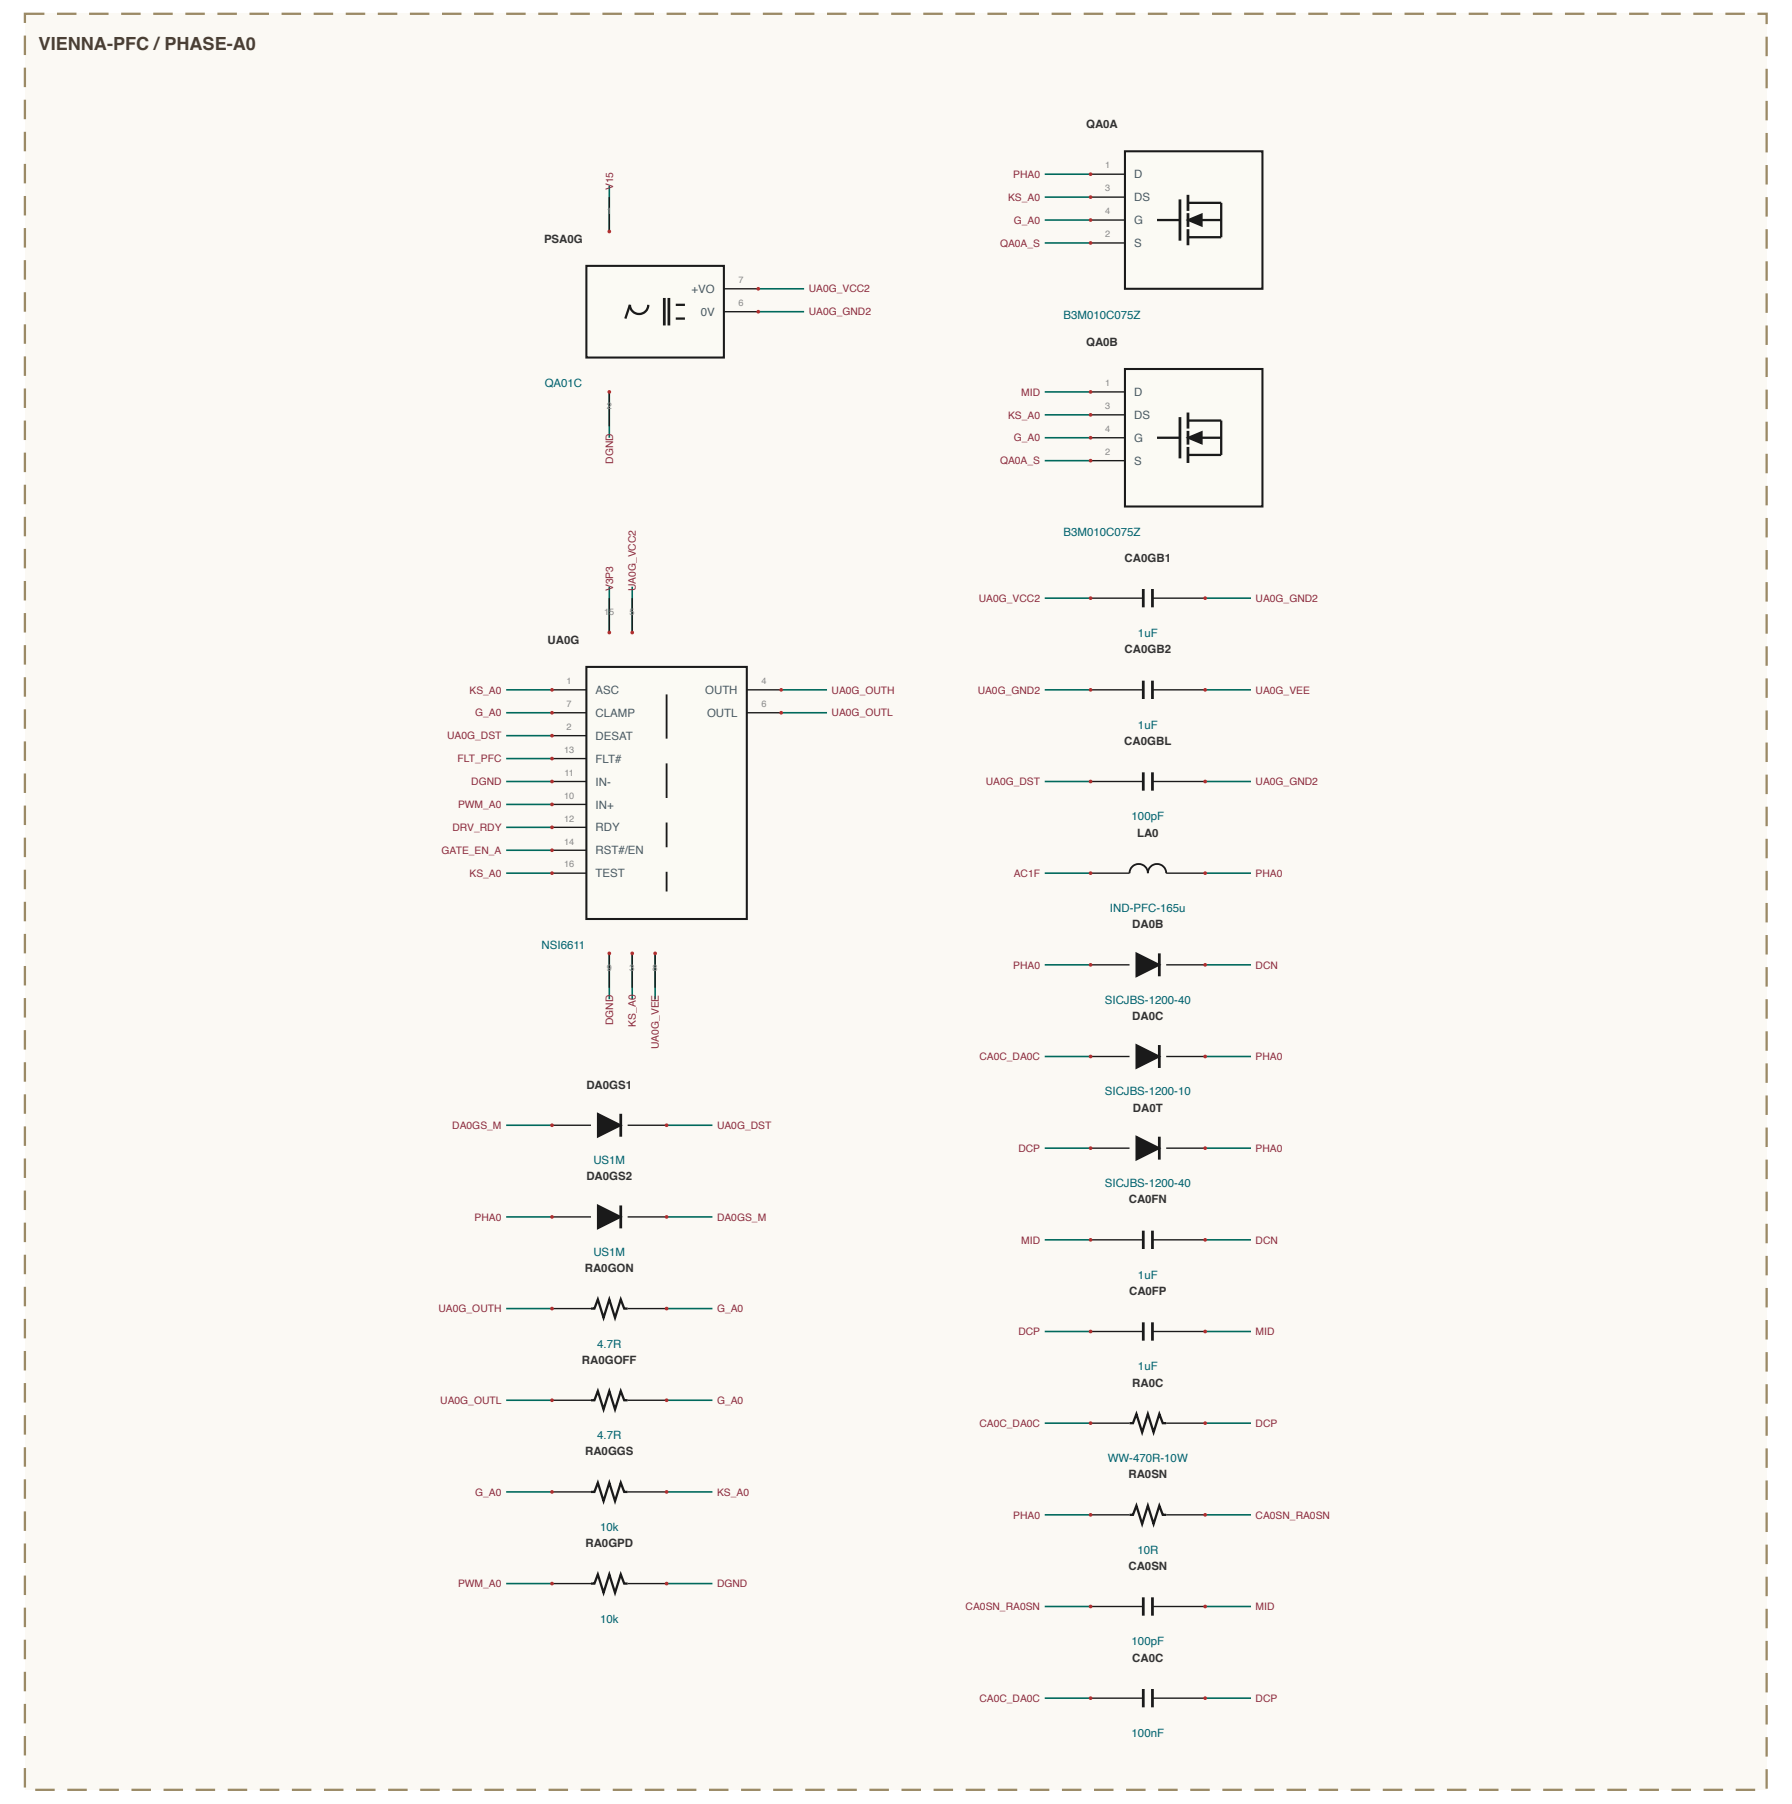
VIENNA-PFC / PHASE-A0

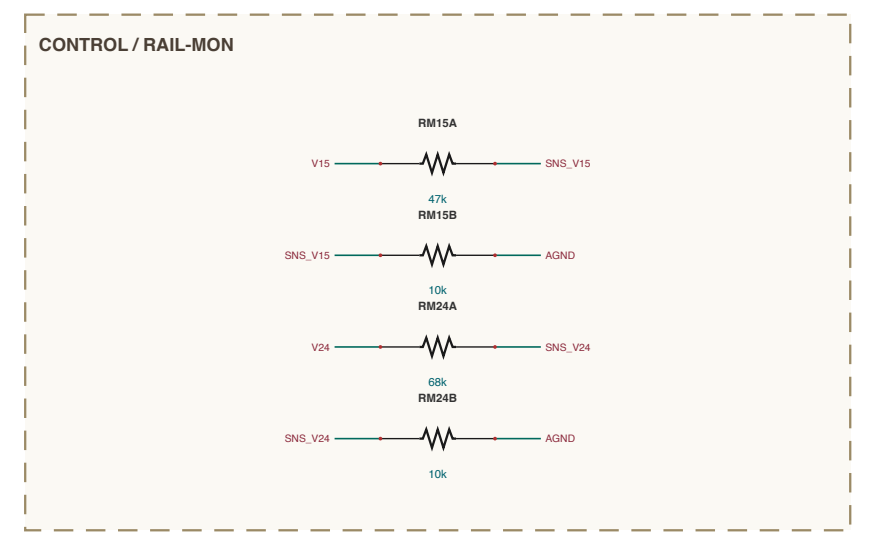
CONTROL / RAIL-MON

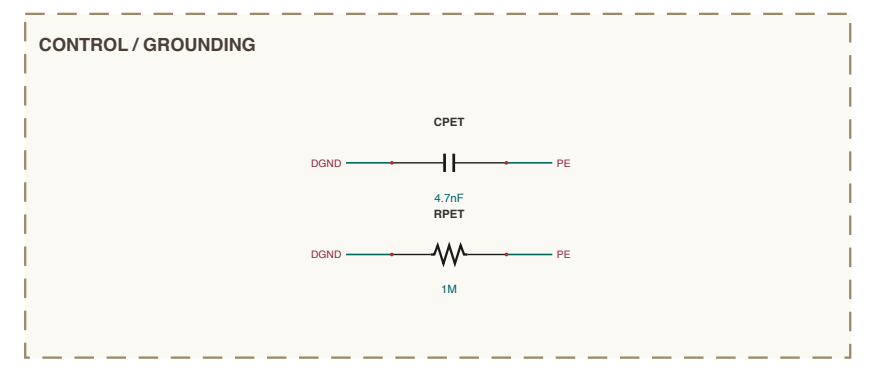
CONTROL / GROUNDING

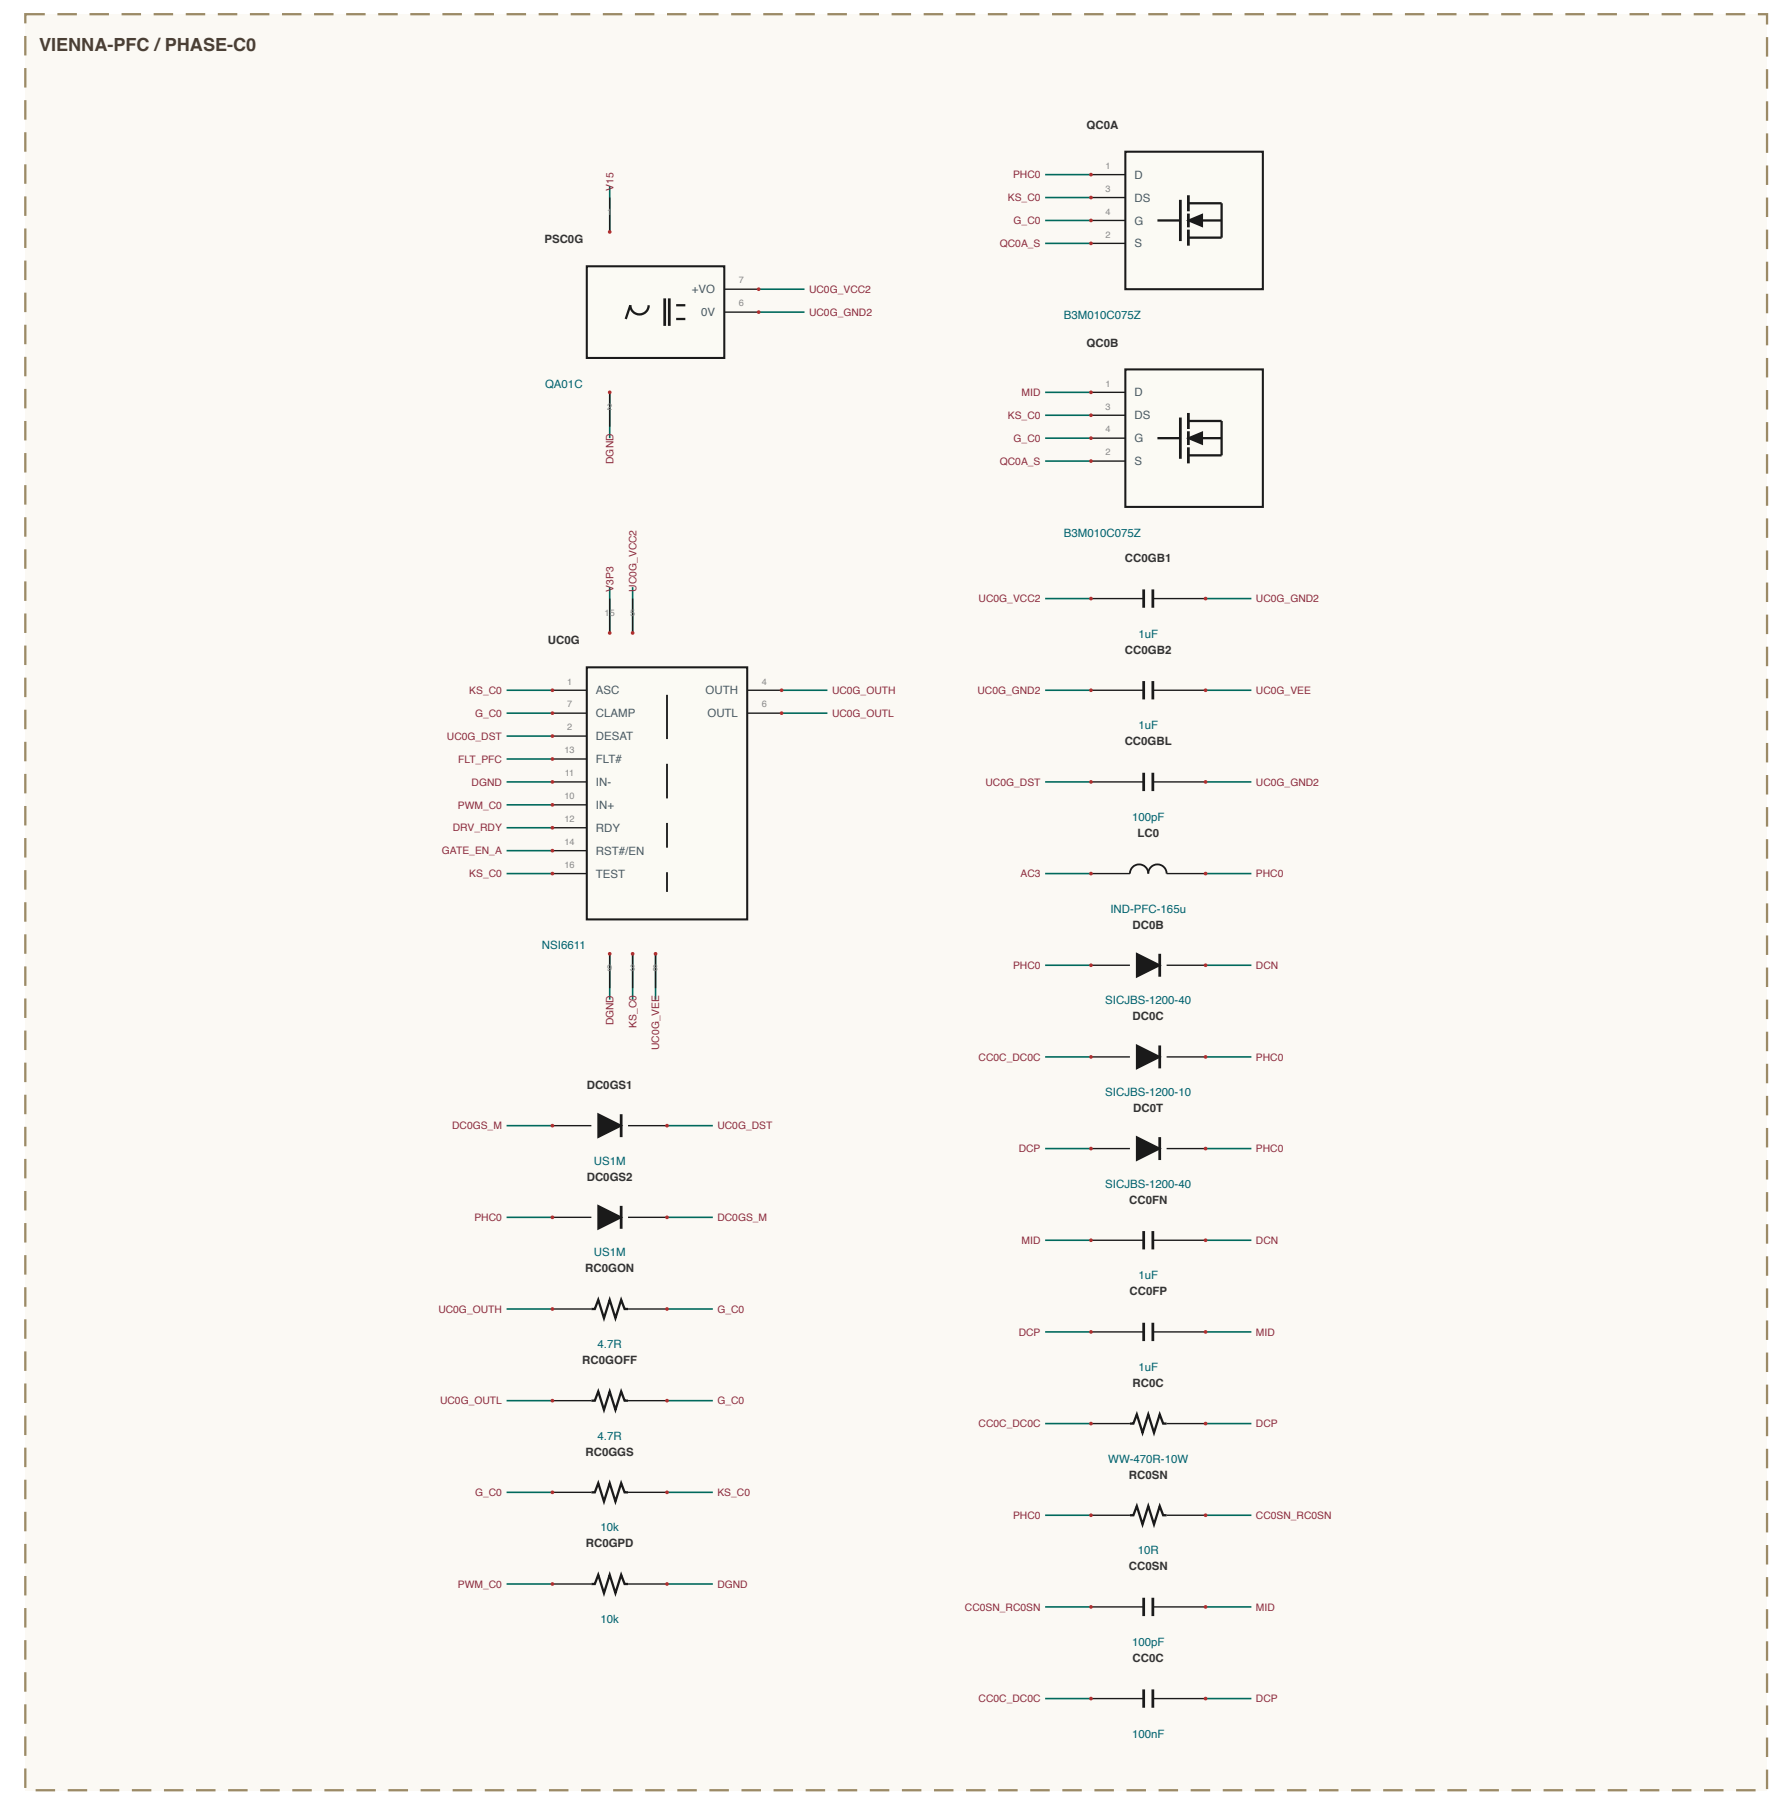
VIENNA-PFC / PHASE-C0

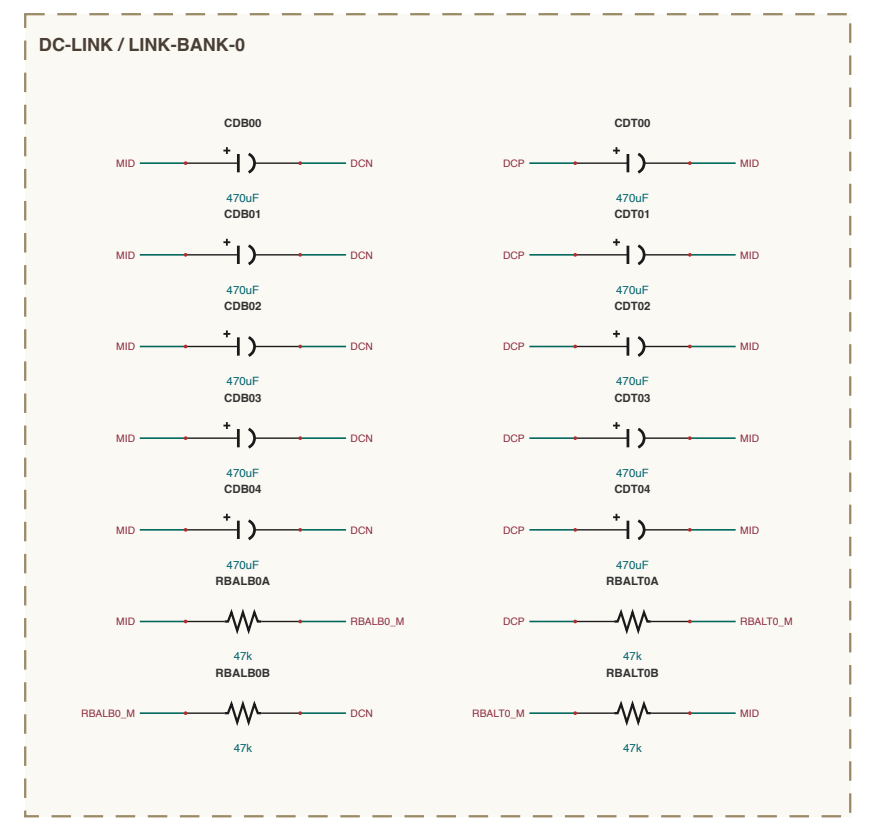
DC-LINK / LINK-BANK-0

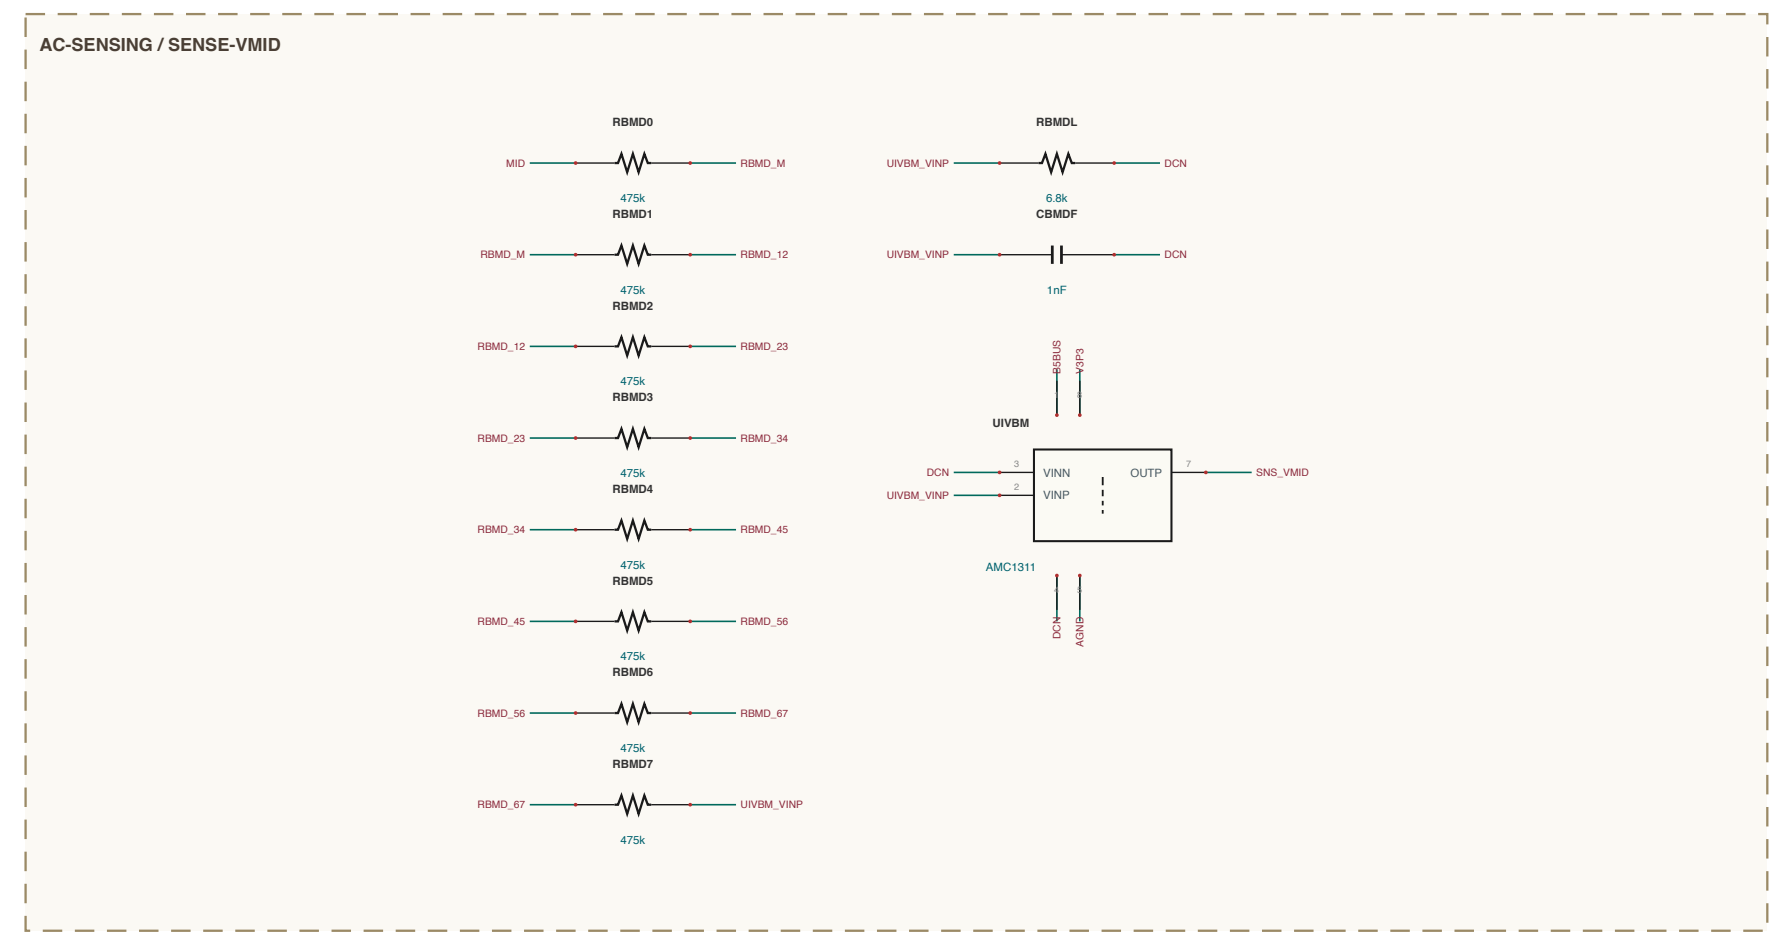
AC-SENSING / SENSE-VMID

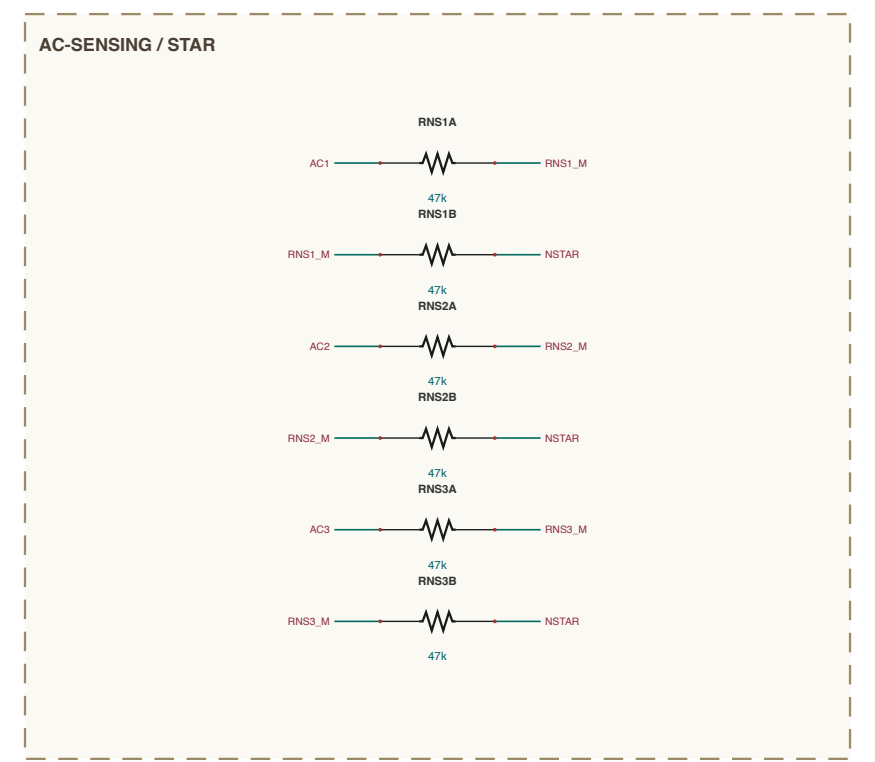
AC-SENSING / STAR

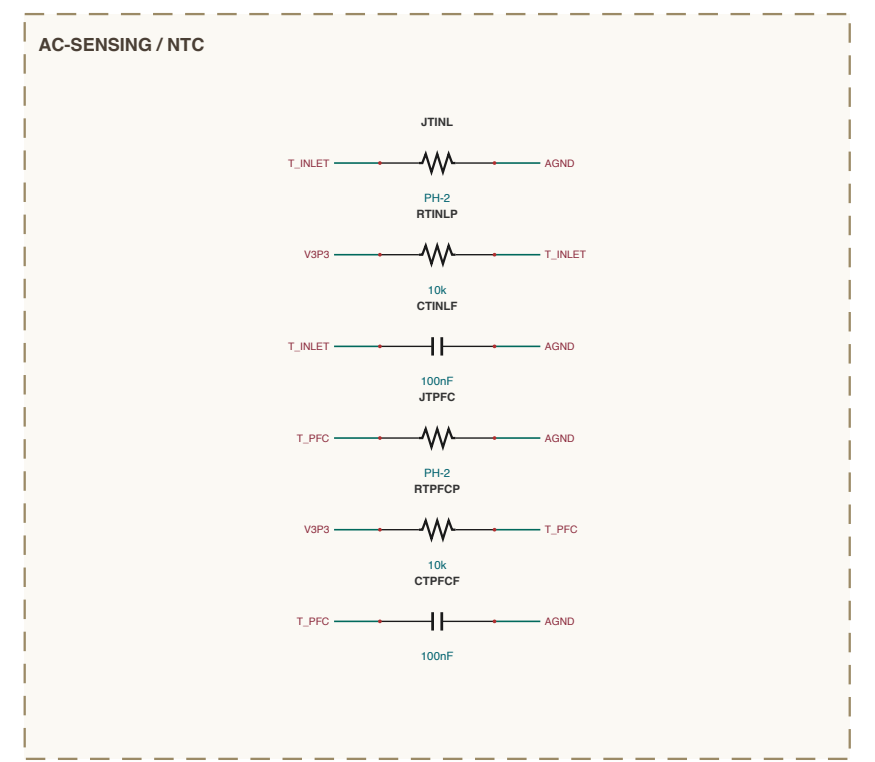
AC-SENSING / NTC

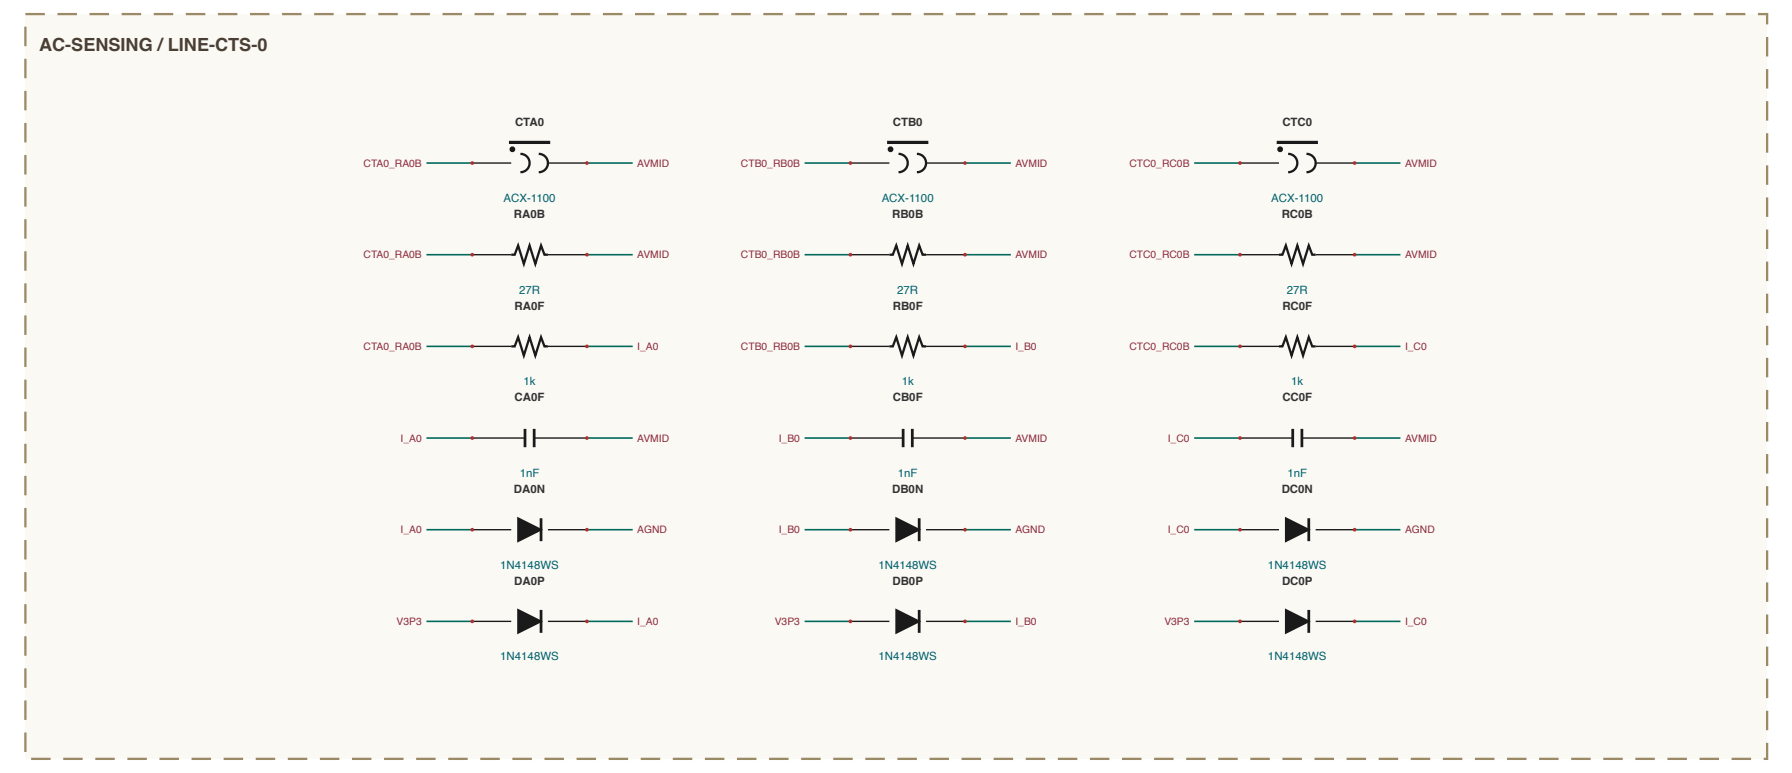
AC-SENSING / LINE-CTS-0

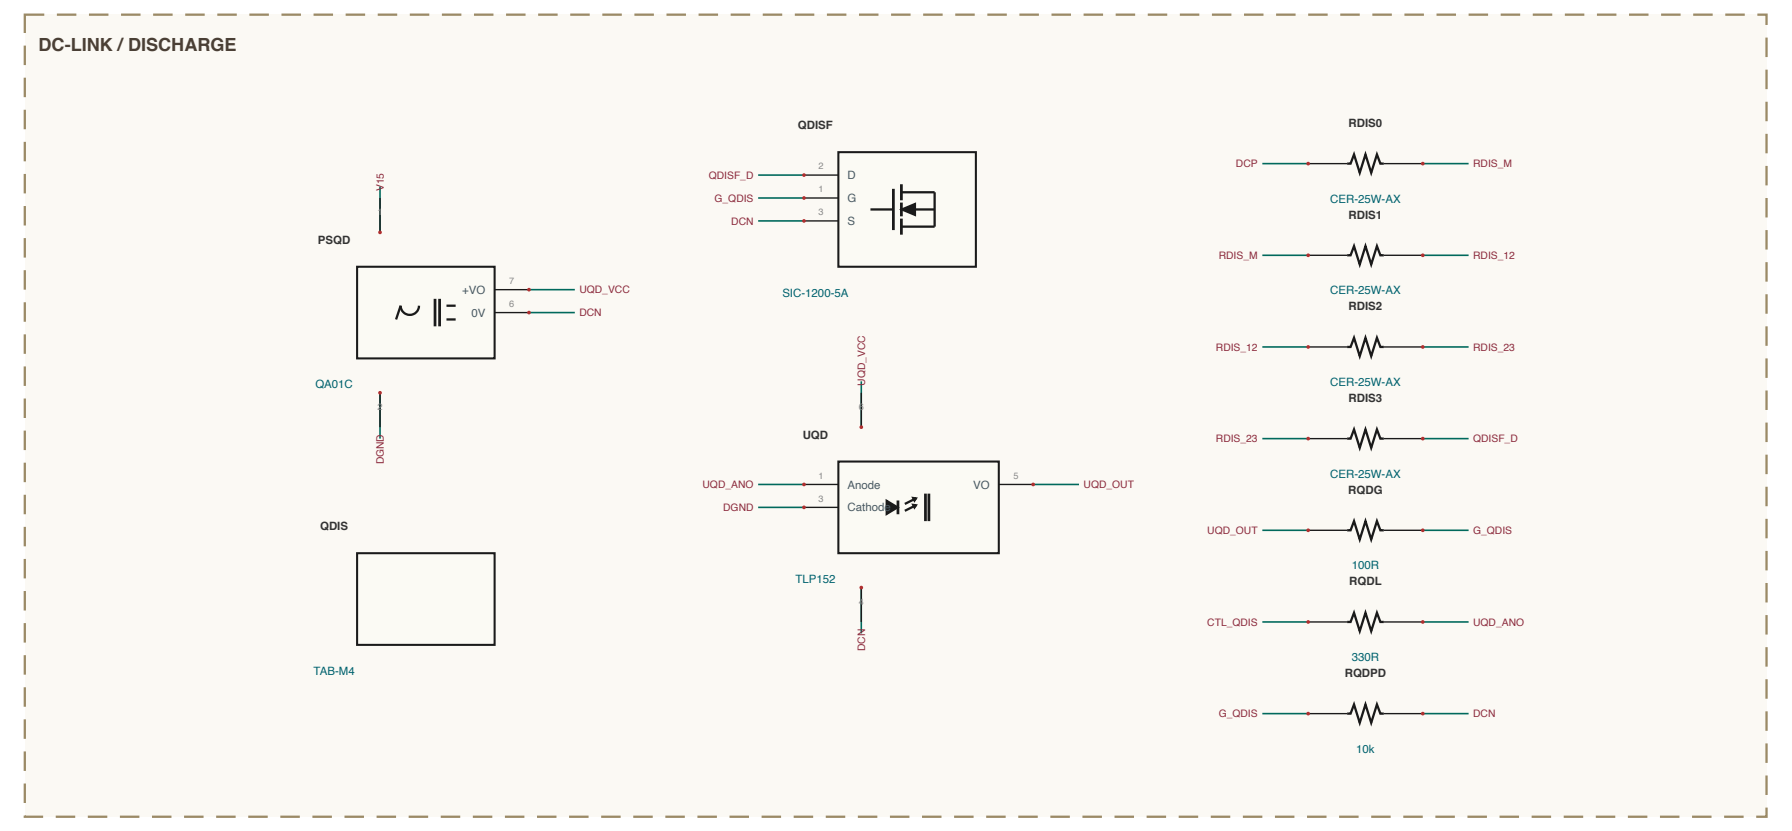
DC-LINK / DISCHARGE

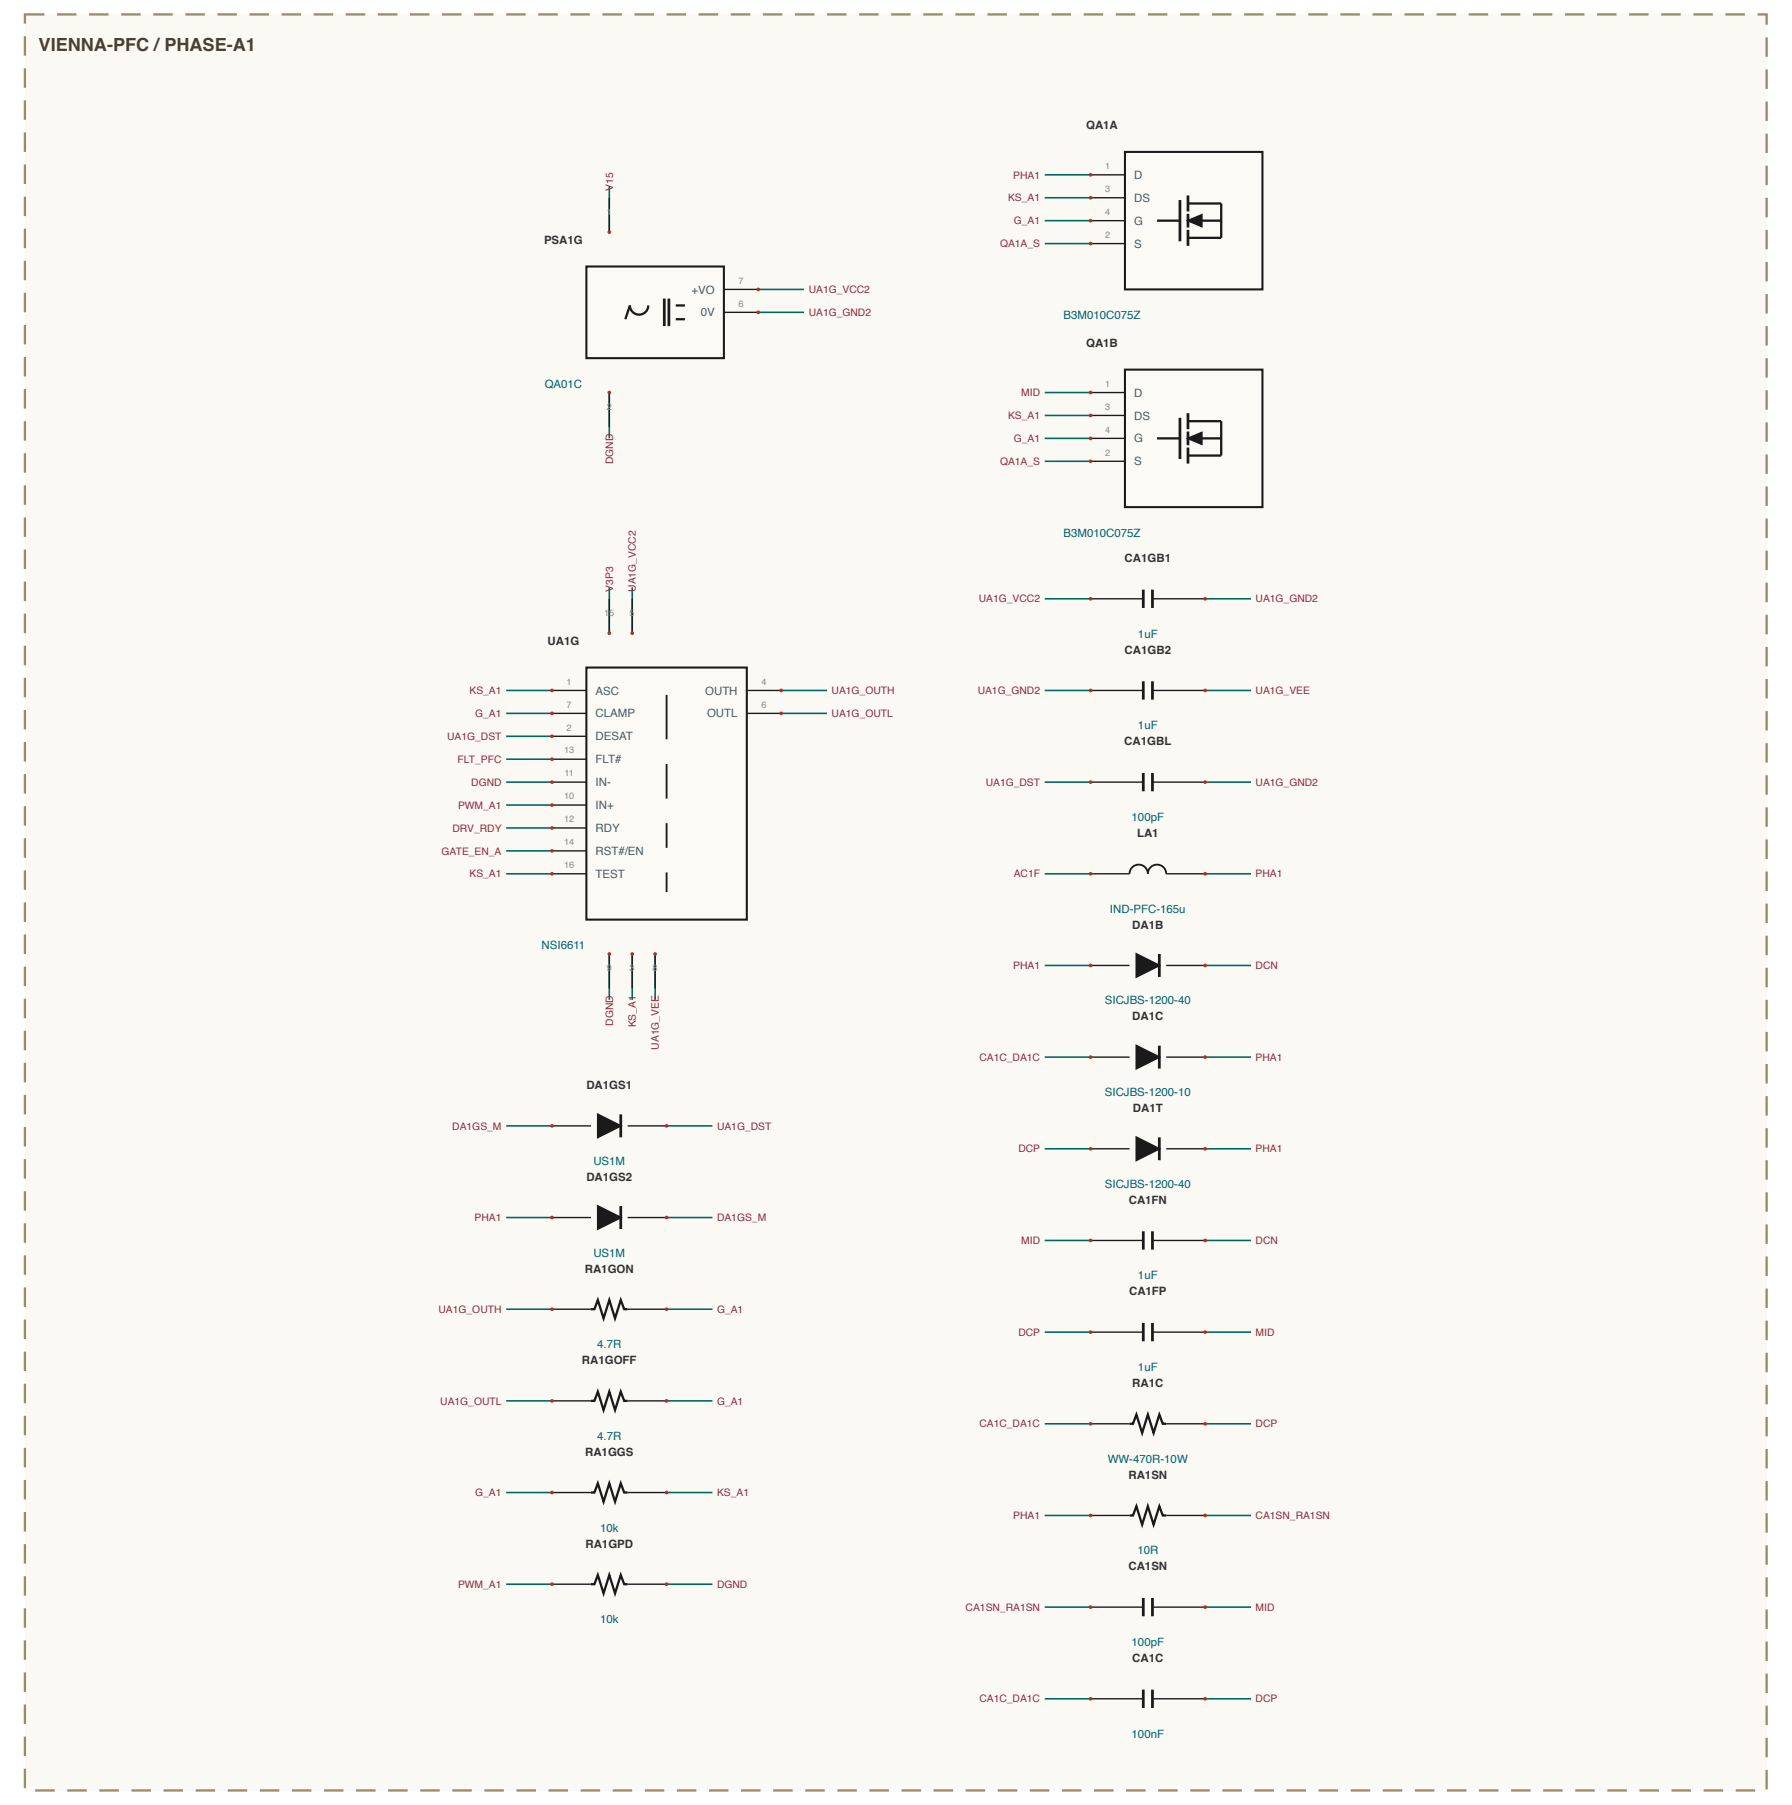
VIENNA-PFC / PHASE-A1

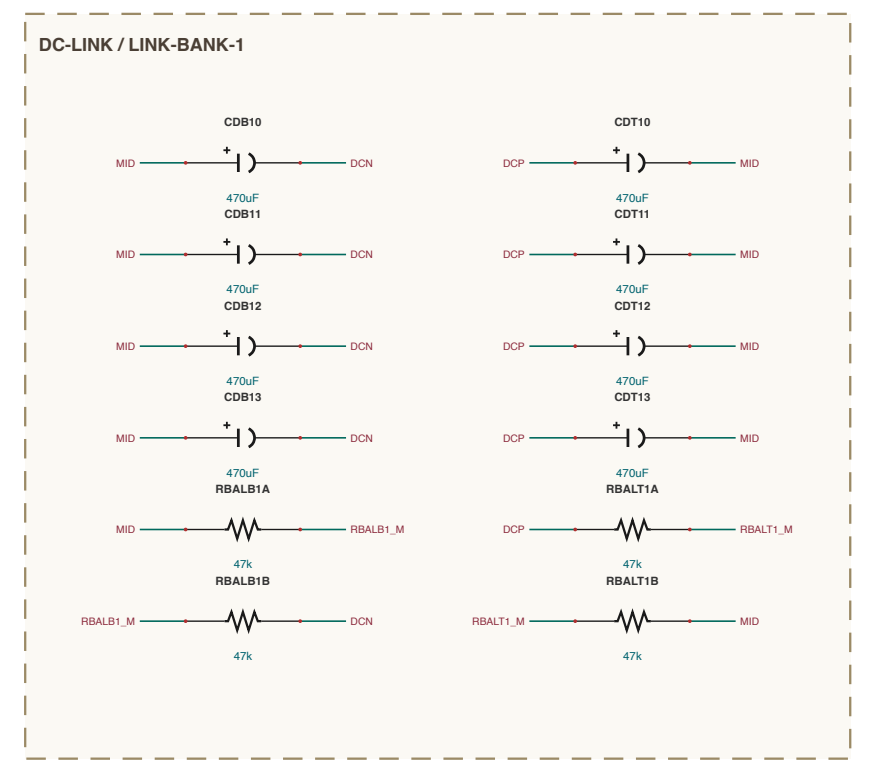
DC-LINK / LINK-BANK-1

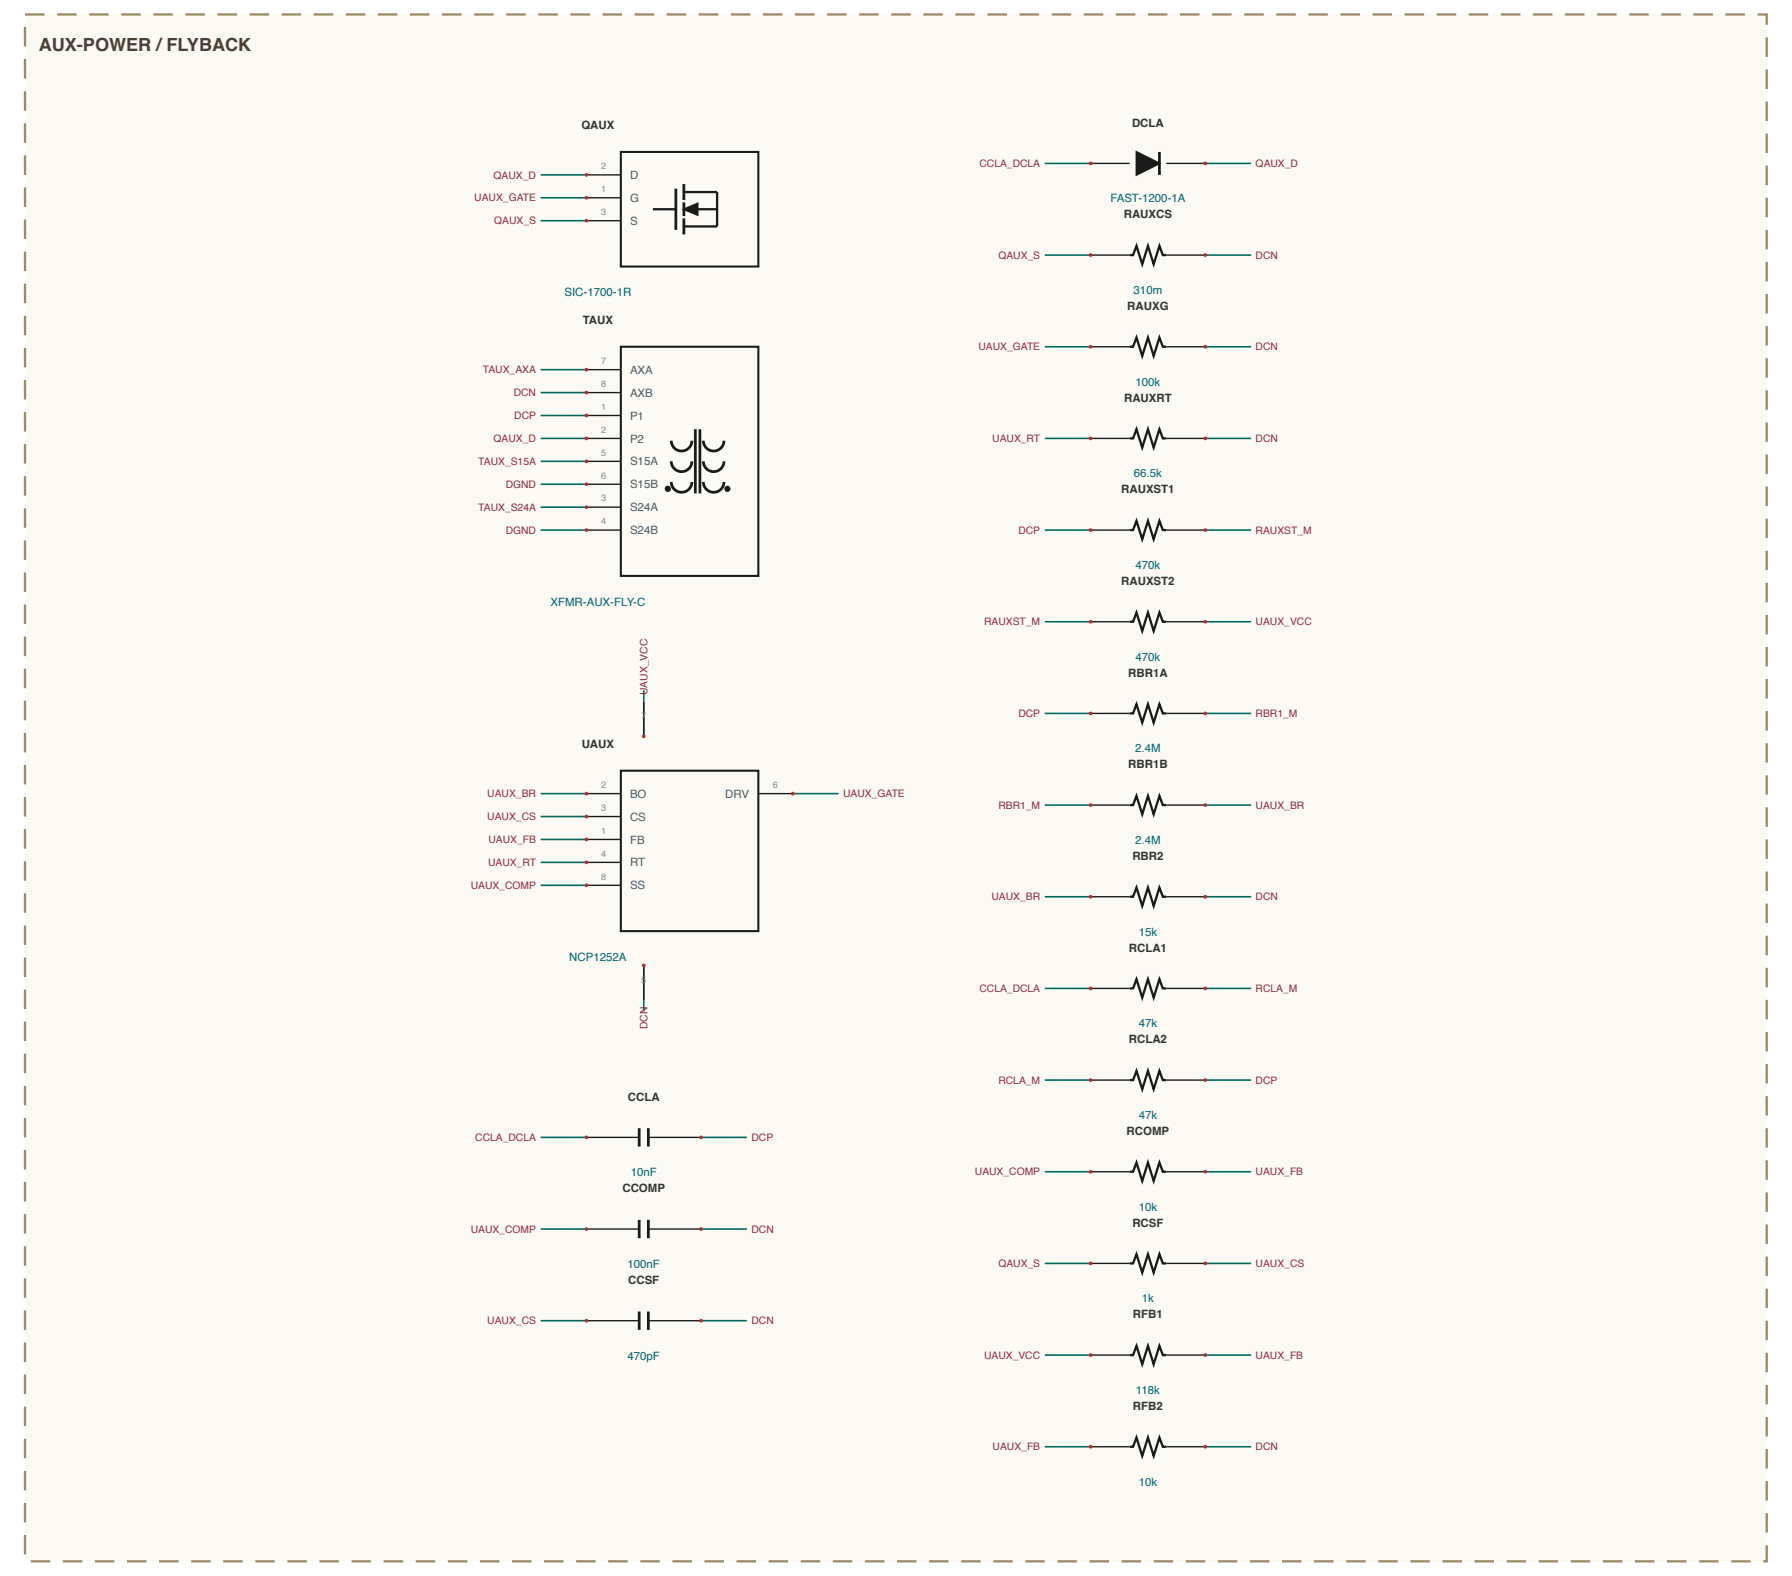
AUX-POWER / FLYBACK

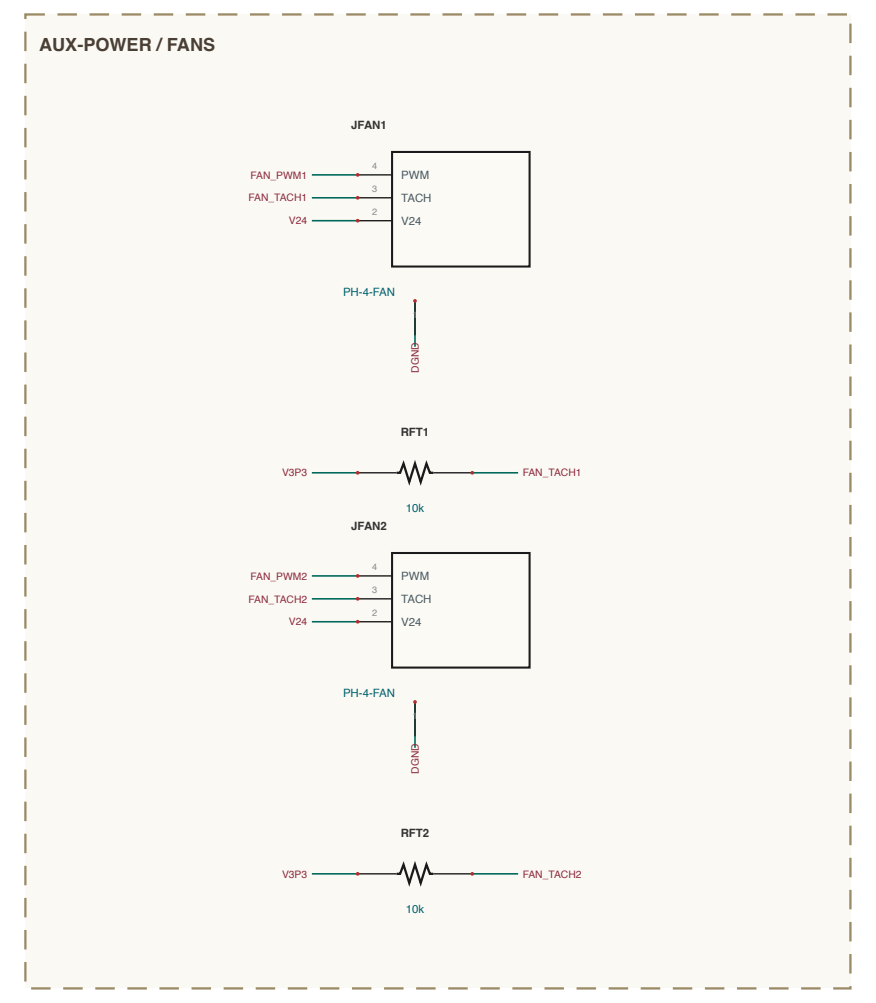
AUX-POWER / FANS

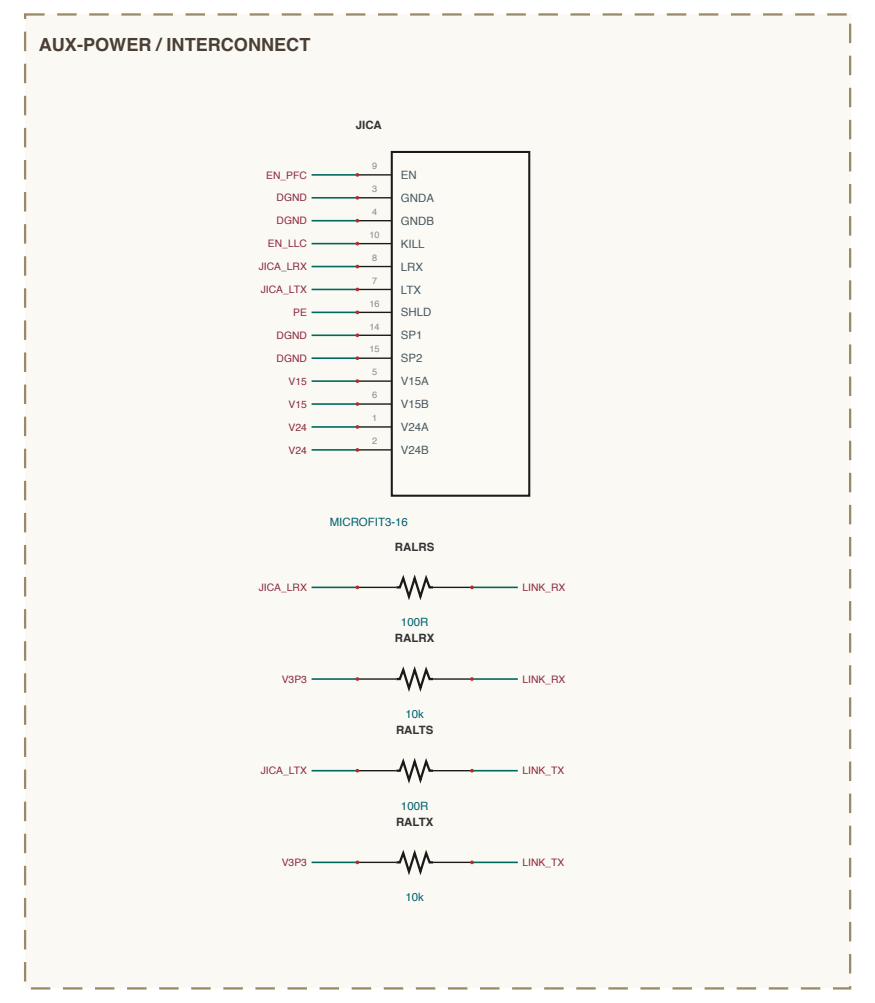
AUX-POWER / INTERCONNECT

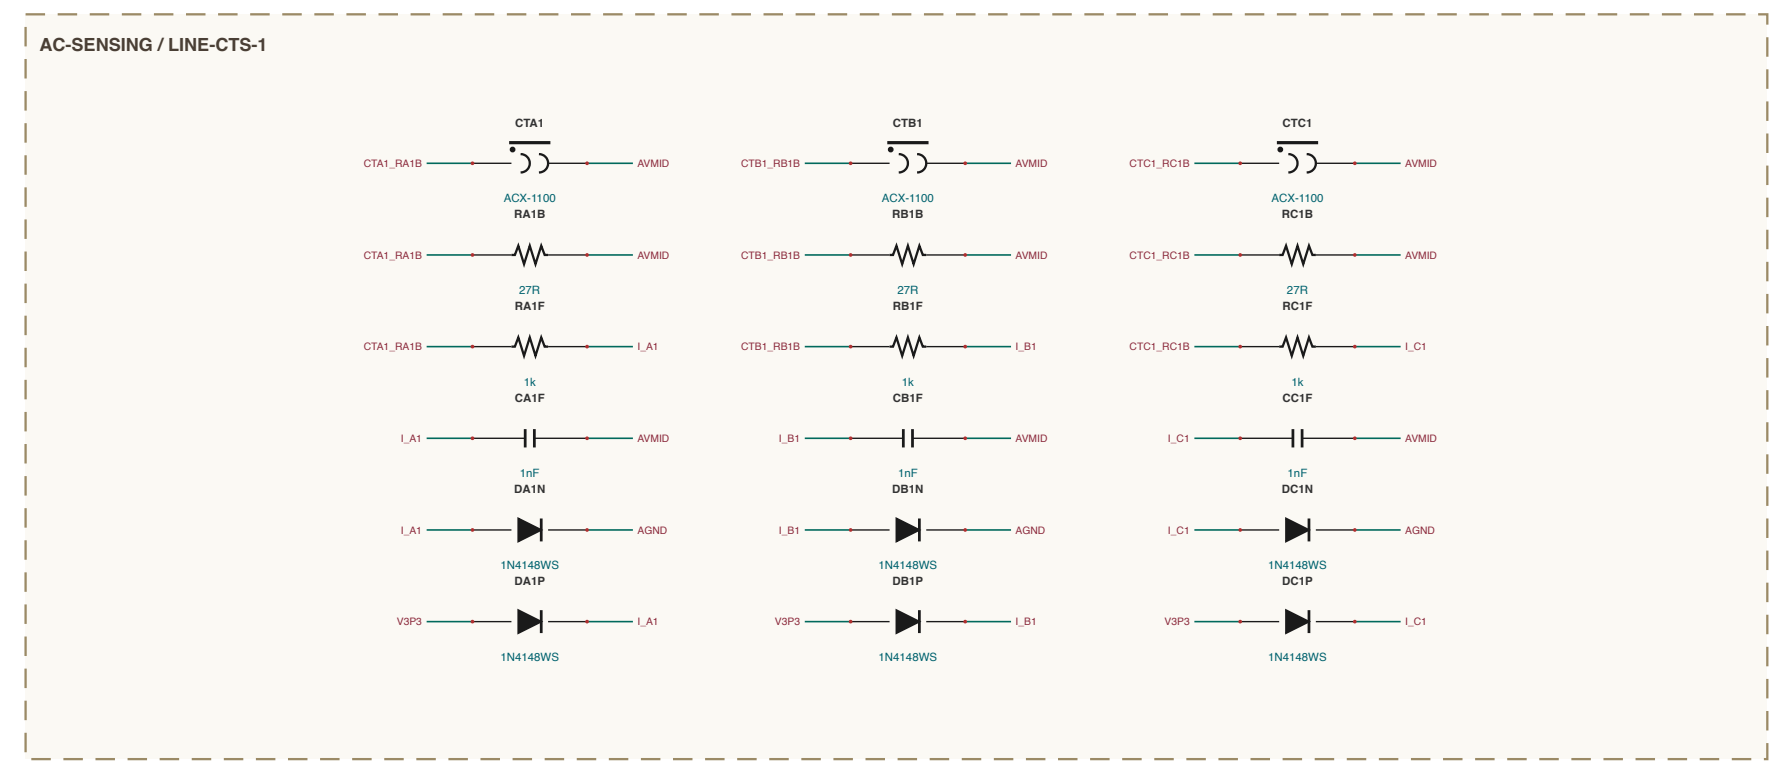
AC-SENSING / LINE-CTS-1

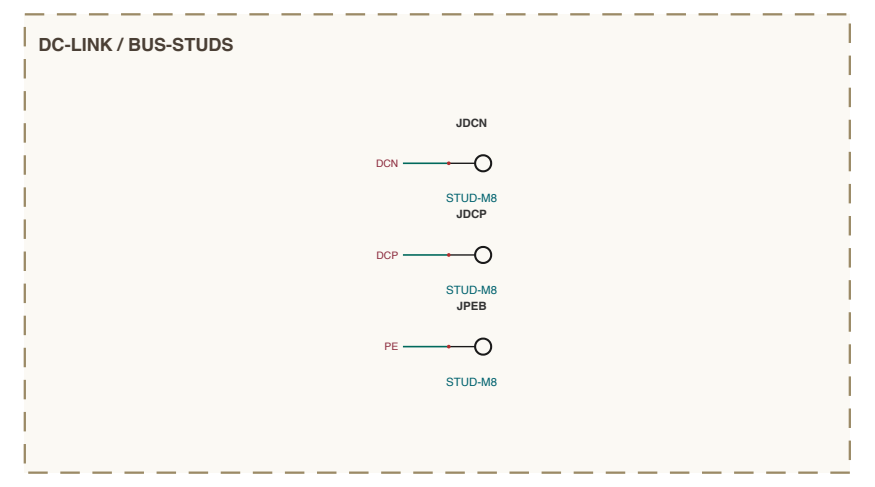
DC-LINK / BUS-STUDS

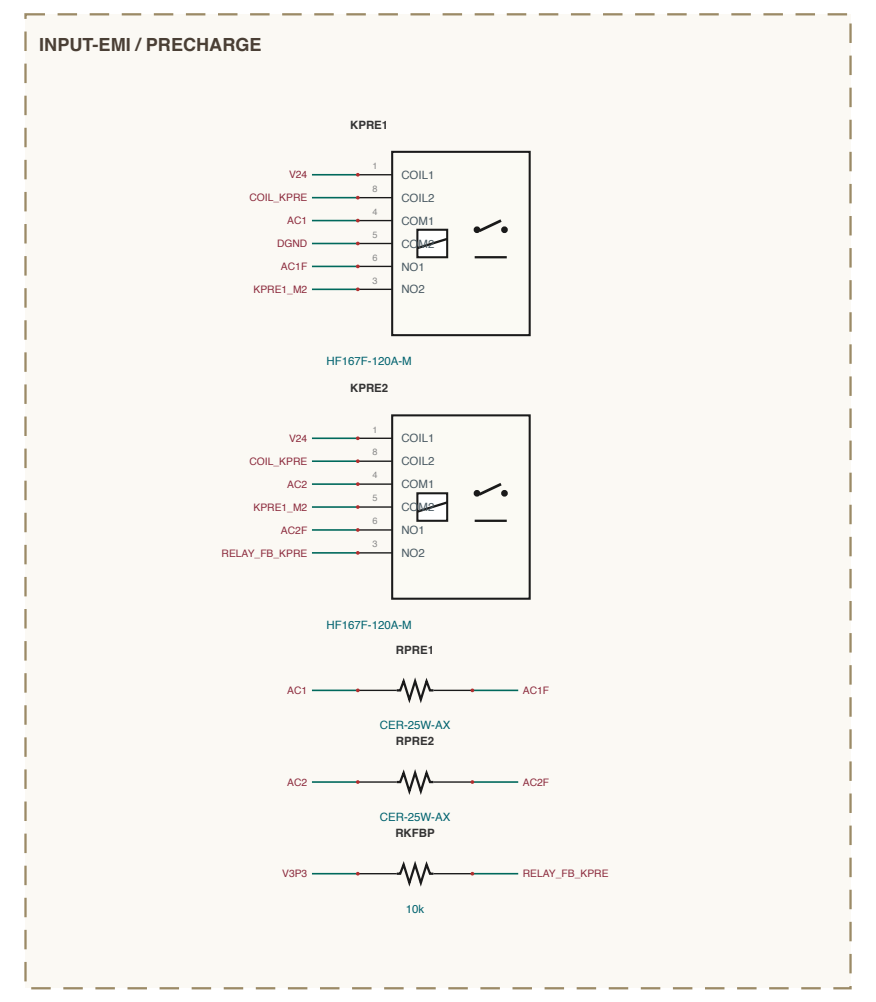
INPUT-EMI / PRECHARGE

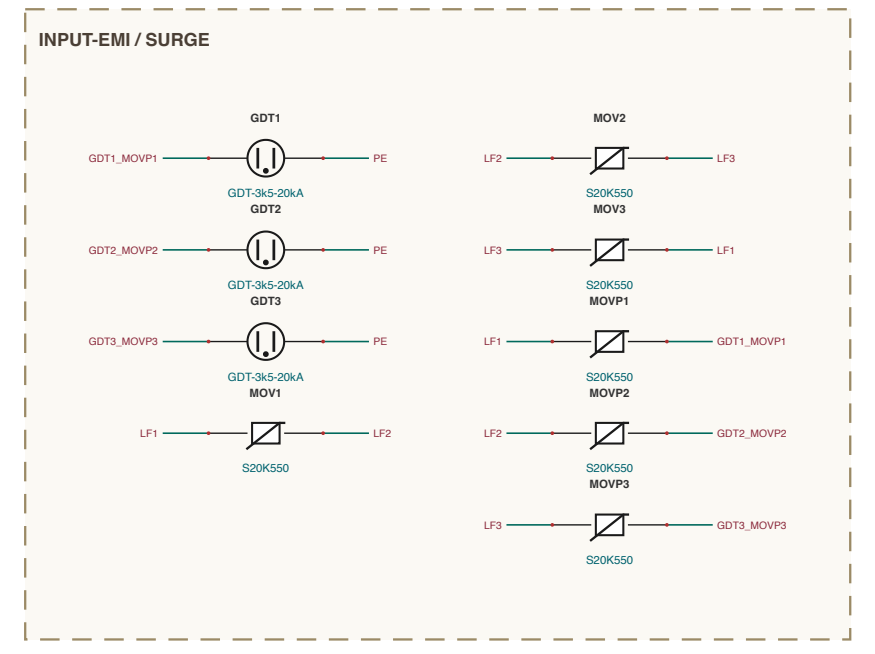
INPUT-EMI / SURGE

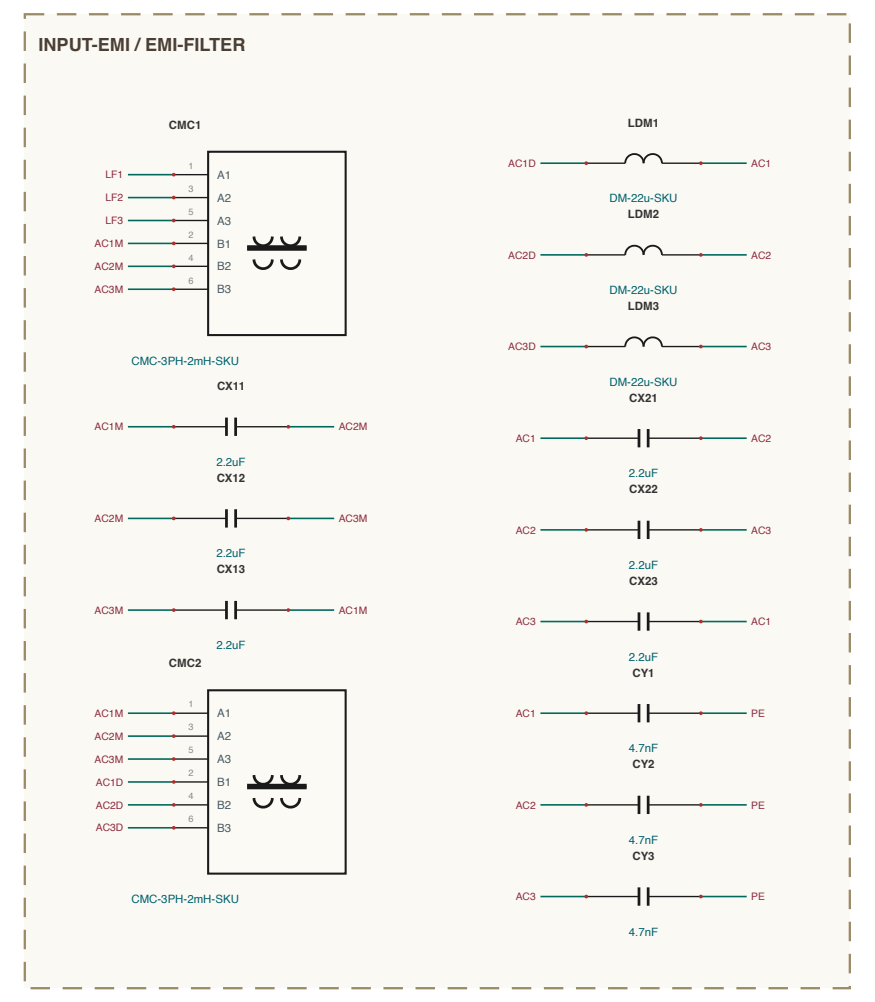
INPUT-EMI / EMI-FILTER

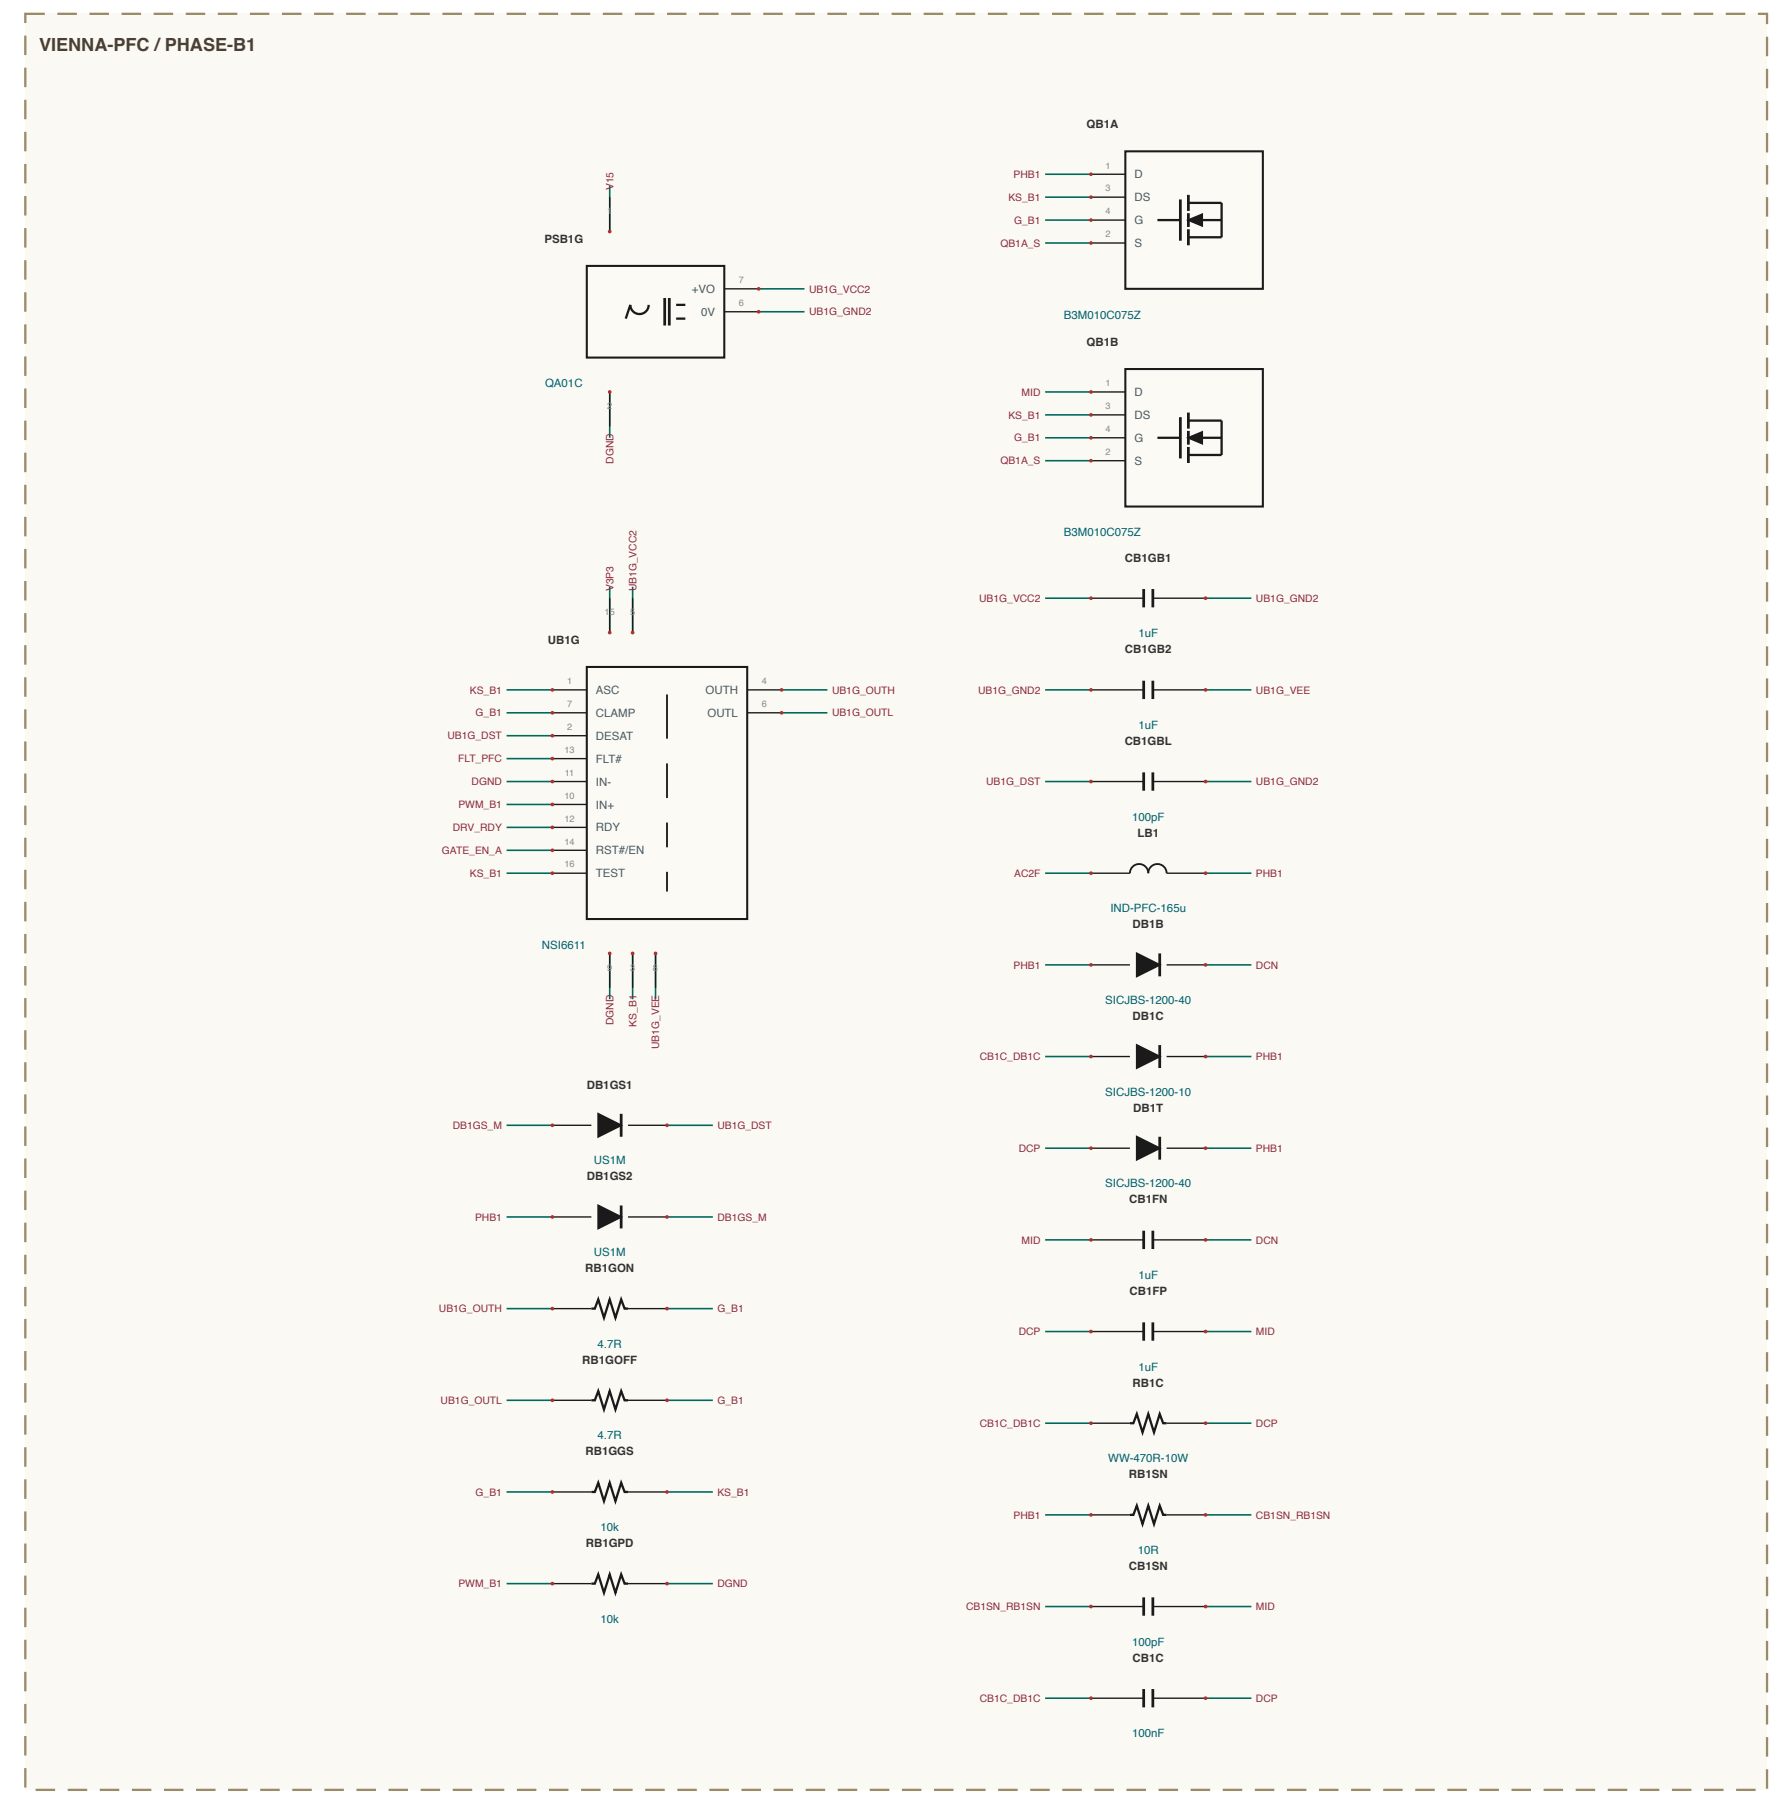
VIENNA-PFC / PHASE-B1

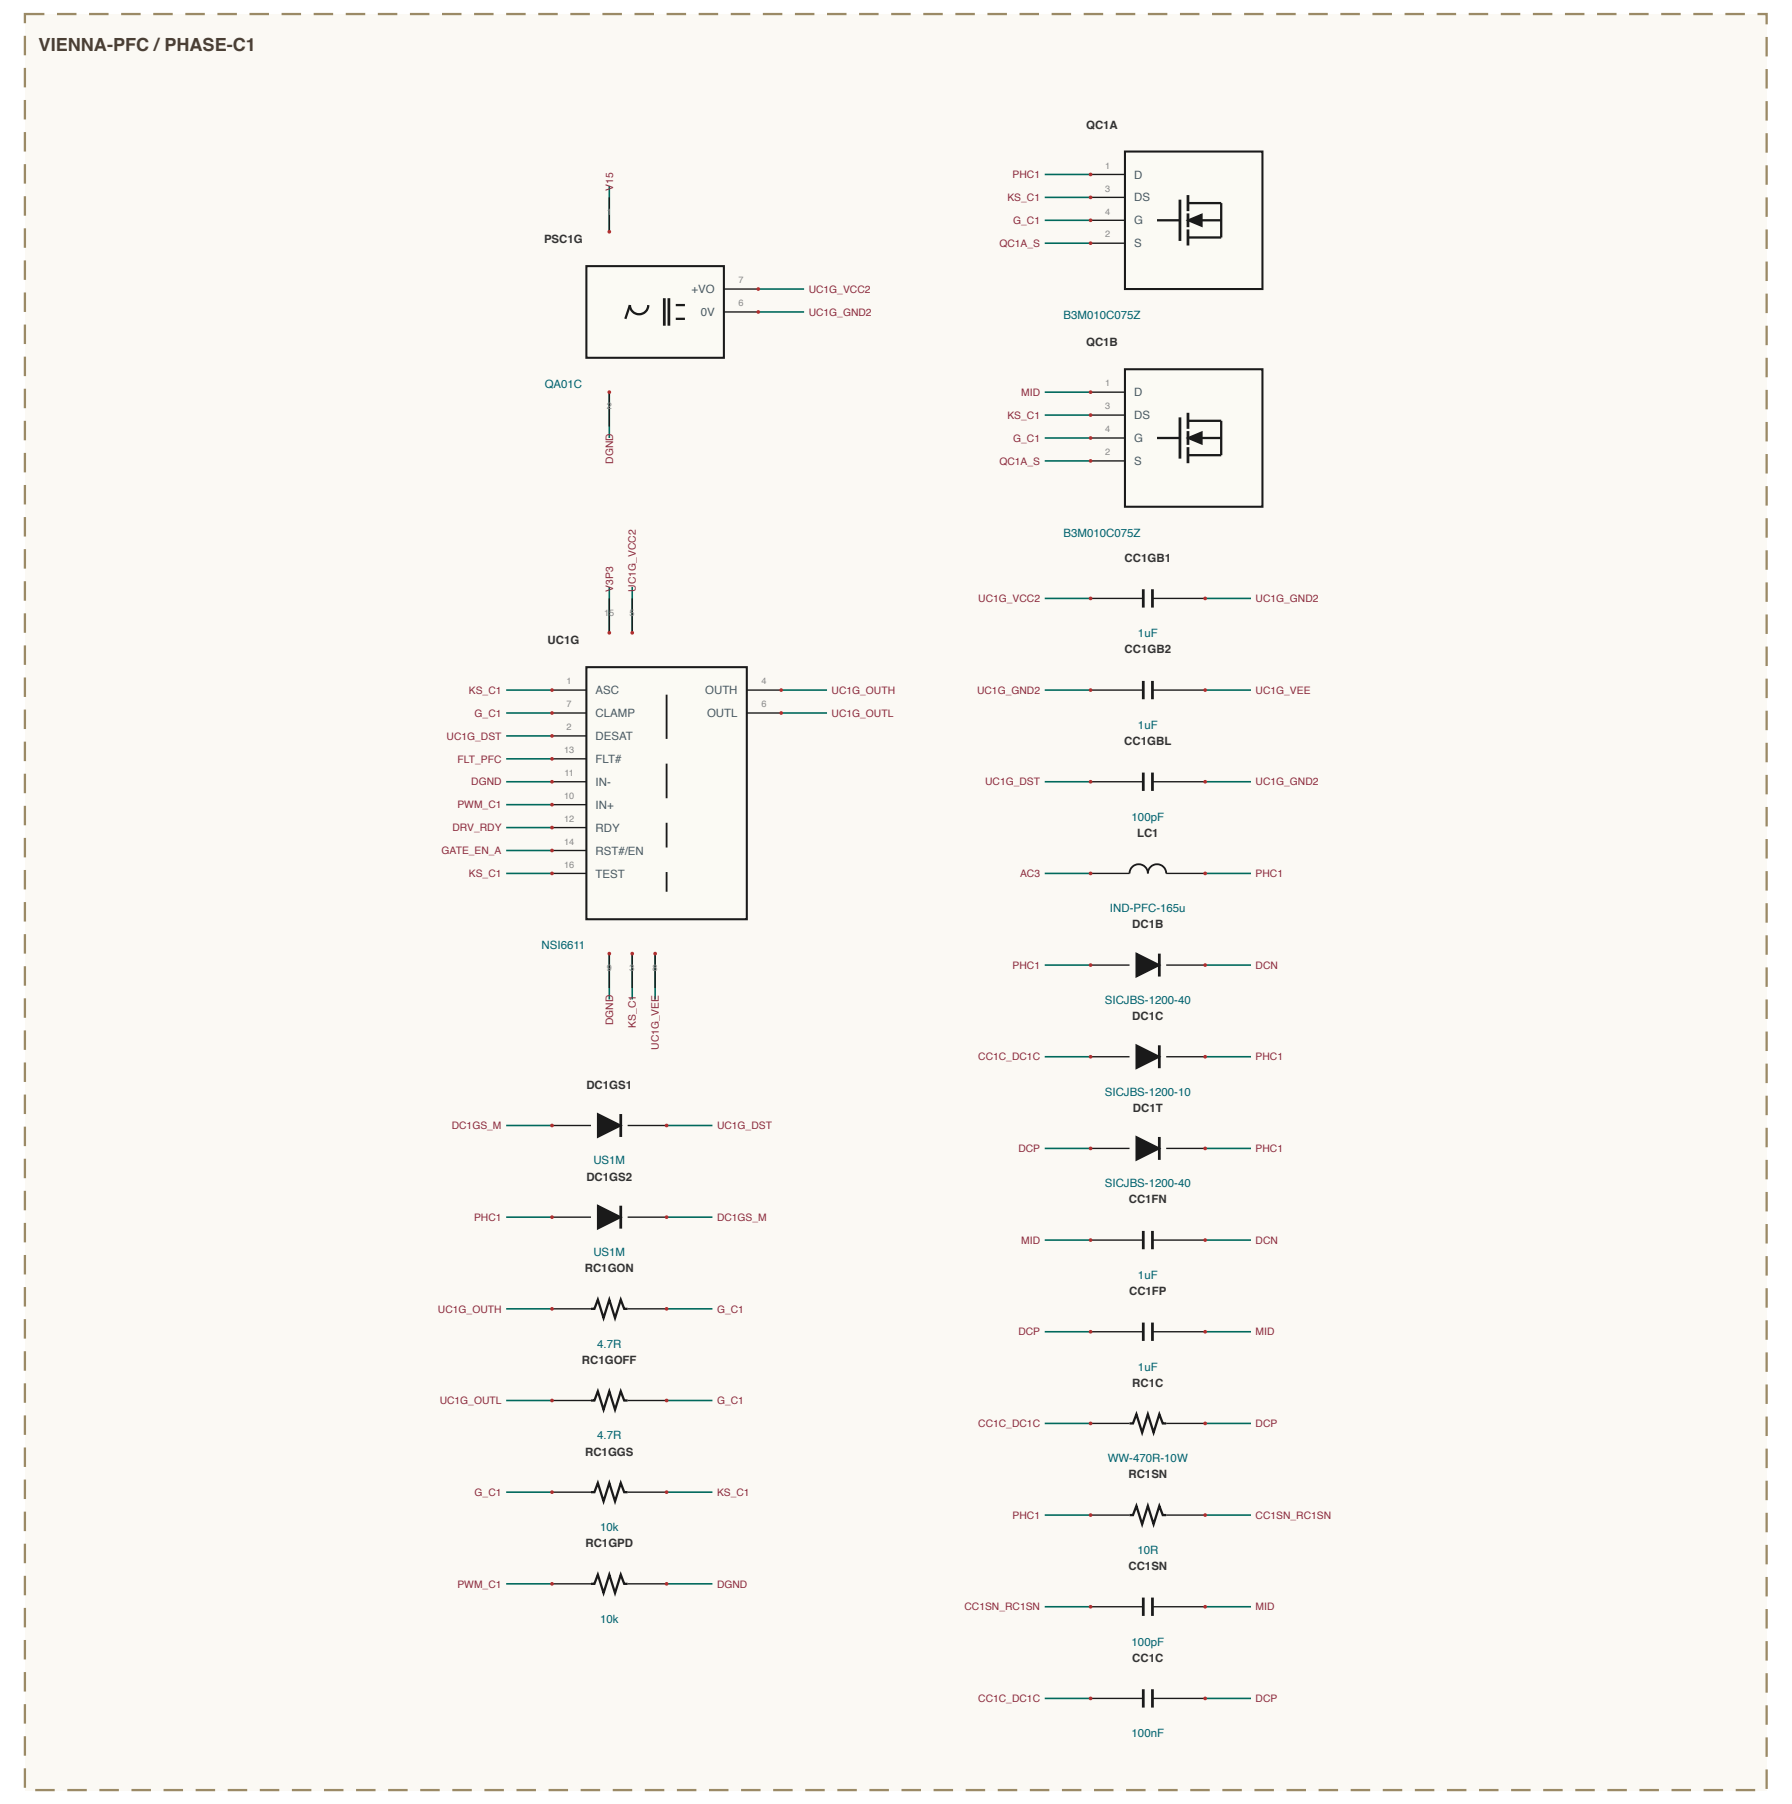
VIENNA-PFC / PHASE-C1

SHEET INDEX

60 kW AC-DC (lower) - 1 of 3

AC-SENSING - 10 sections

VIENNA-PFC - 6 sections

AUX-POWER - 4 sections

CONTROL - 4 sections

DC-LINK - 4 sections

INPUT-EMI - 4 sections

rev D.3 - 32 sections - 370 components

NET NAMING

internal junctions are named for what they join

U<ref>_<PIN> node at that IC pin e.g. UIVOA_VINP

R<stem>_M midpoint of a series pair e.g. RBALTA_M

R<stem>_<nm> tap between R<stem>n/m e.g. RV1D_01

all others are explicit design nets

DC-Modules 60 kW — AC-DC board (Vienna PFC, 2x cells)

DC-Modules 60 kW - board AC-DC (lower), sheet 1 of 3

2026-09-06 · rev D.3