
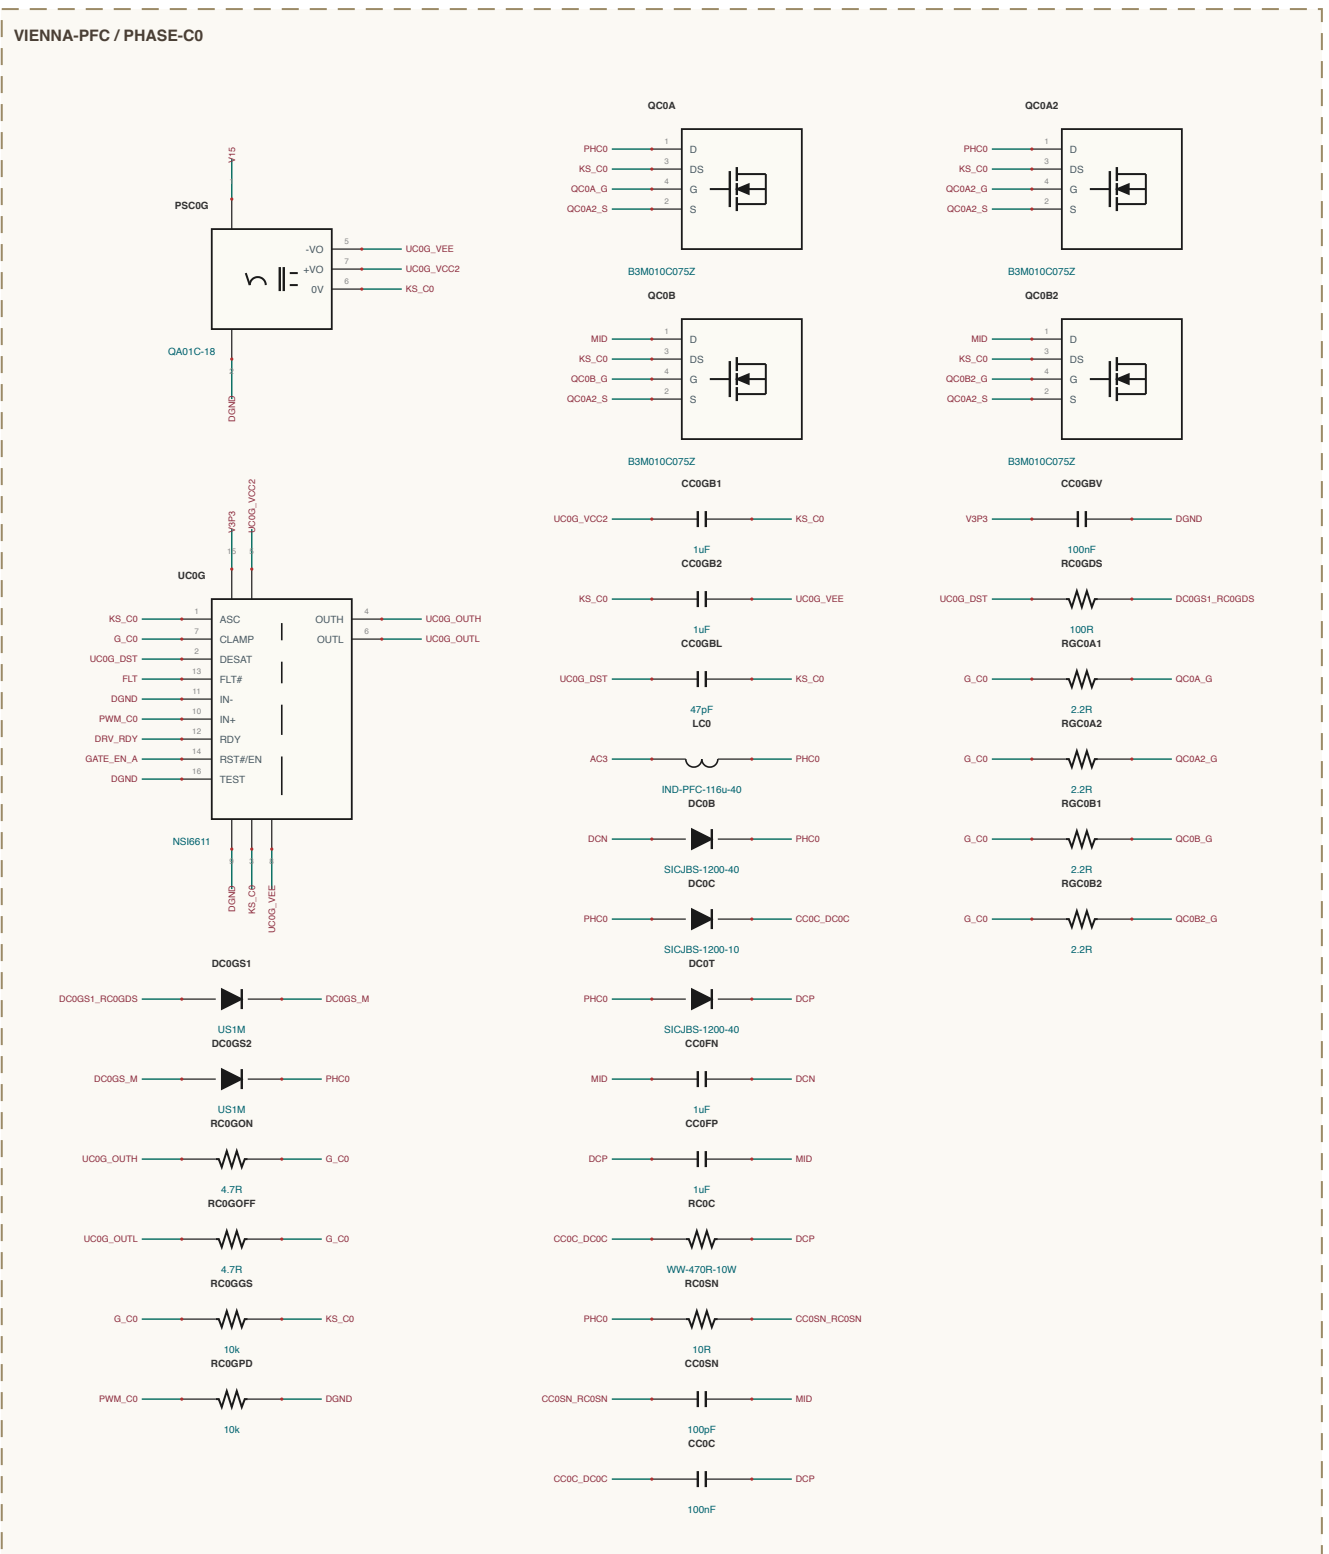
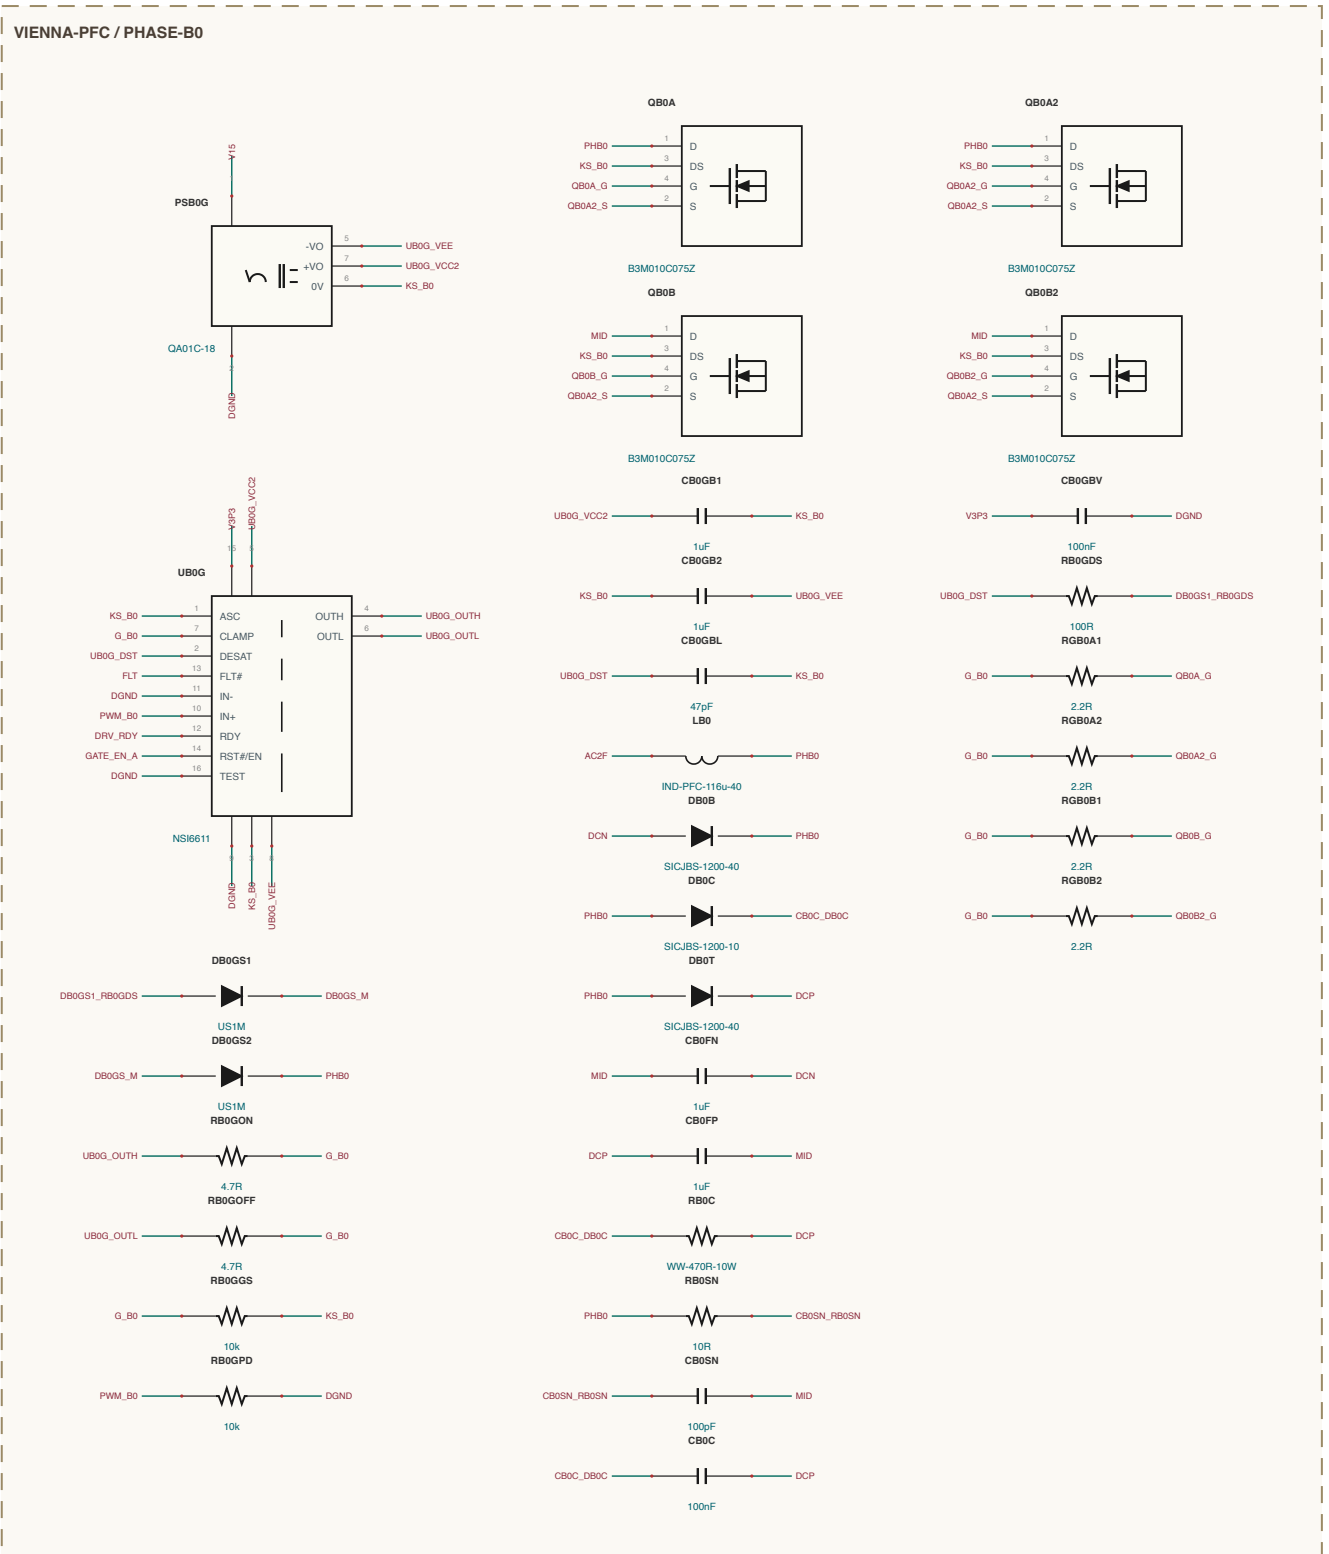
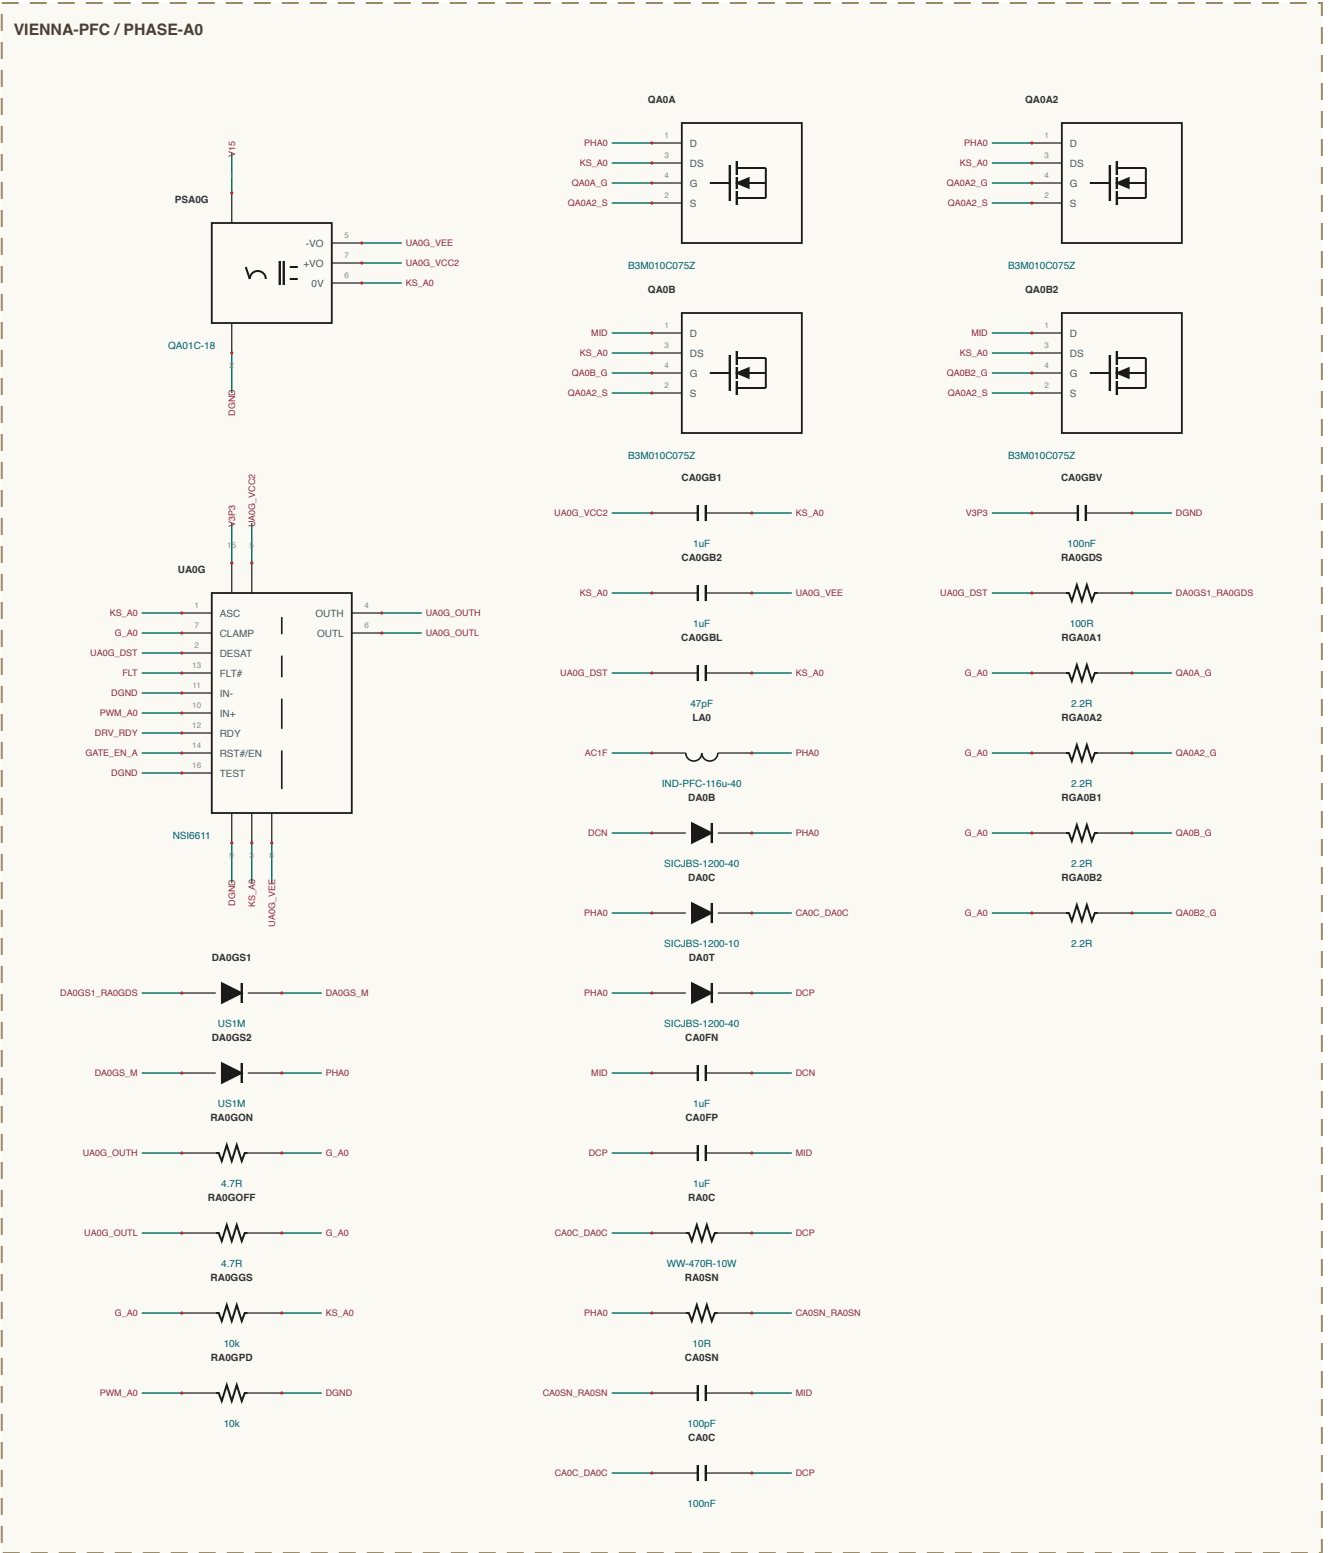
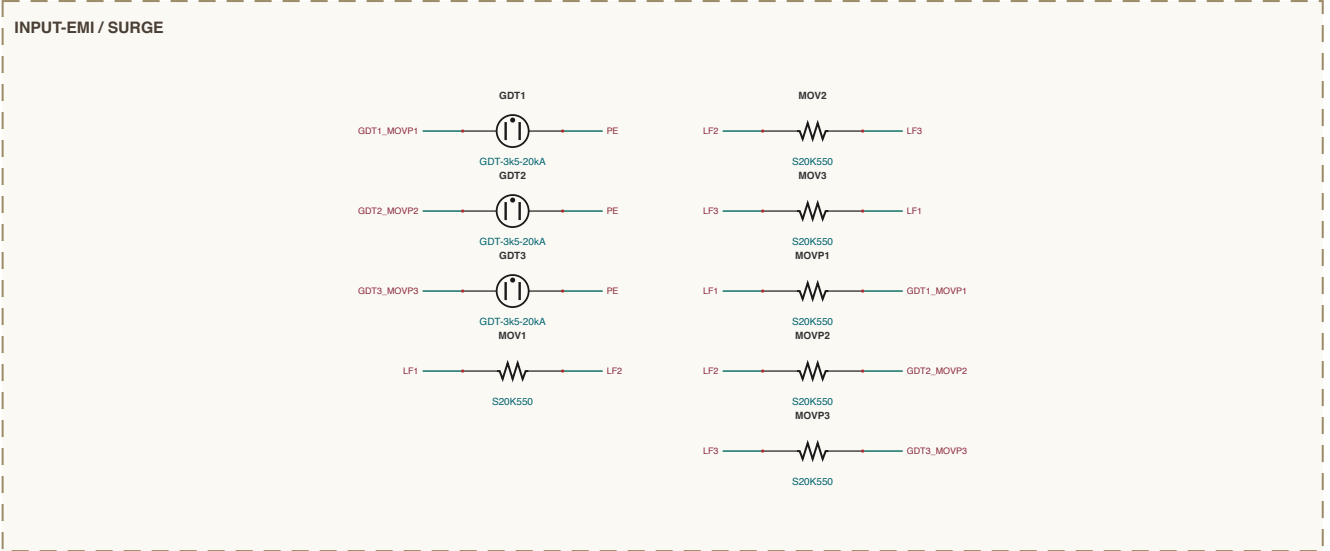
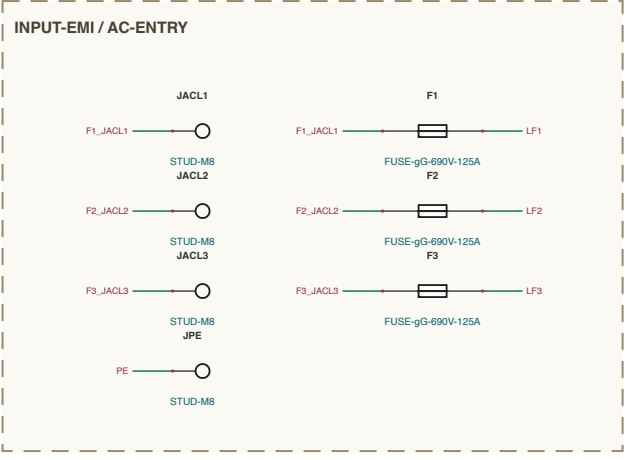
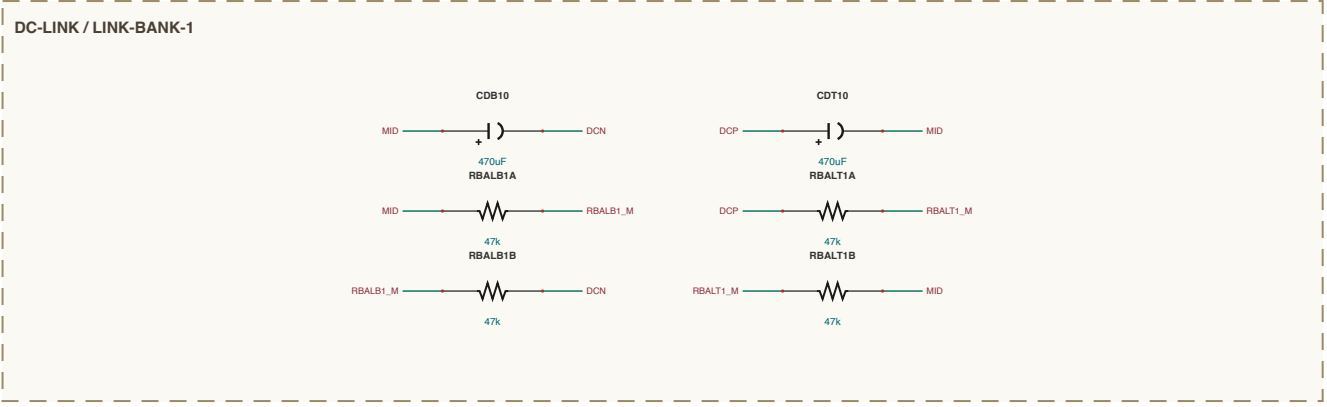
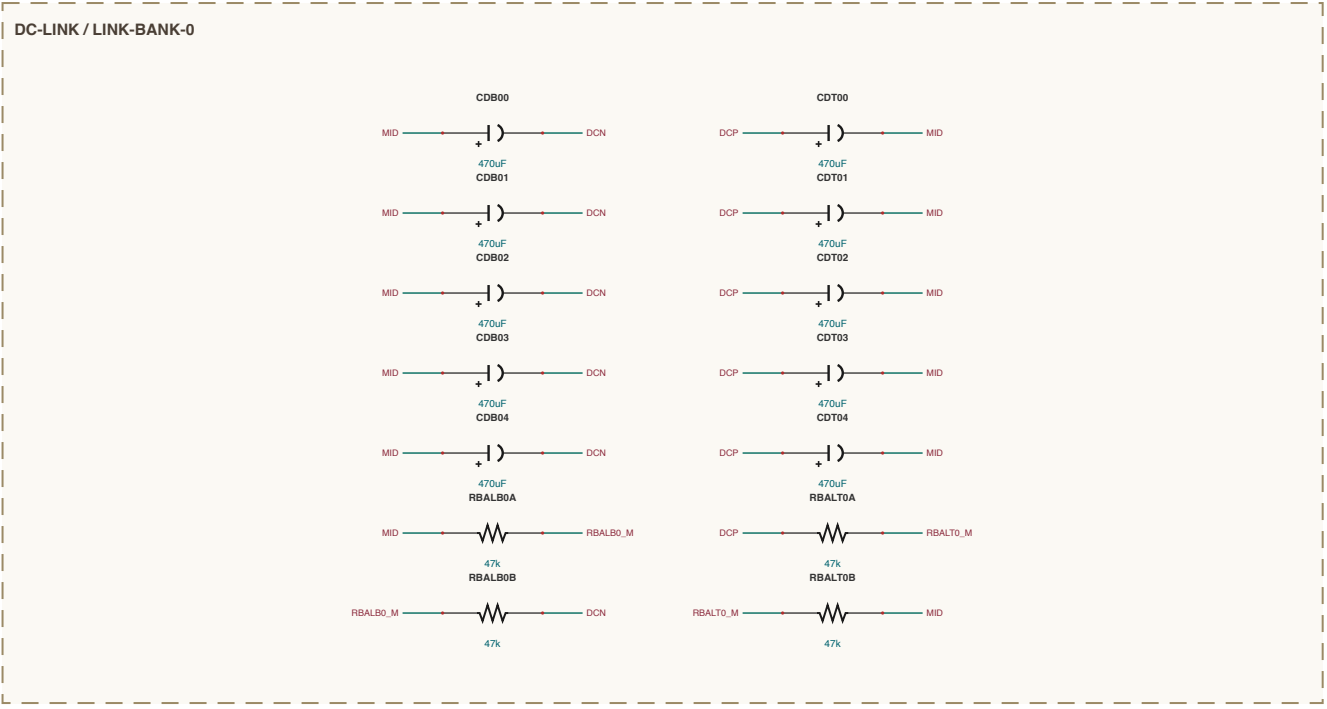
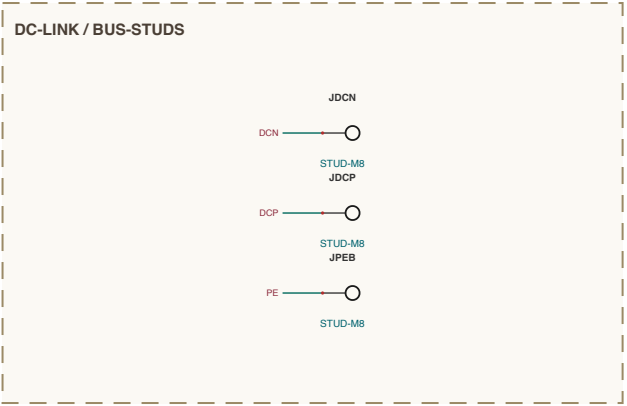
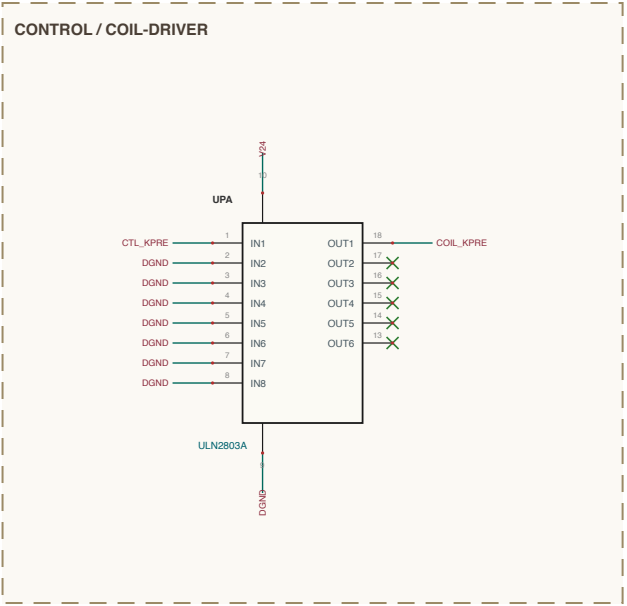
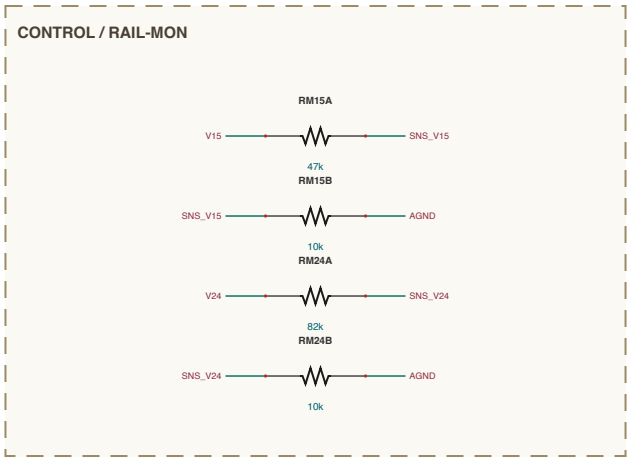
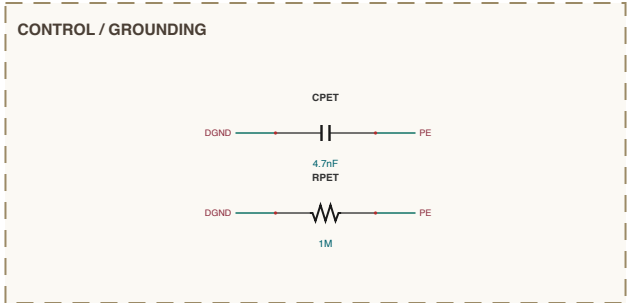
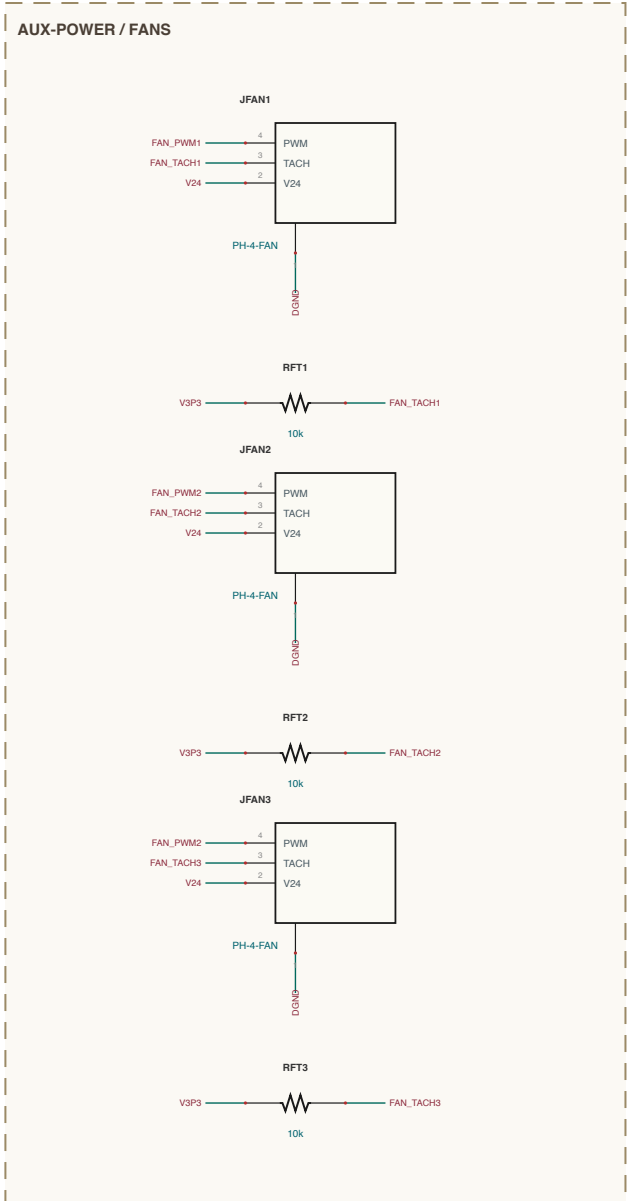
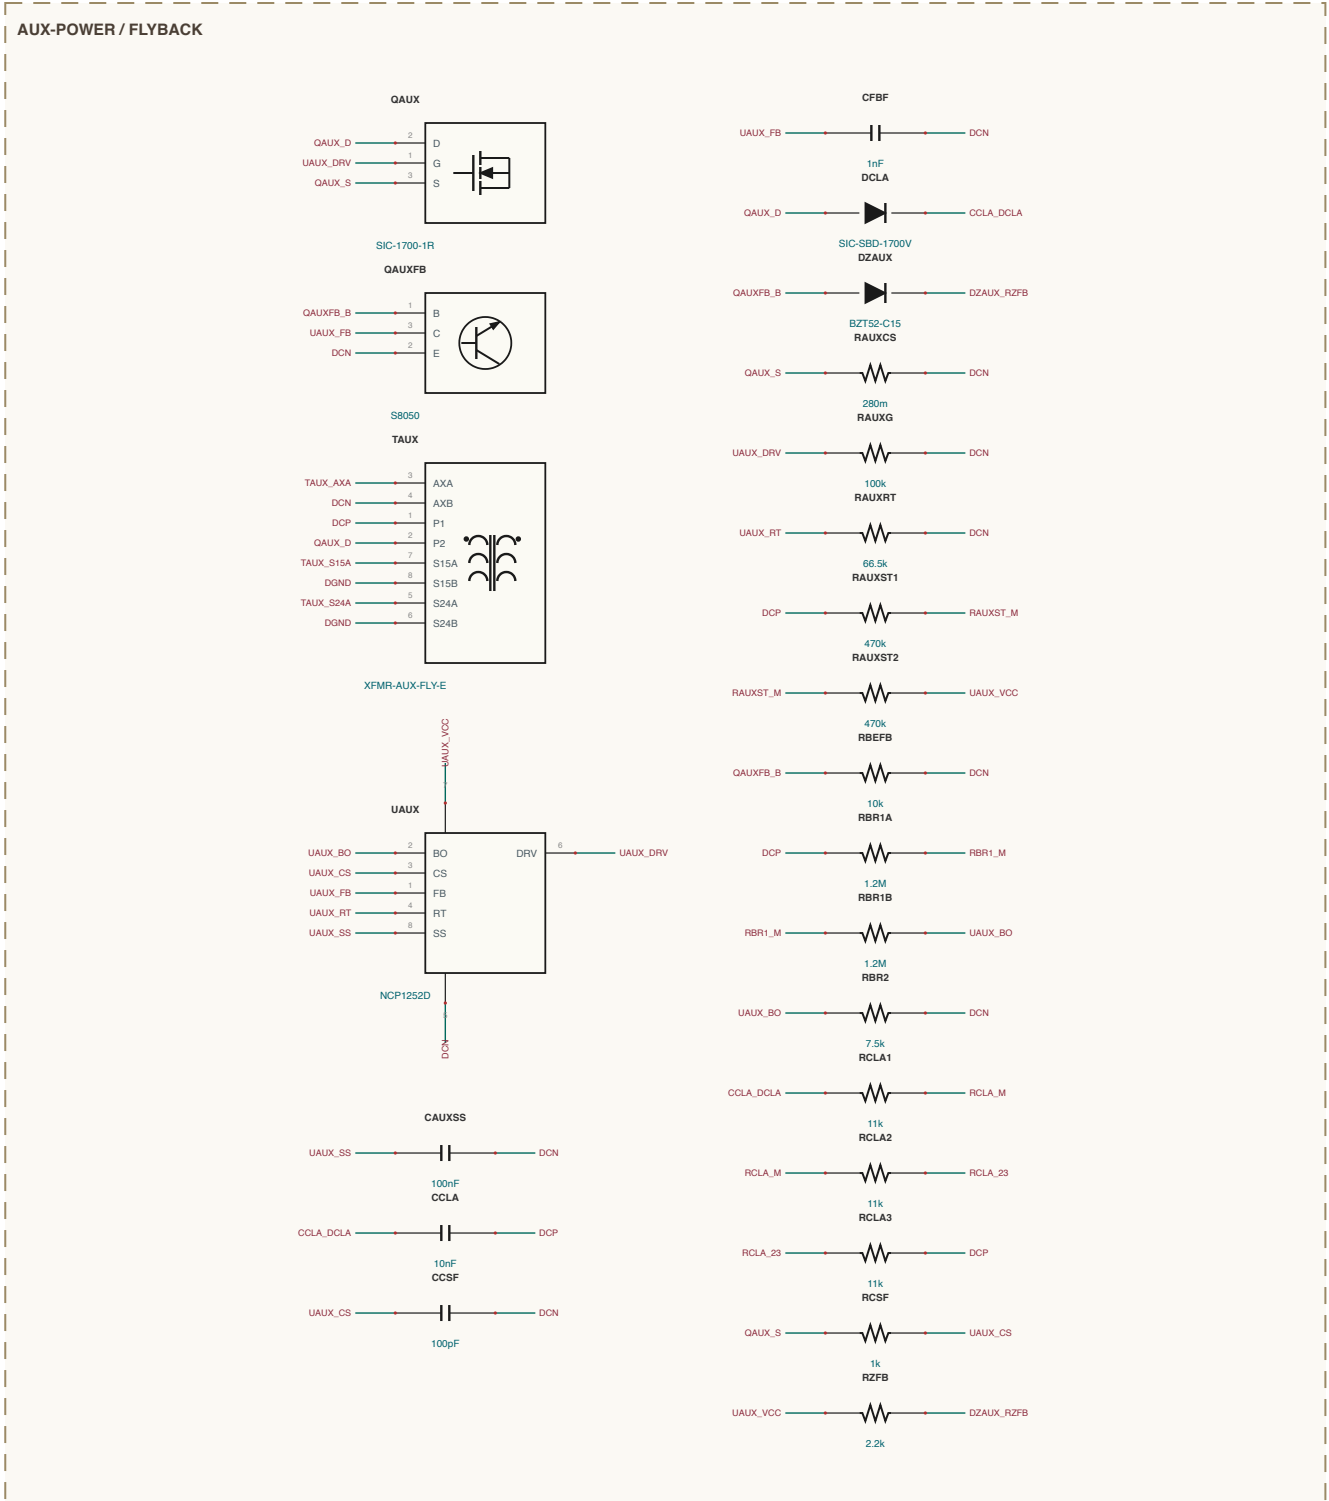
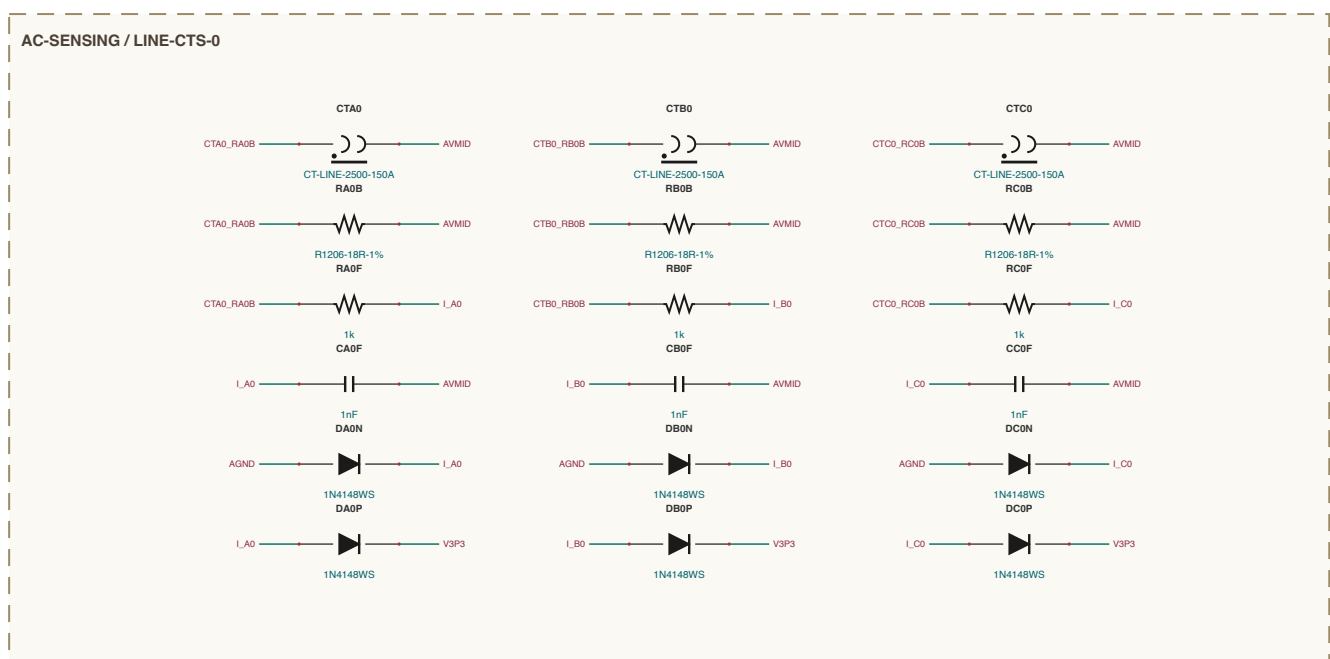
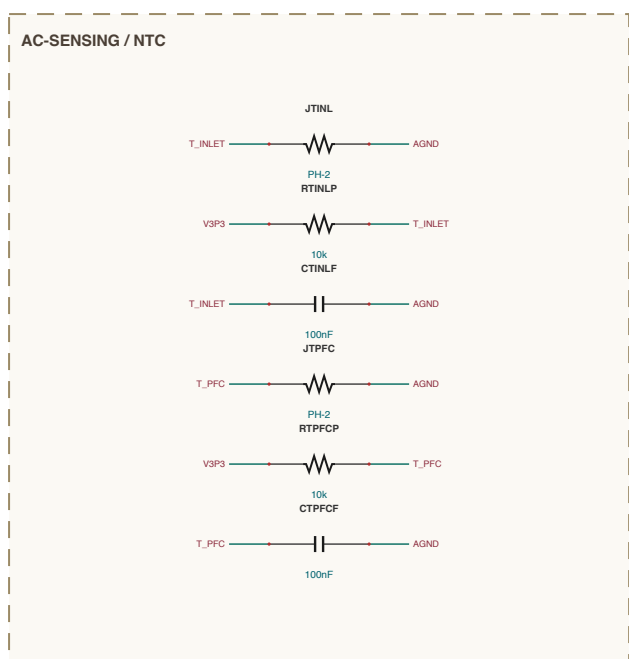
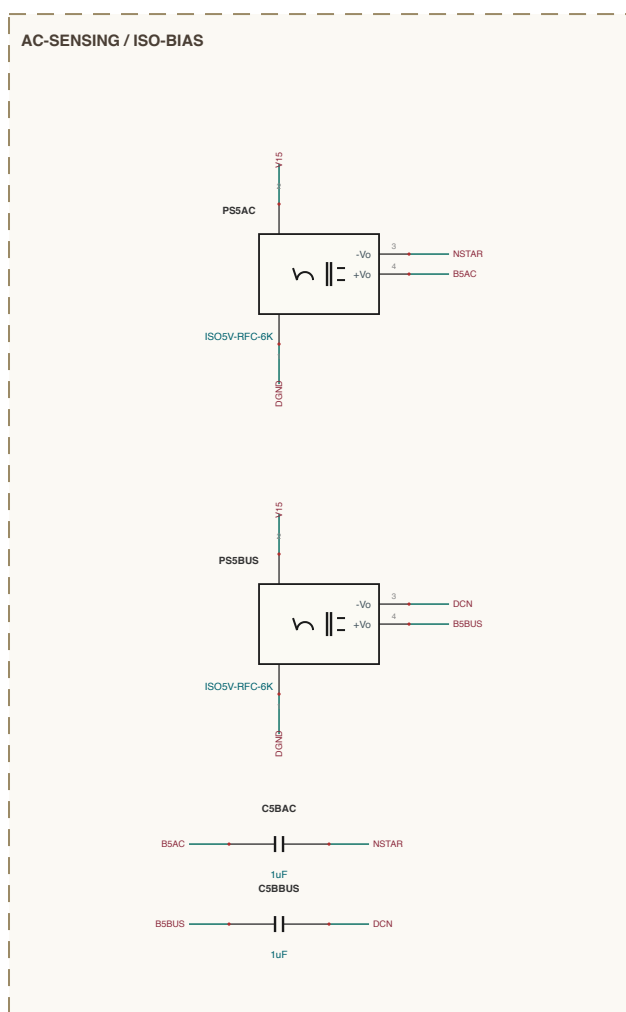
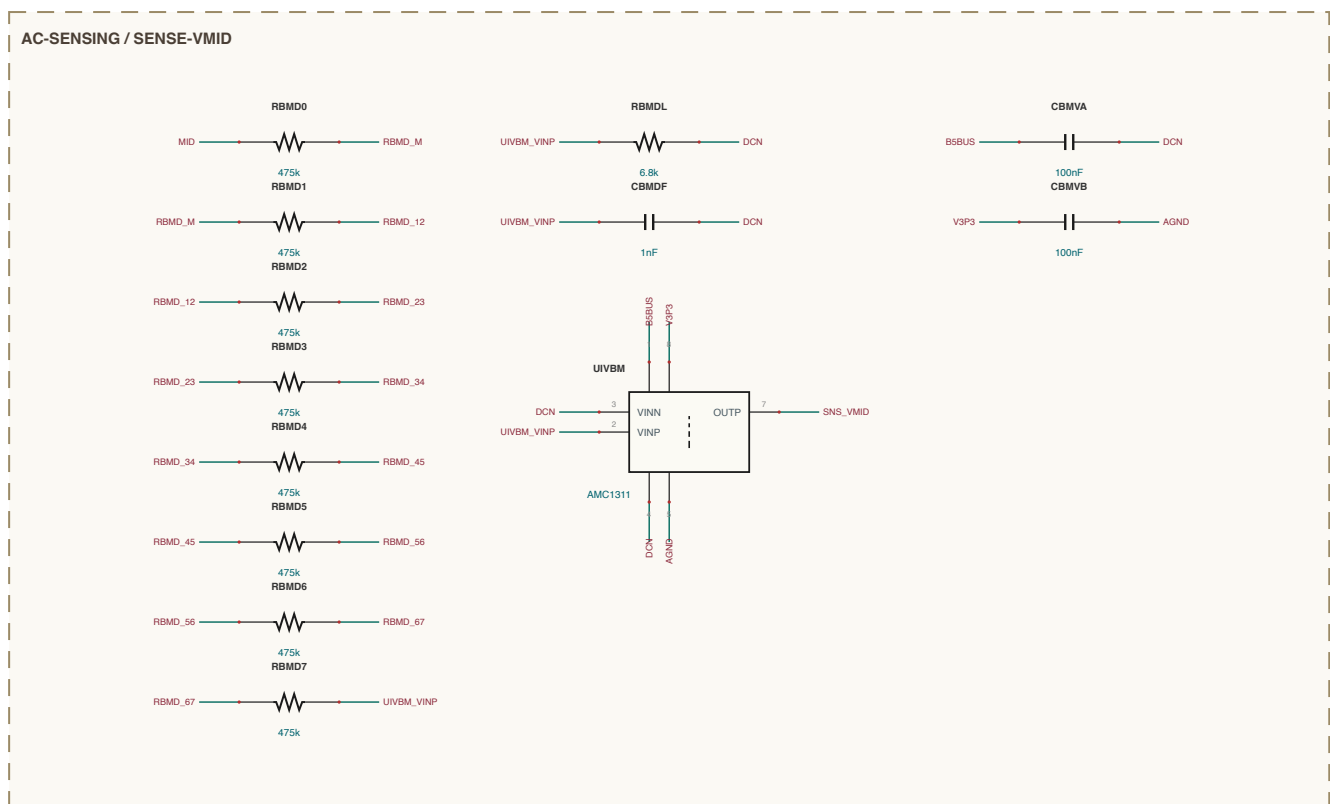
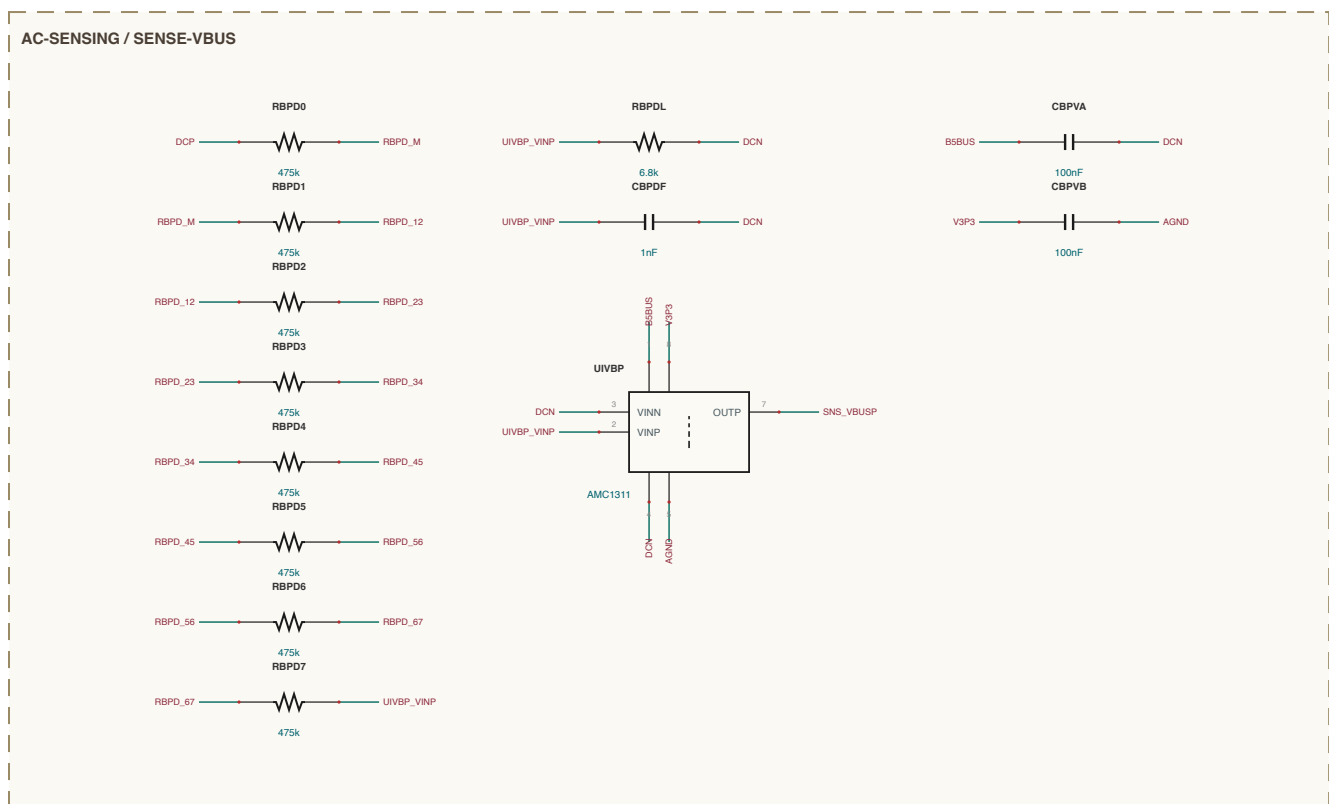
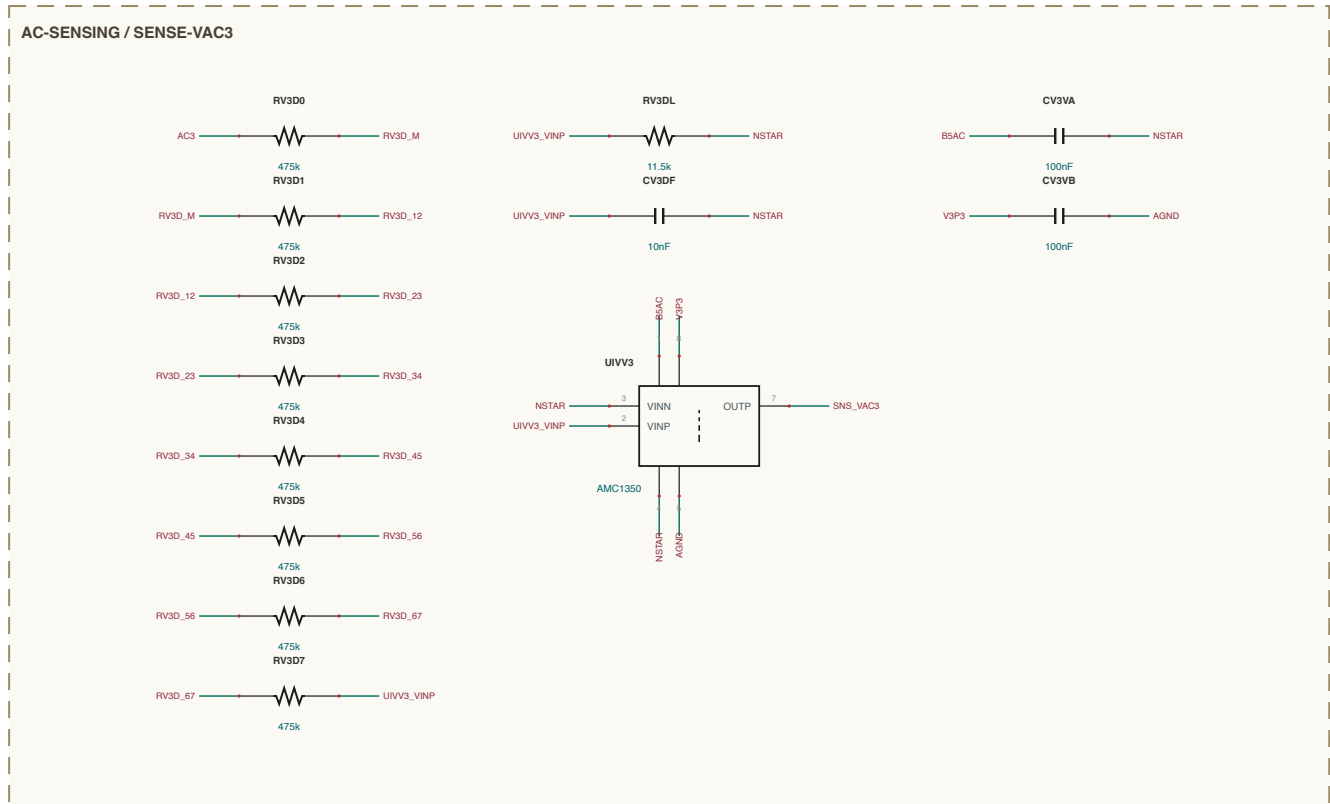
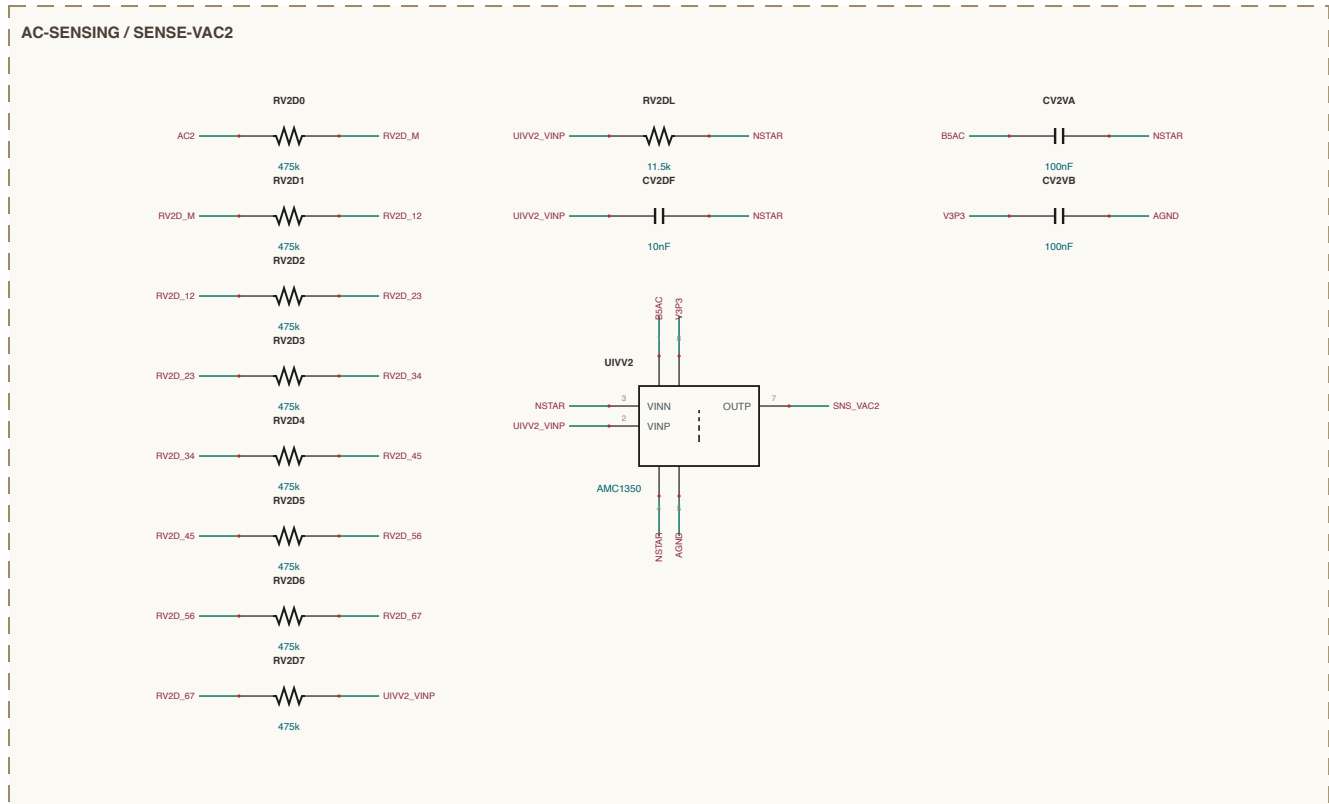
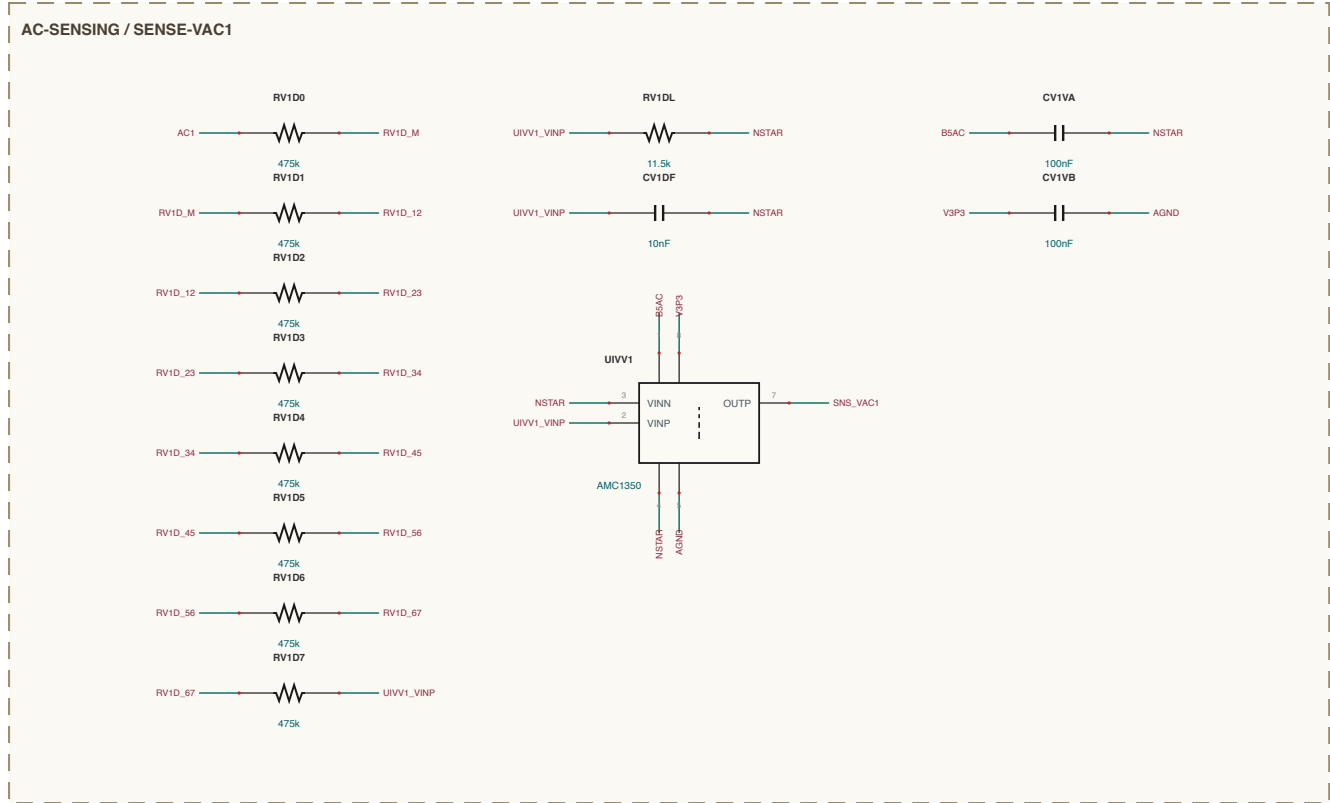


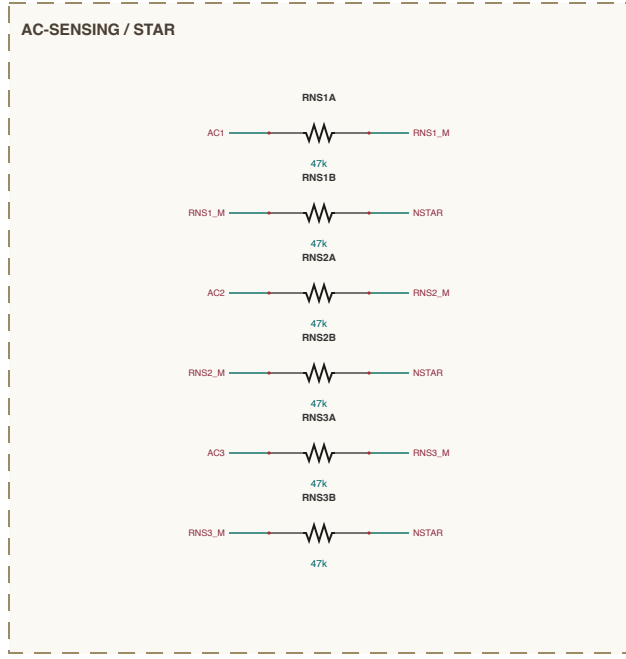

SHEET INDEX
REF AC-DC (lower) - 1 of 3
AC-SENSING - 9 sections
AUX-POWER - 5 sections
CONTROL - 4 sections
DC-LINK - 4 sections
INPUT-EM - 4 sections
VIENNA-PFC - 3 sections
ref 0.4 - 39 sections - 125 components

NET NAMING
Universal junctions are named for what they join
Symbol, offset, node or that of pin e.g. L1SENSE_VMP
Position: M, independent of a section point e.g. RSENSE_M
Position: unless tag between R and S e.g. R1S12_01
all others are explicit design rules

MAGNETICS CONSTRUCTION
Identify per electromagnetic and thermal, geo, tol, acceptance (from test notes)
01 LAR-LCS 16 80778847 Roubin (CATALOG ALU7), Node v1 161118A, out of 01184A, pin 0101
02 L0001-3, 3x T07 860, 16x, 38 16000 - 15 161118A, out of 01184A, pin 0101
03 or 04 161118A