
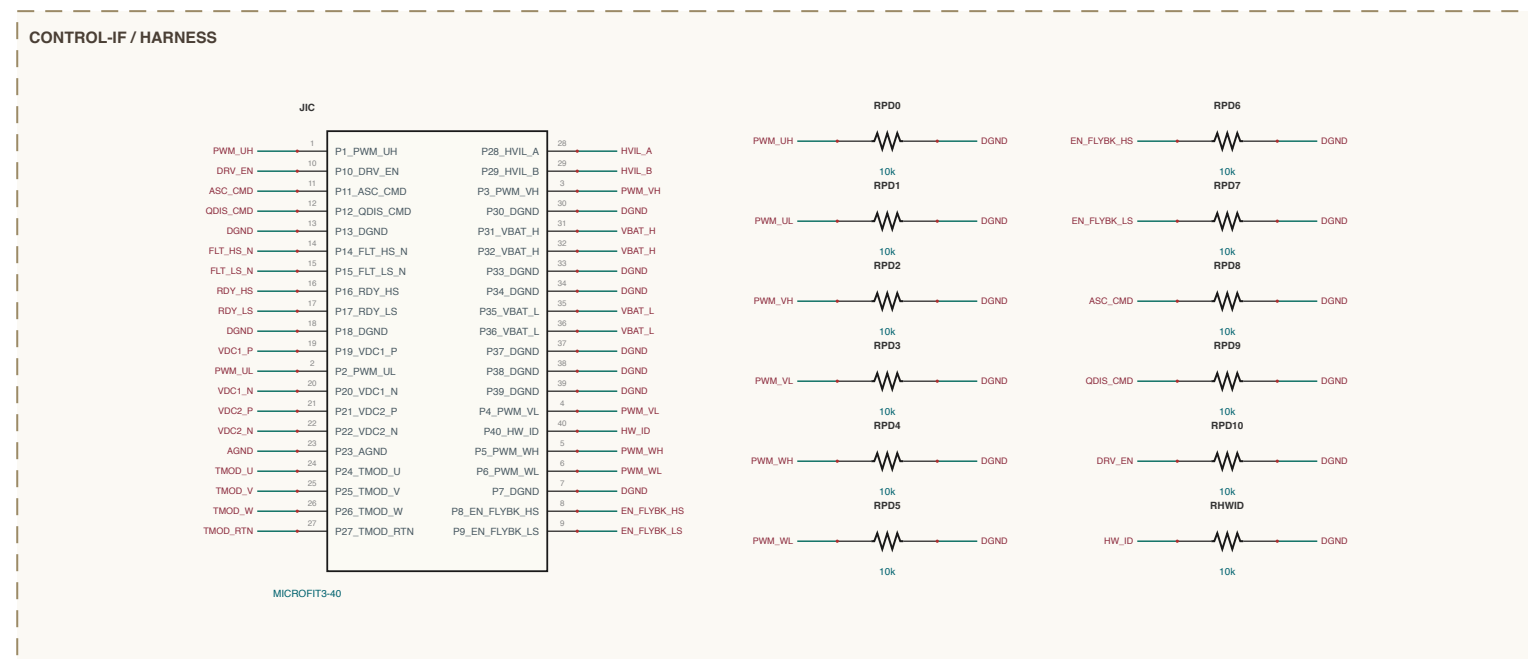
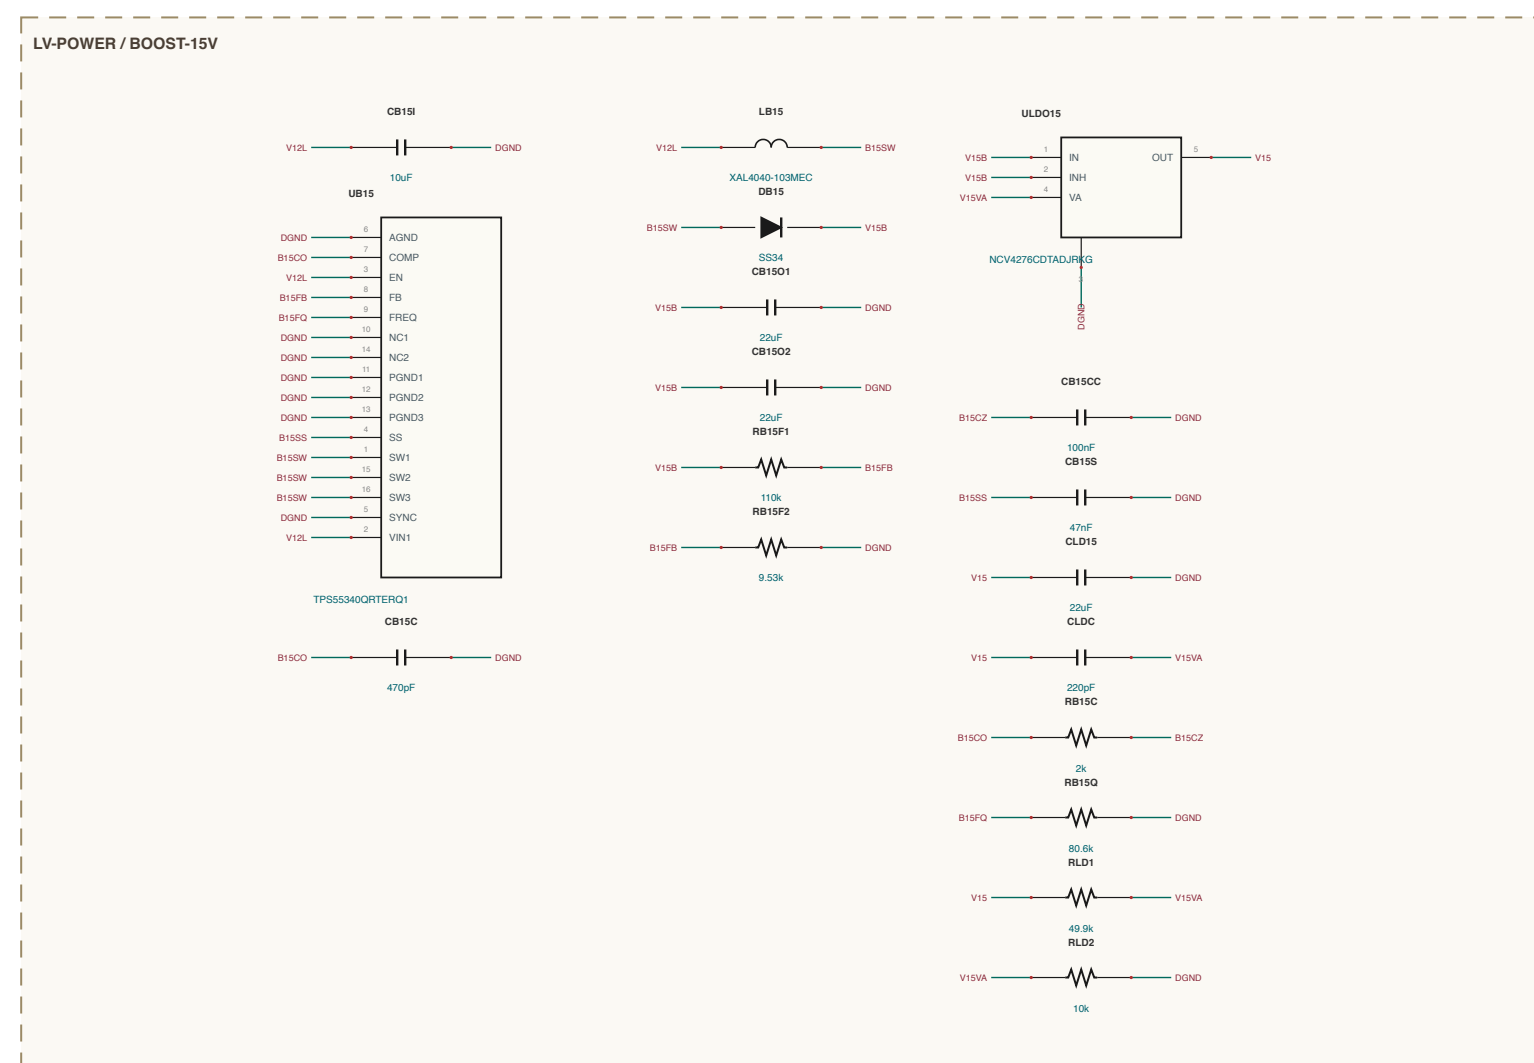
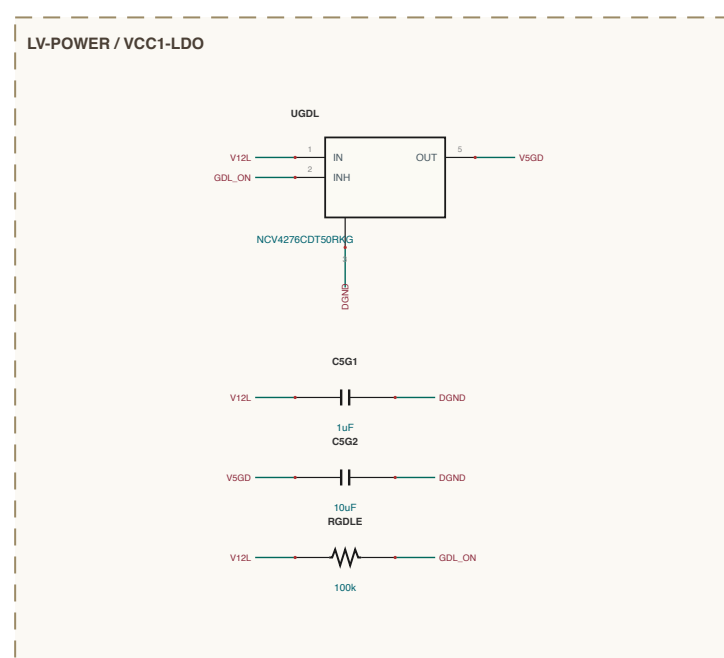
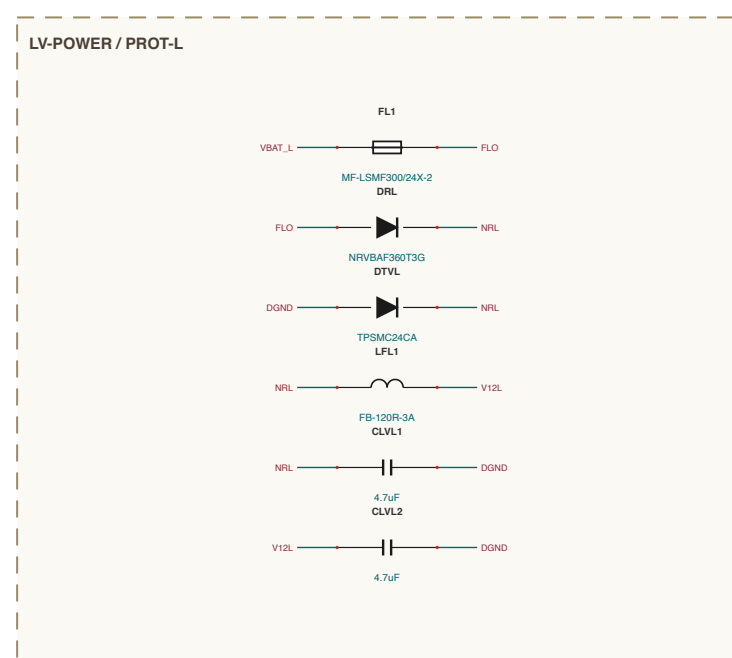
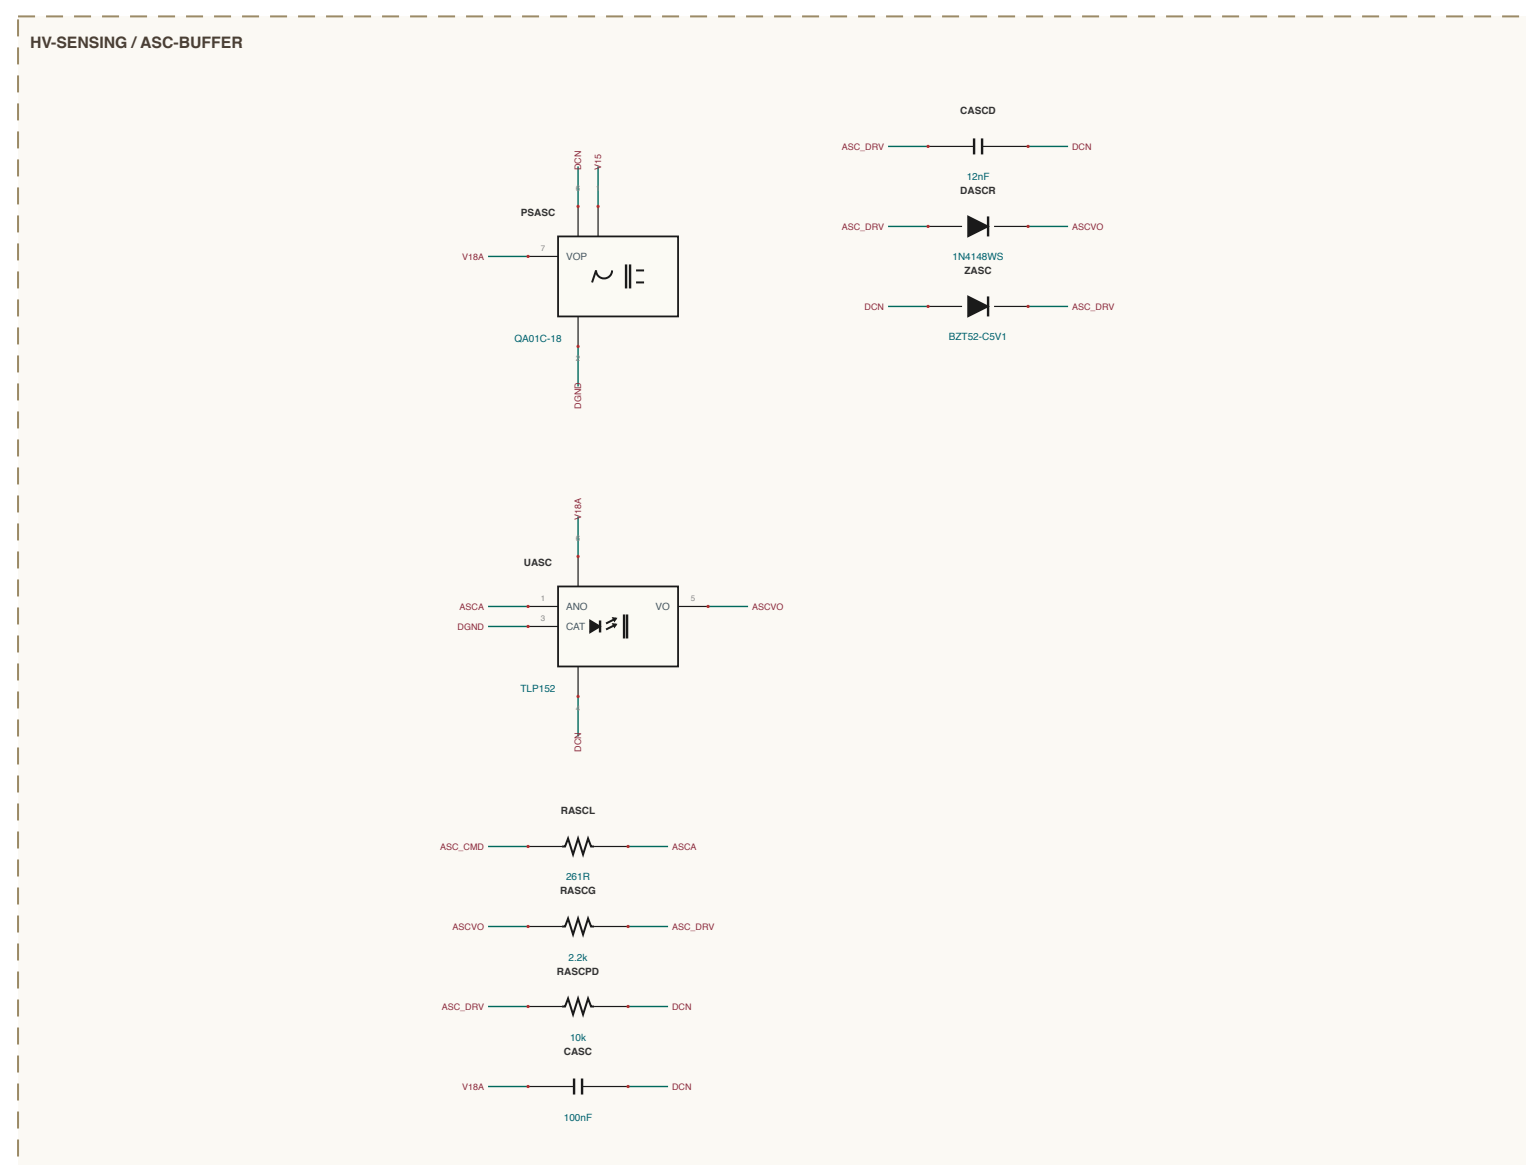
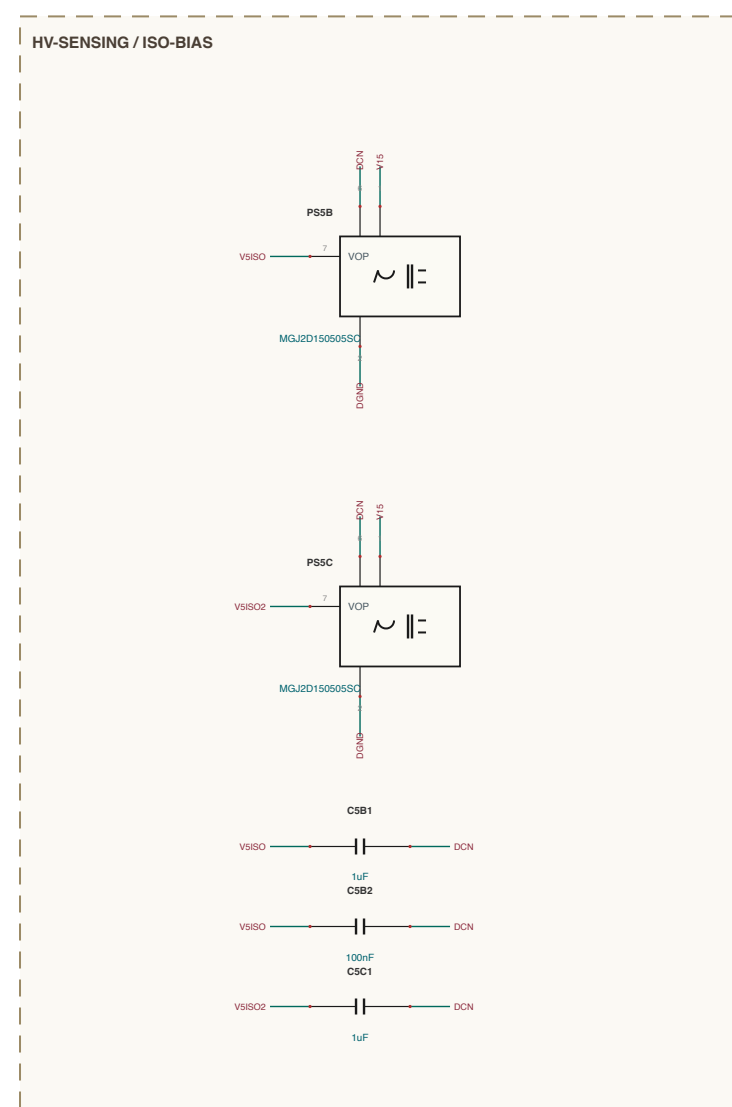
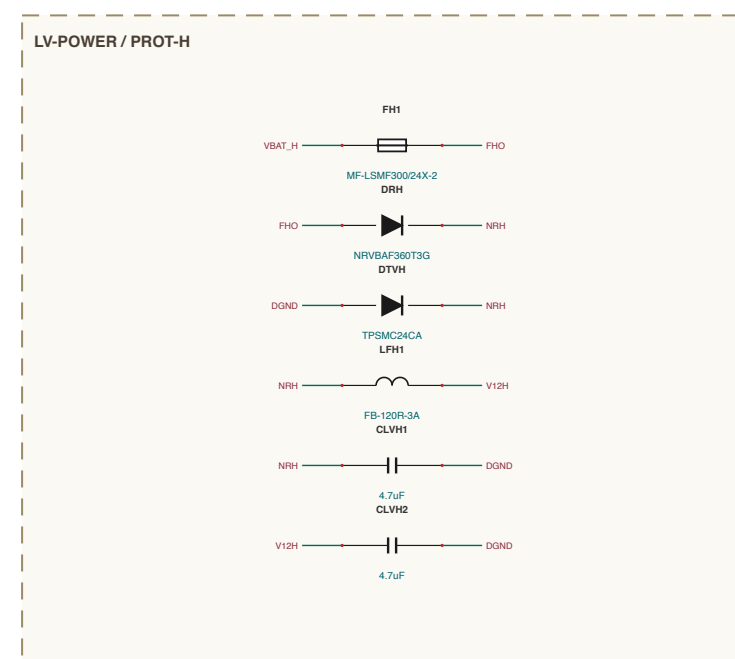
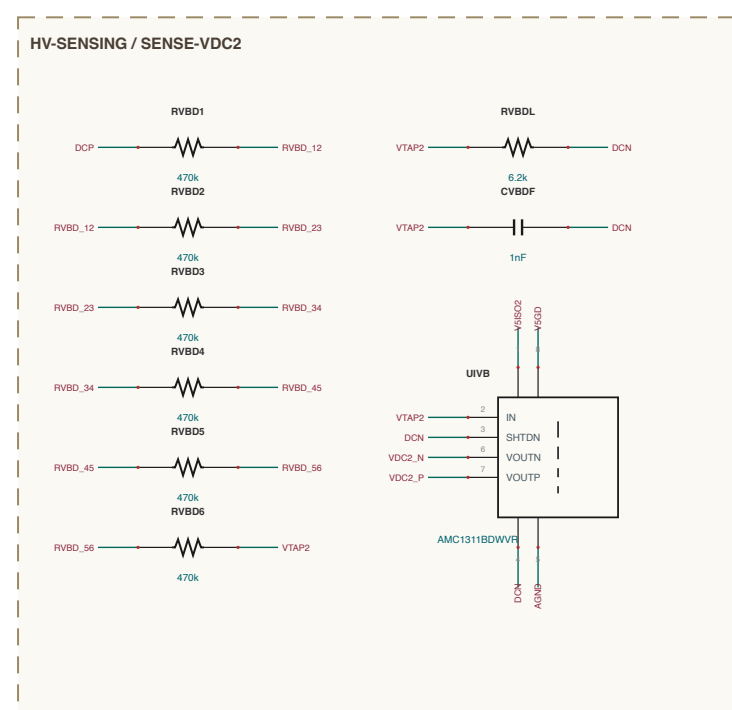
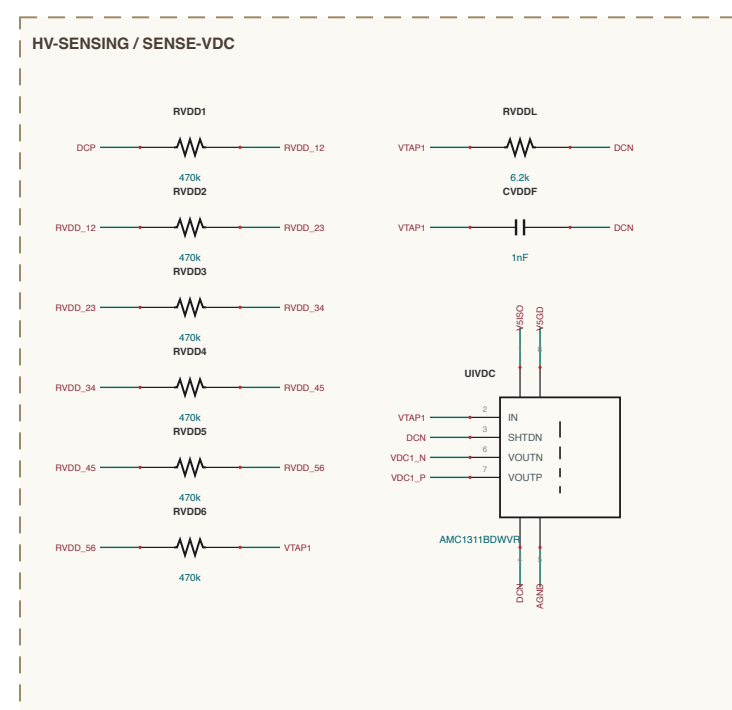
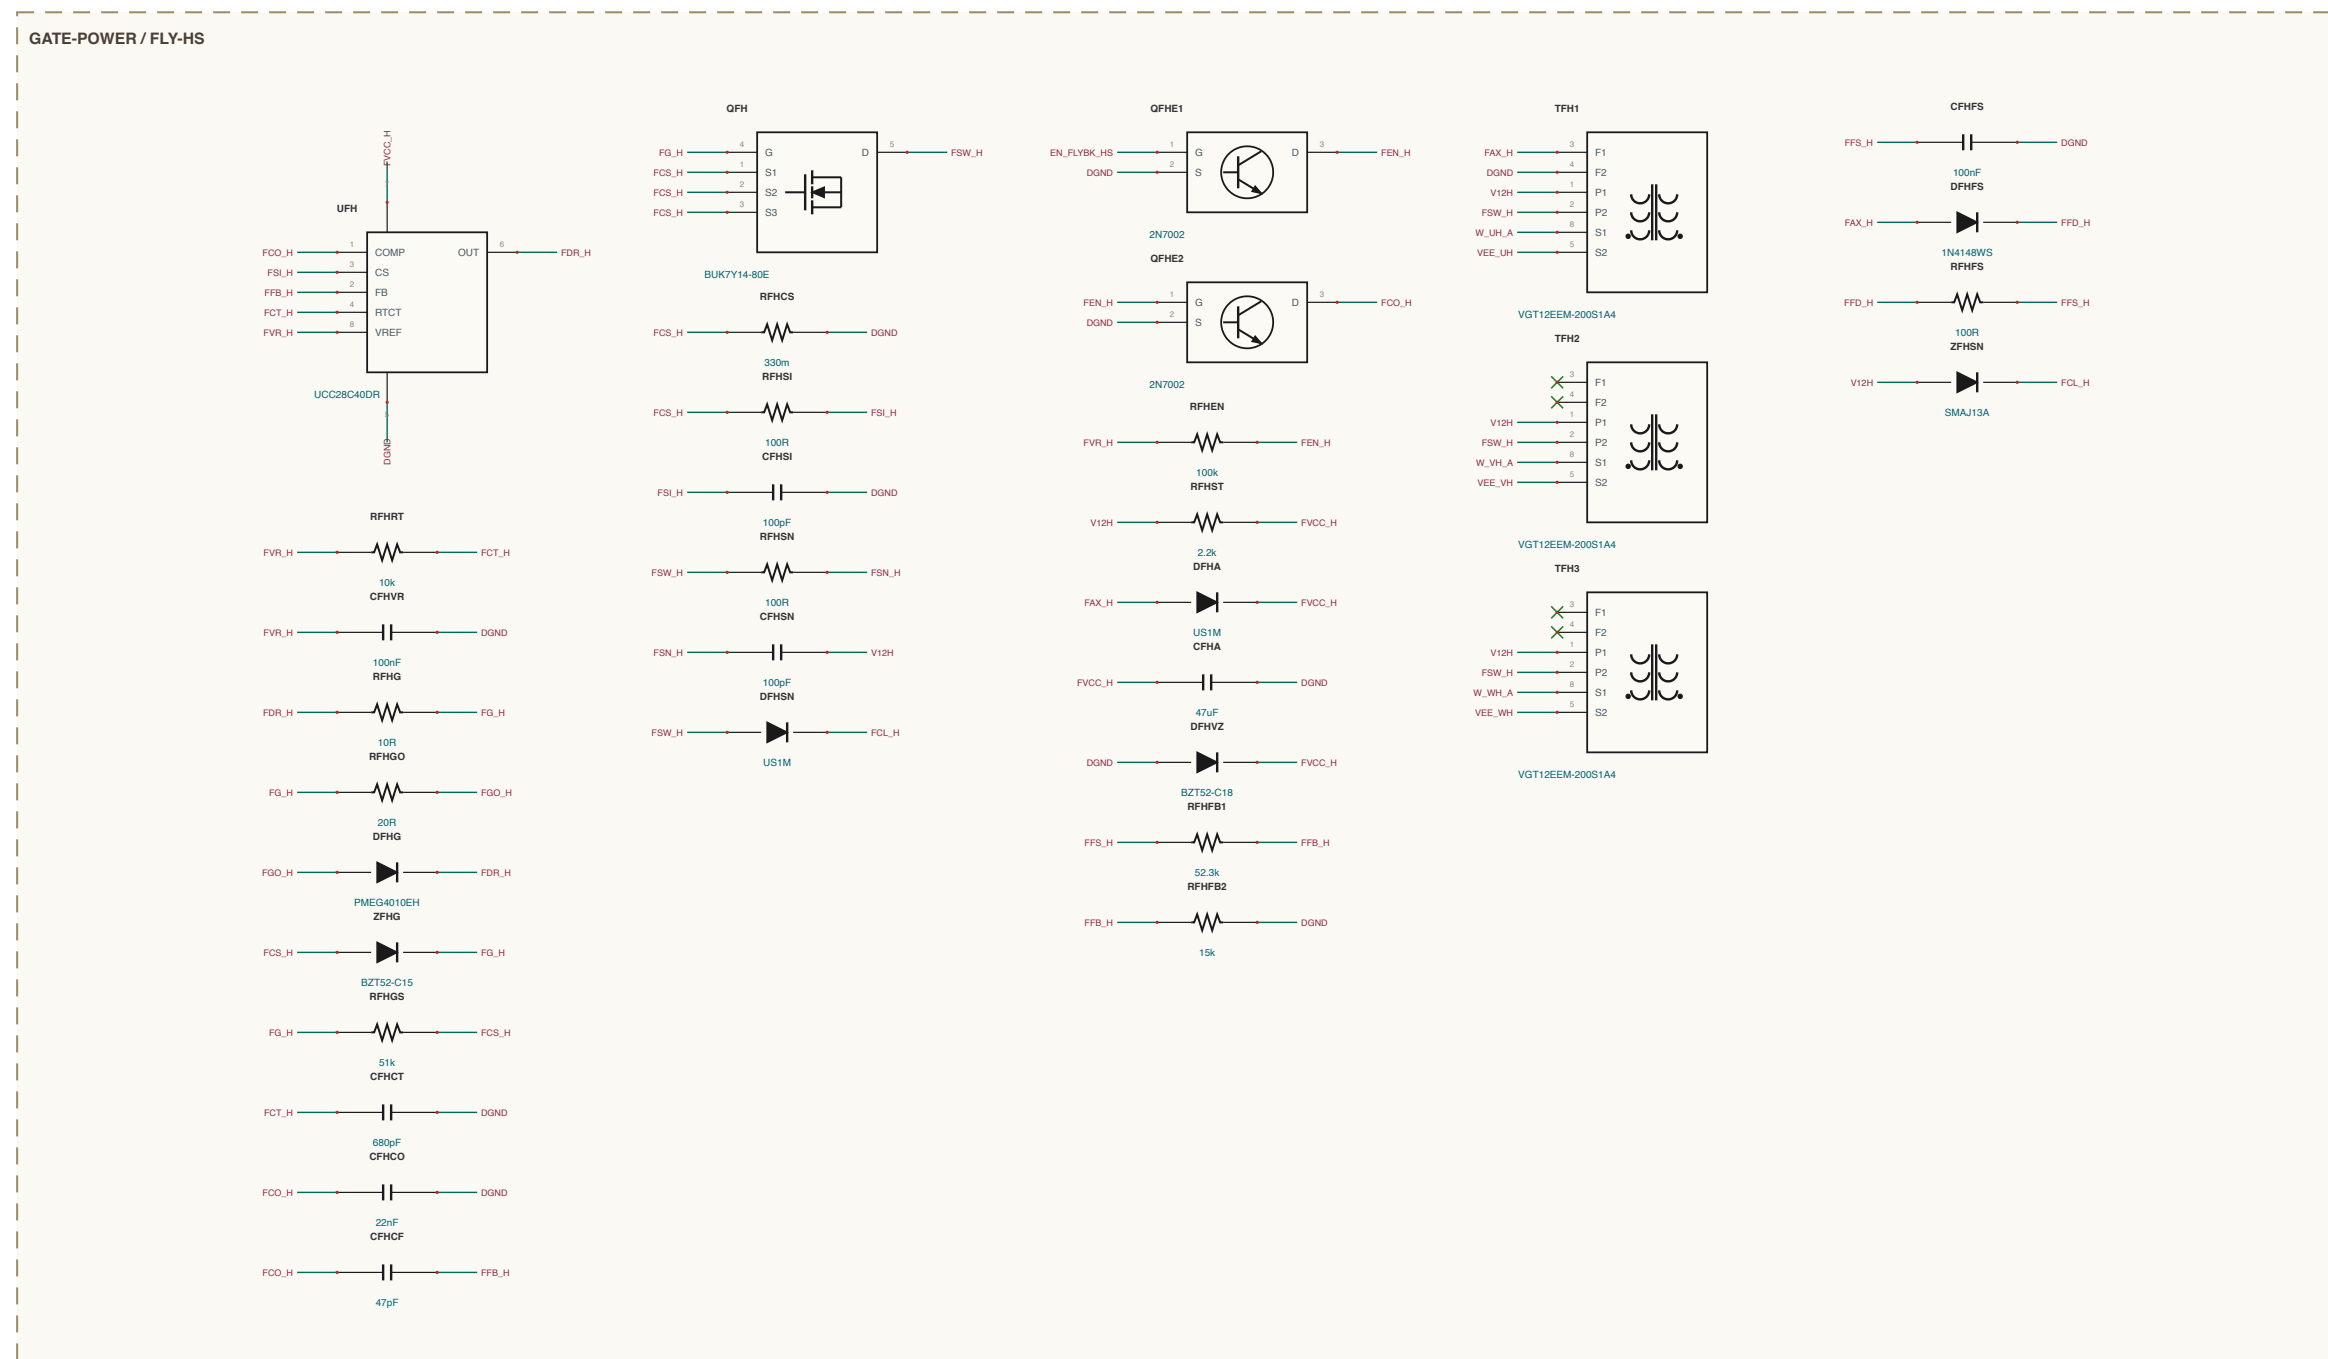
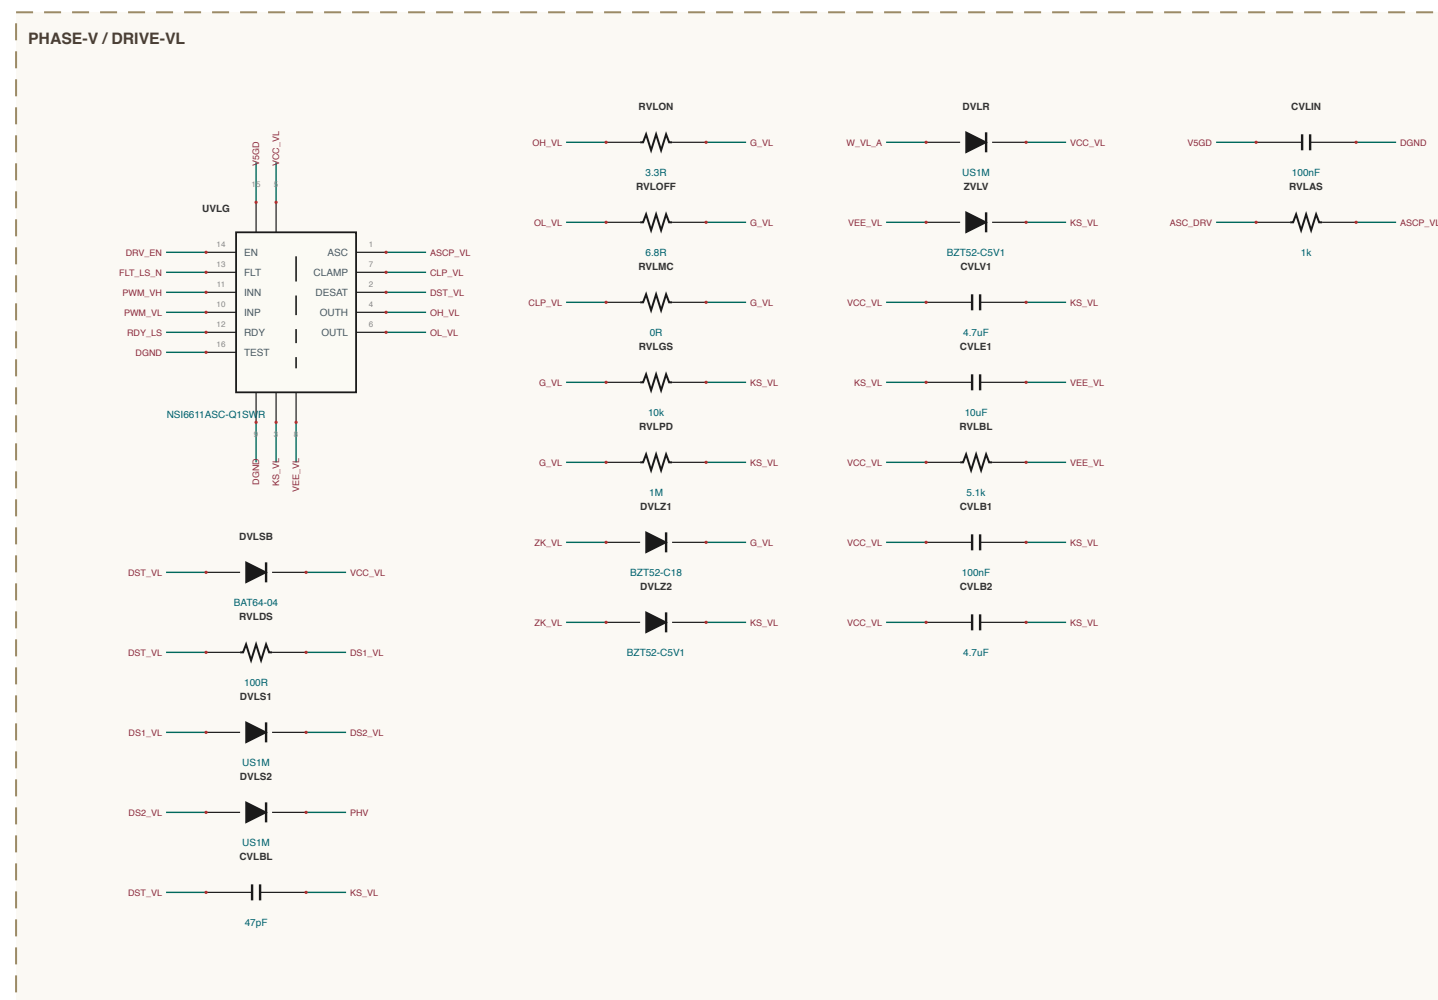
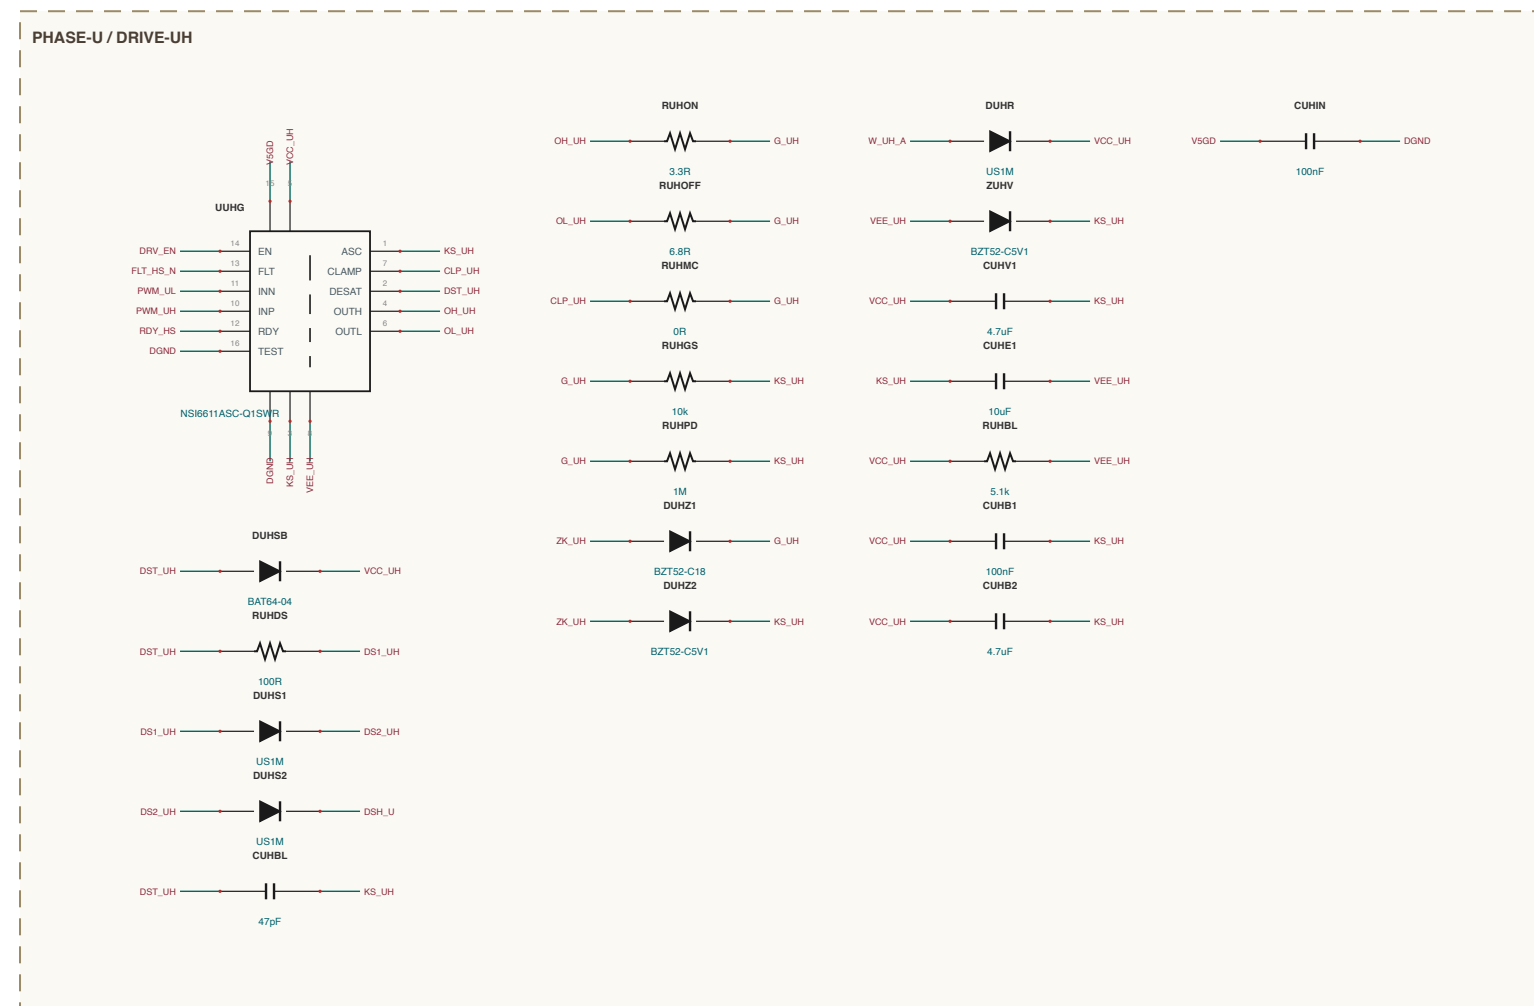
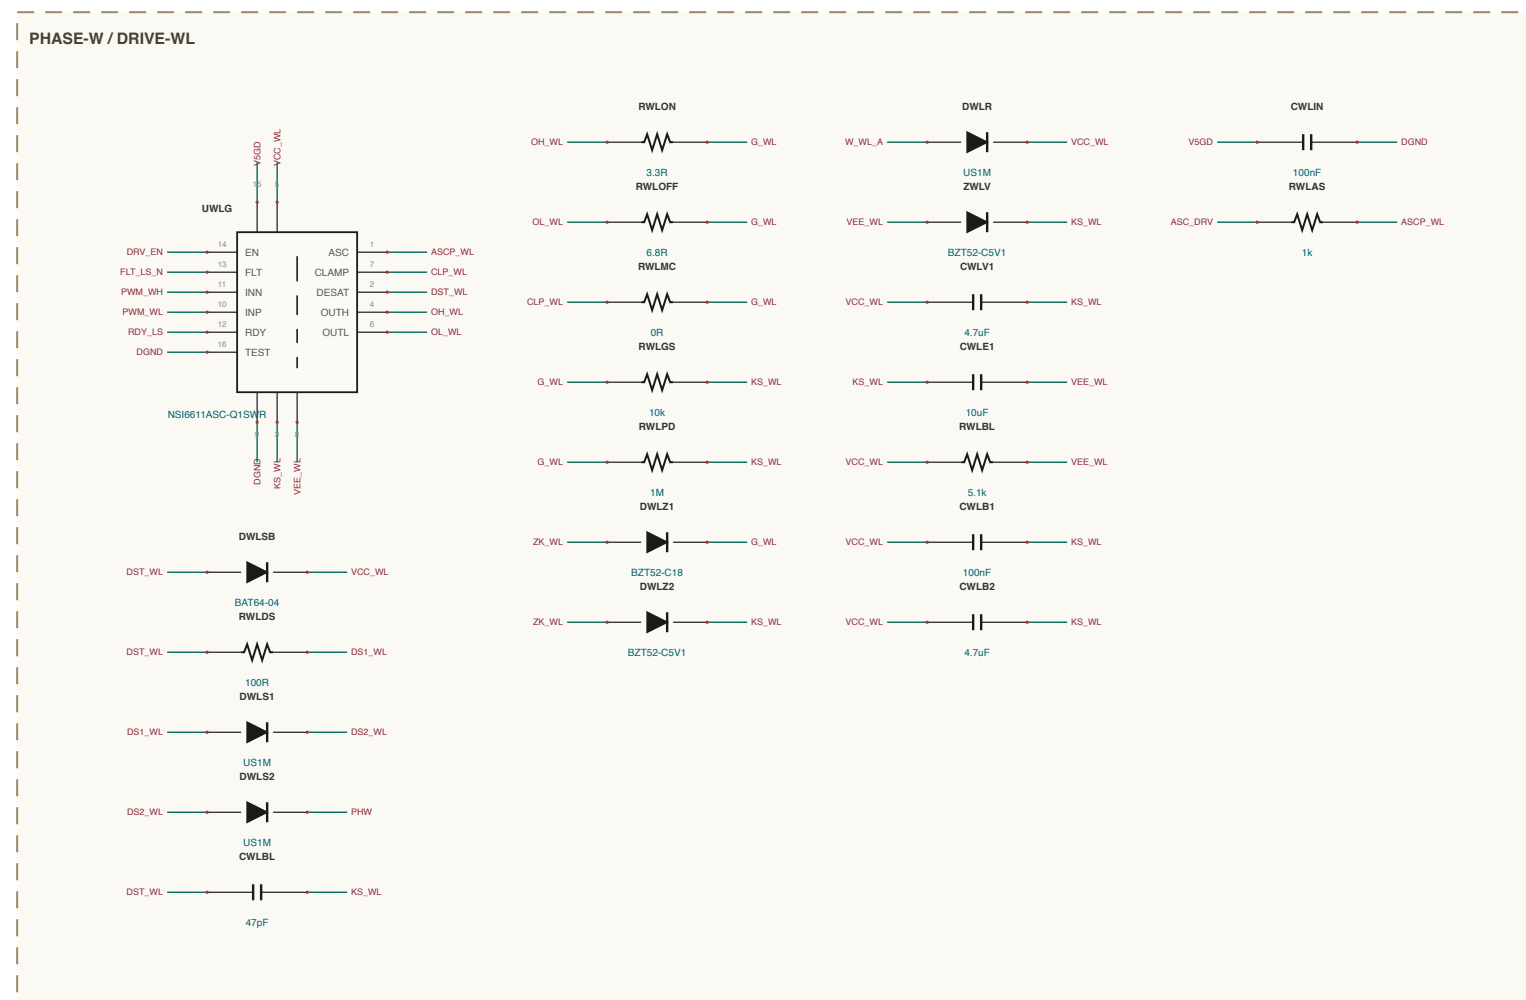
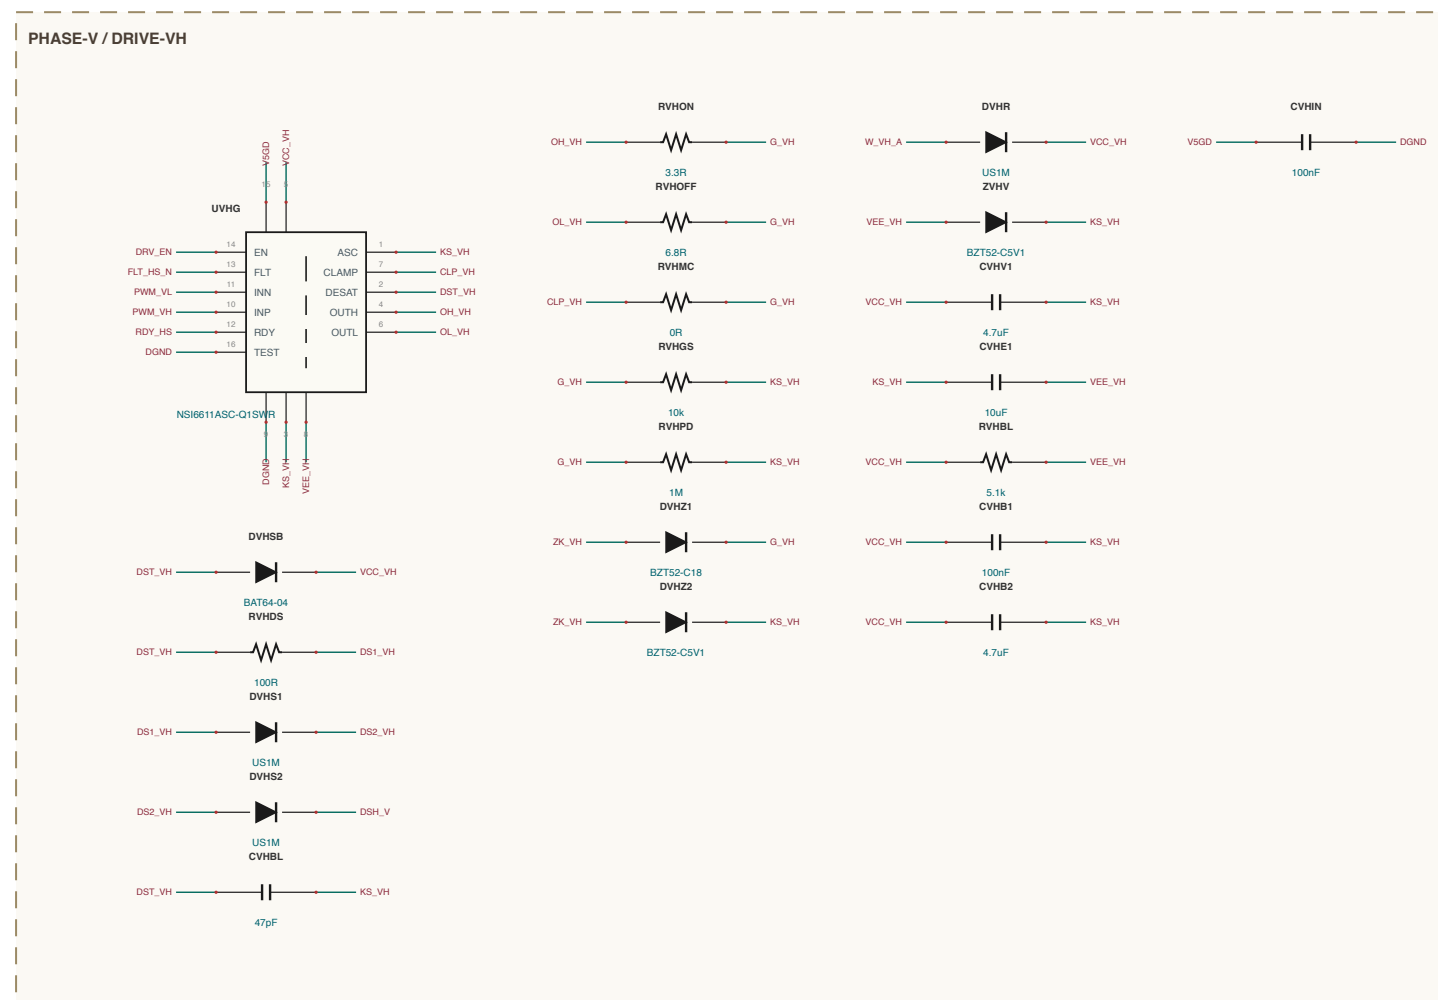
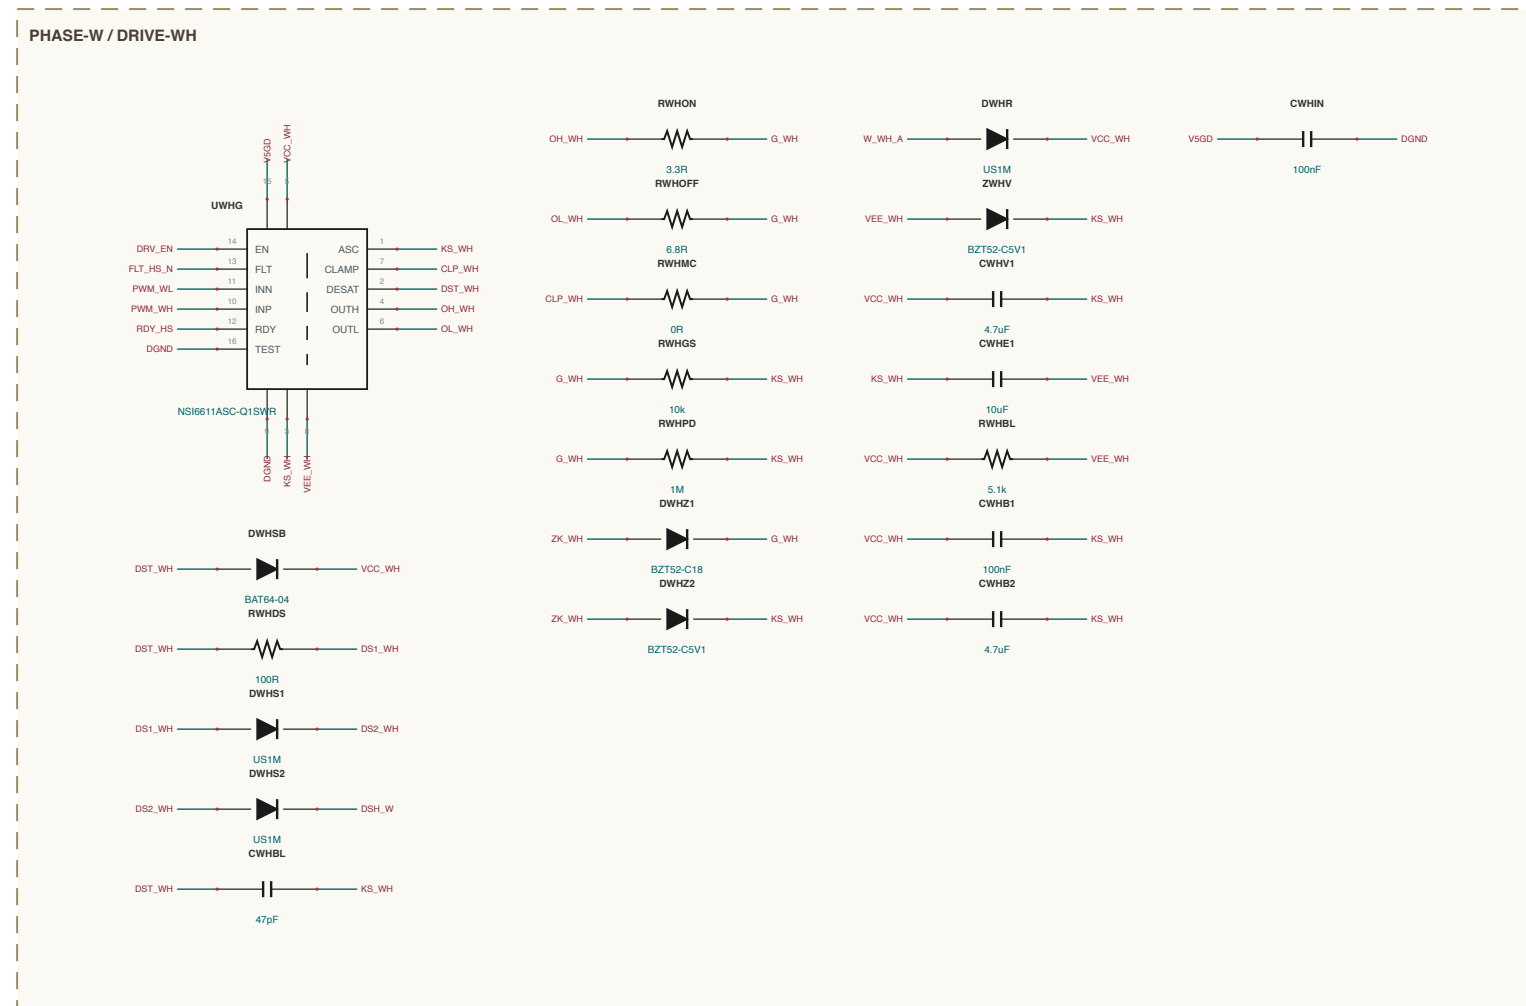
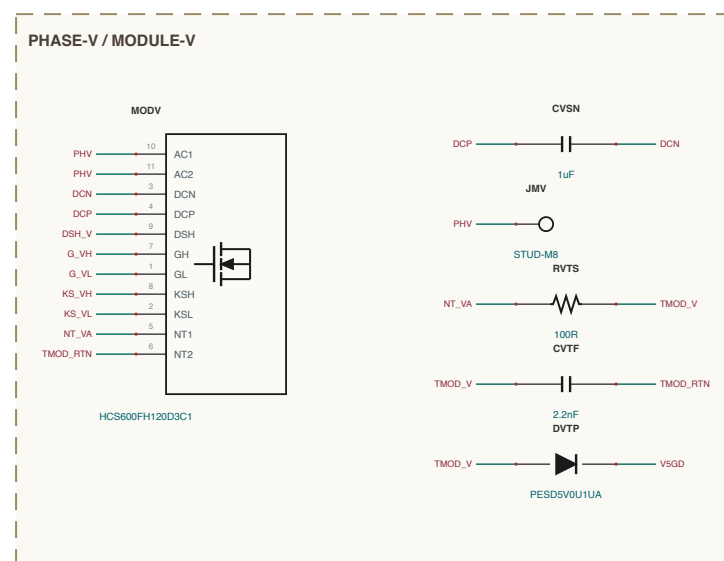
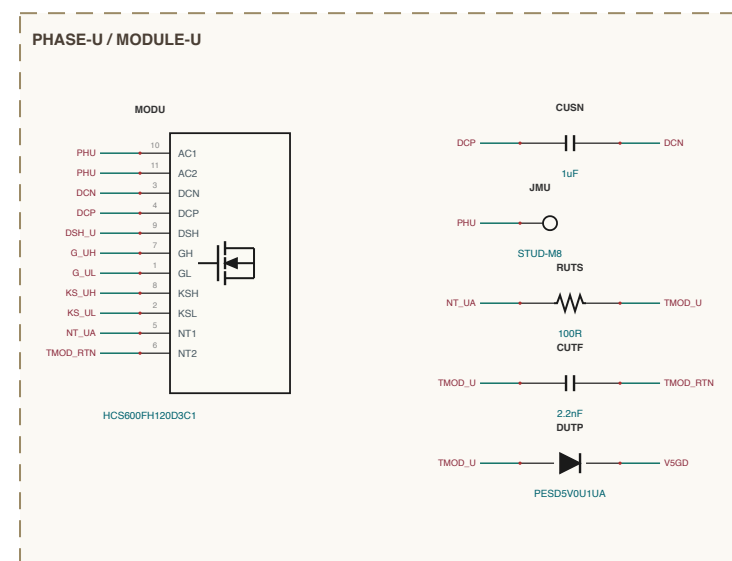
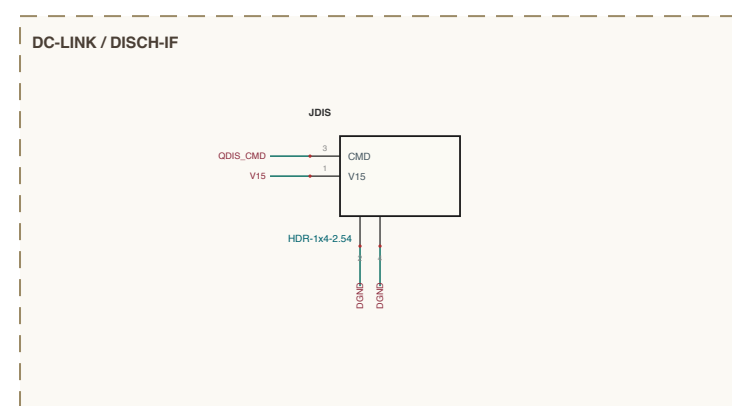
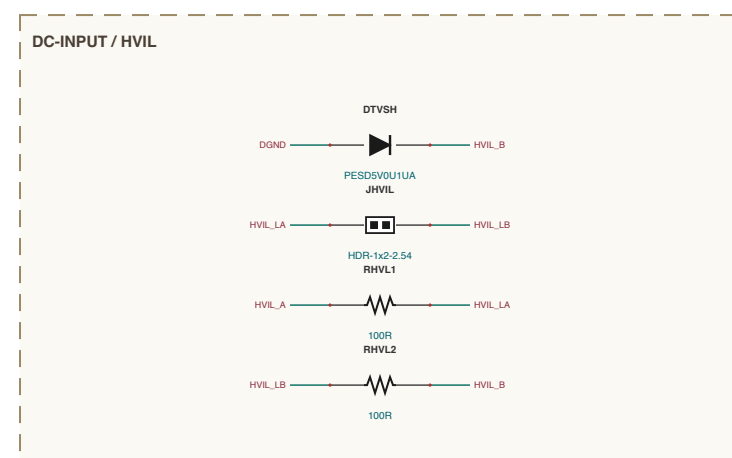
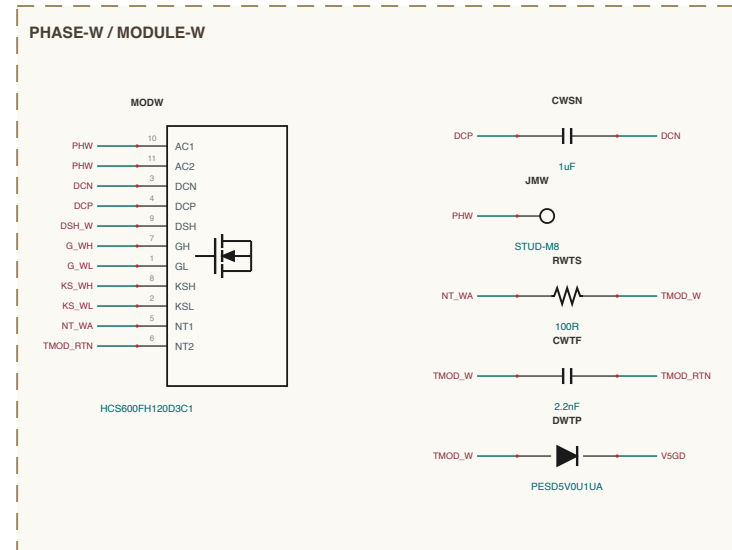
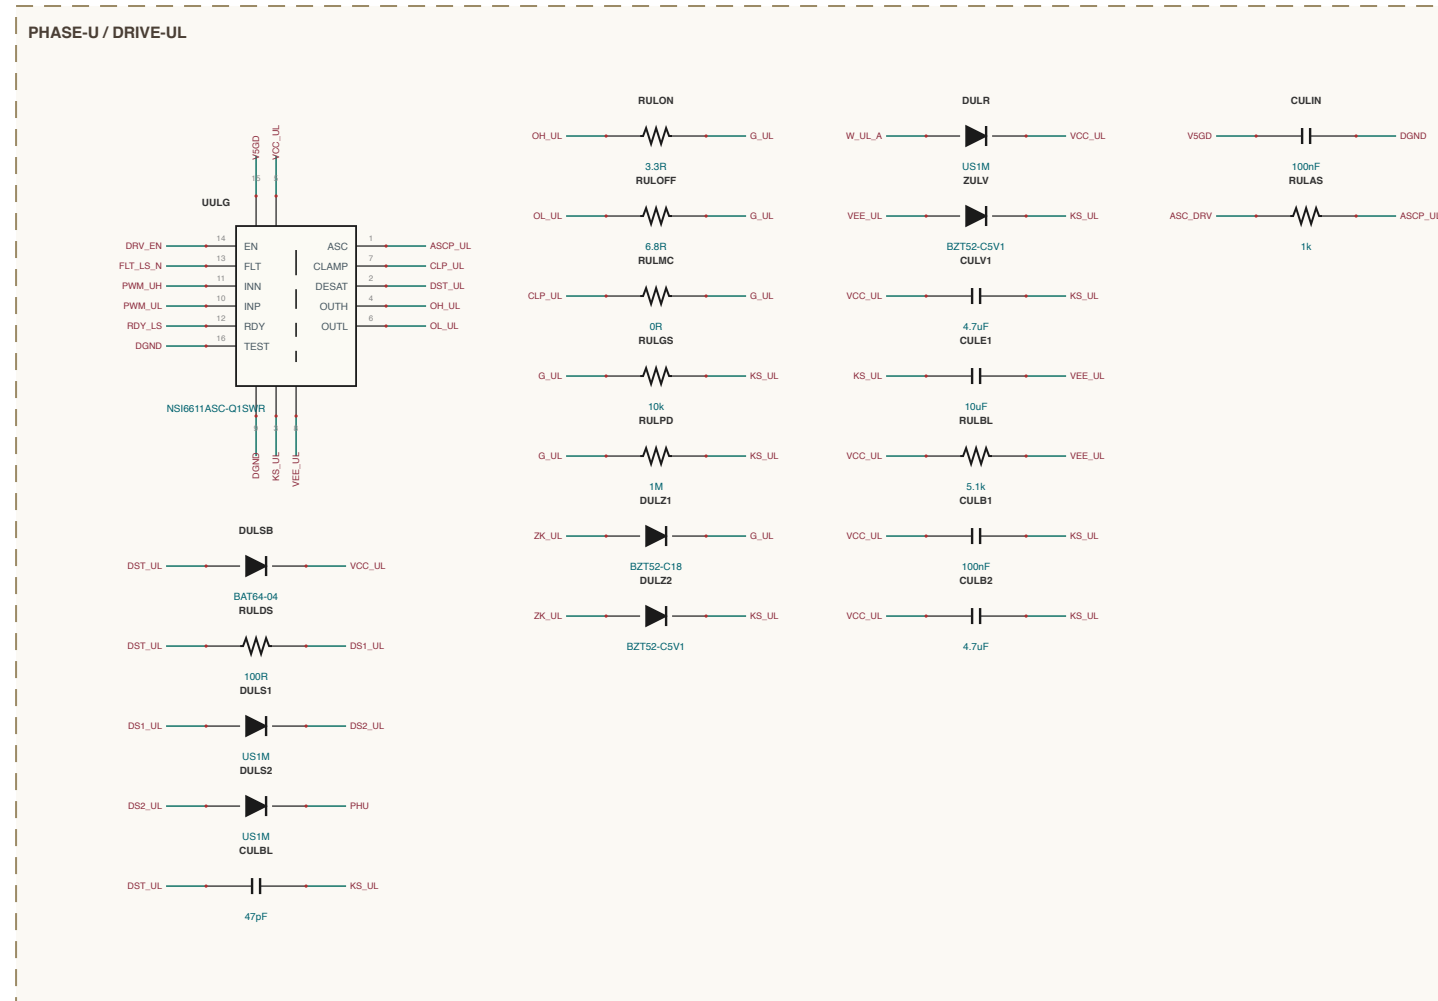
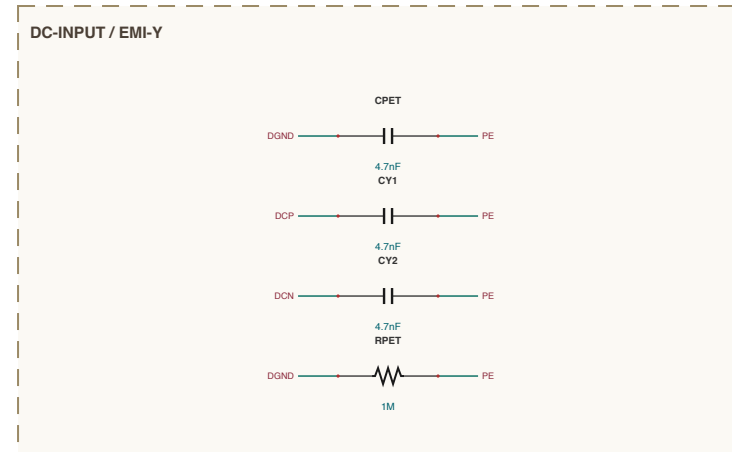


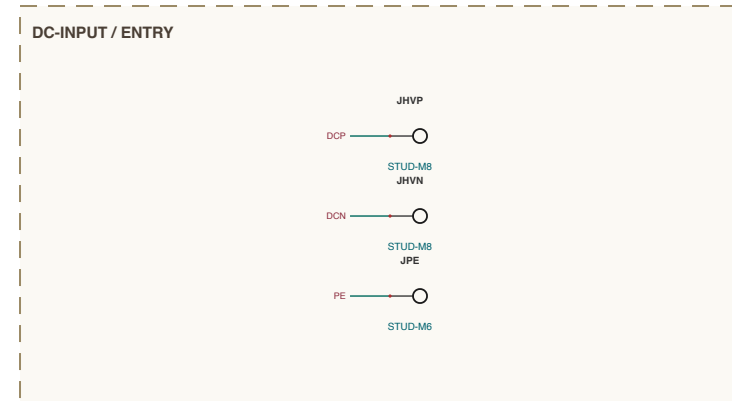


























```

BHEET INDEX
|
| 200 HP Air Power (PS) - 1 of 4
|
|
| HUSSENGAL - 1 section
|
| C.PQNDRI - 4 sections
|
| OCMPPT - 1 section
|
| PRADE W - 3 sections
|
| PRADE W - 2 sections
|
| PRADE W - 1 section
|
| SATS POWER - 1 section
|
|
| CONTROLLR - 1 section
|
|
| OCLARE - 1 section
|
|
| no A.B - 28 sections - 298 components

```

[illegible][illegible]

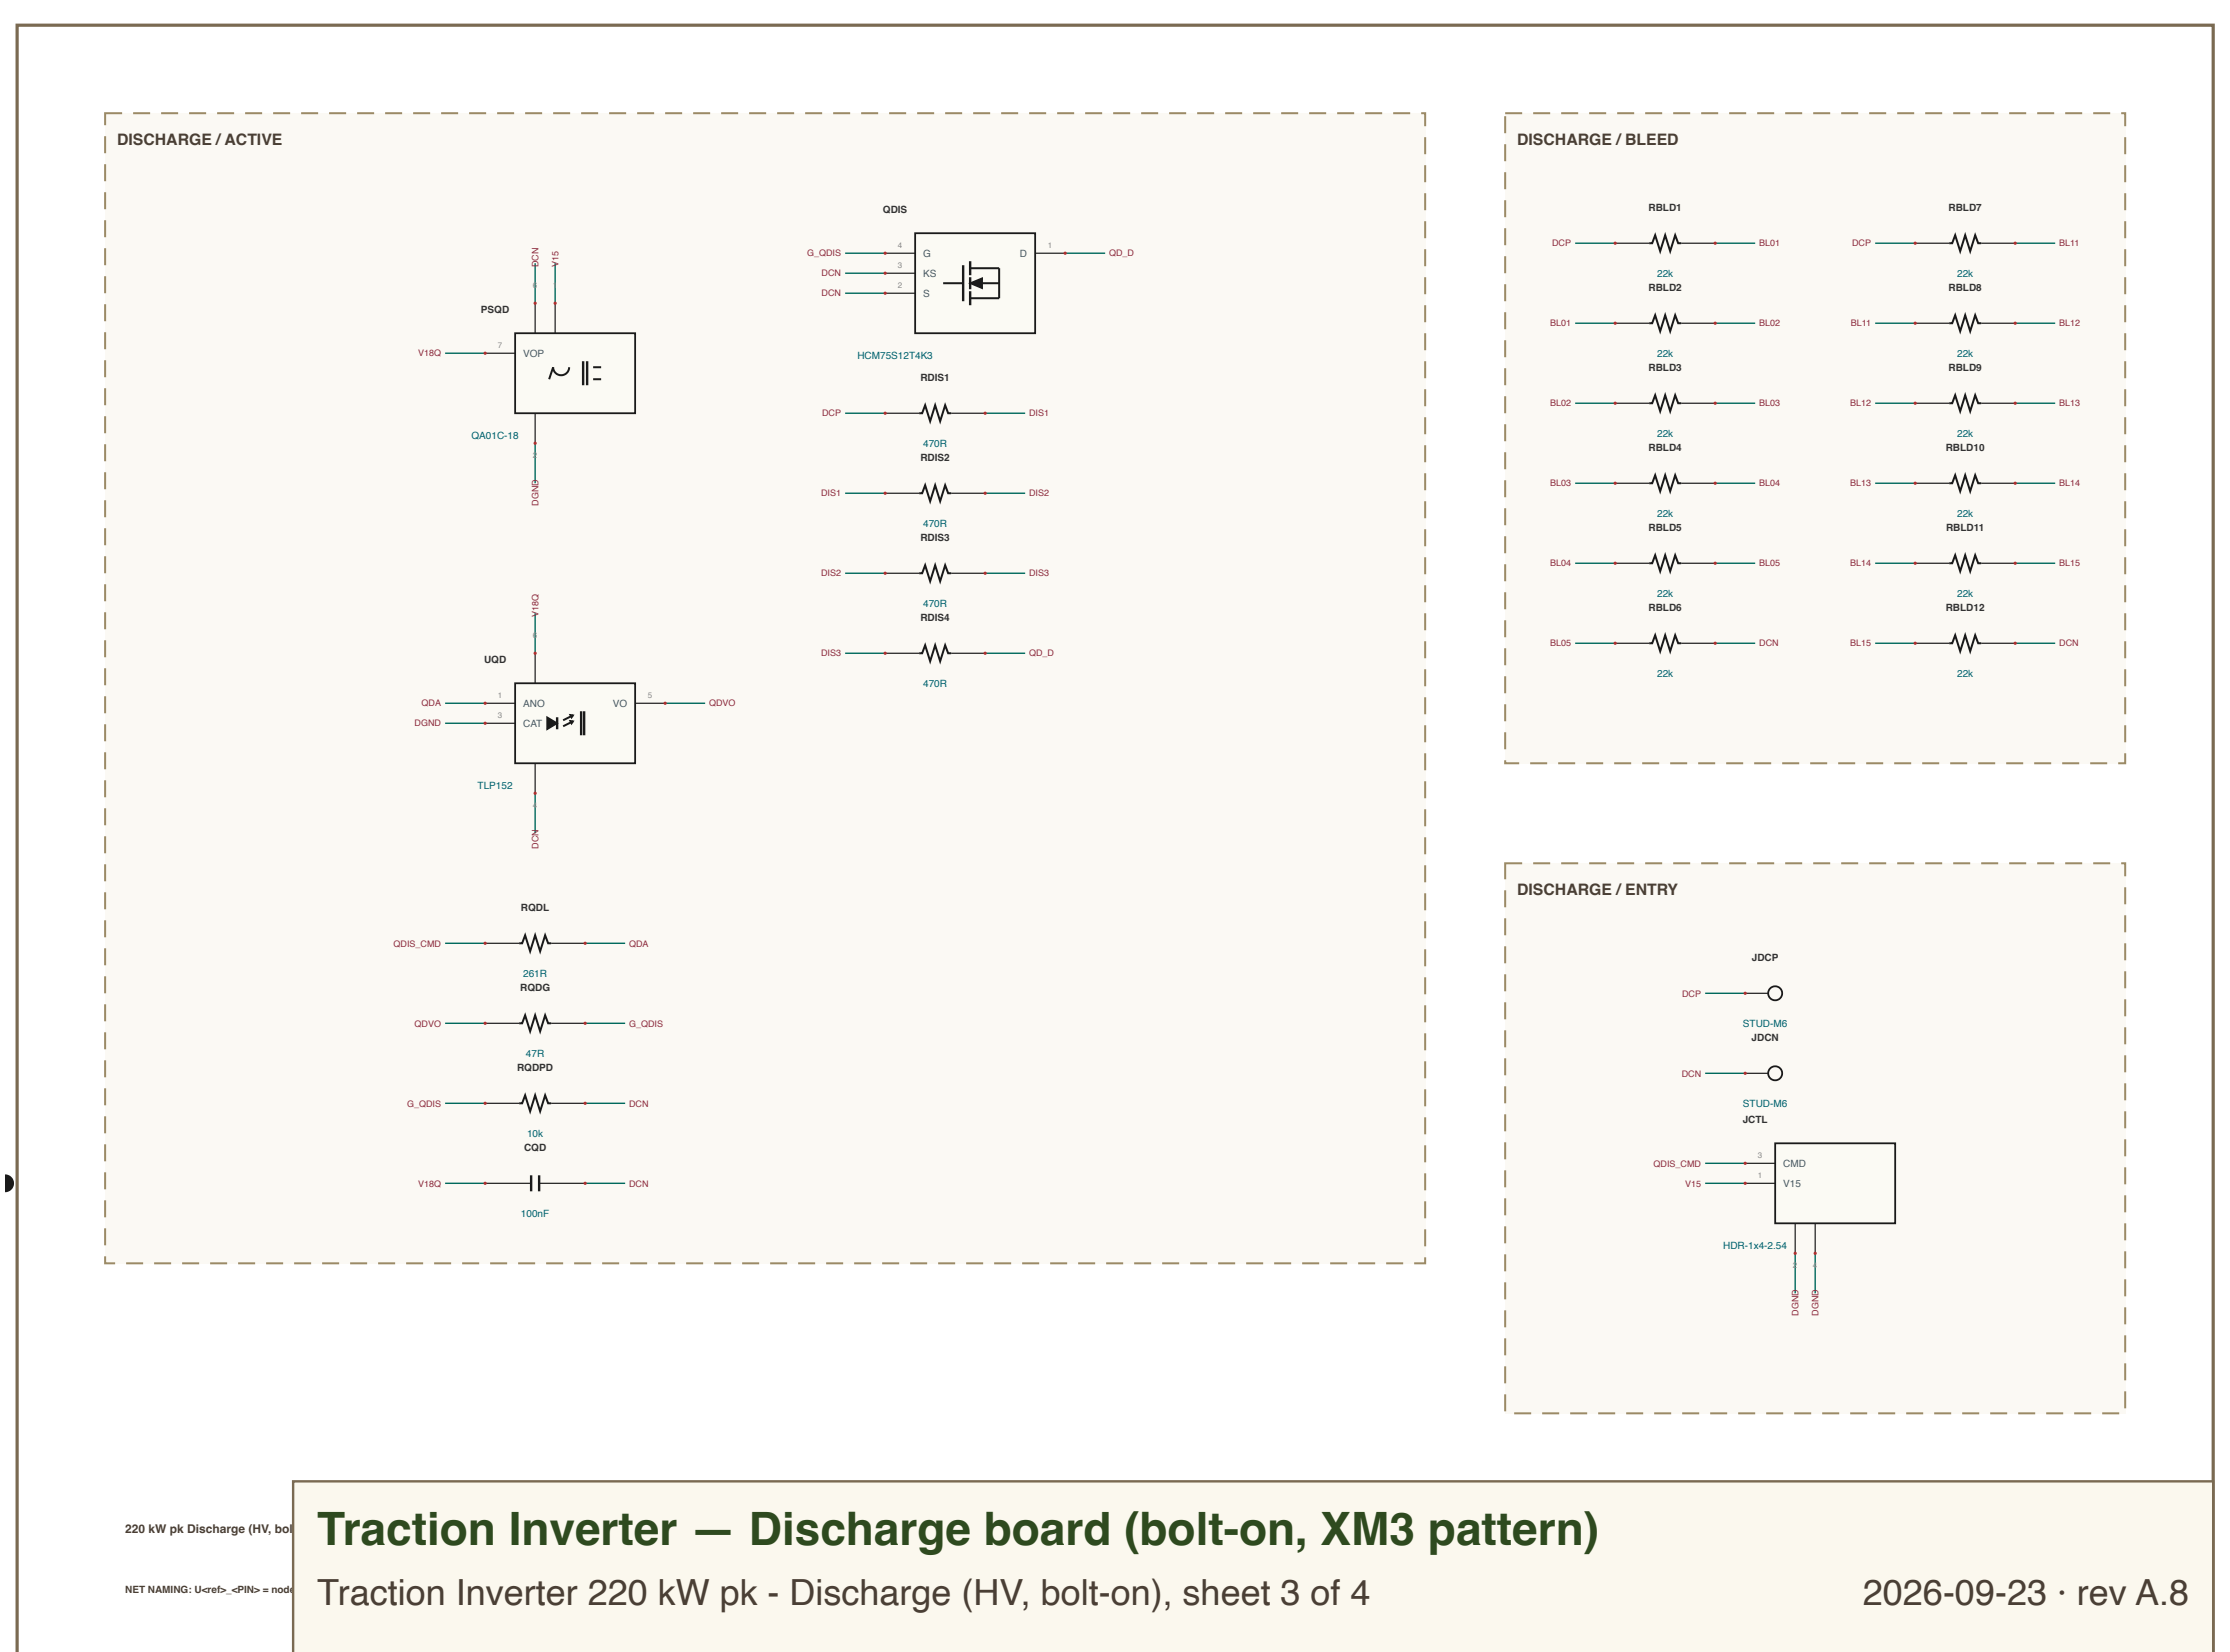

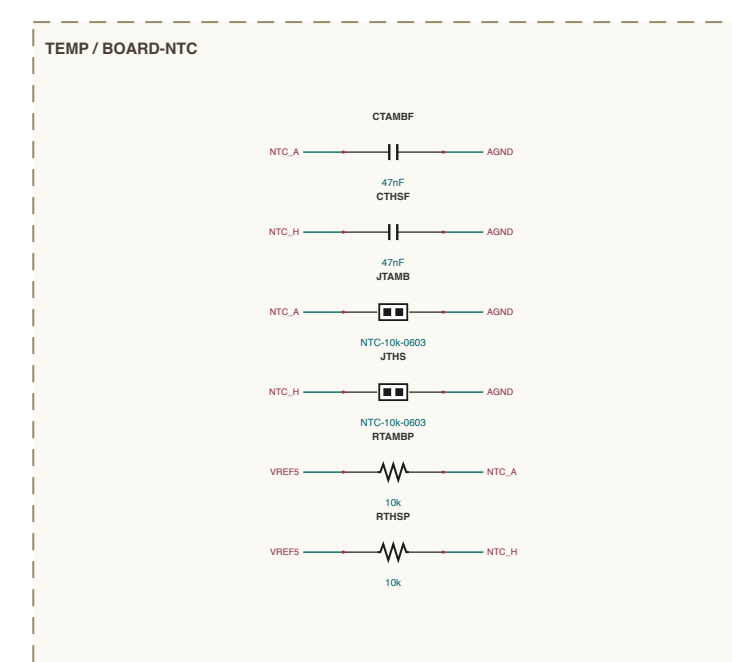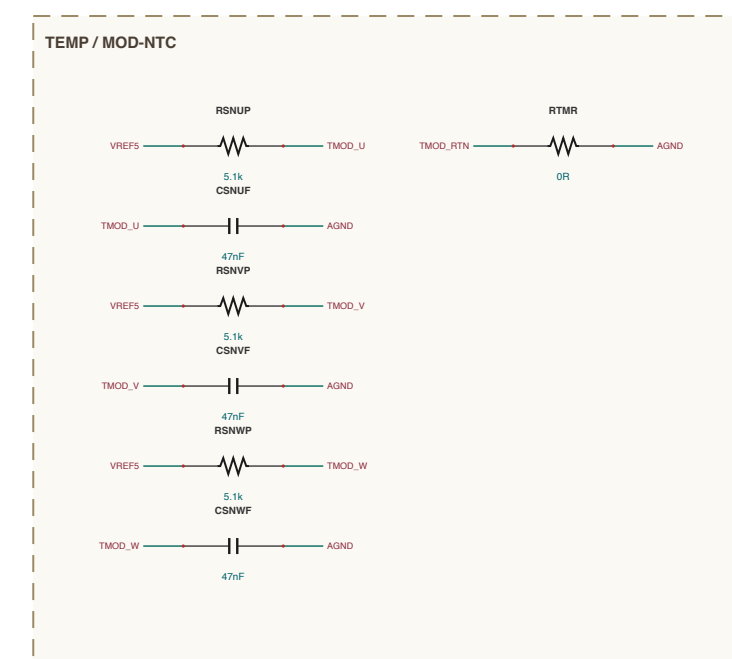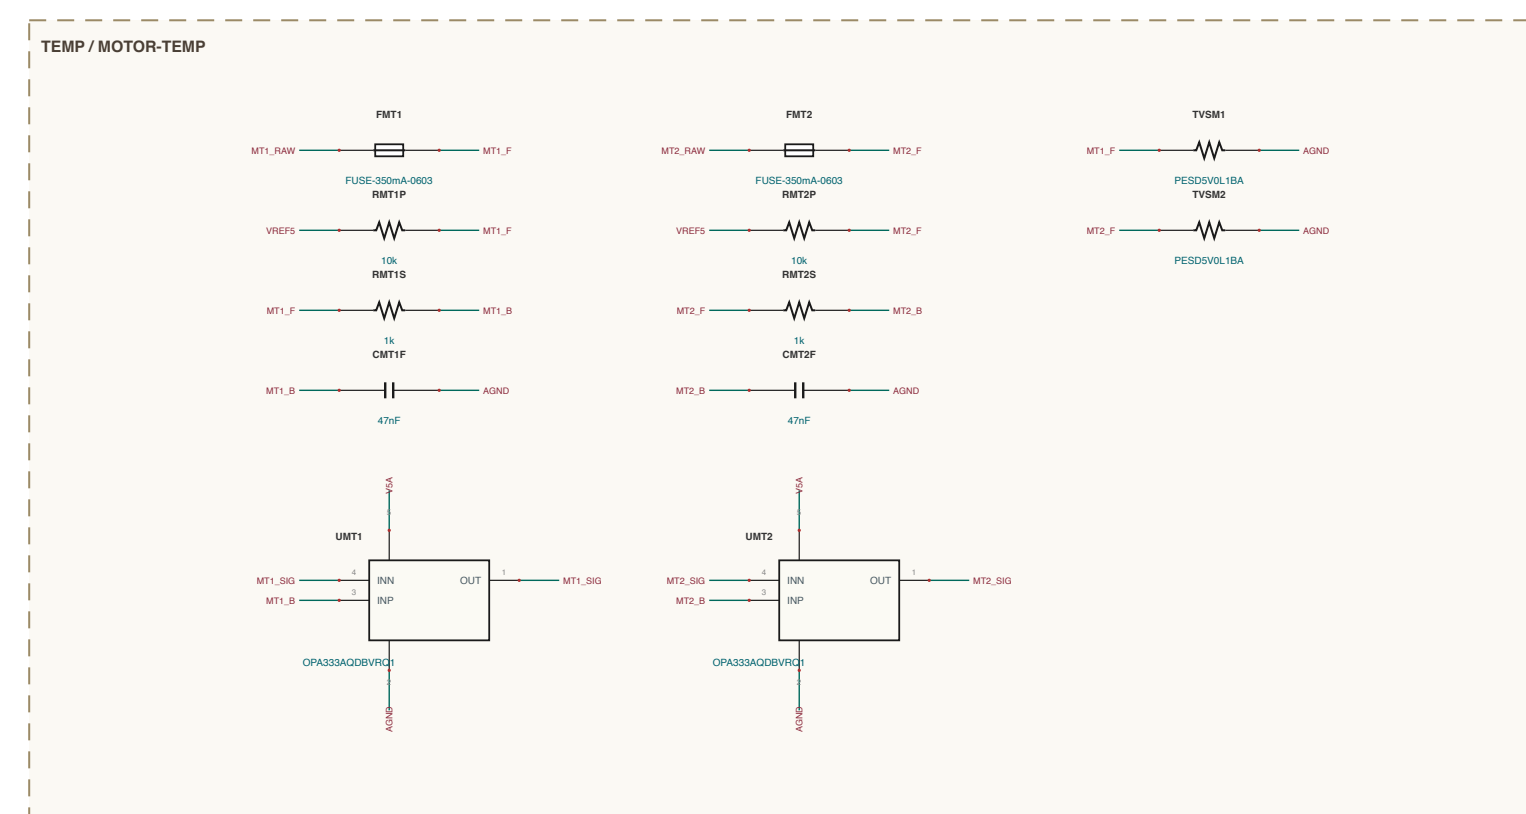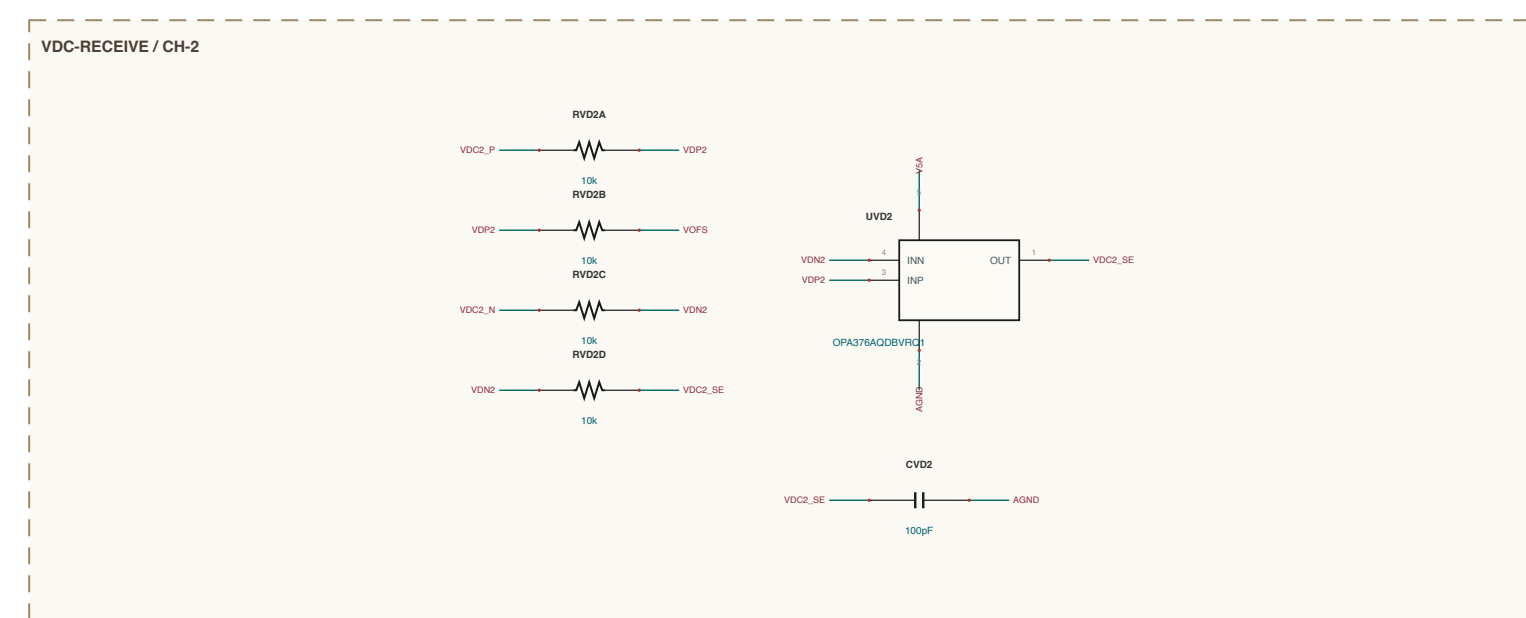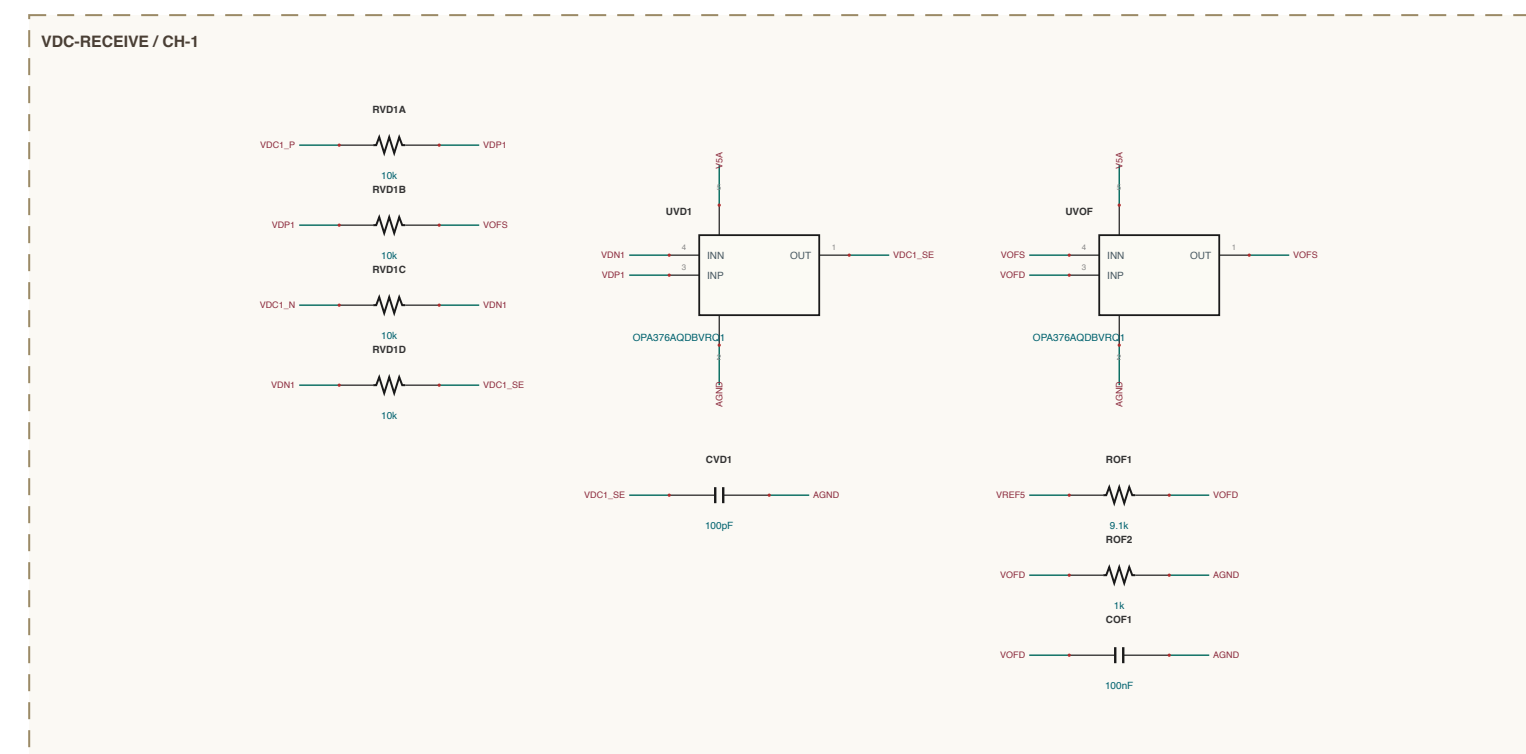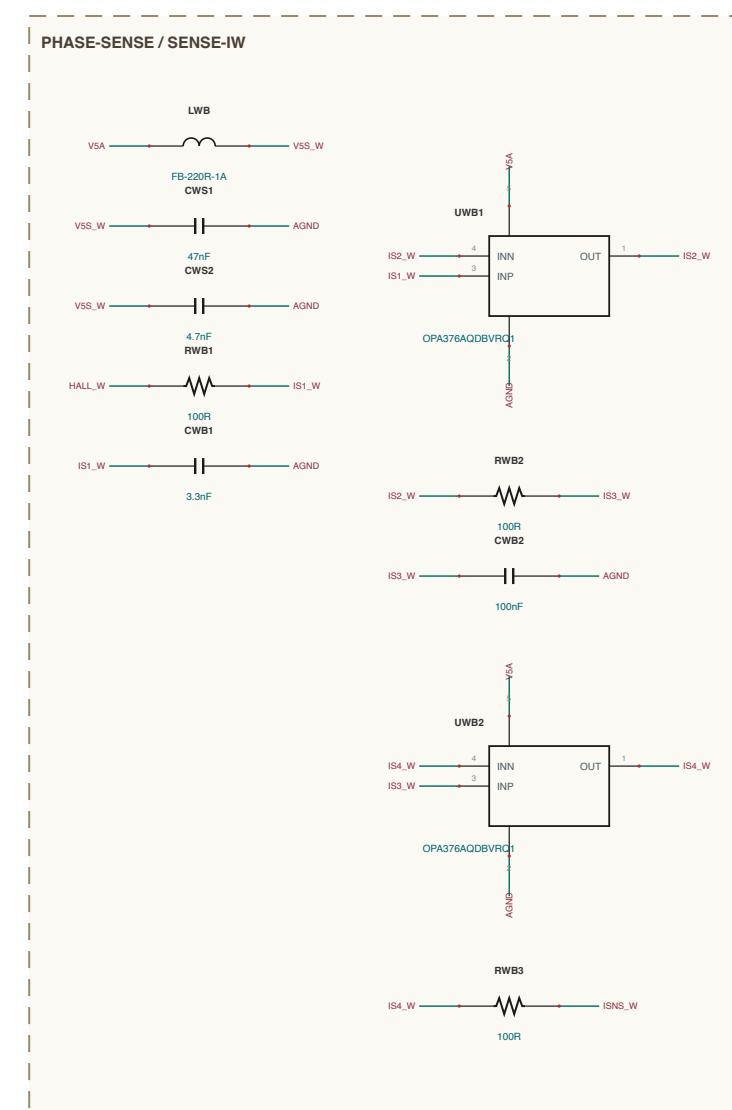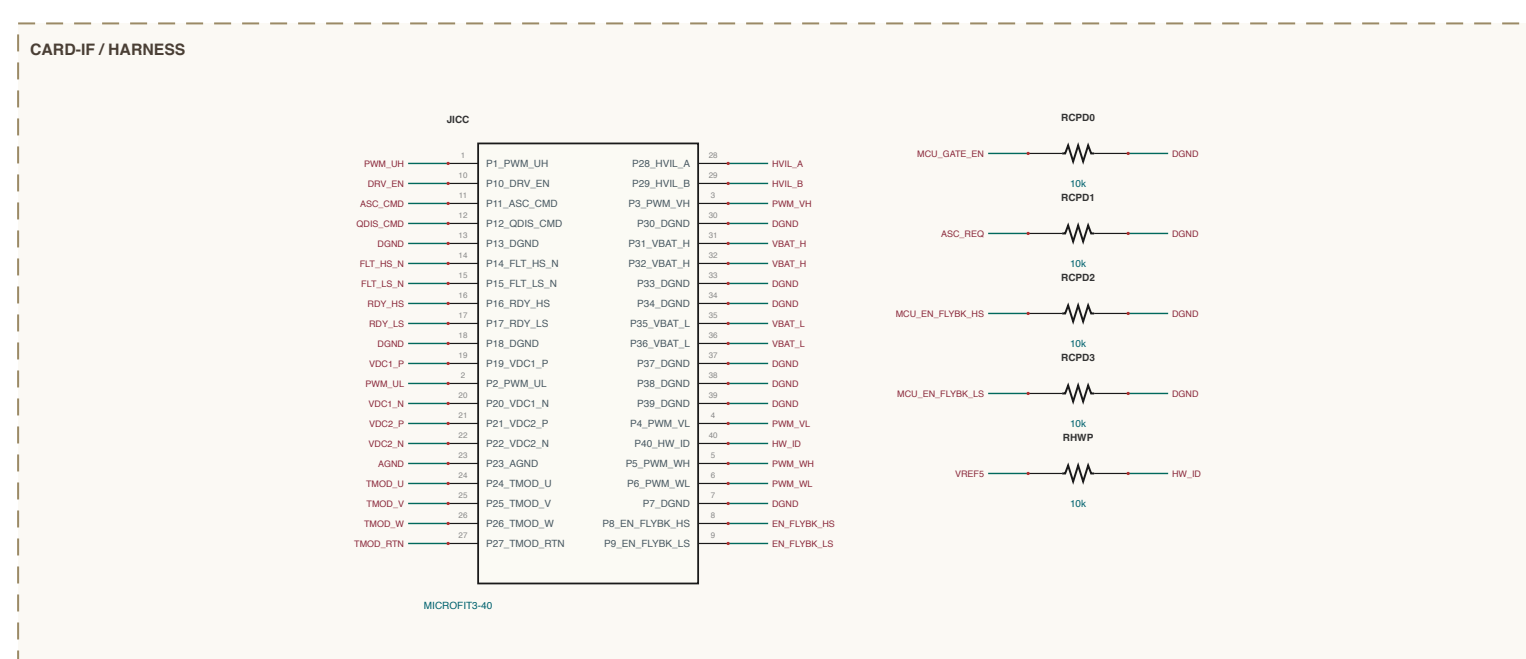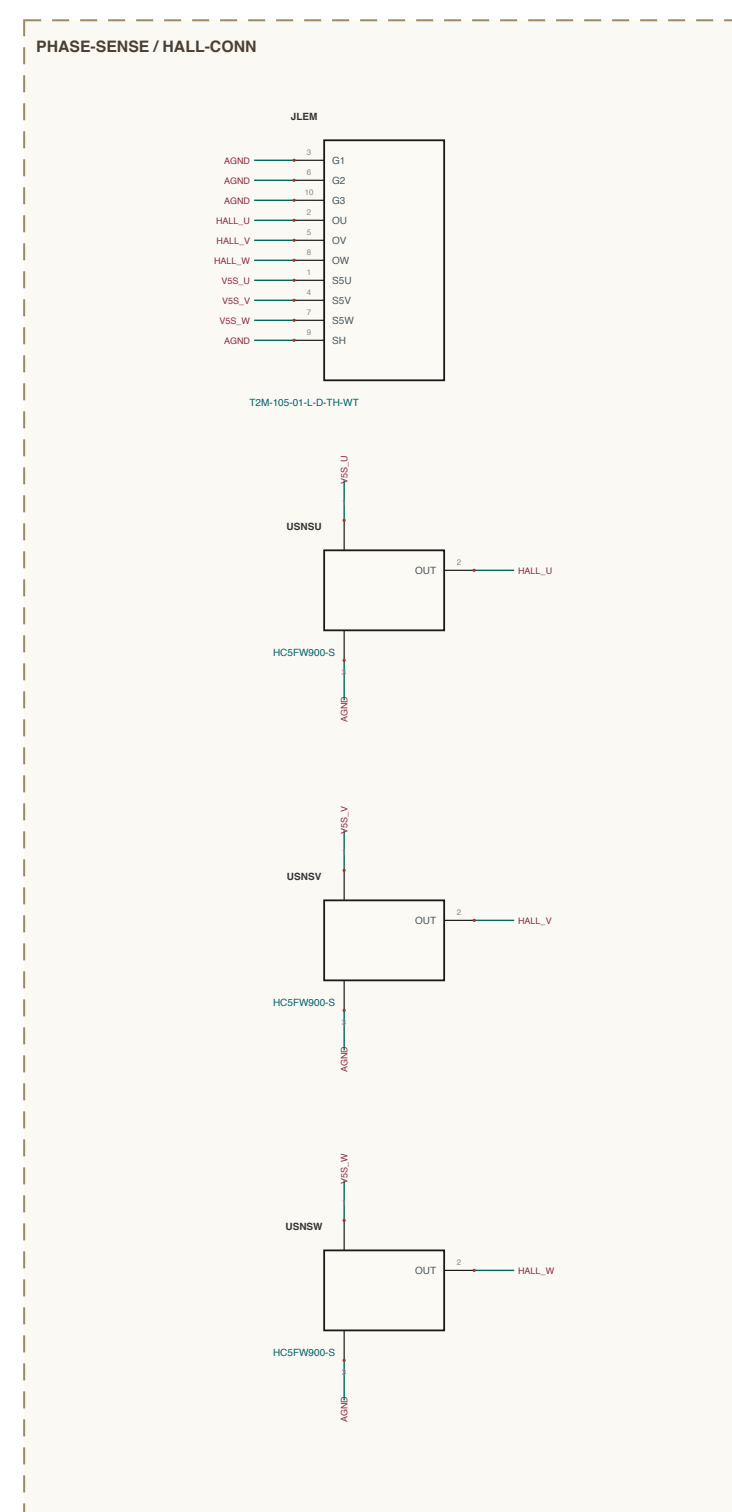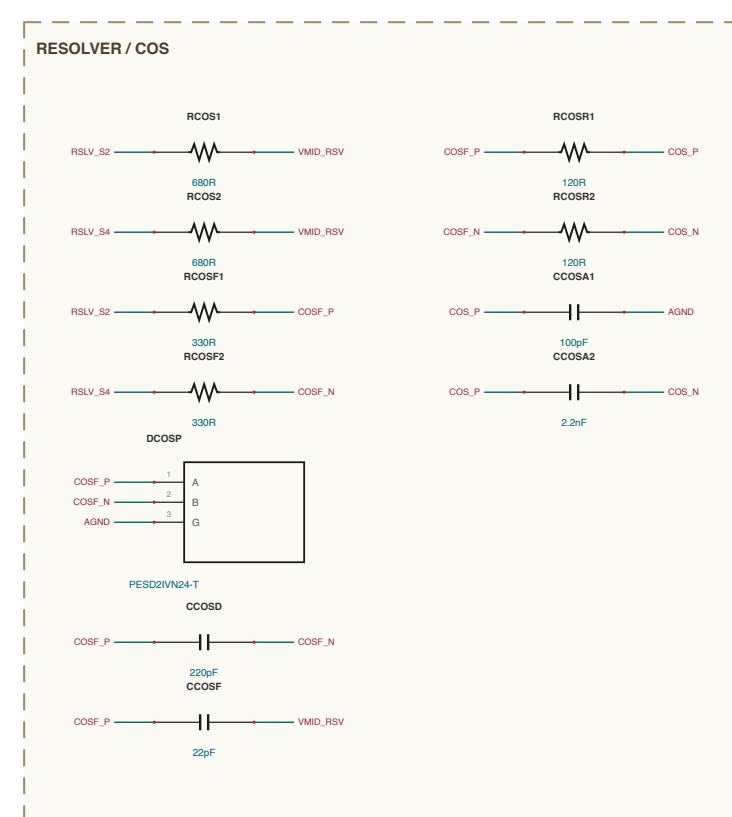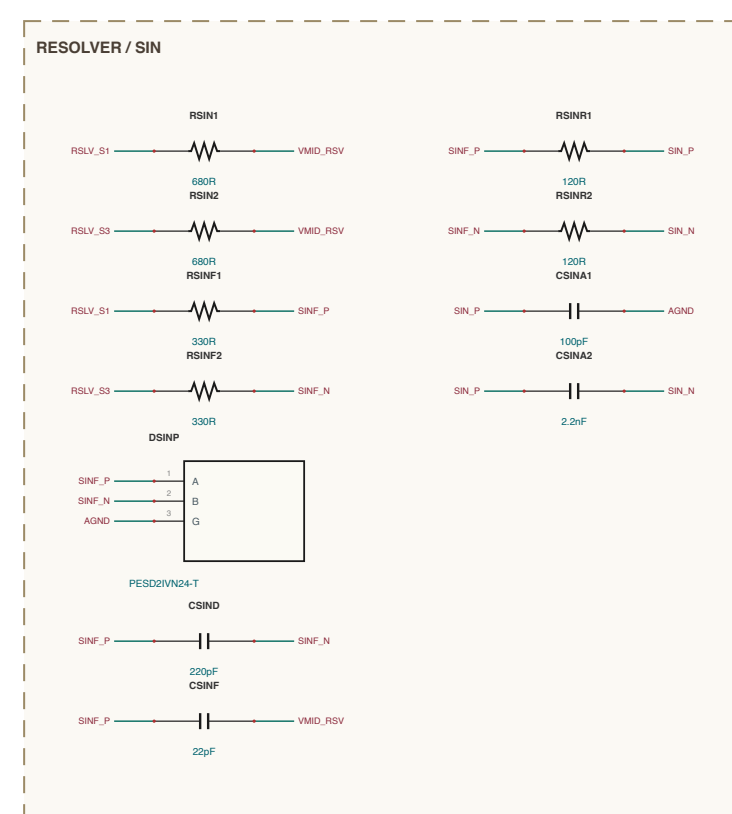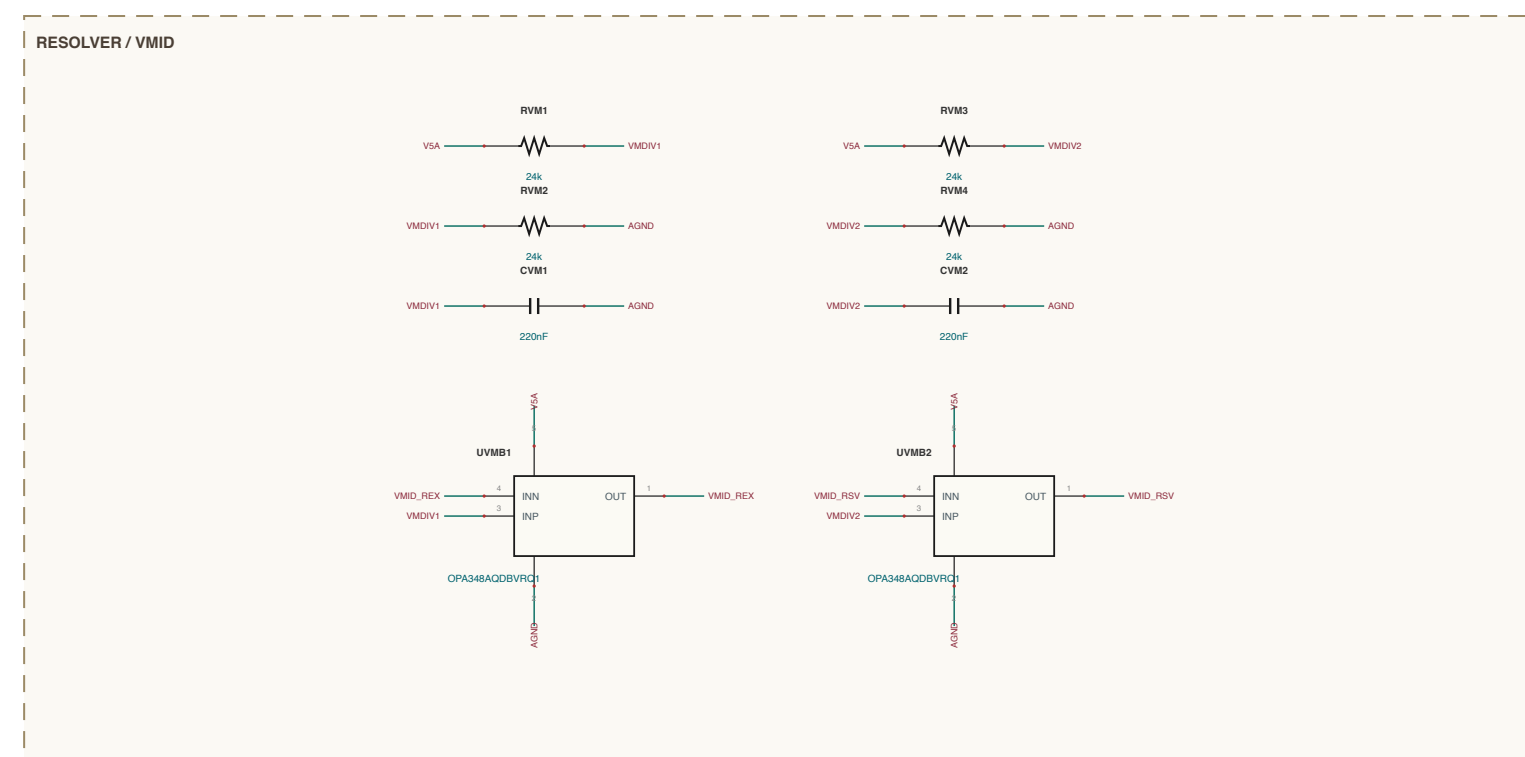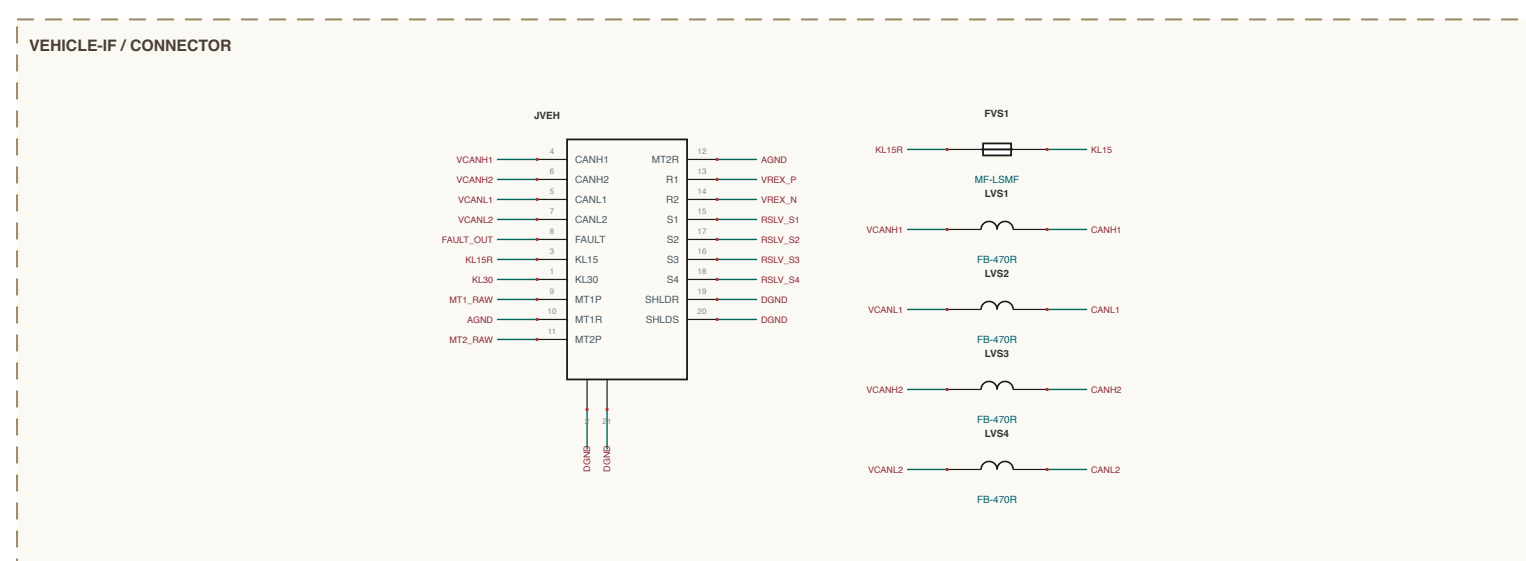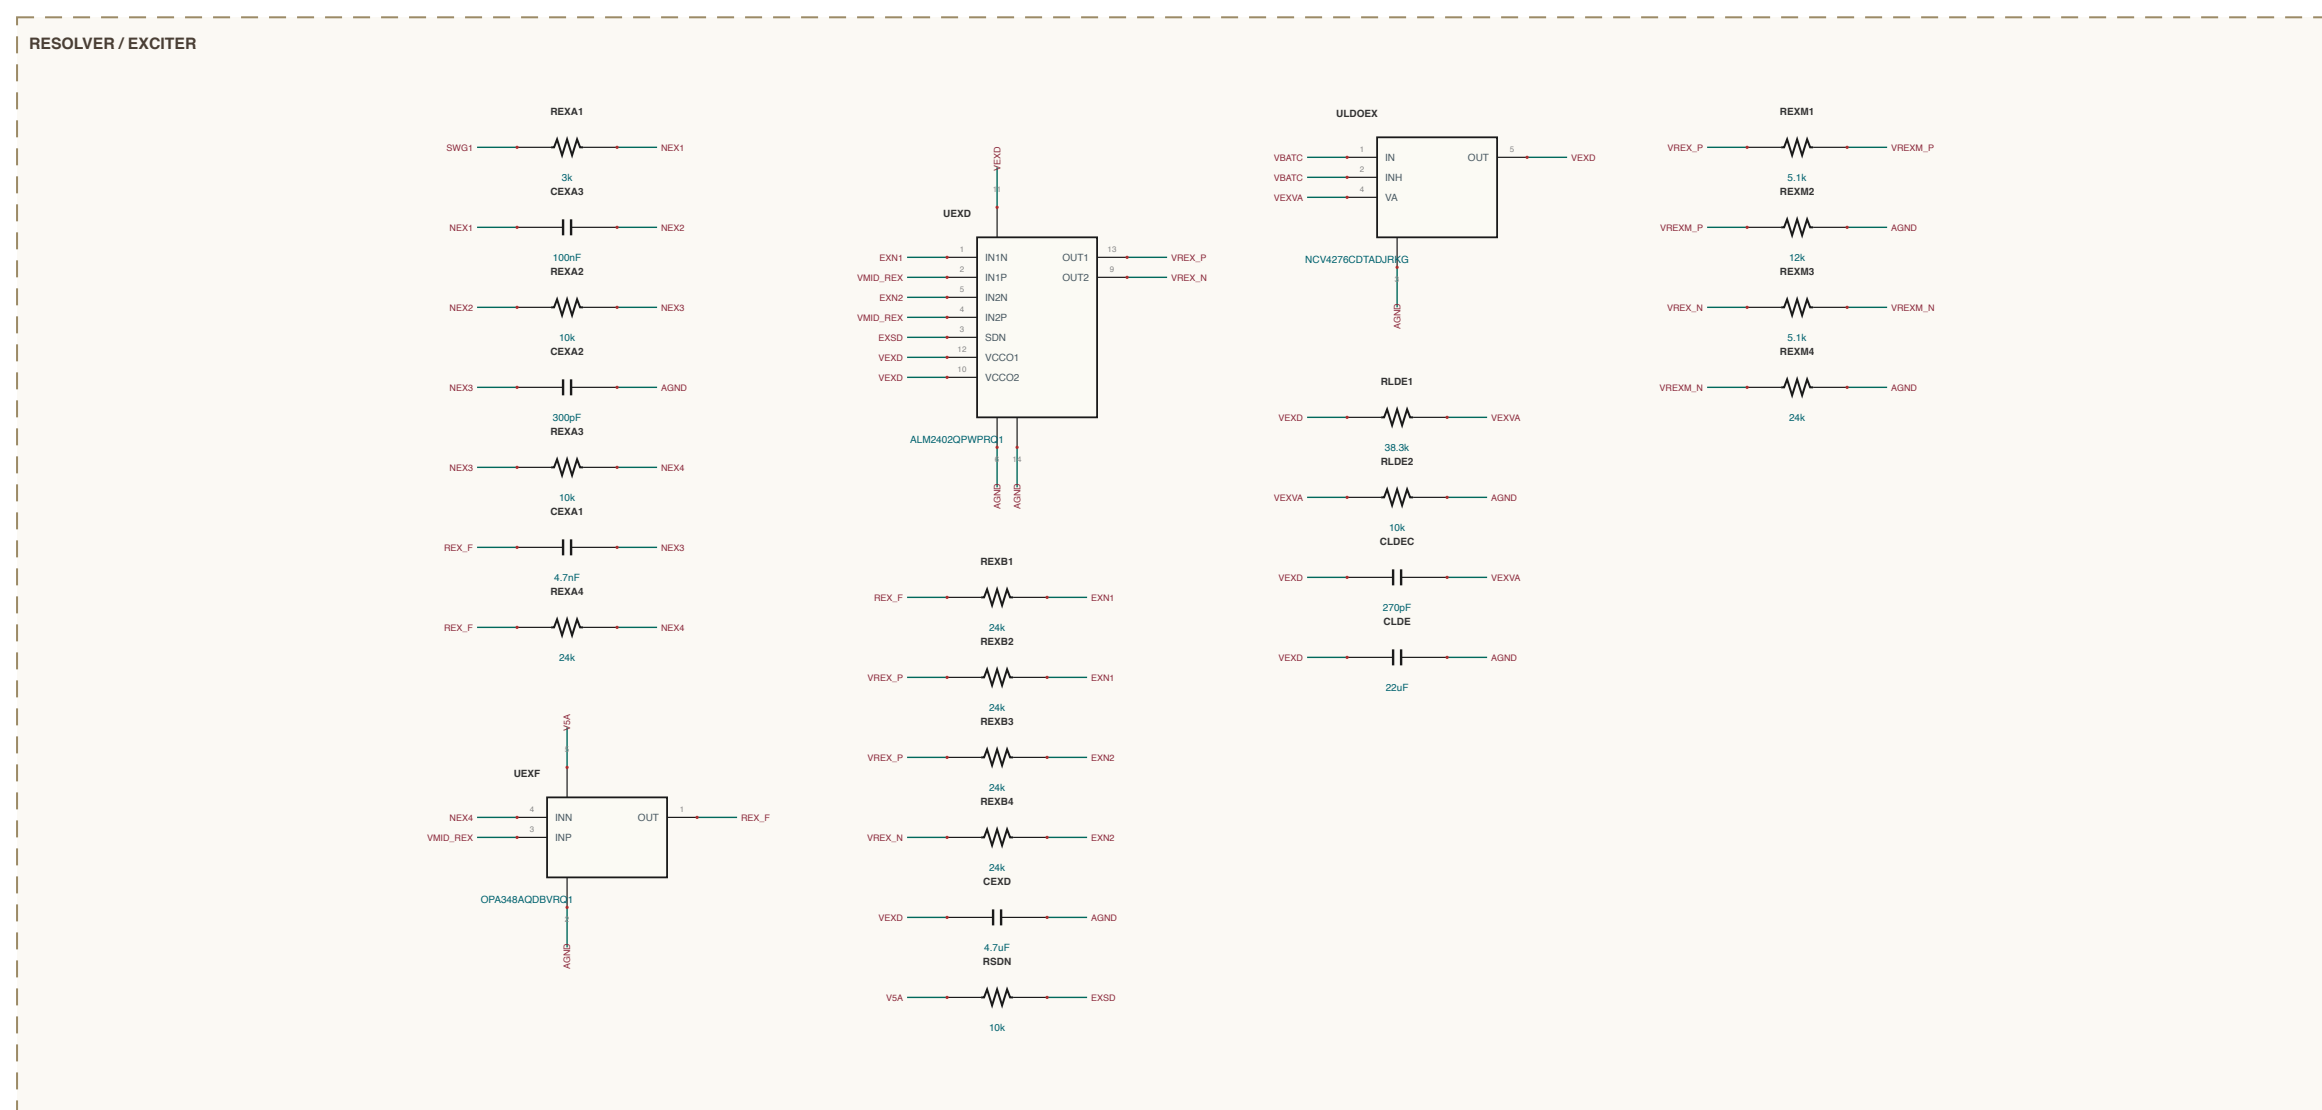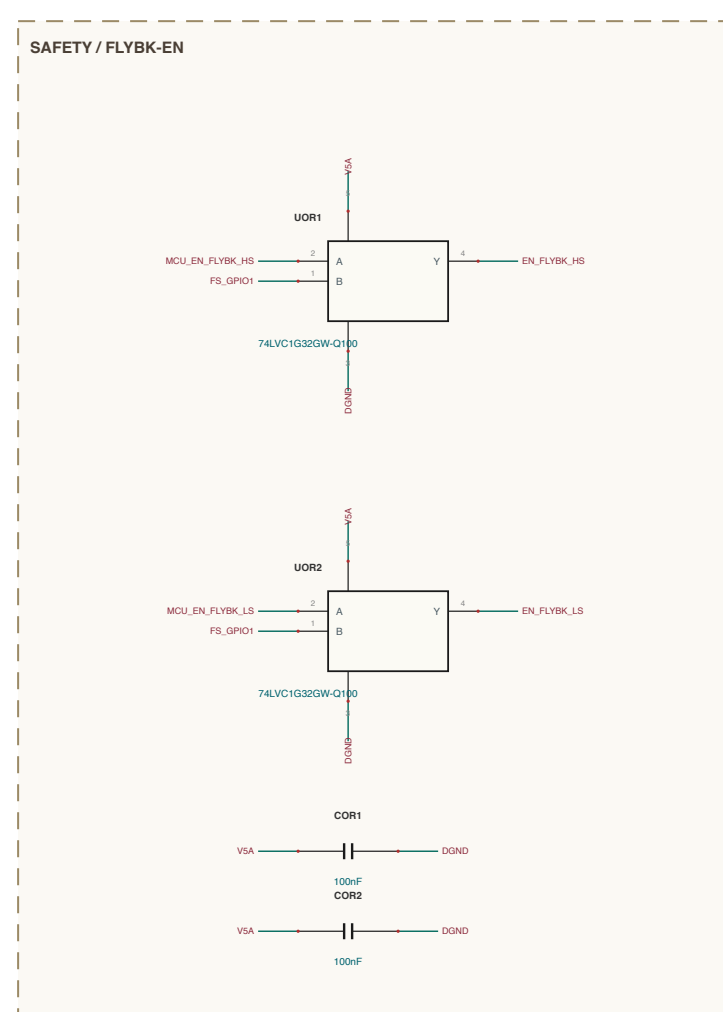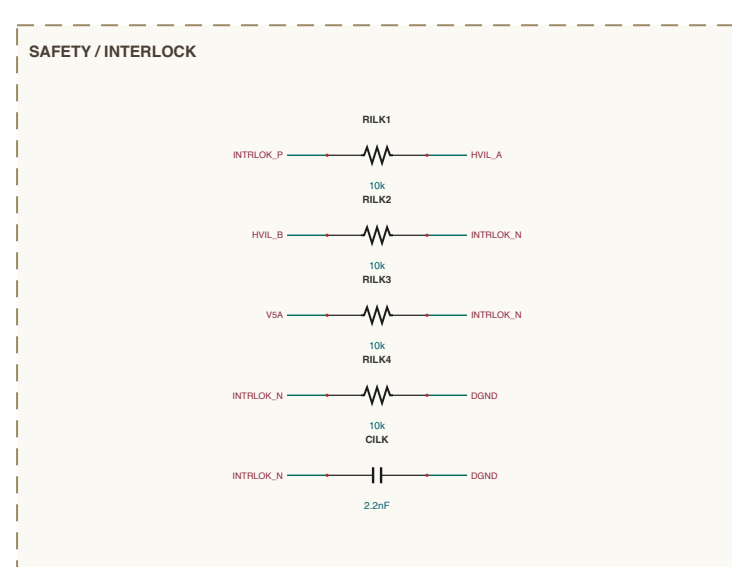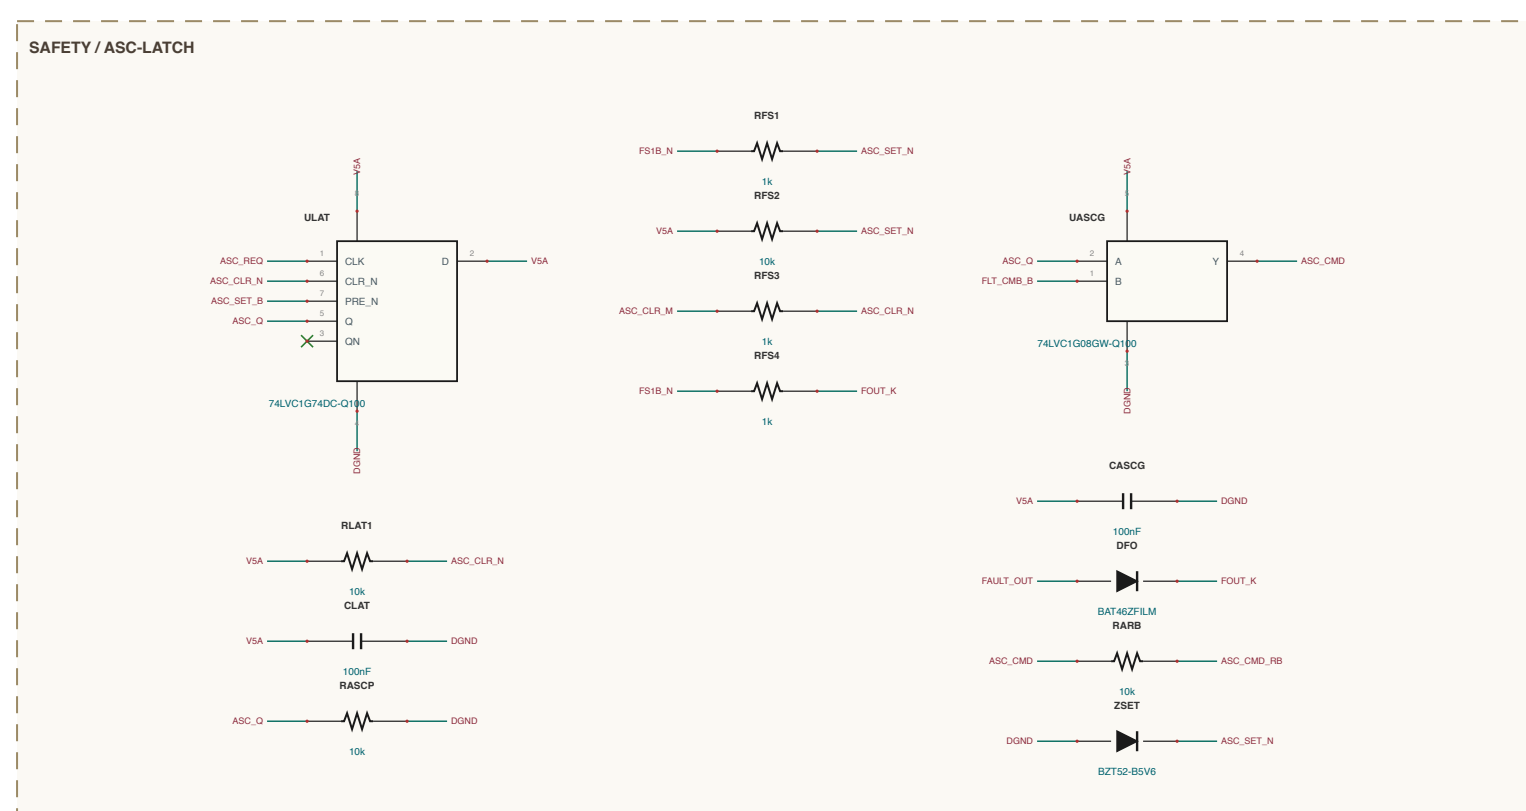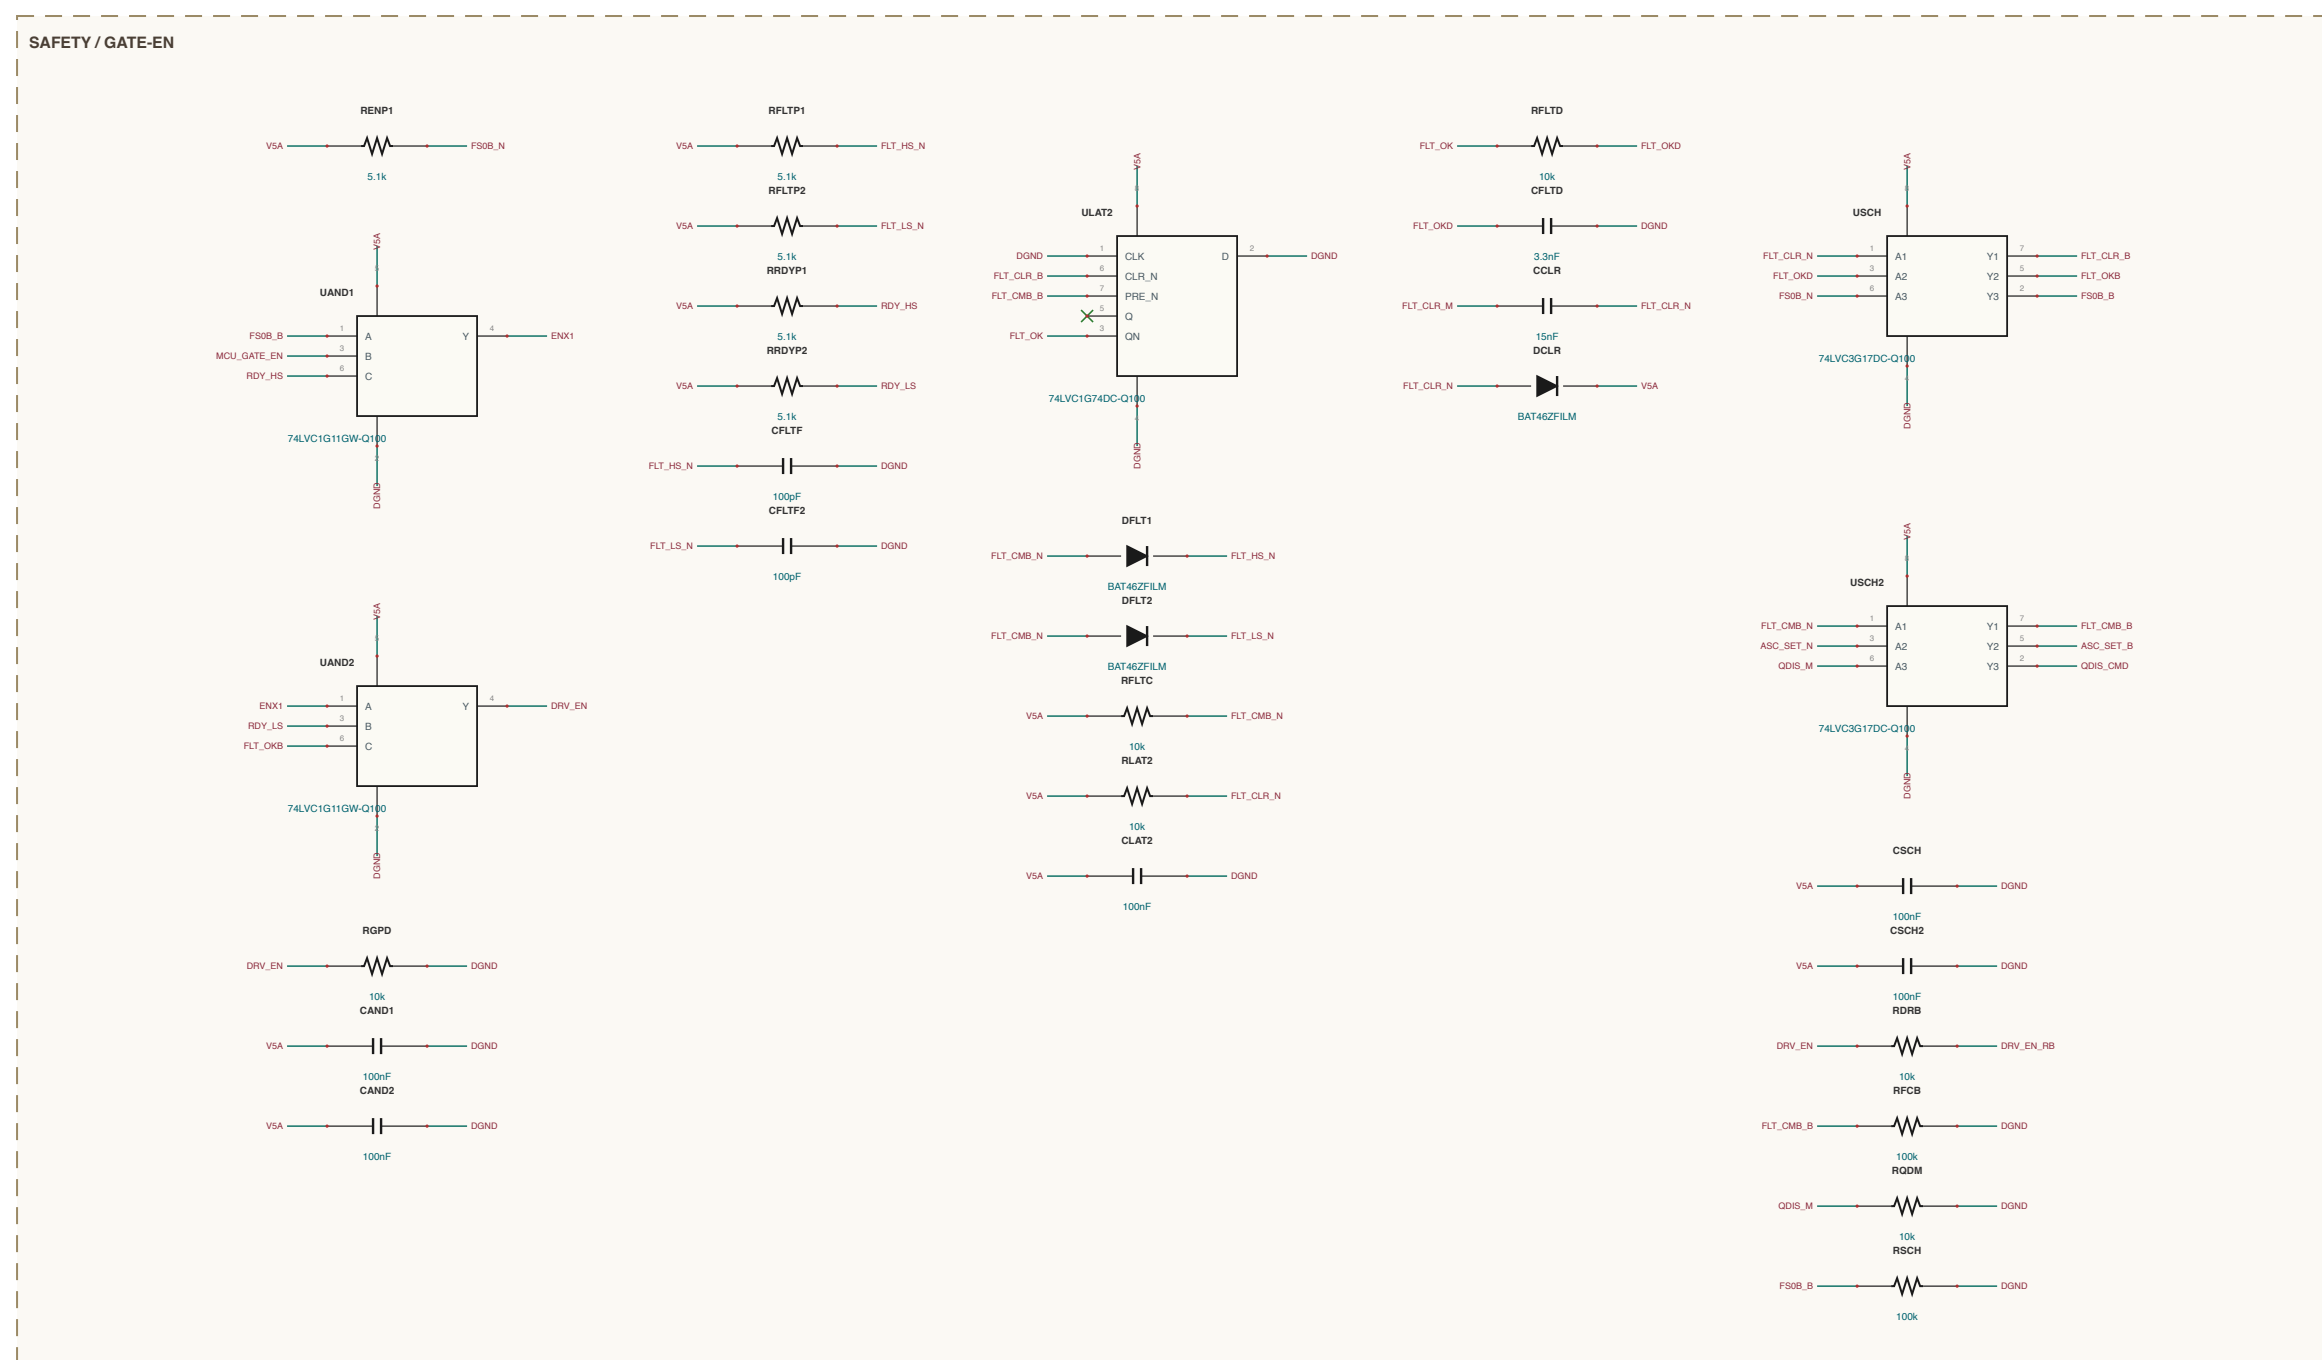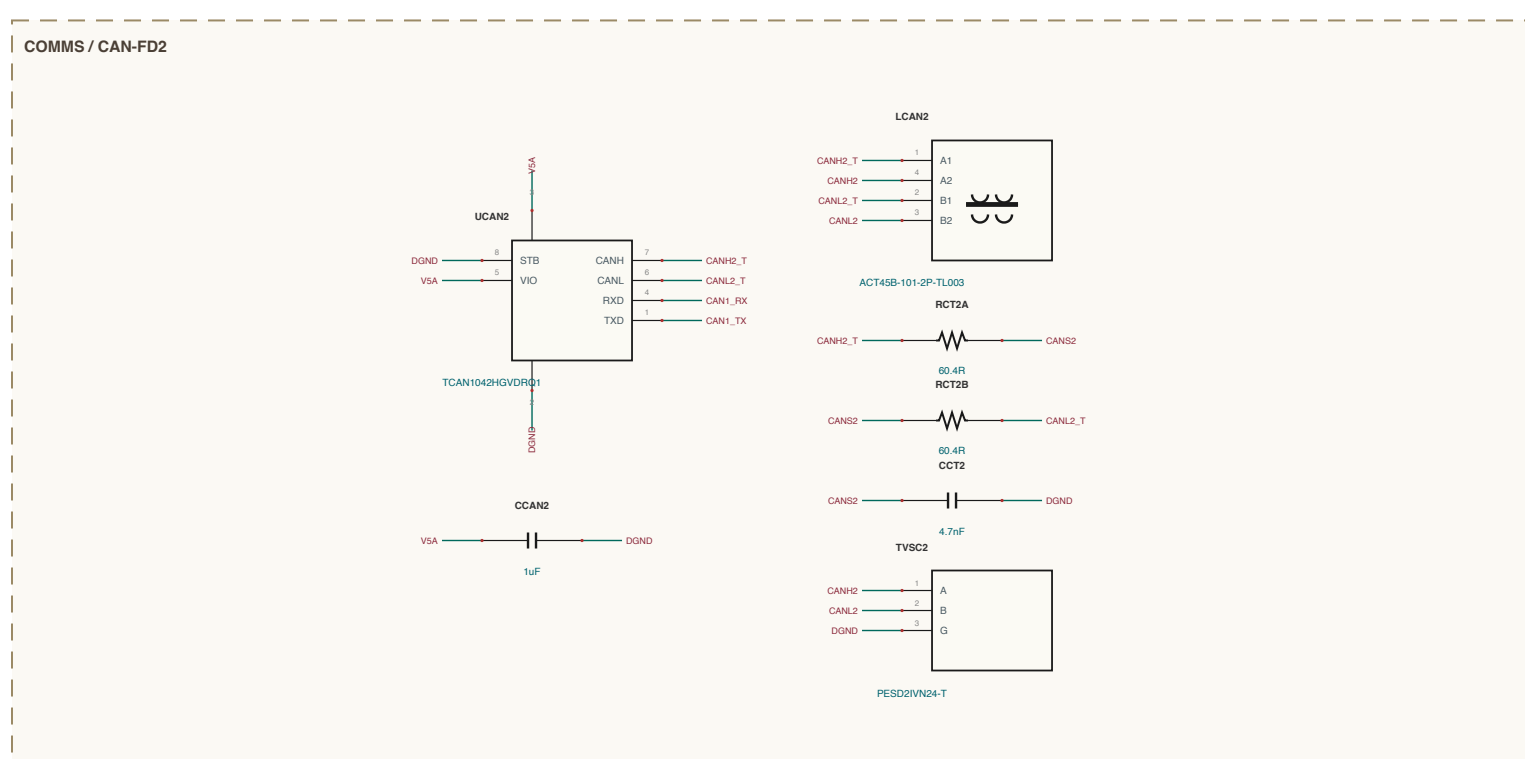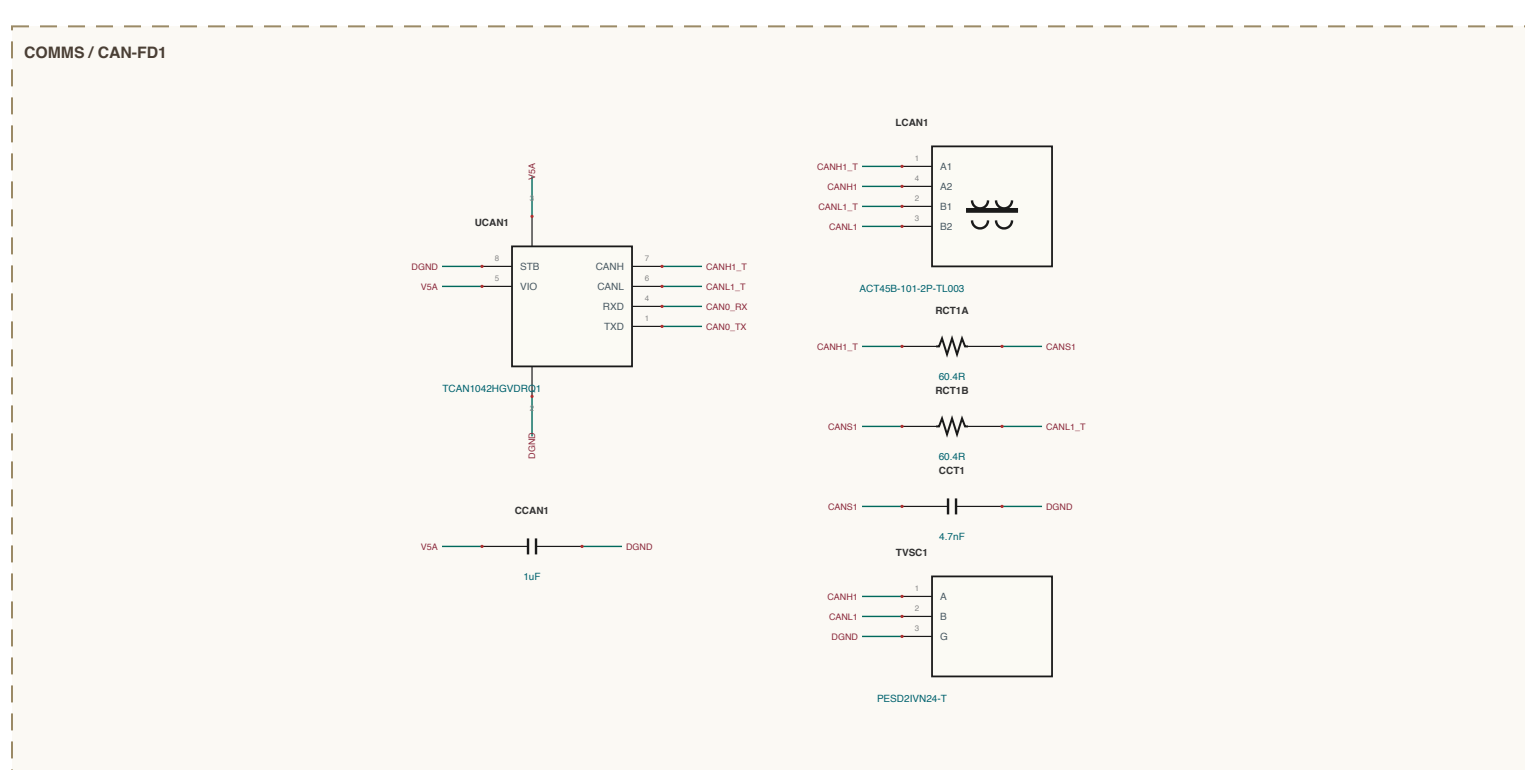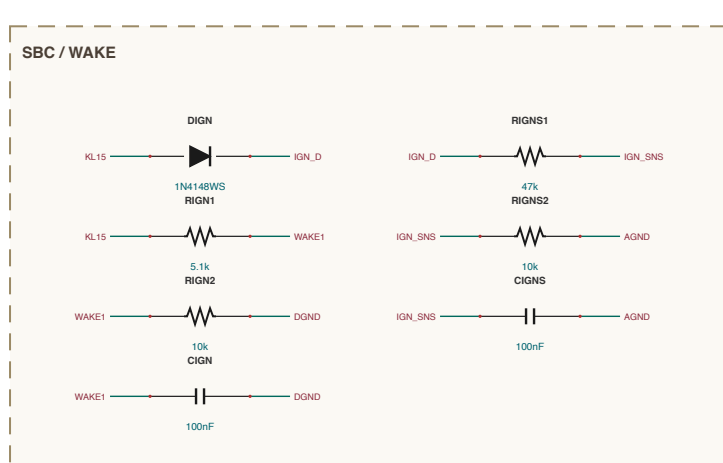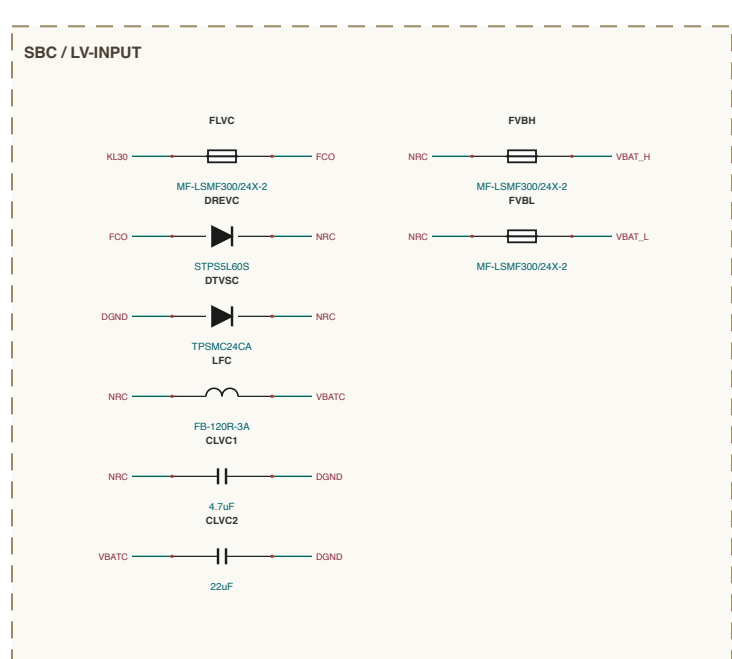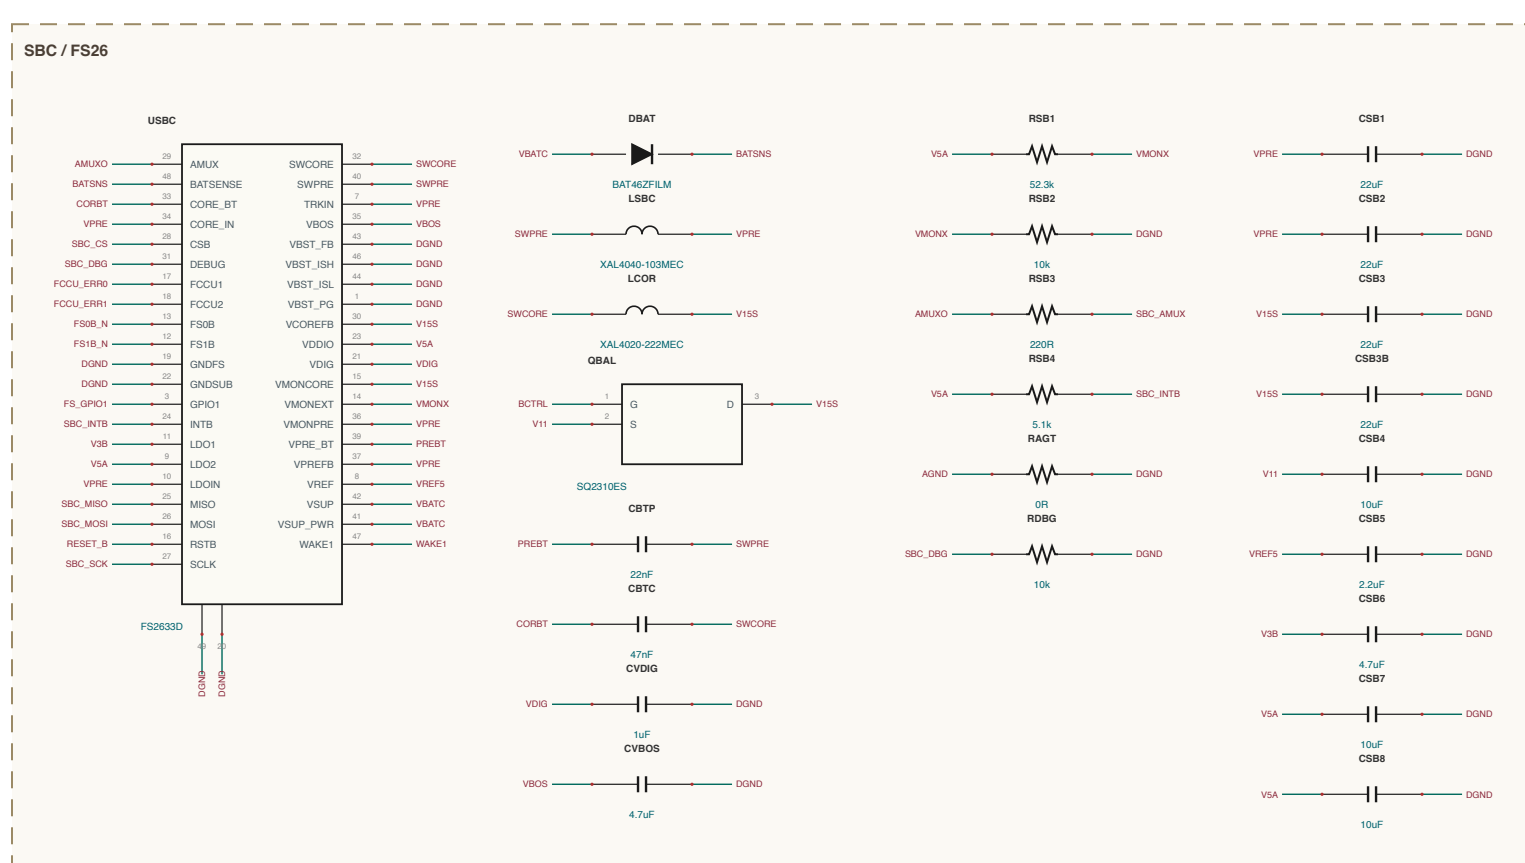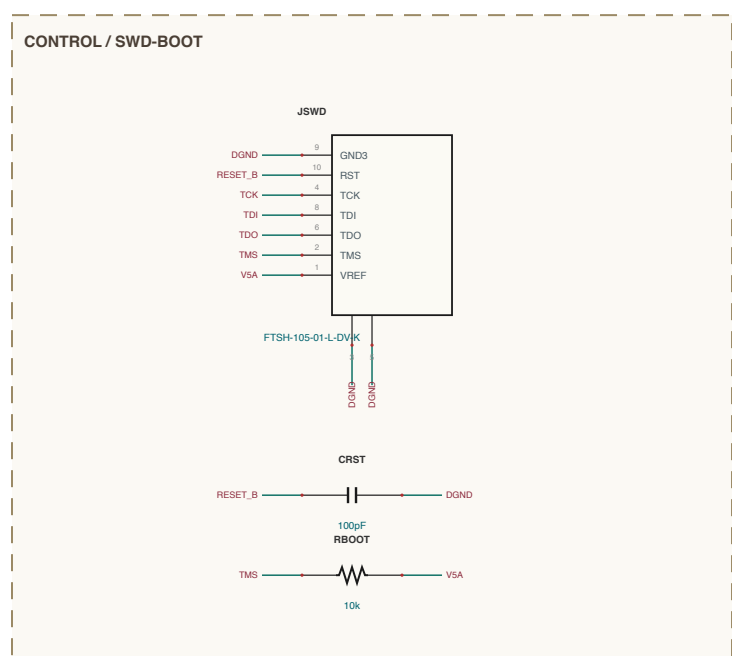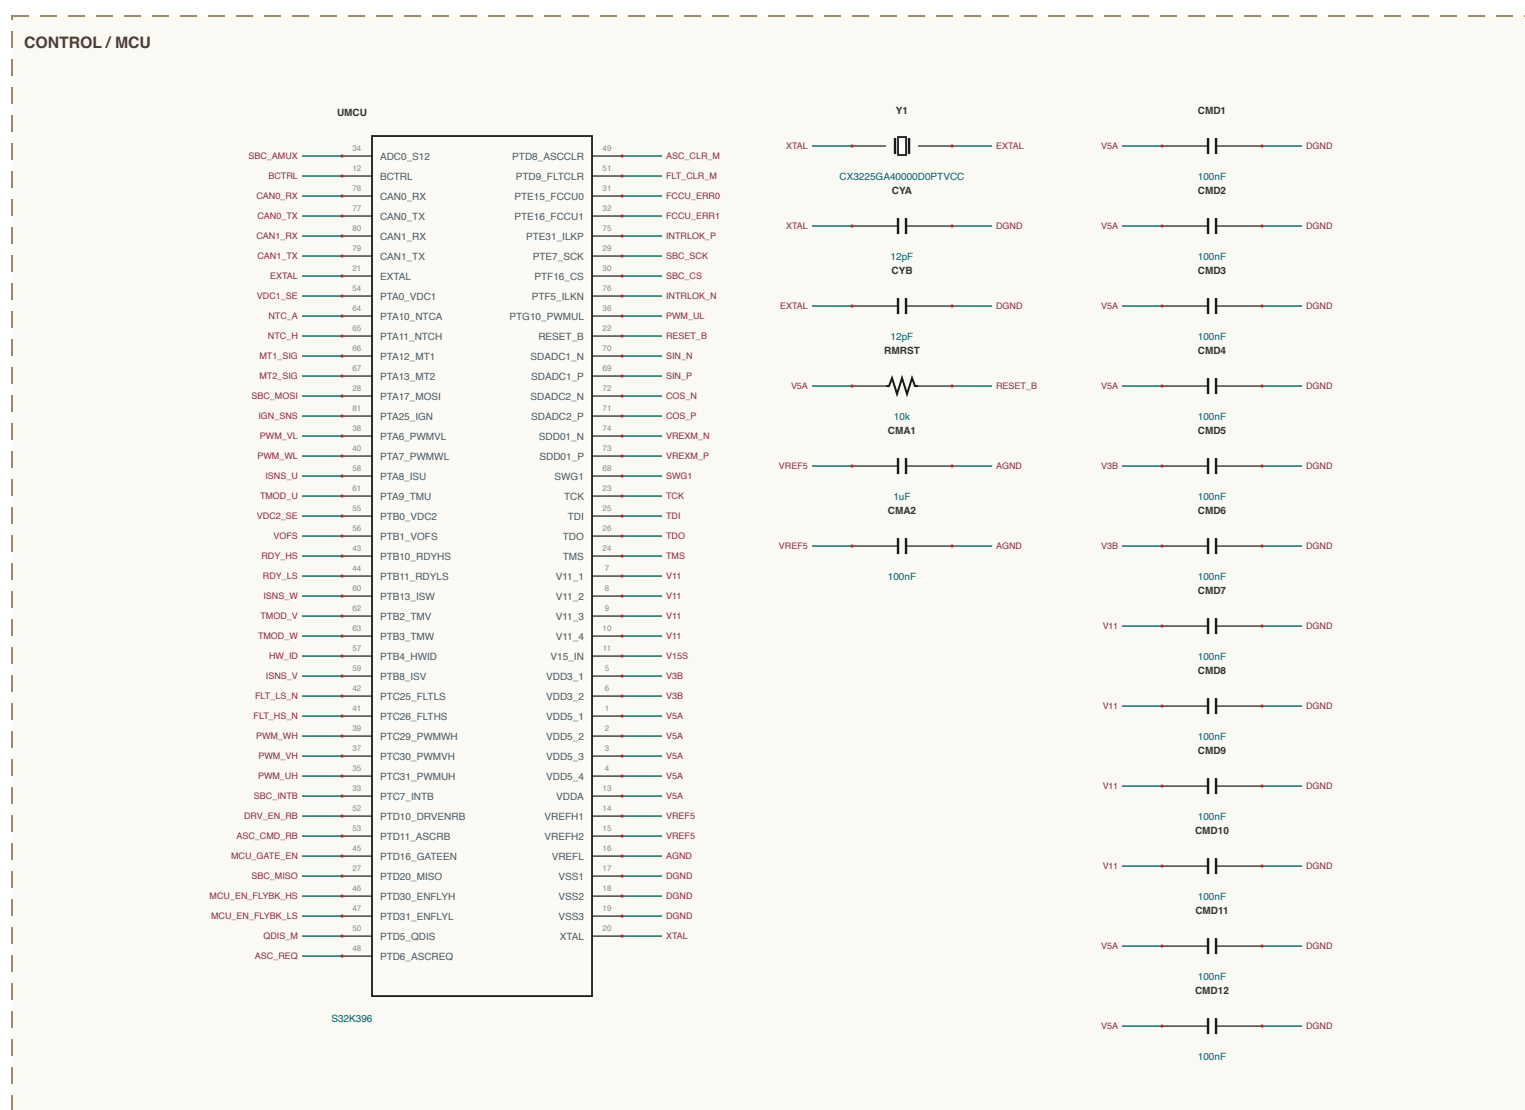

SHEET INDEX

229 kW pk Control card (LN) - 4 of 4

PHASE-SENSE - 4 sections

RESOLVER - 4 sections

SAFETY - 4 sections

COMES - 2 sections

CONTROL - 2 sections

YOO-PSICENTE - 2 secciones

rev A.B - 26 sections - 288 components

NET NAMING

Internal junctions are named for what they join.

Useful xPins mode at that IC pin e.g. WDC_VB

Isotams_M midpoint of a series pair e.g. BEA

Systems_crm log between Systems_crm e.g. B

all colors and exposed design runs

— www.comcast.net (see **INTERCOMPL**)