
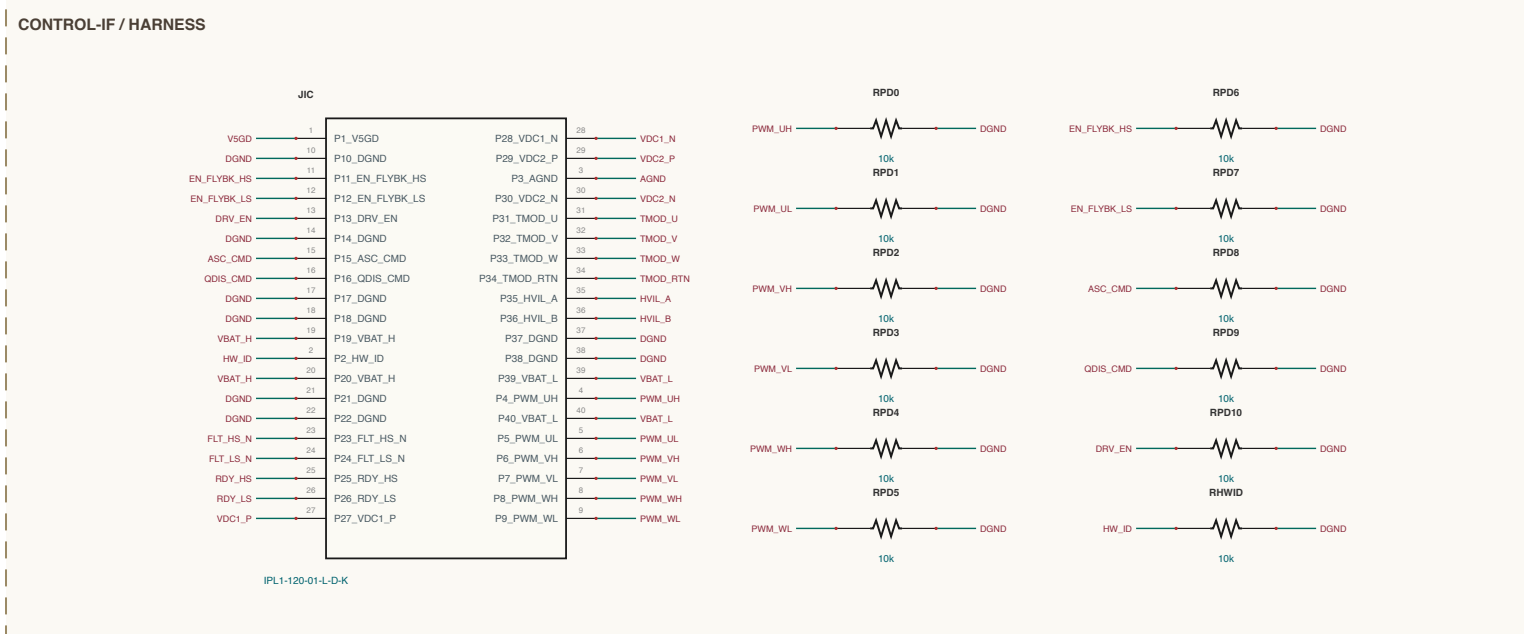
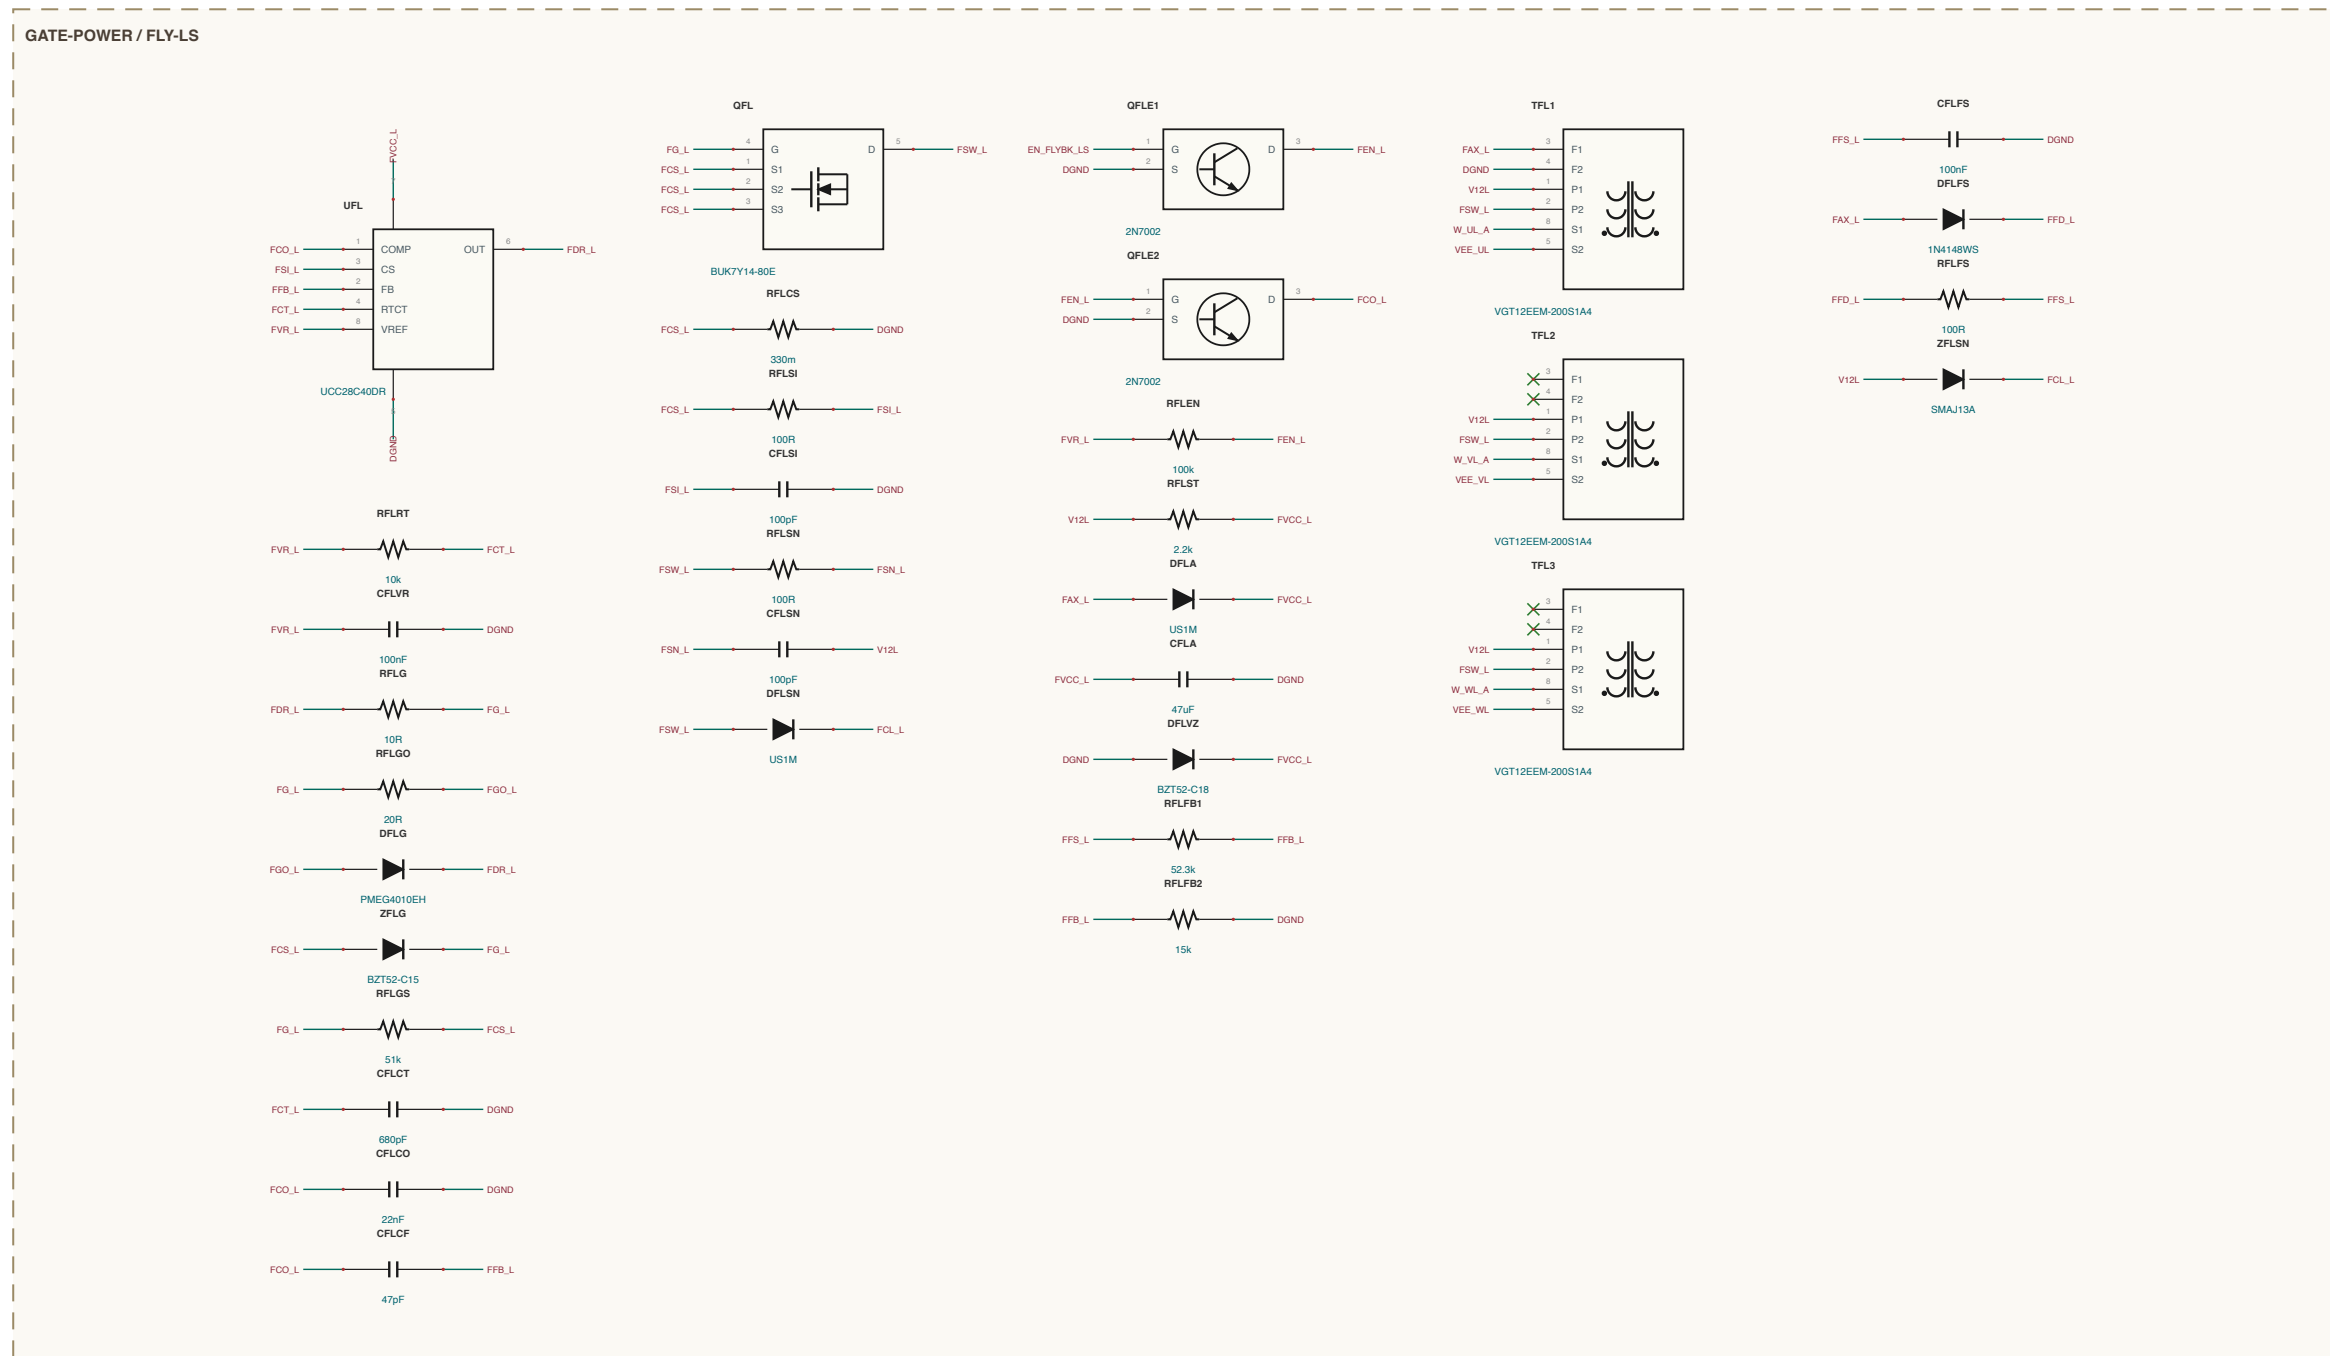
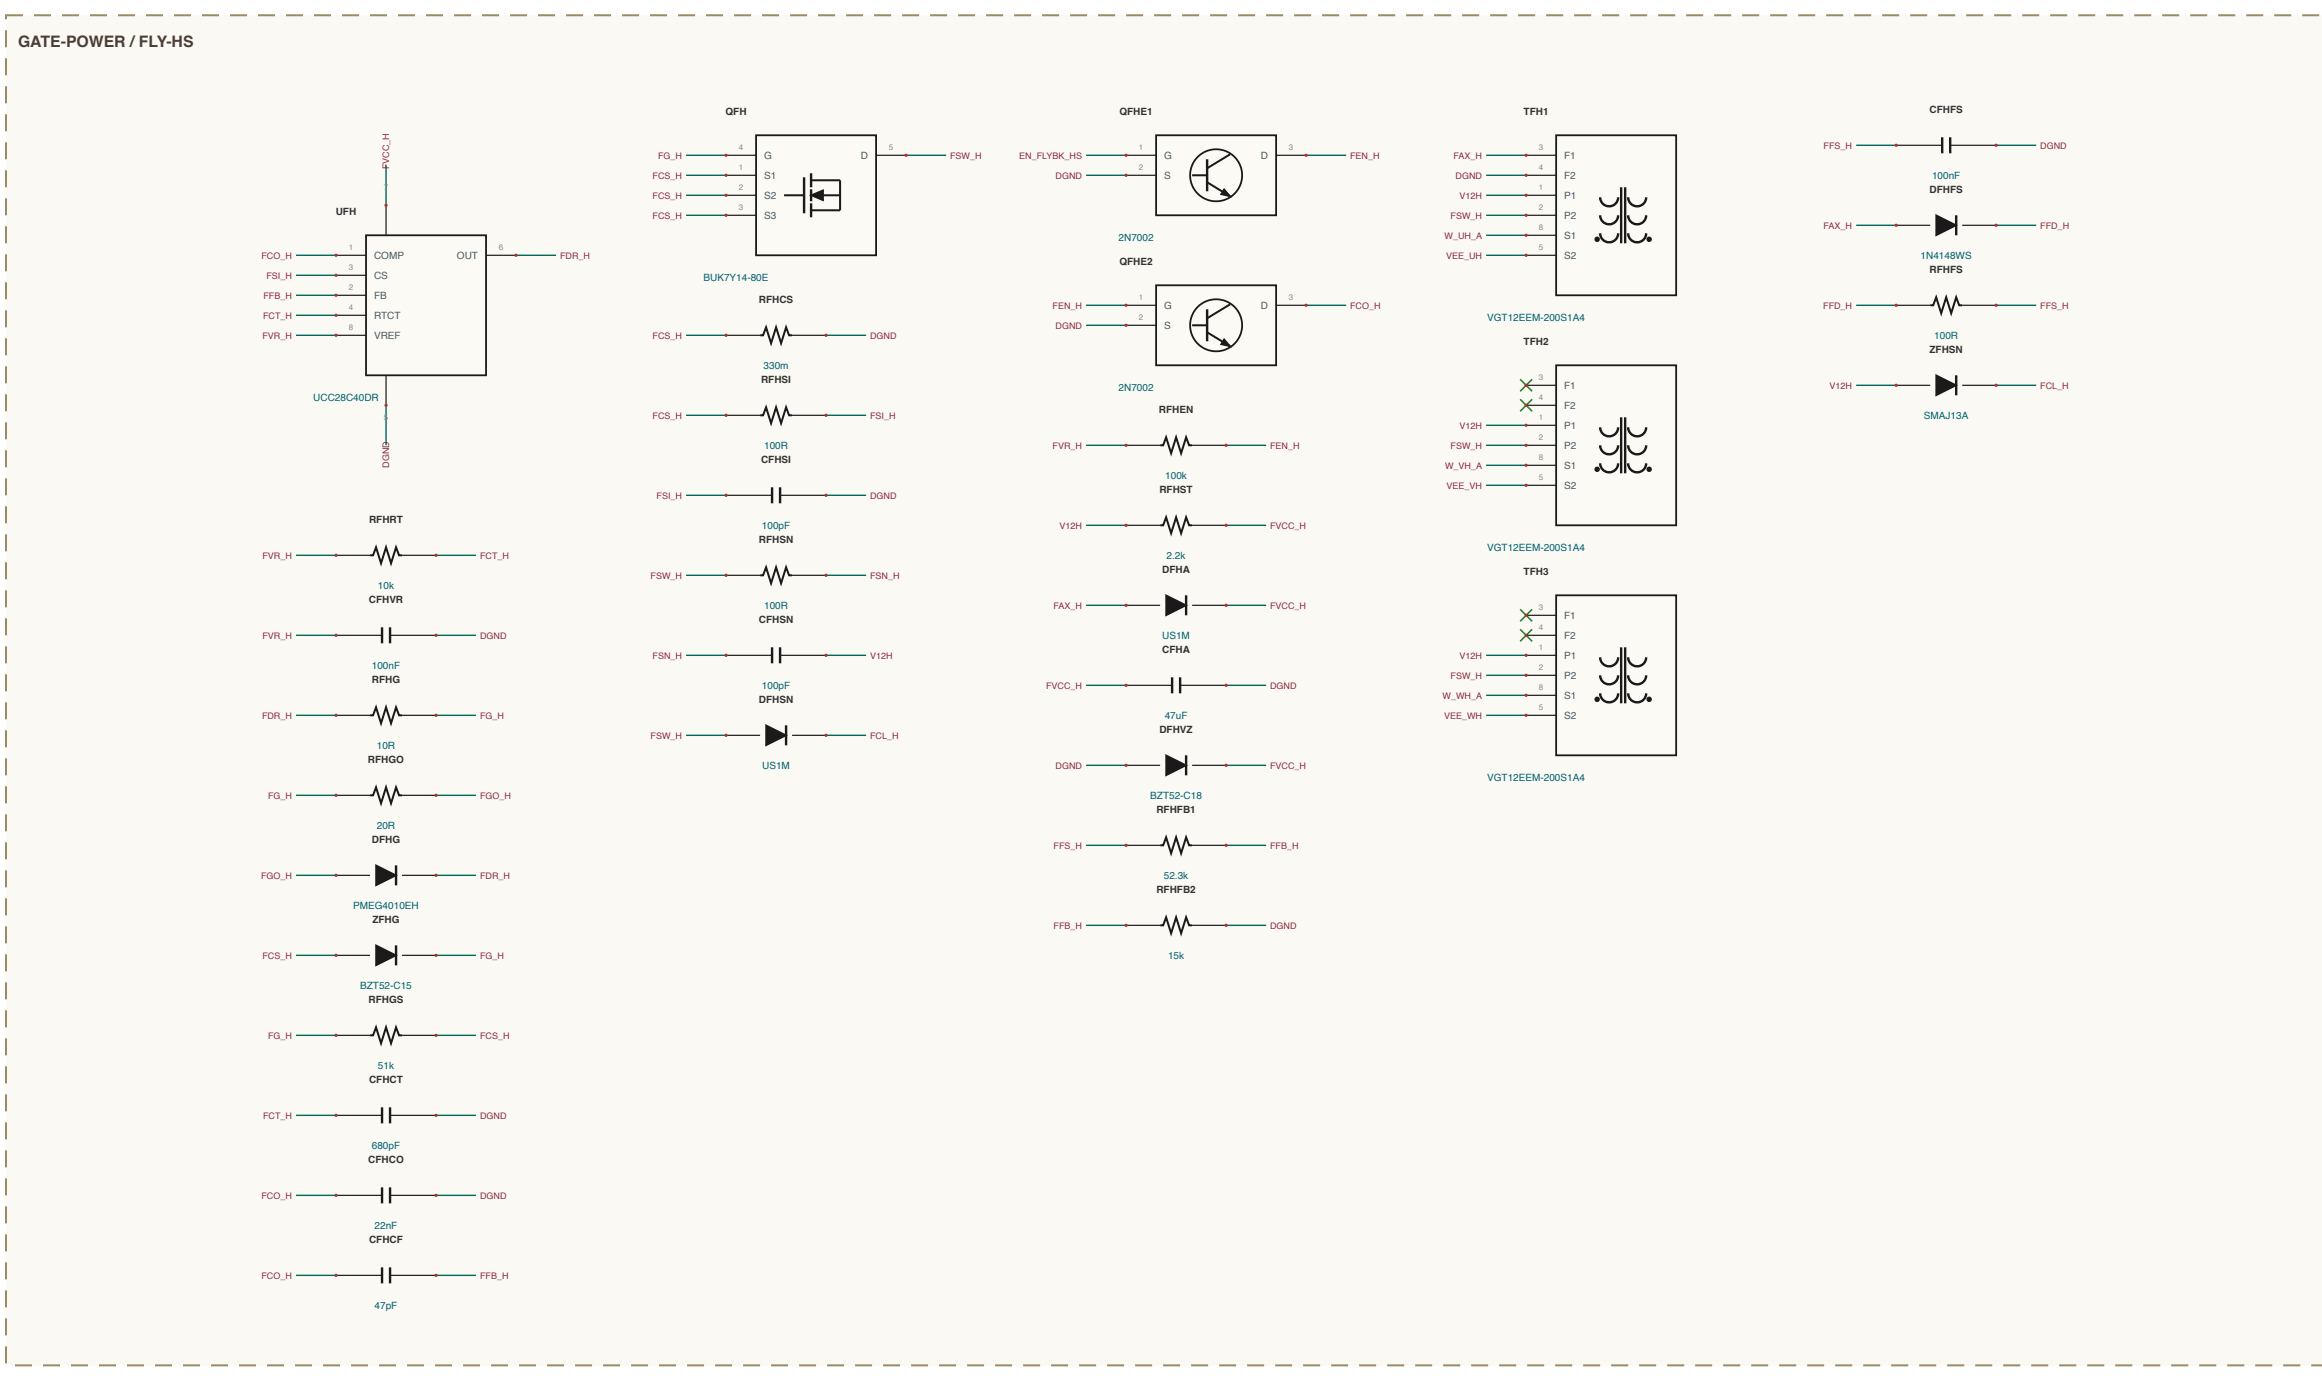
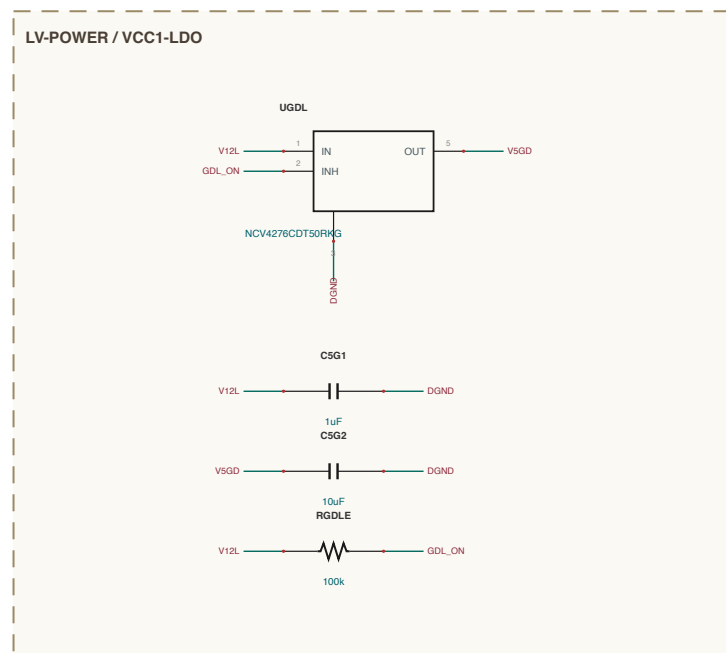
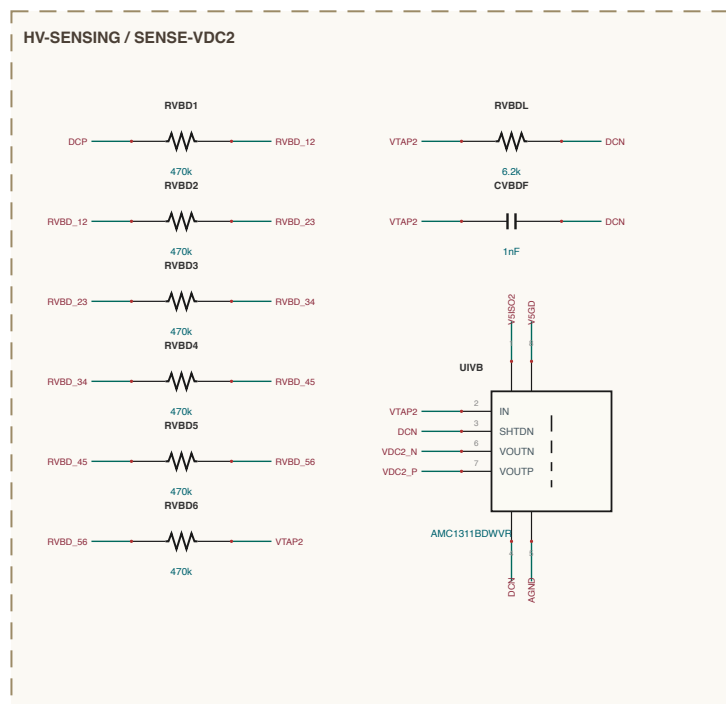
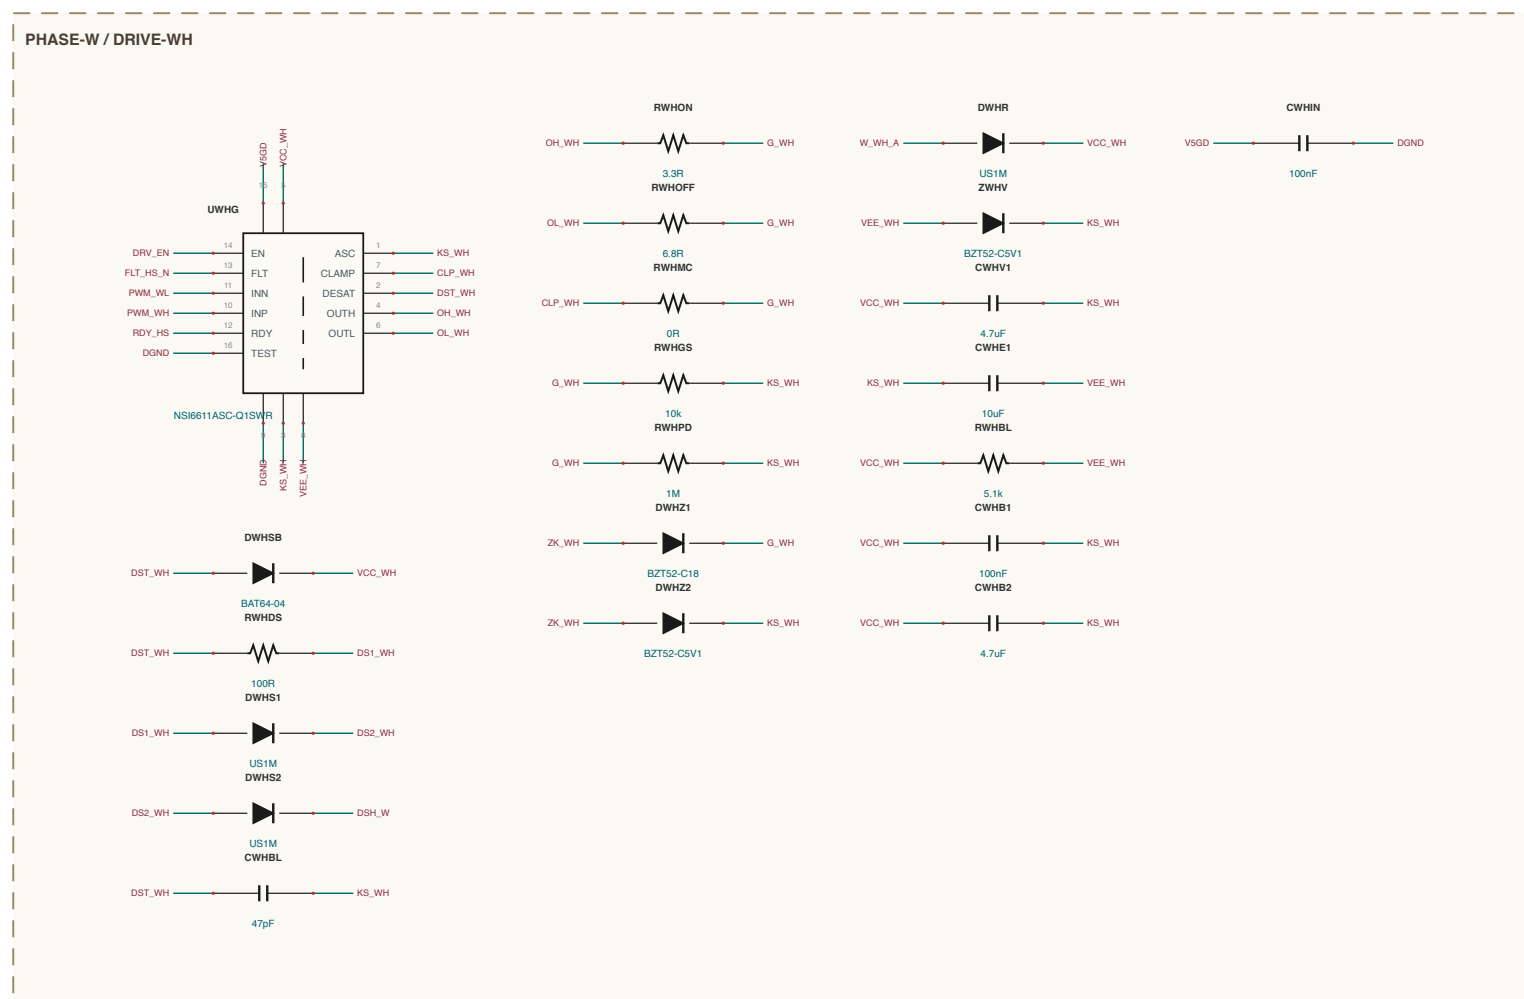
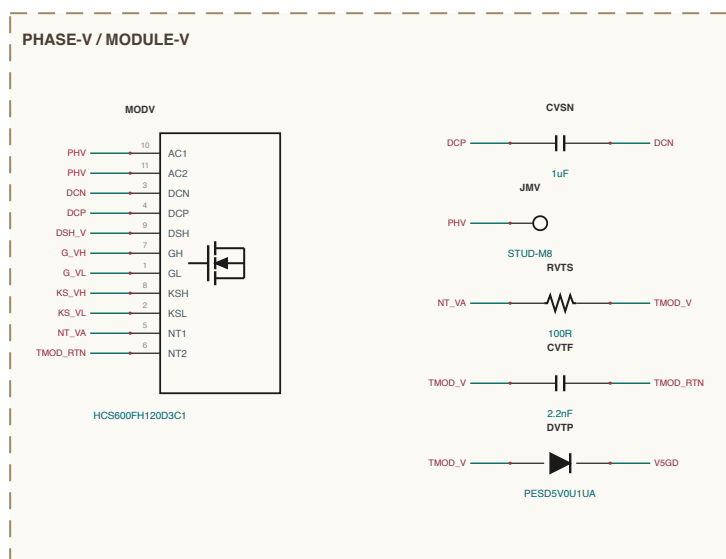
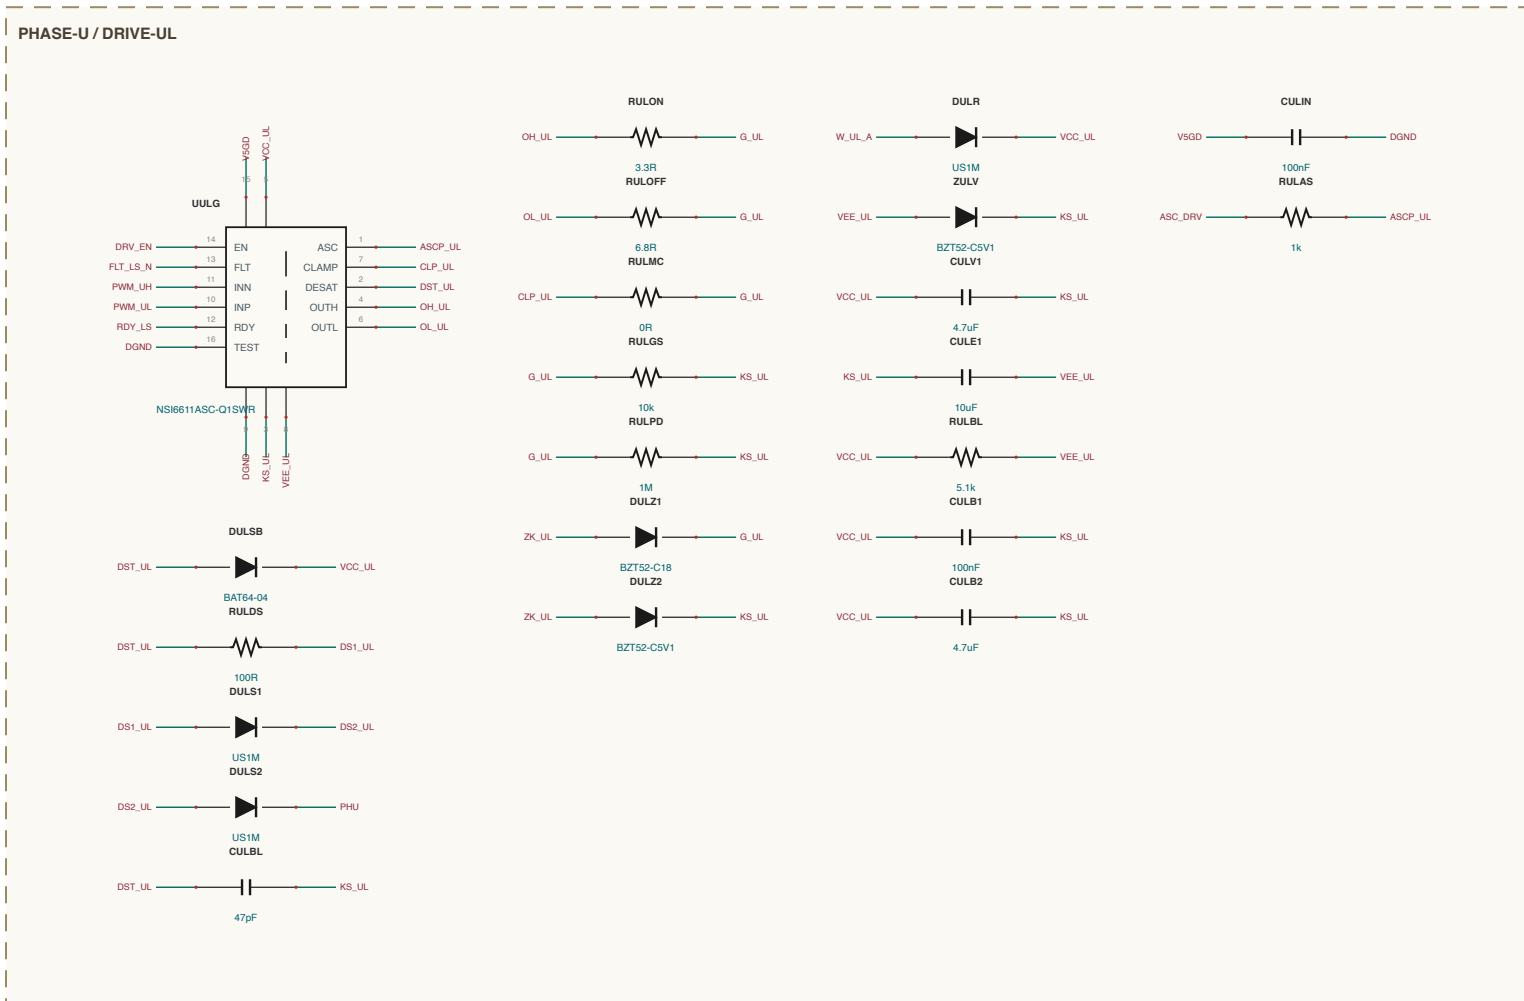
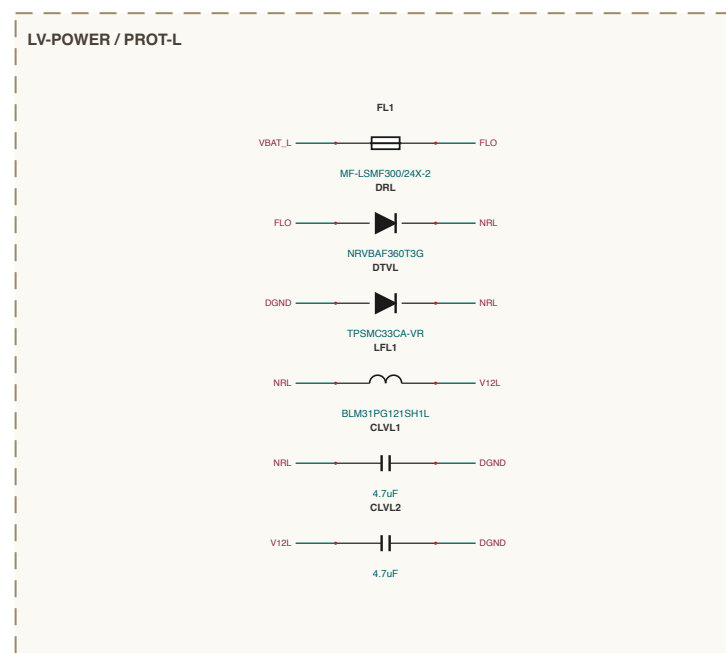
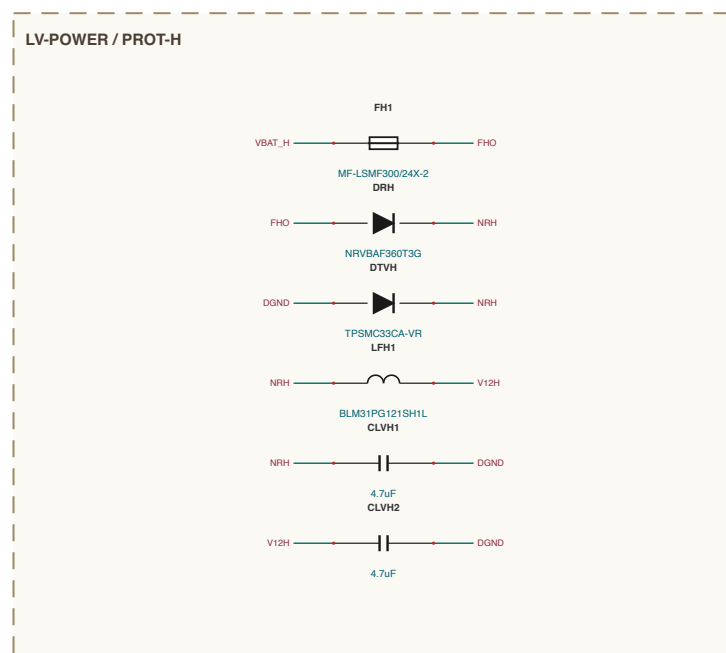
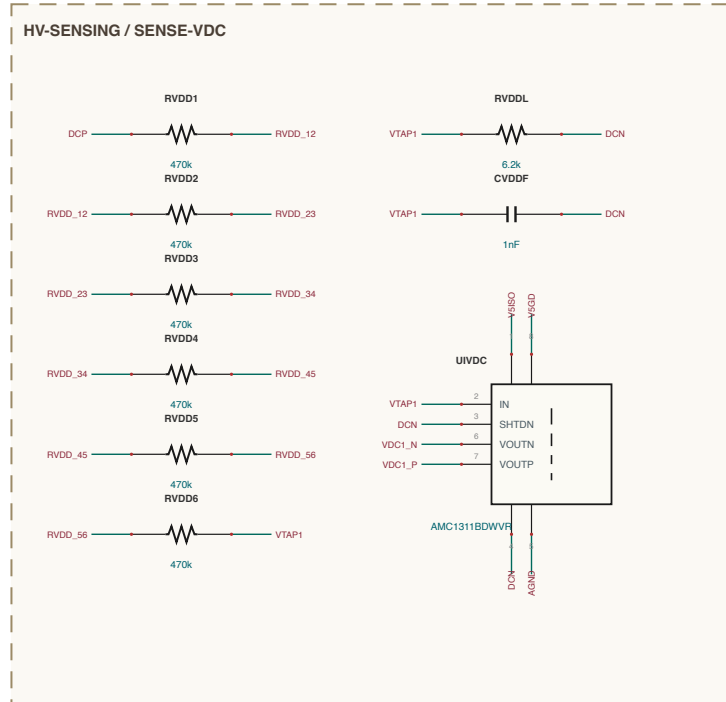
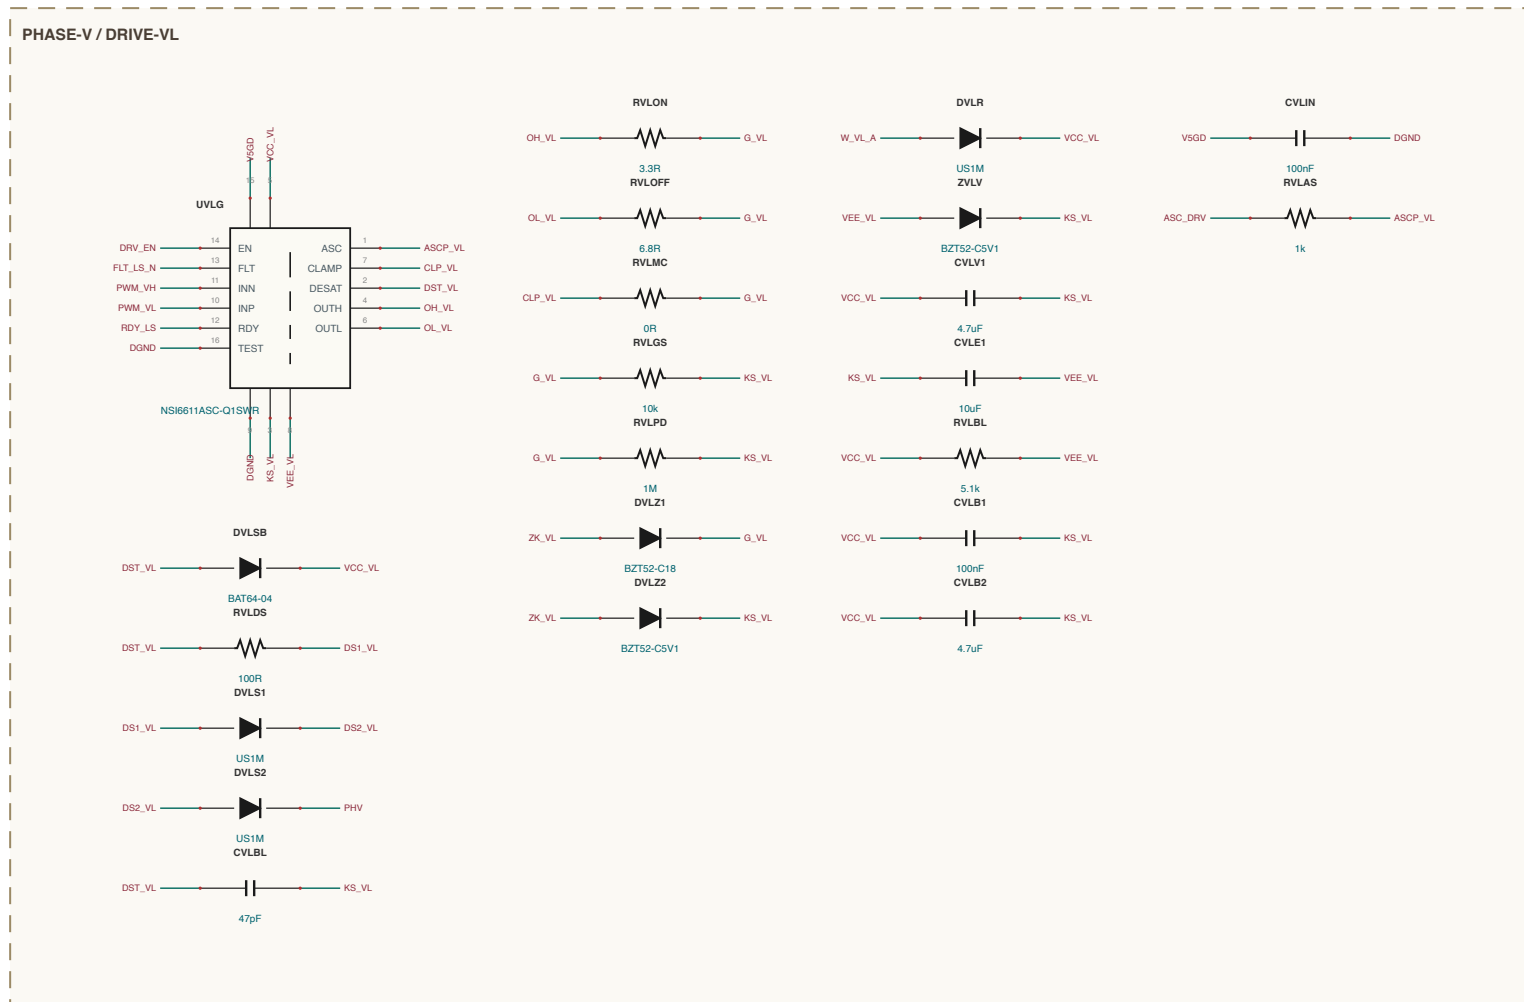
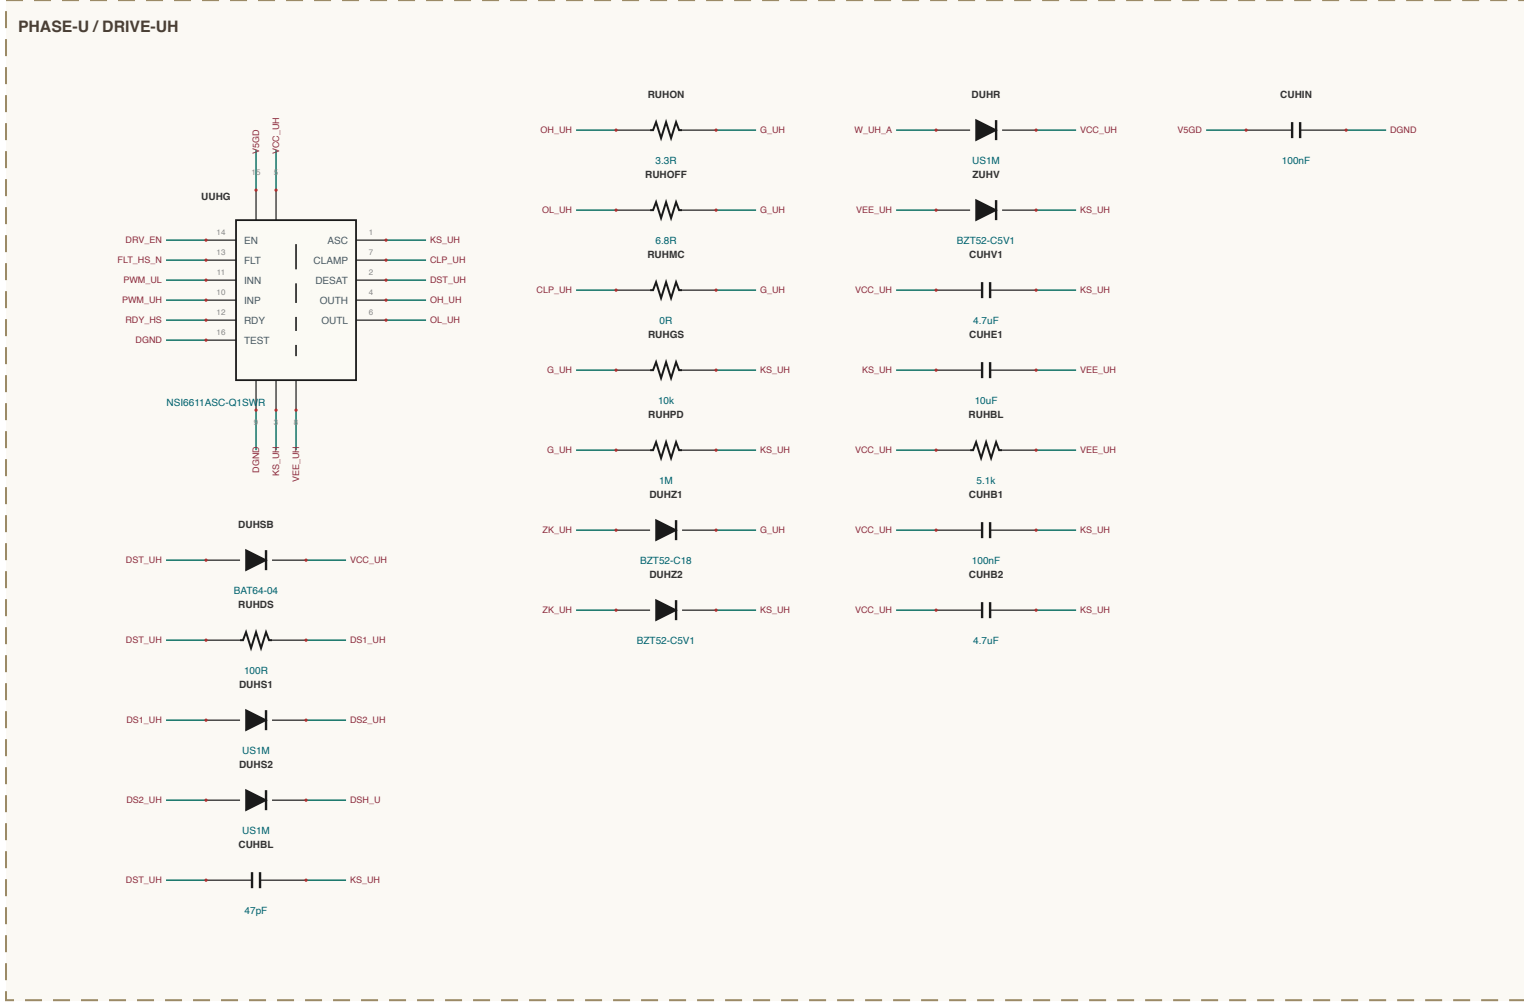
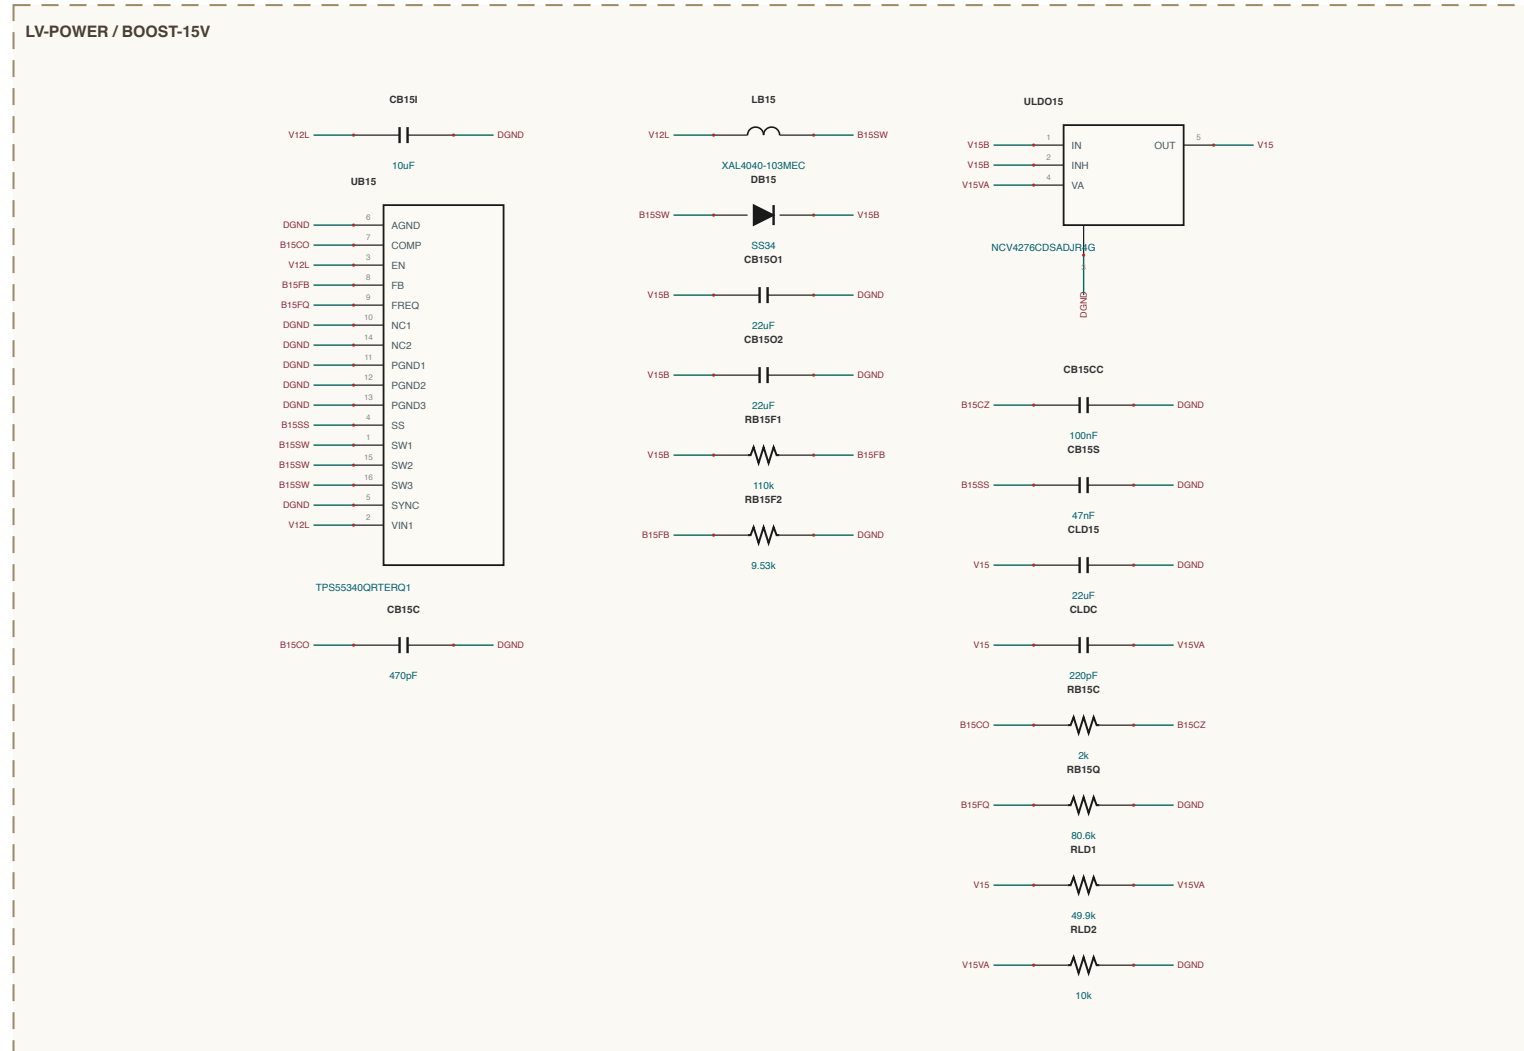
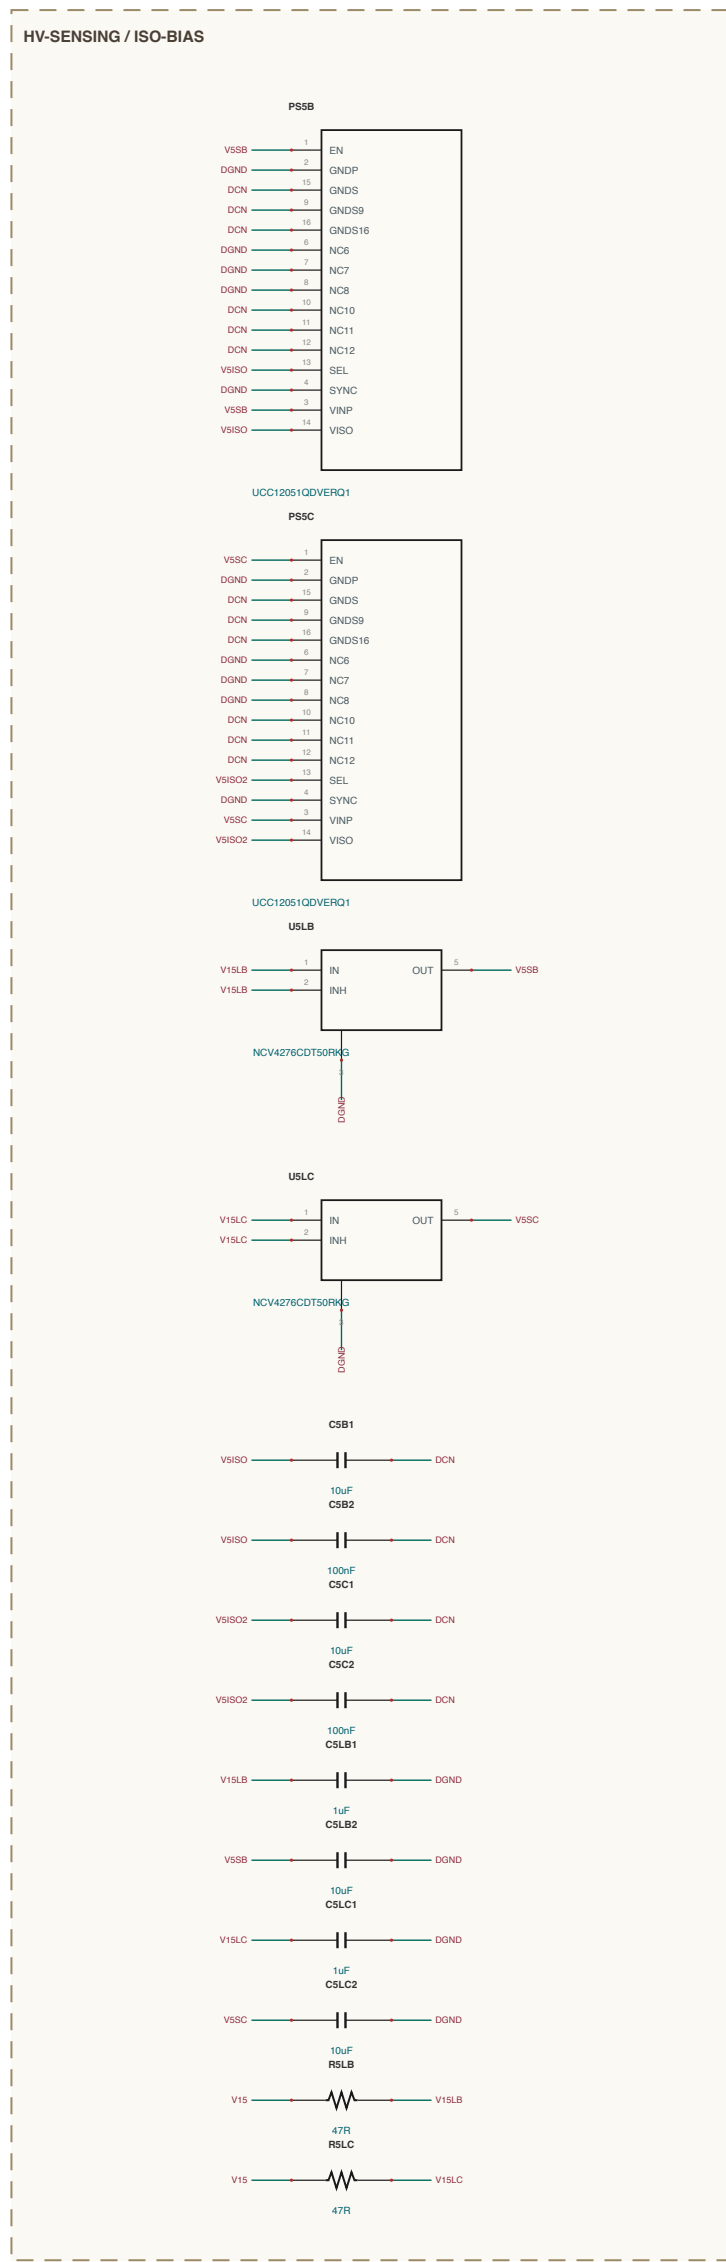
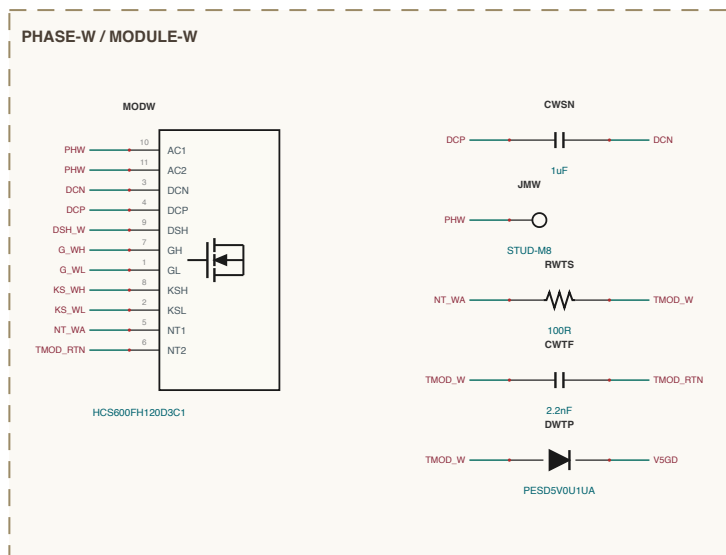
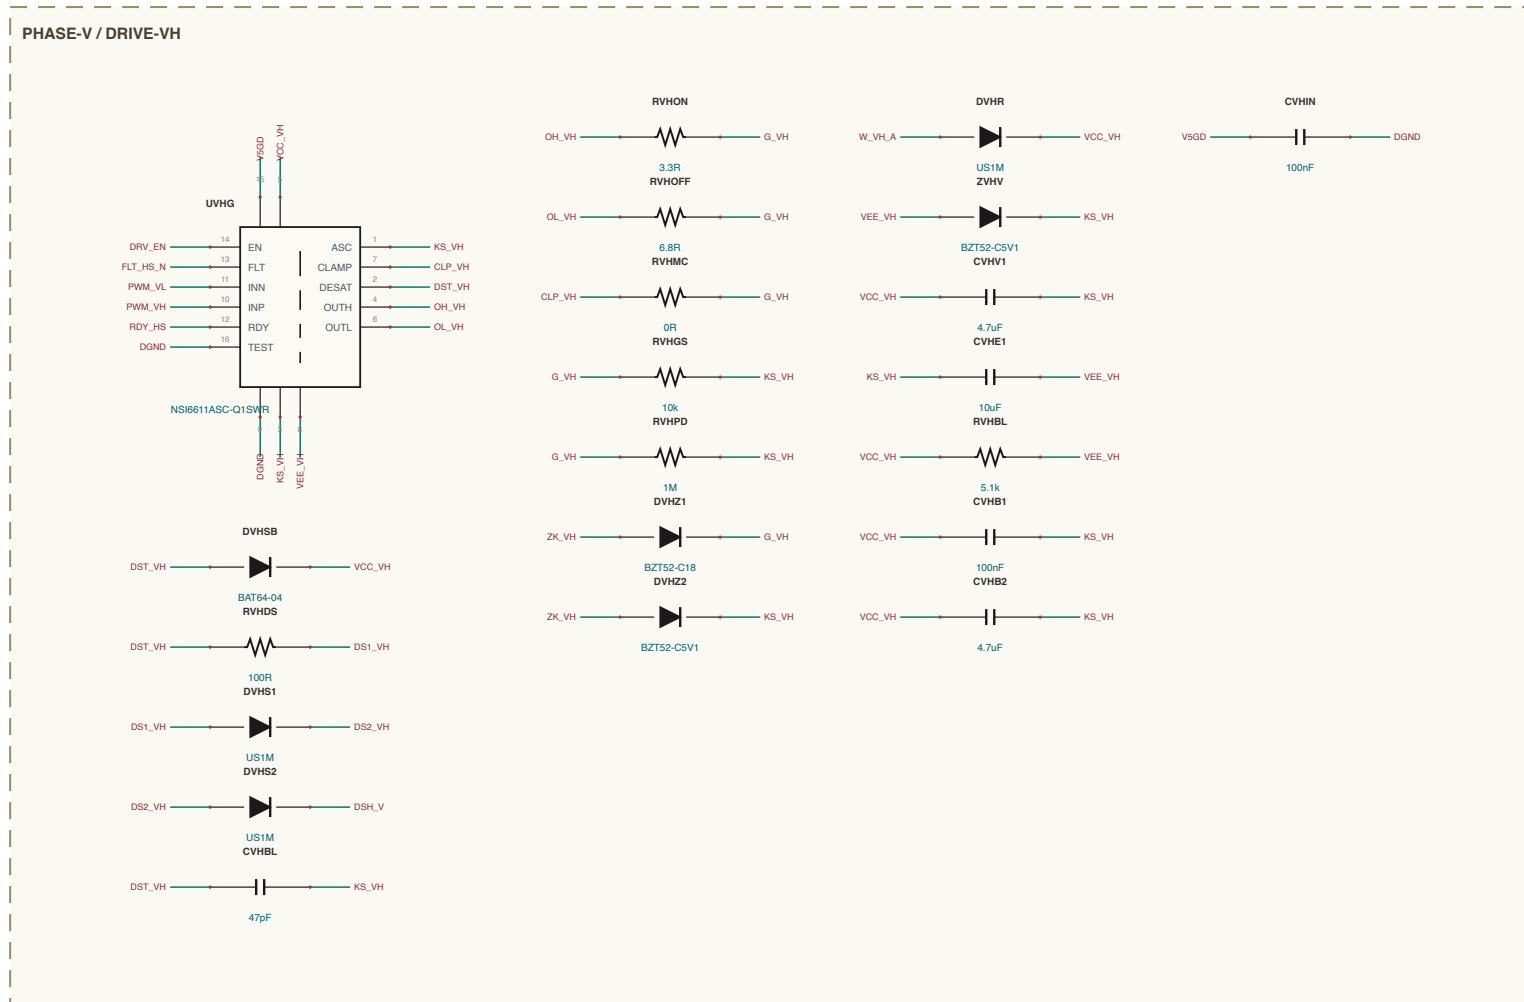
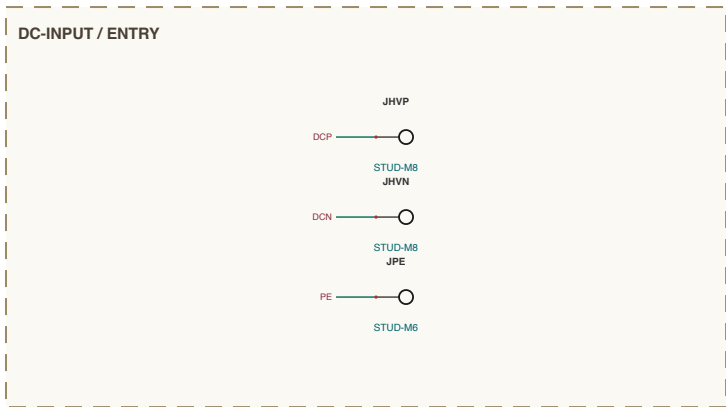
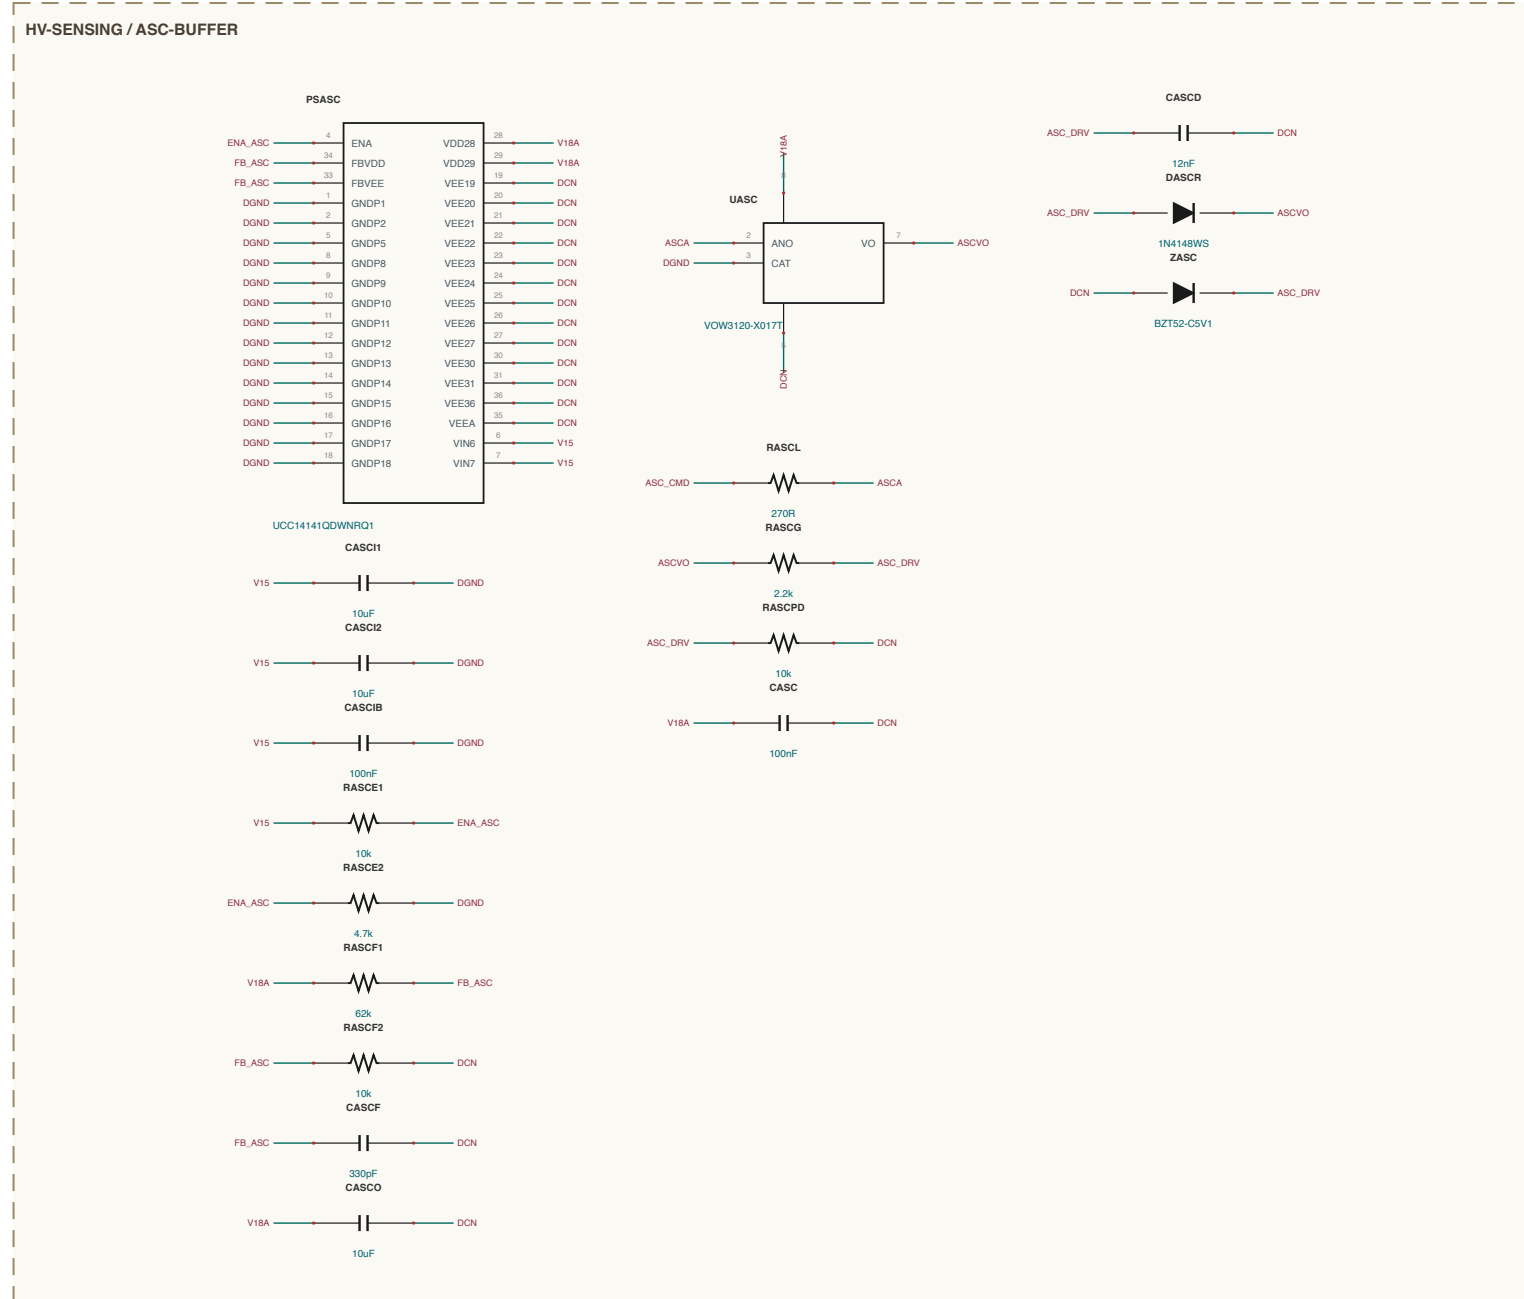
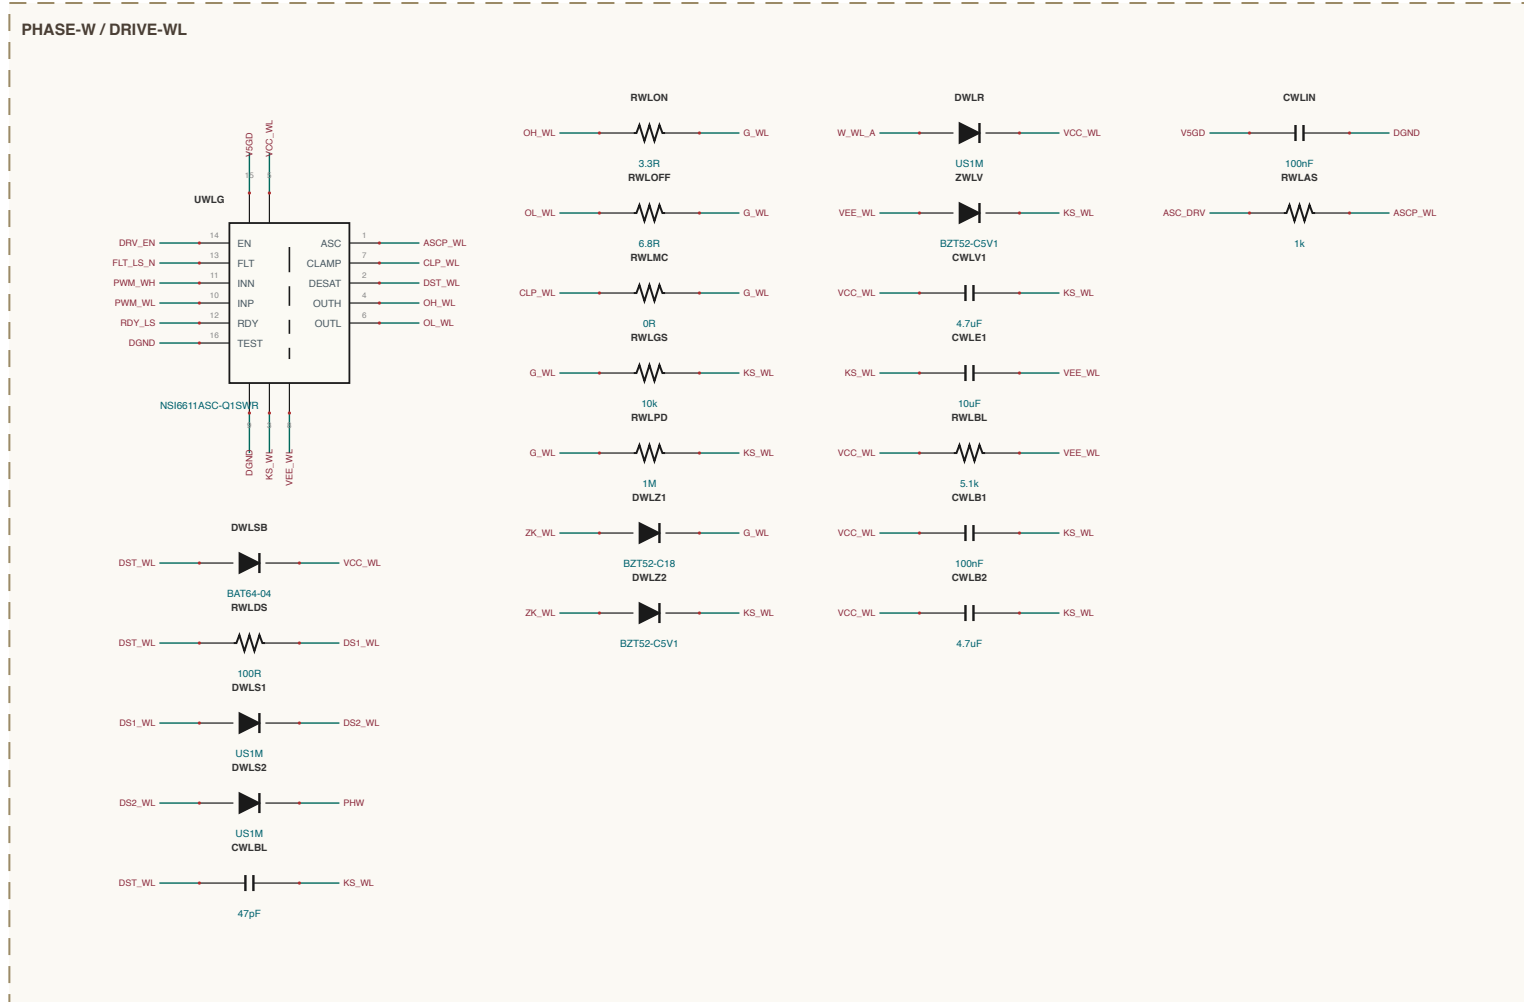
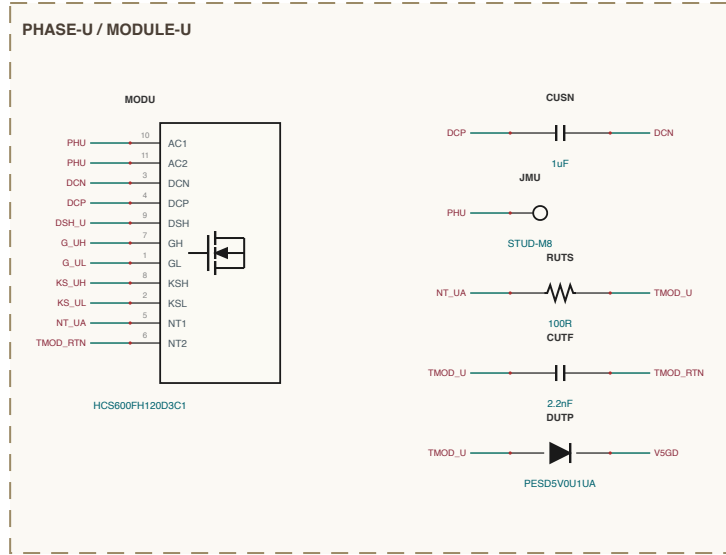
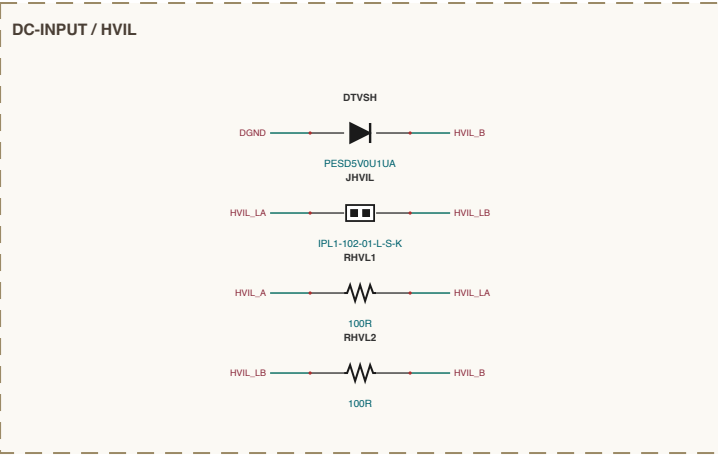


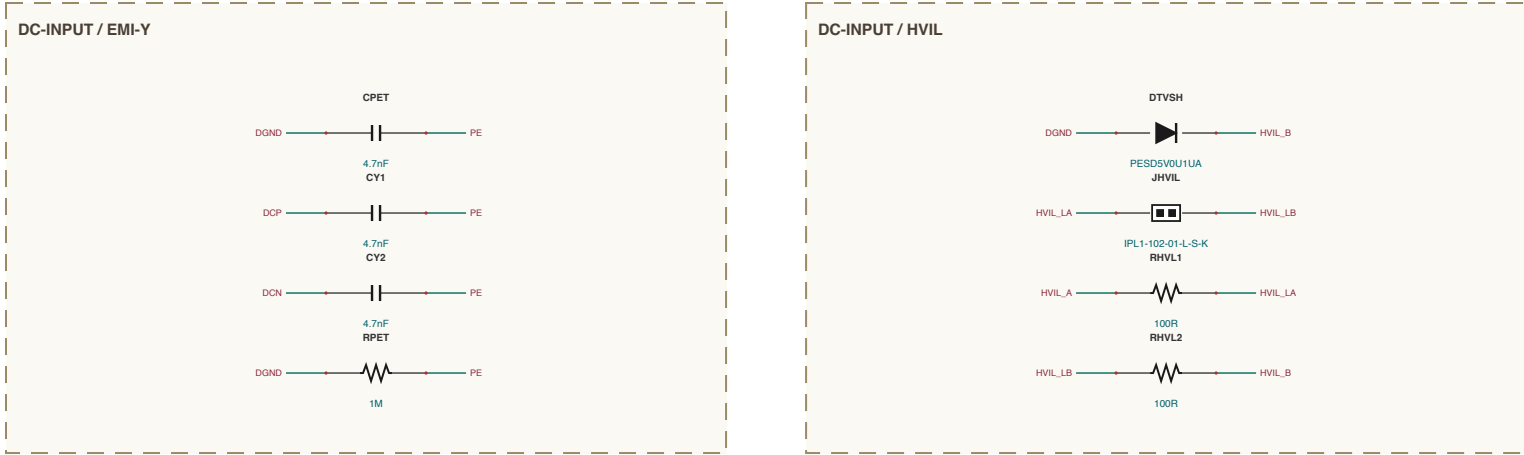

NET NAMING

Internet positions are named for what they are.

Qualif. vPb's nodes at that IC pin e.g. VDDC1, VDDP.

Resistor: 30 independent of a series pair e.g. PRLA, M.

Resistor: series leg between Resistor1 and e.g. PRLD, L2.

All others are explicit design rules.

Series name on another sheet e.g. name not joined ONLY if the.

named connection/label (from INTERGATE LINKS, design team)