
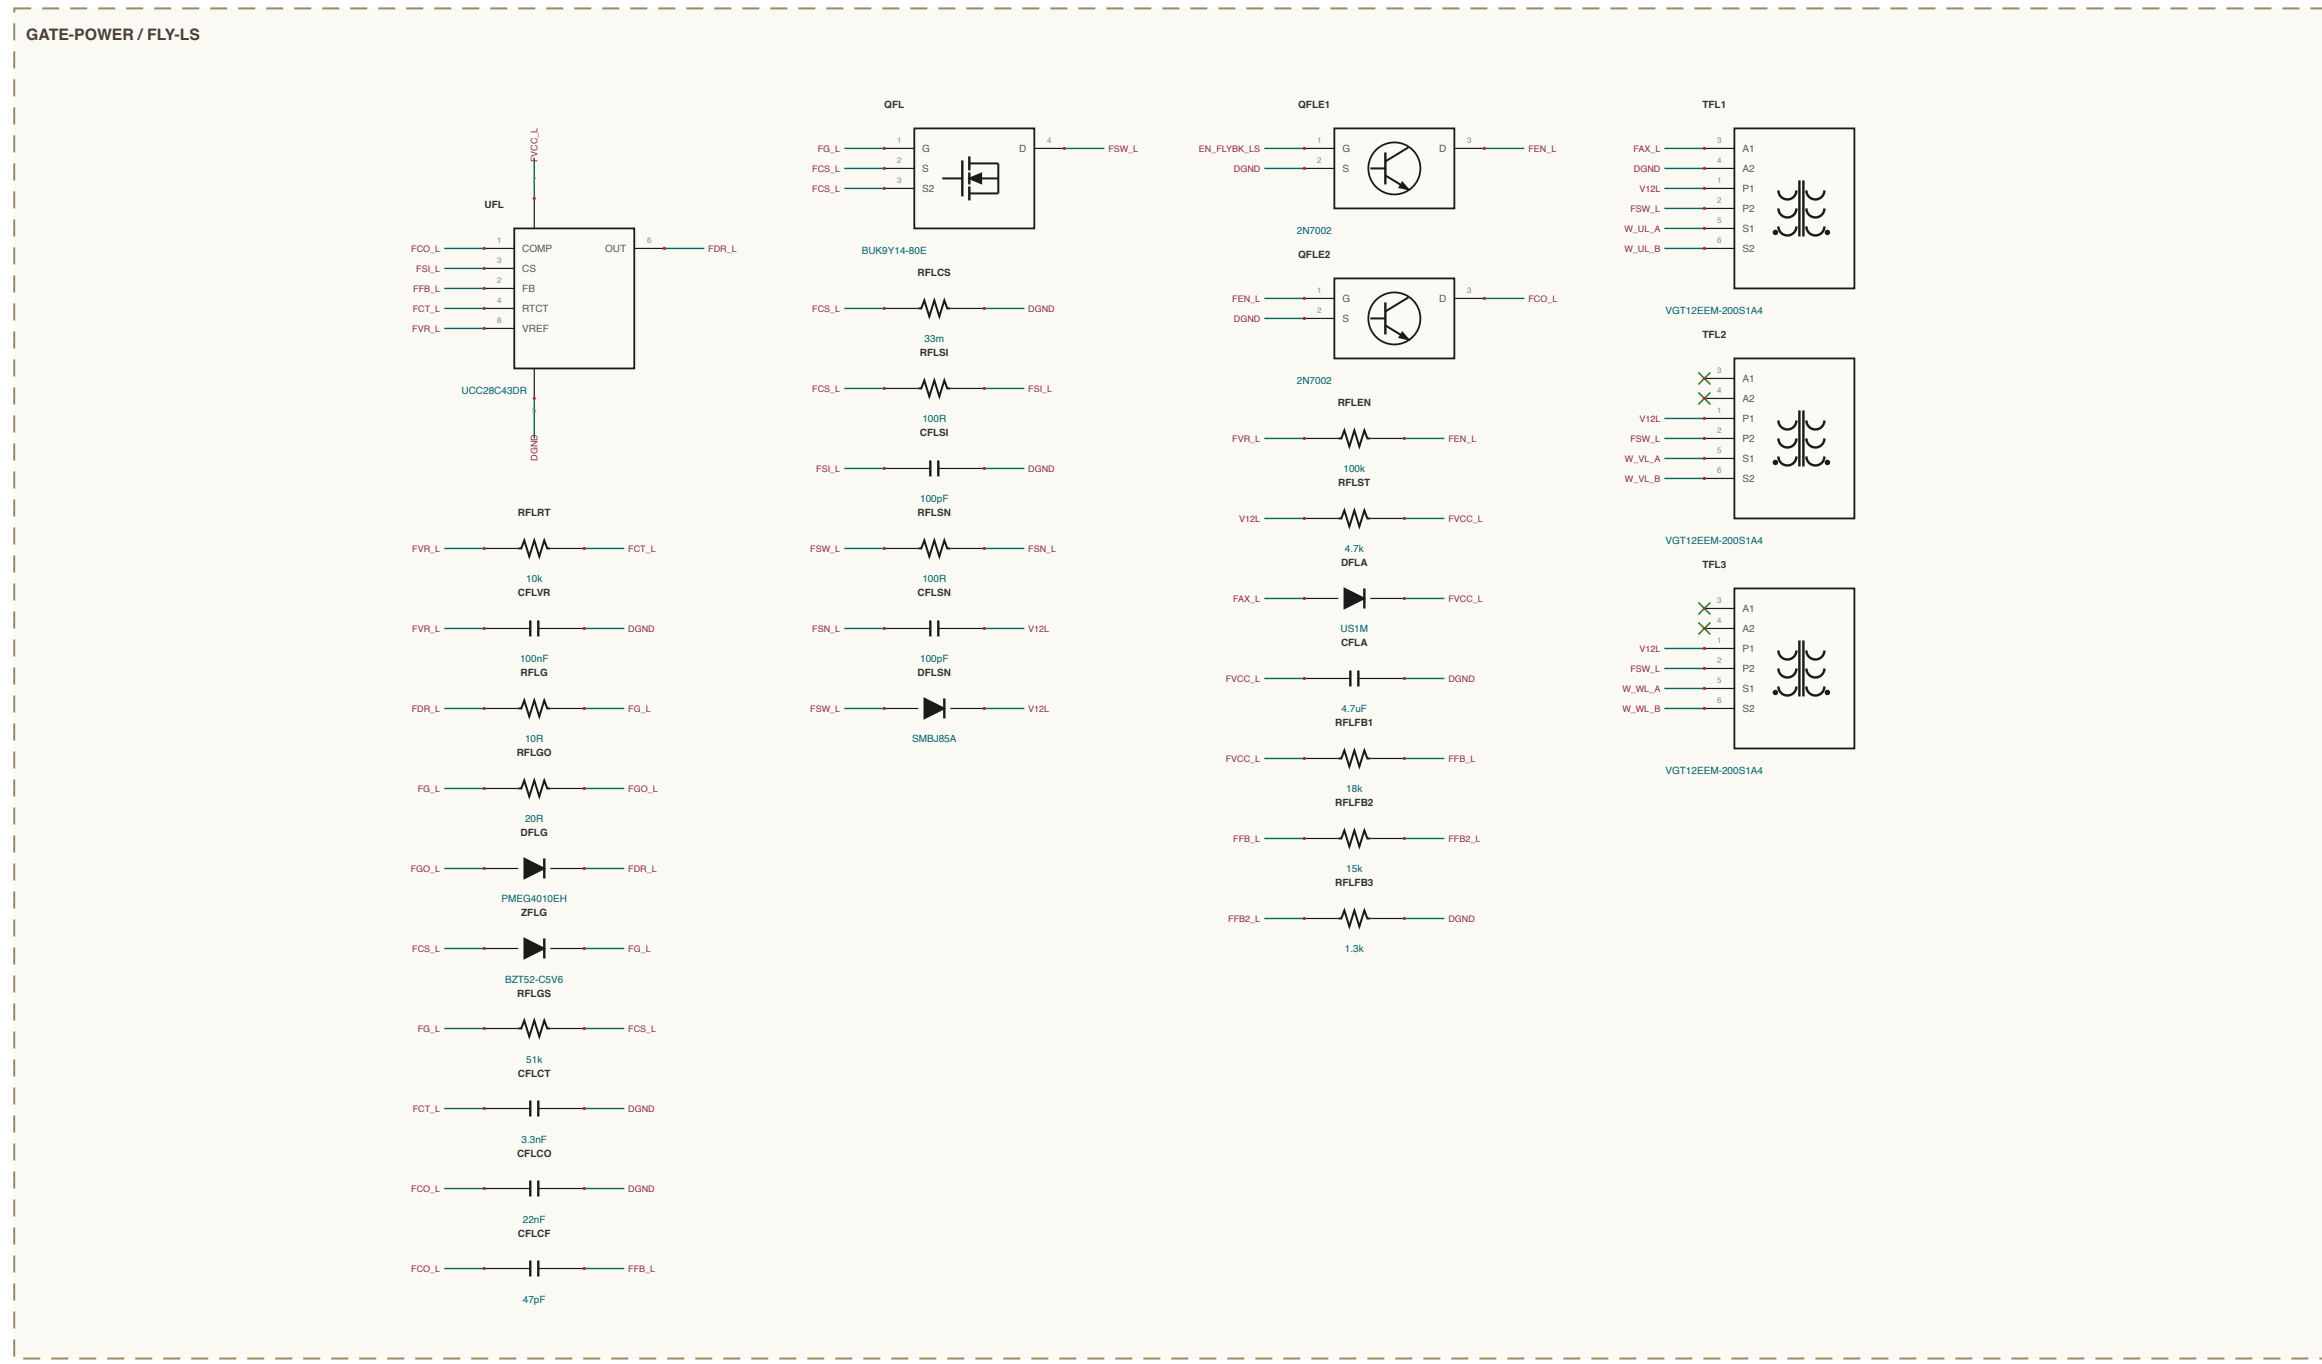
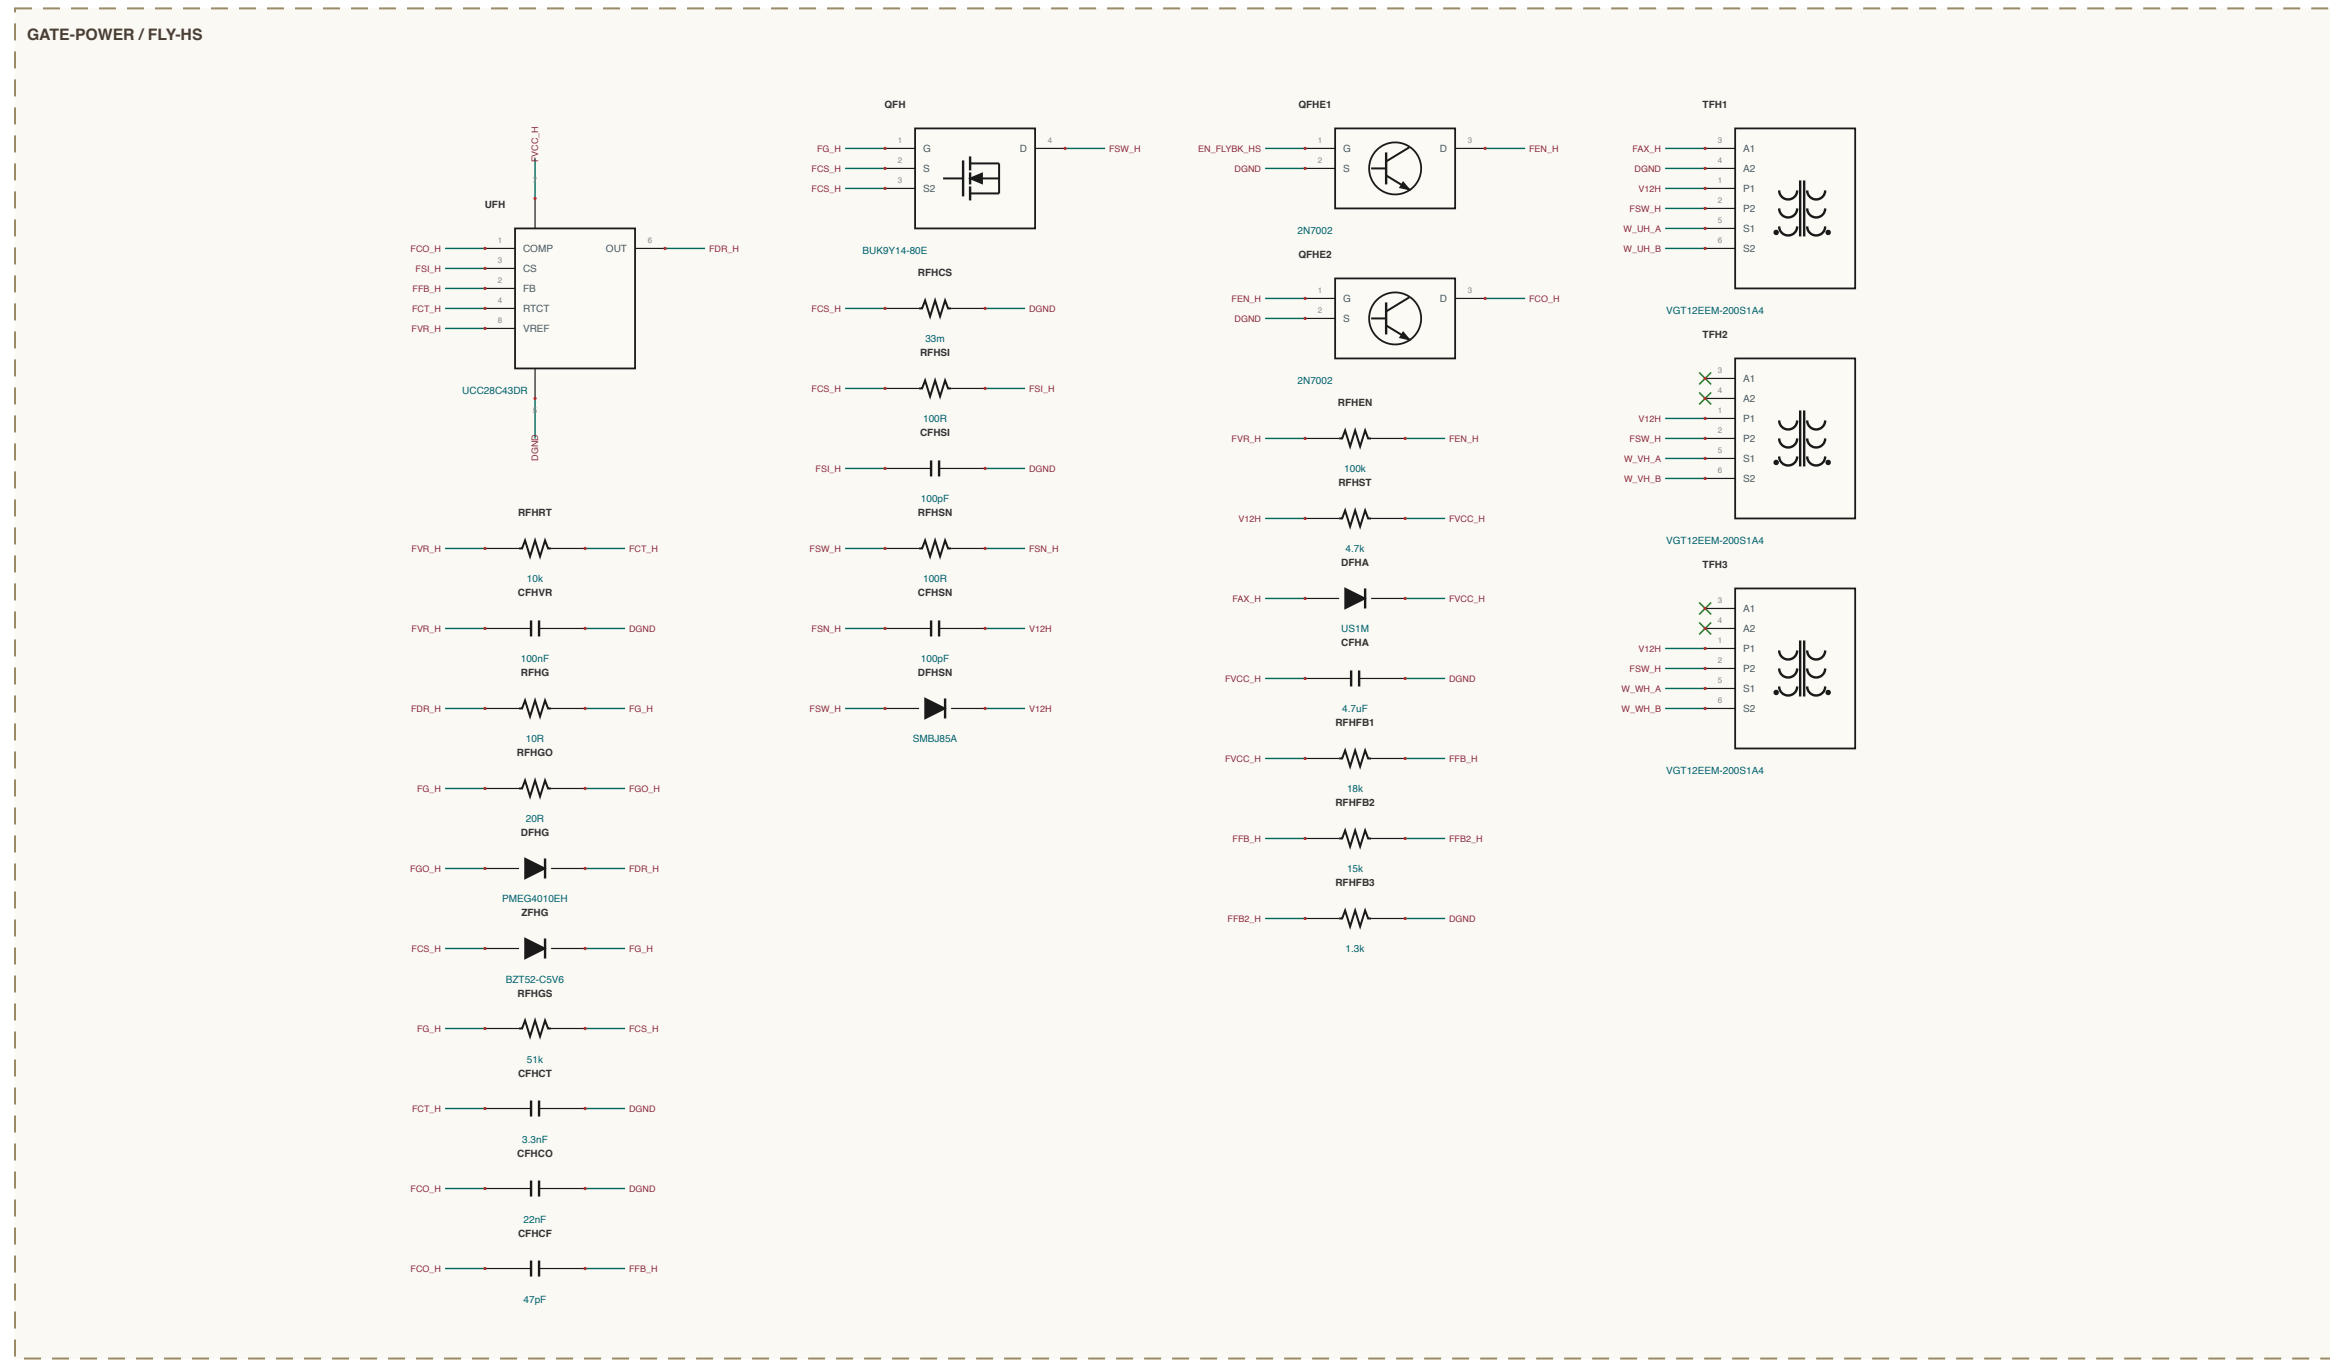
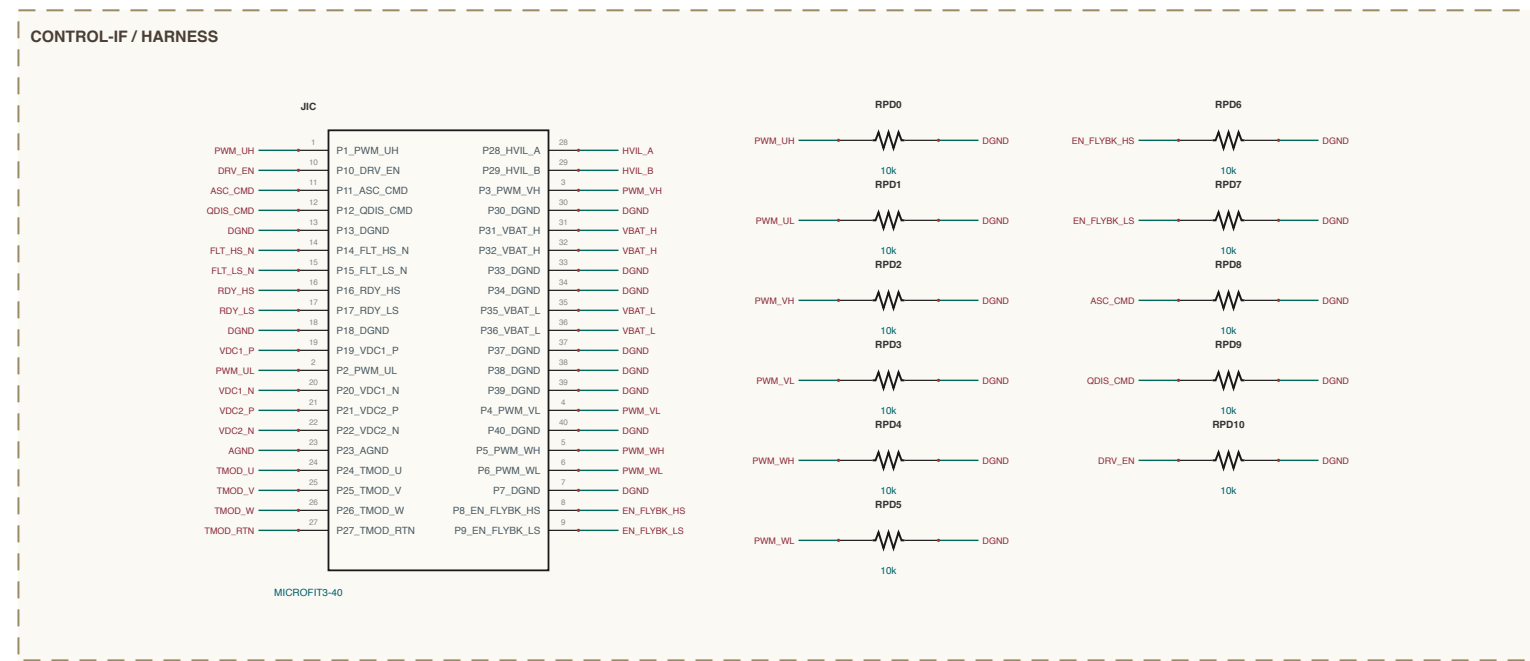
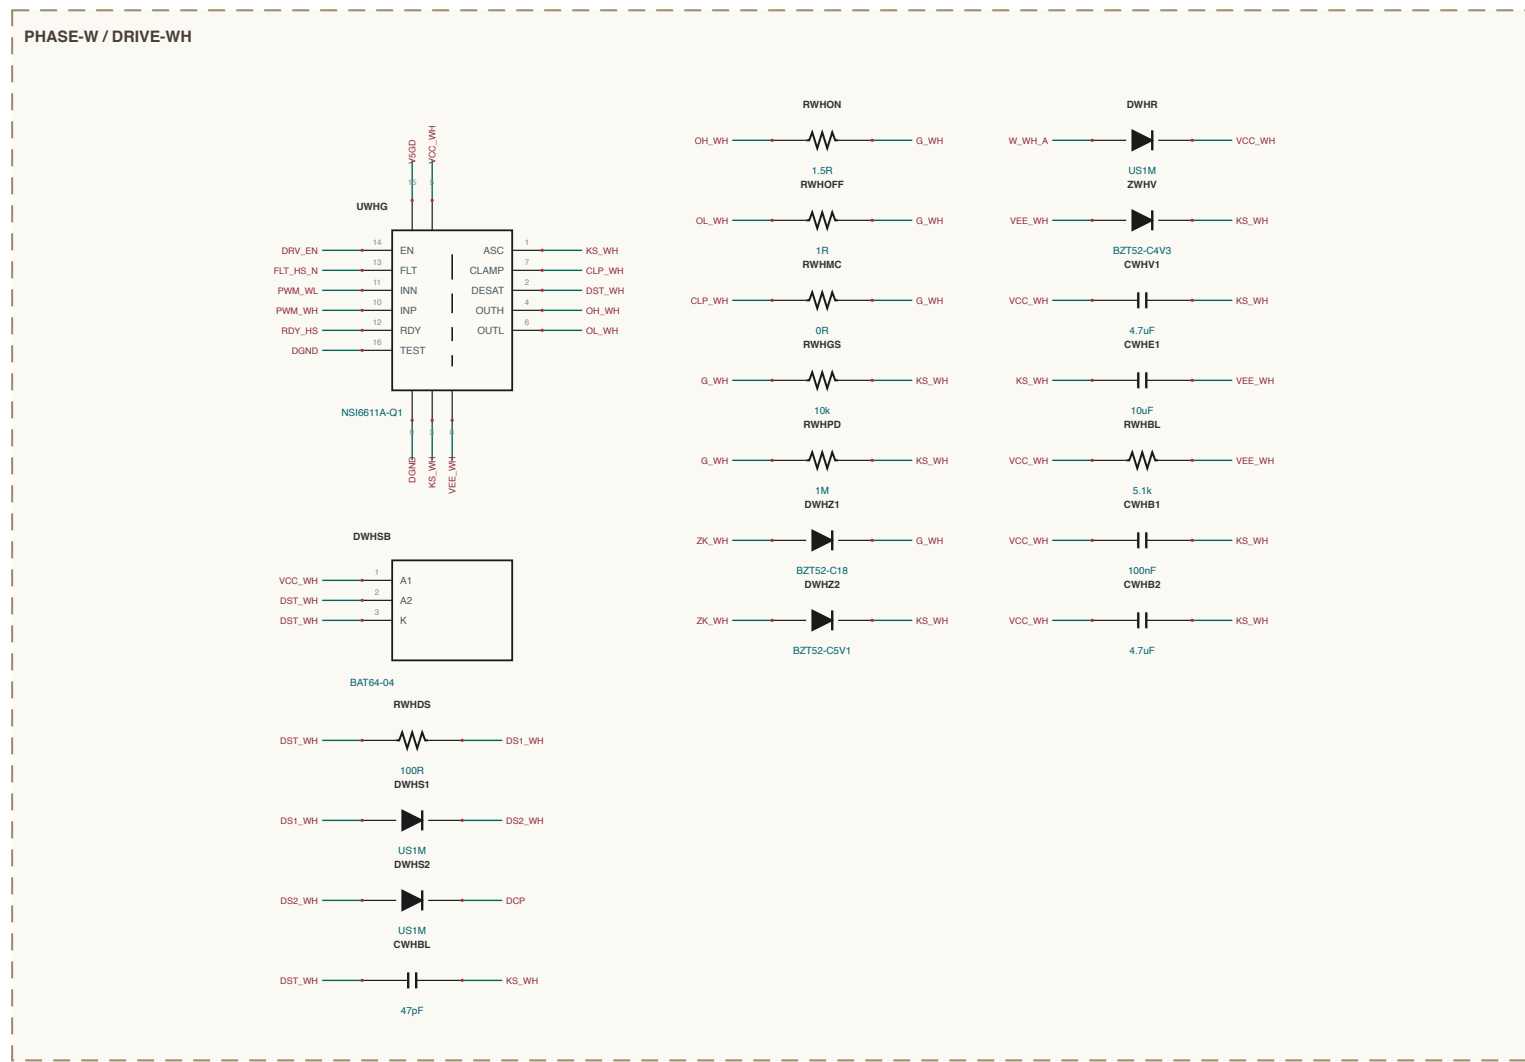
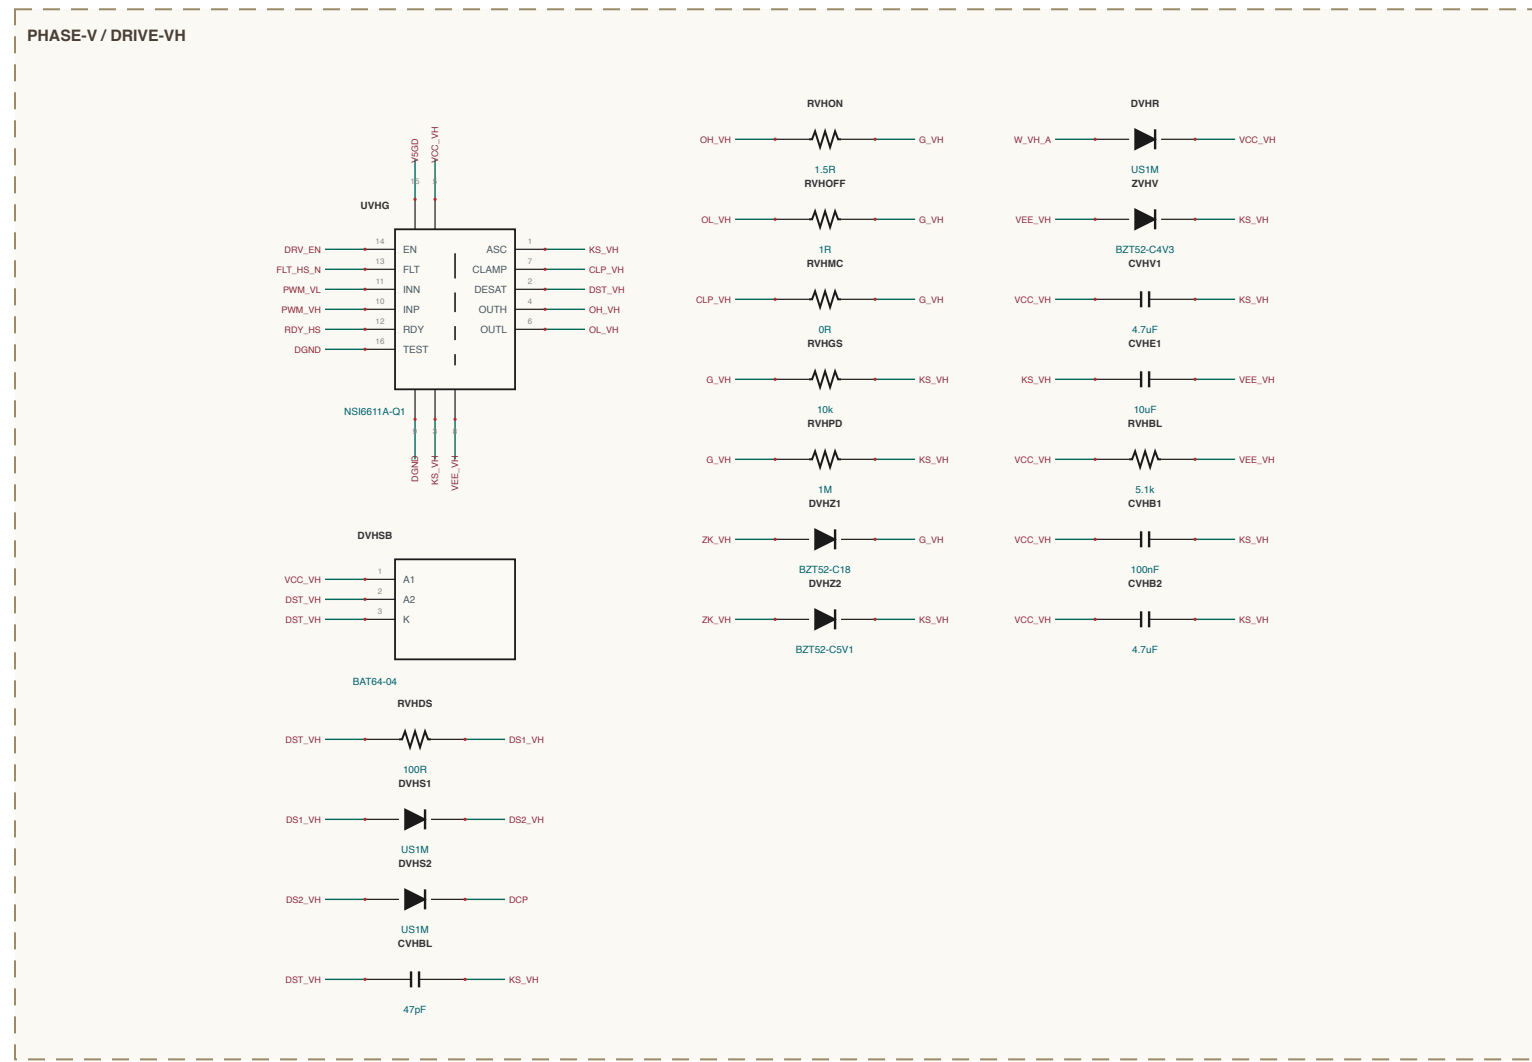
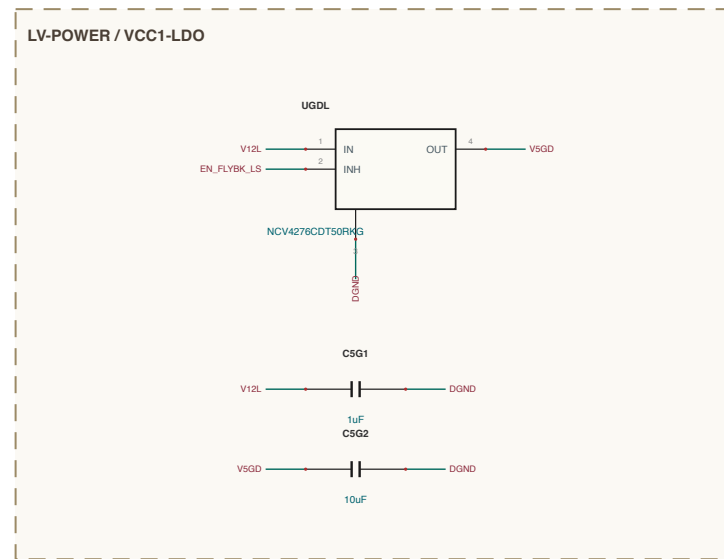
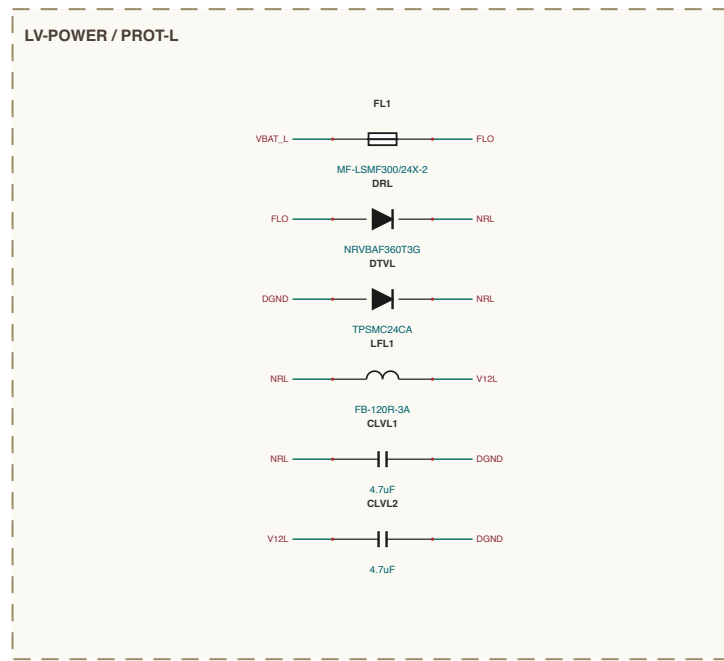
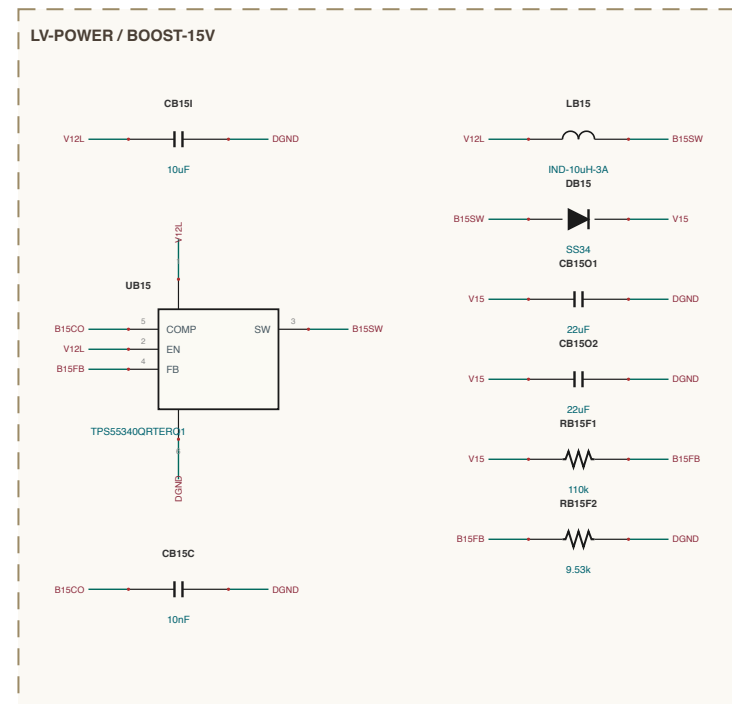
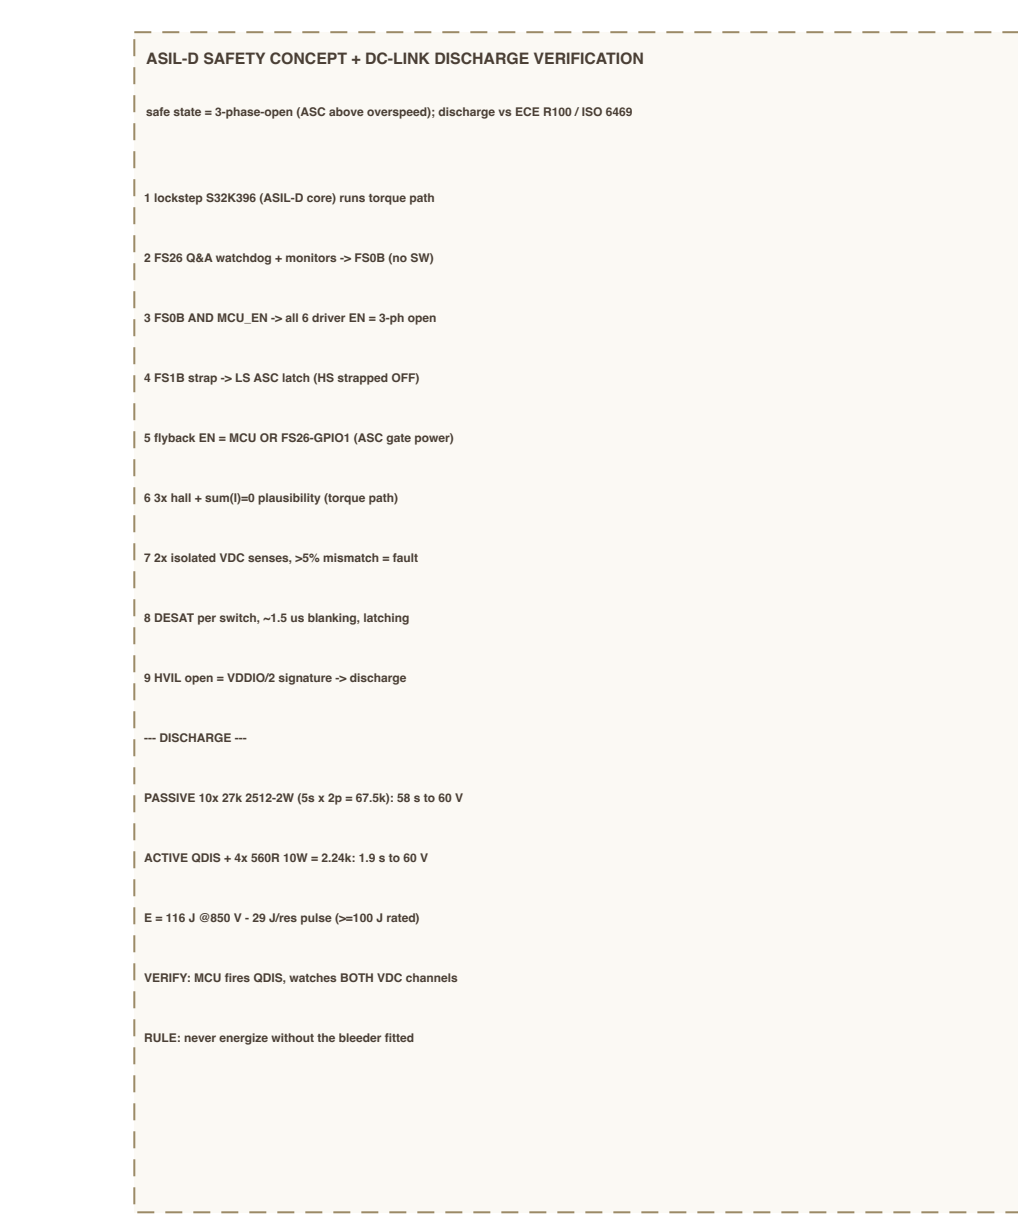
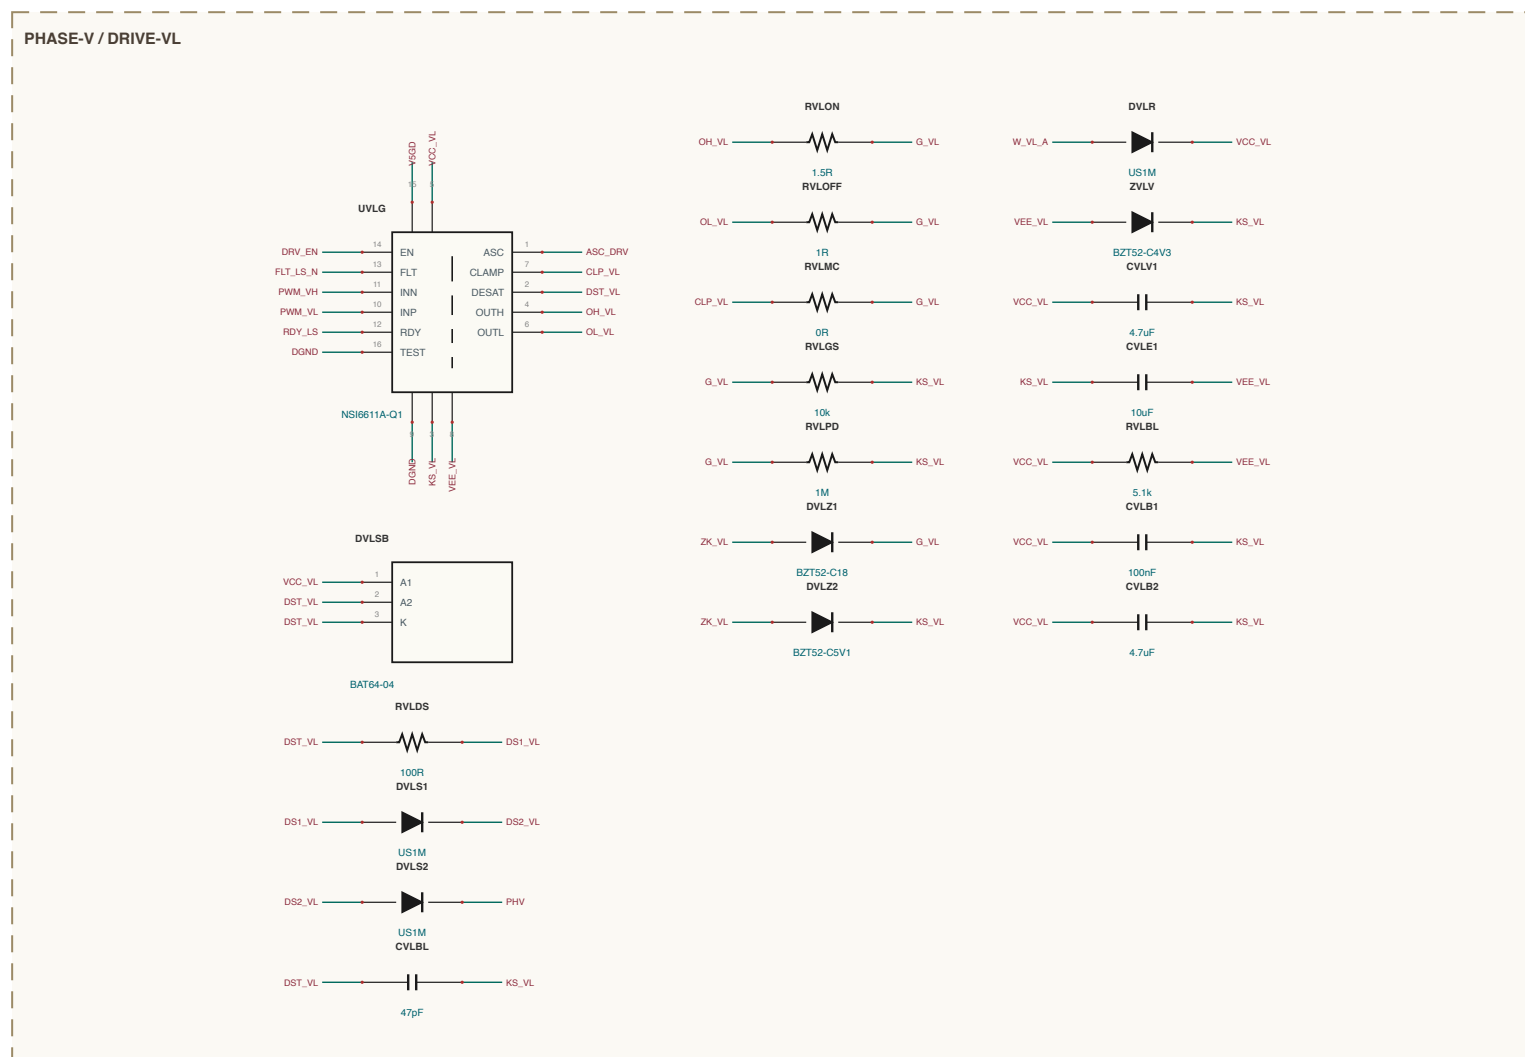
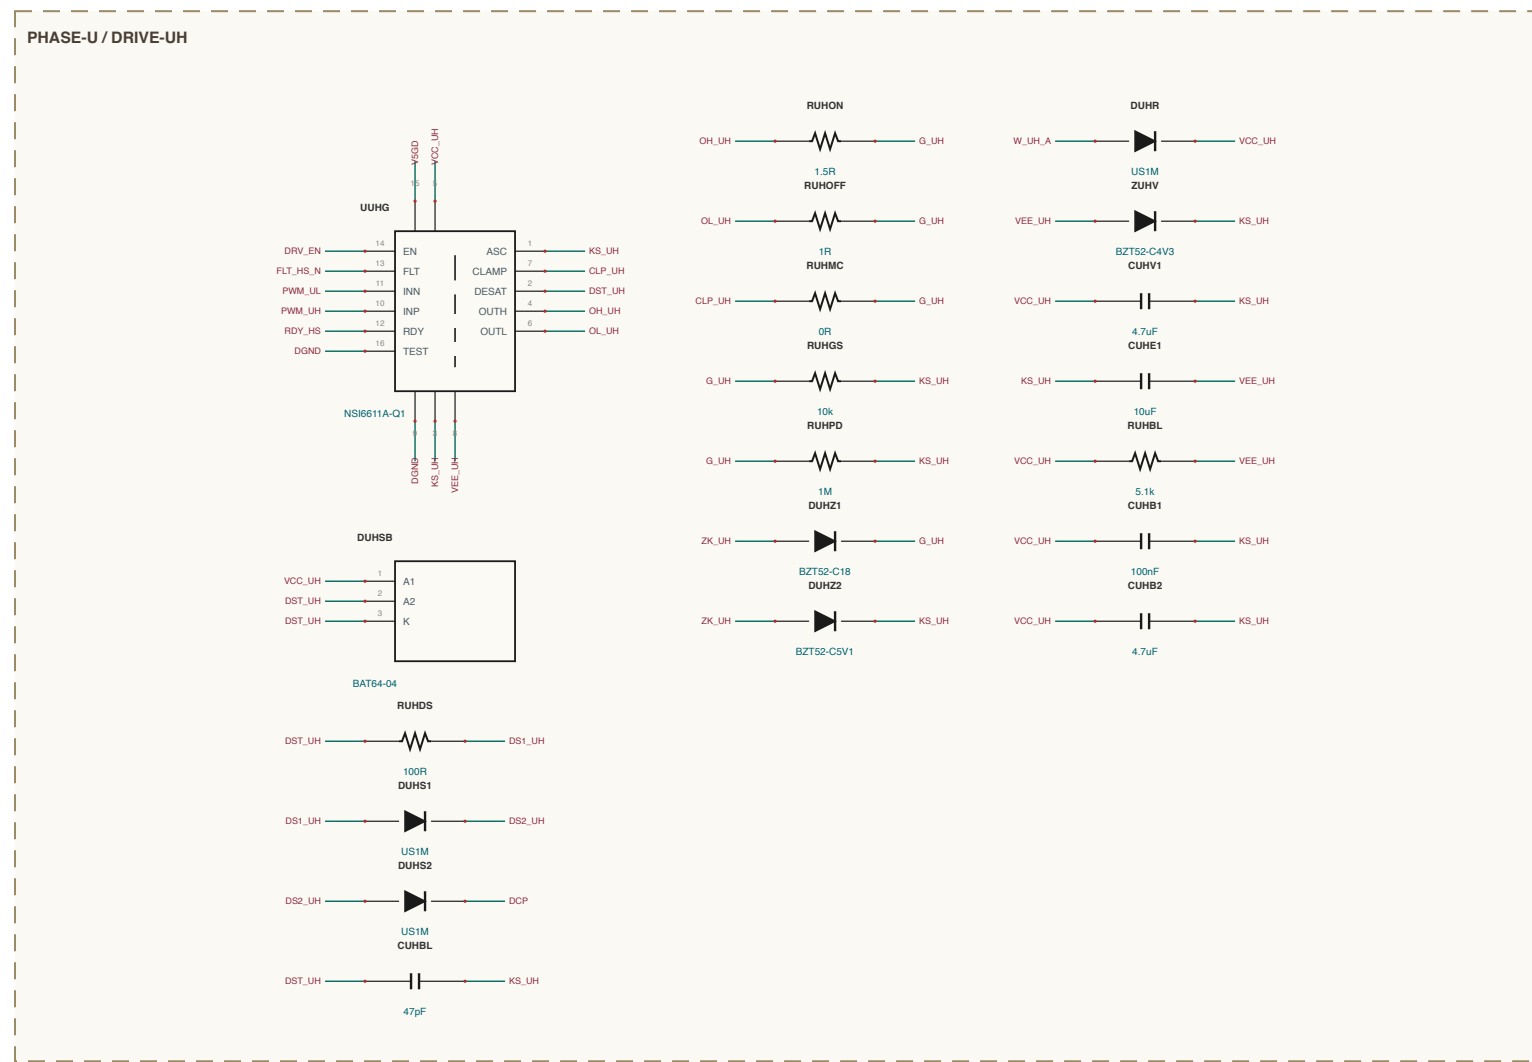
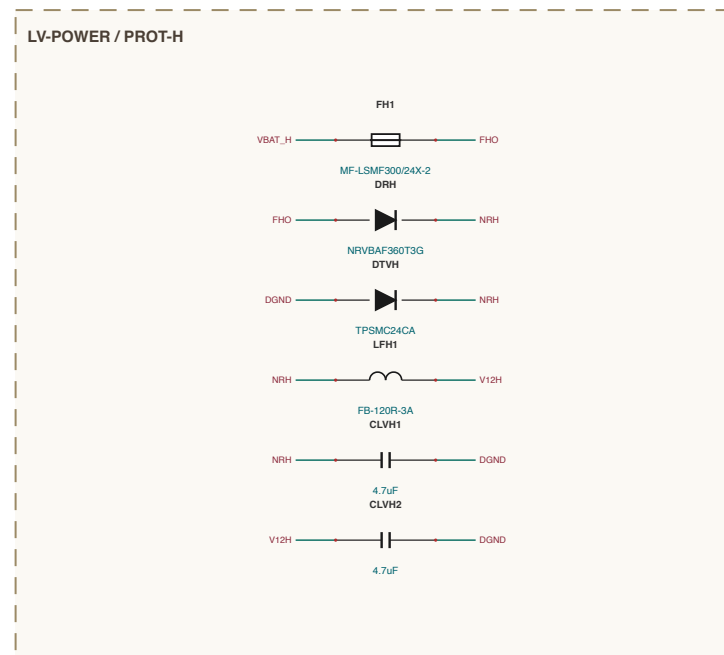
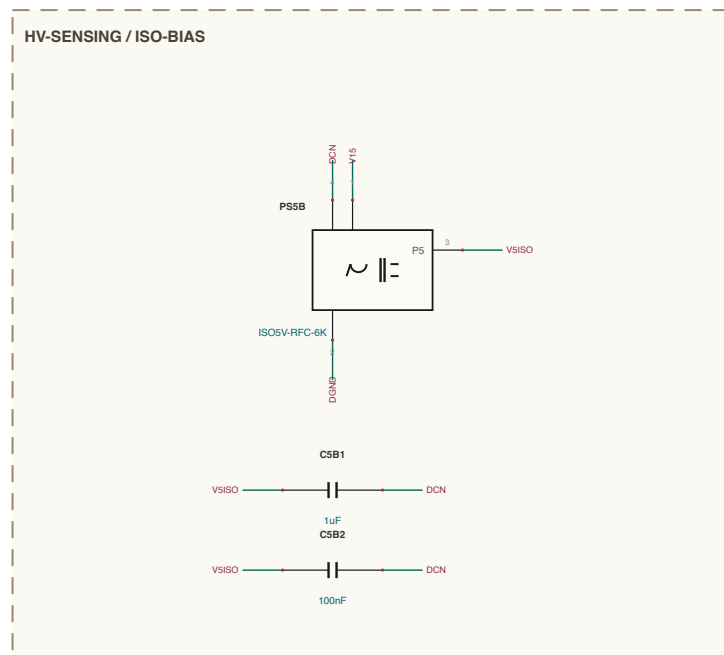
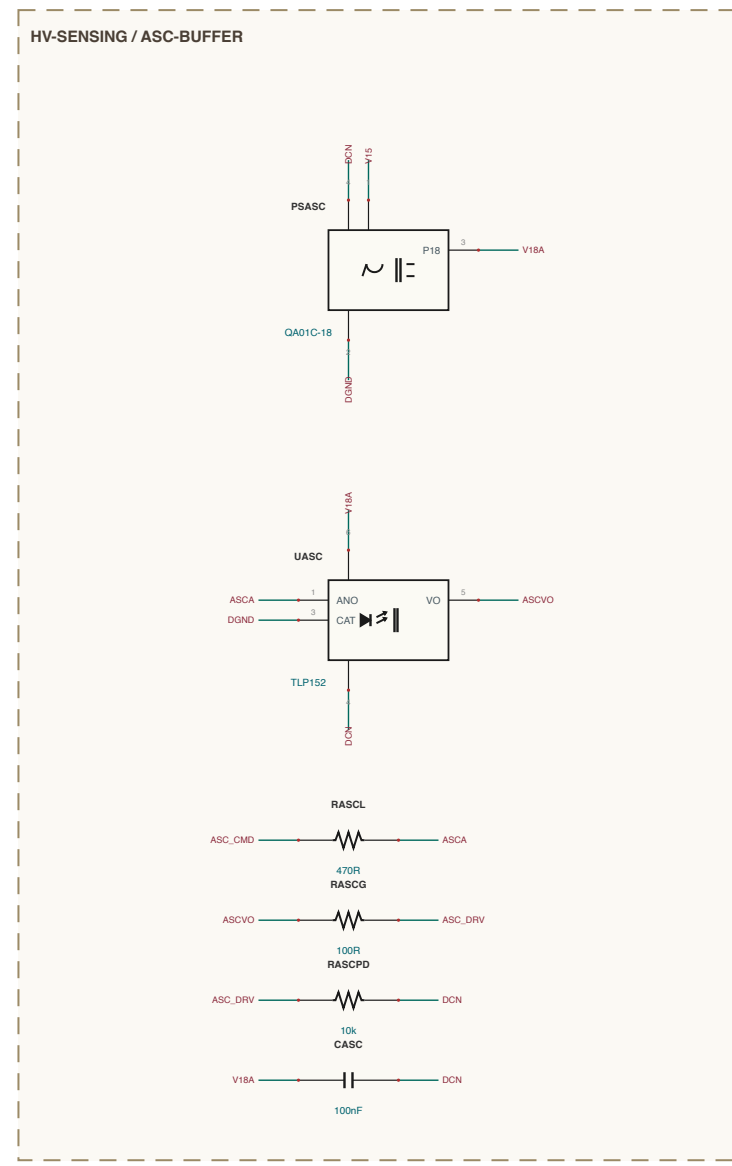
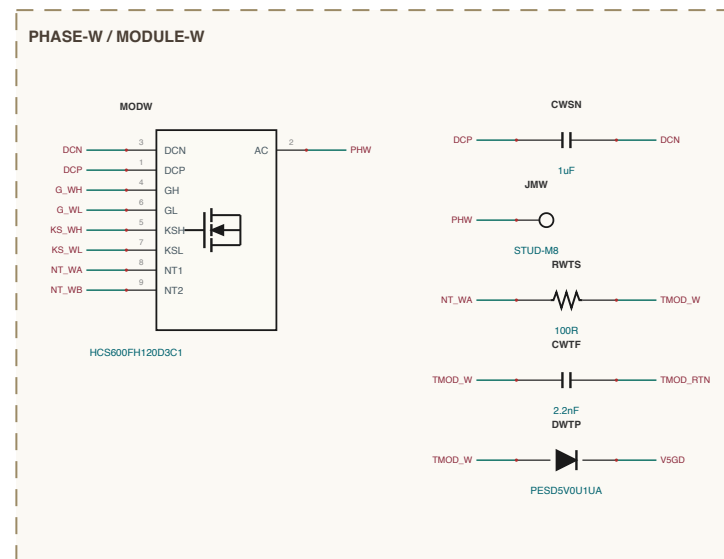
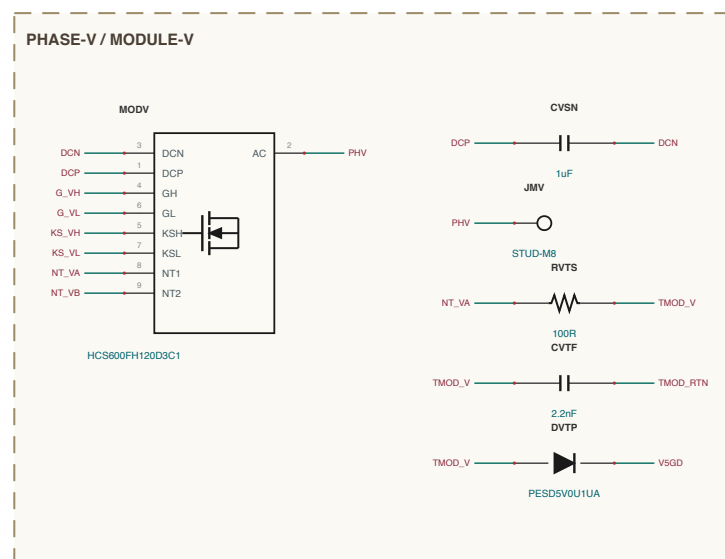
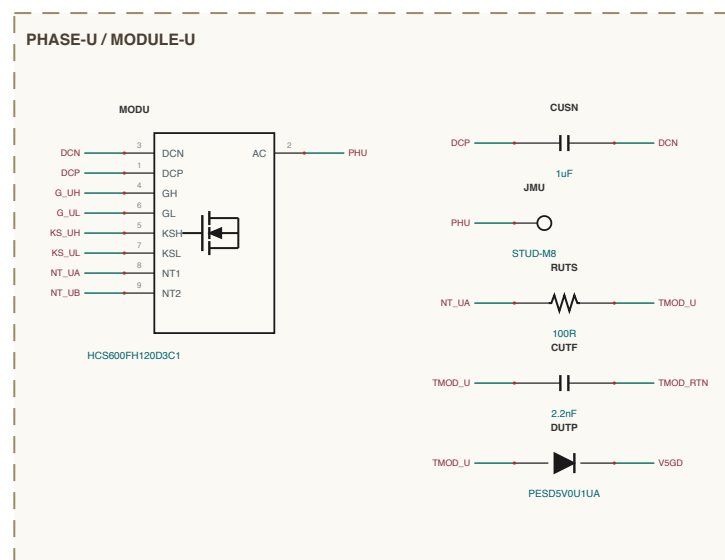
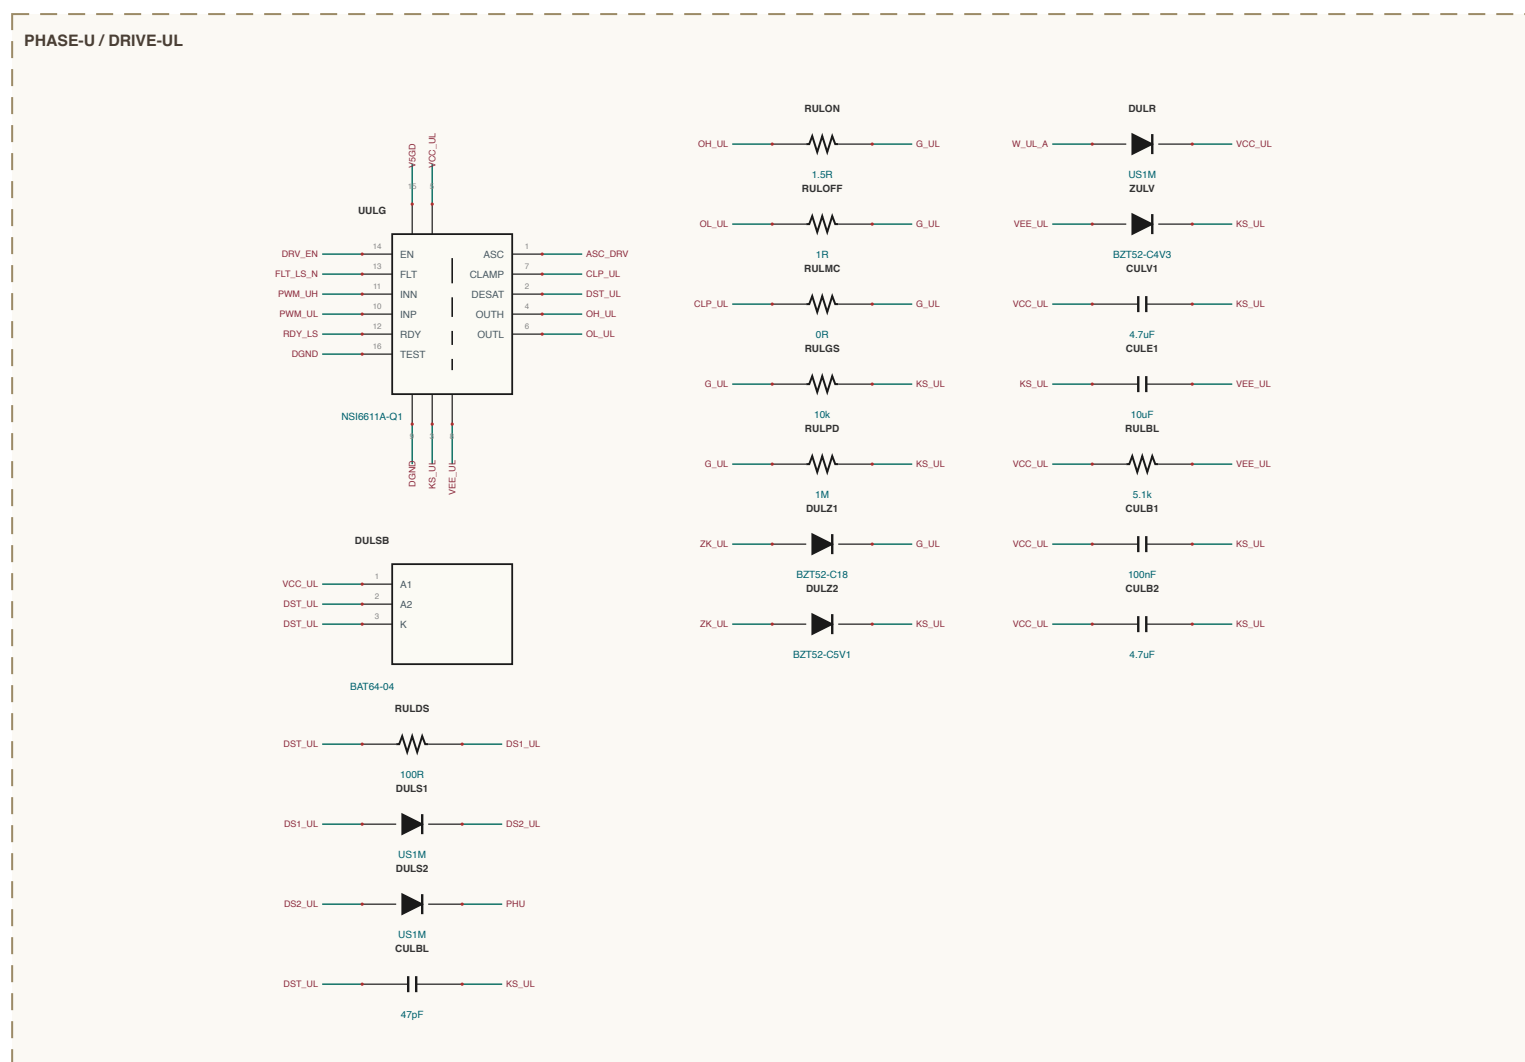
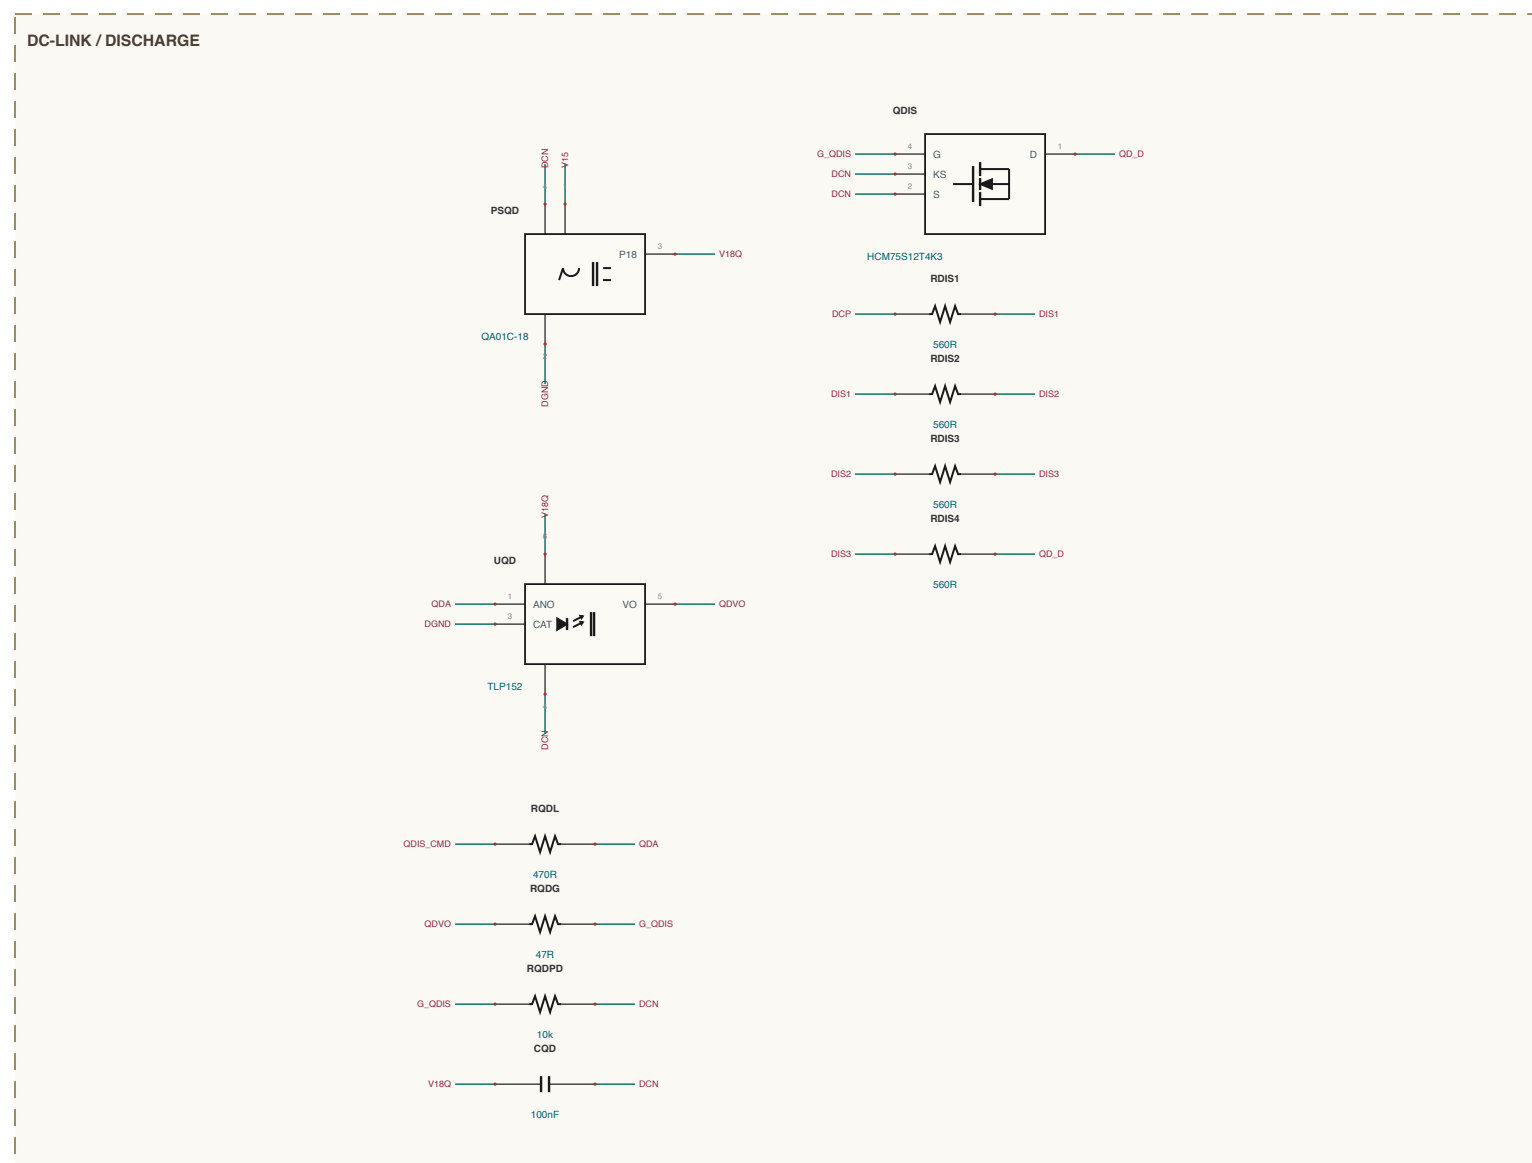
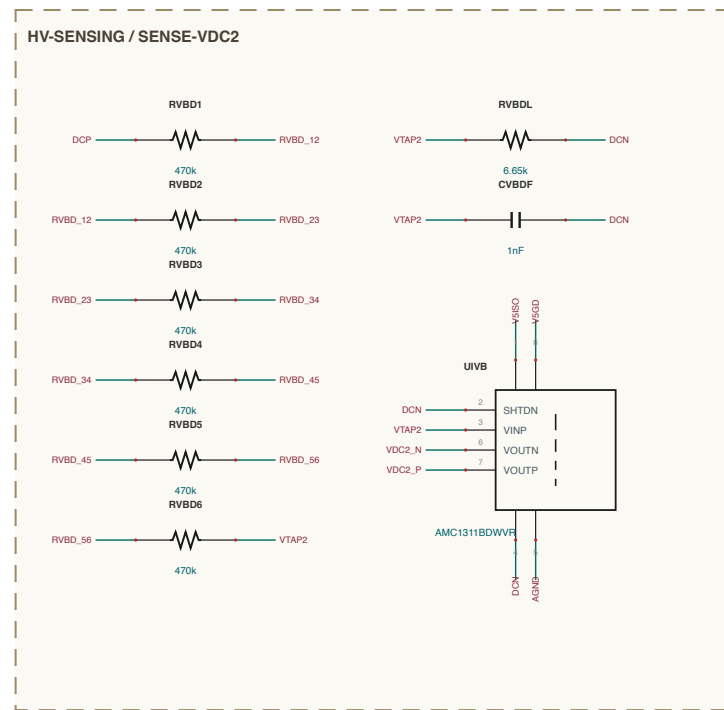
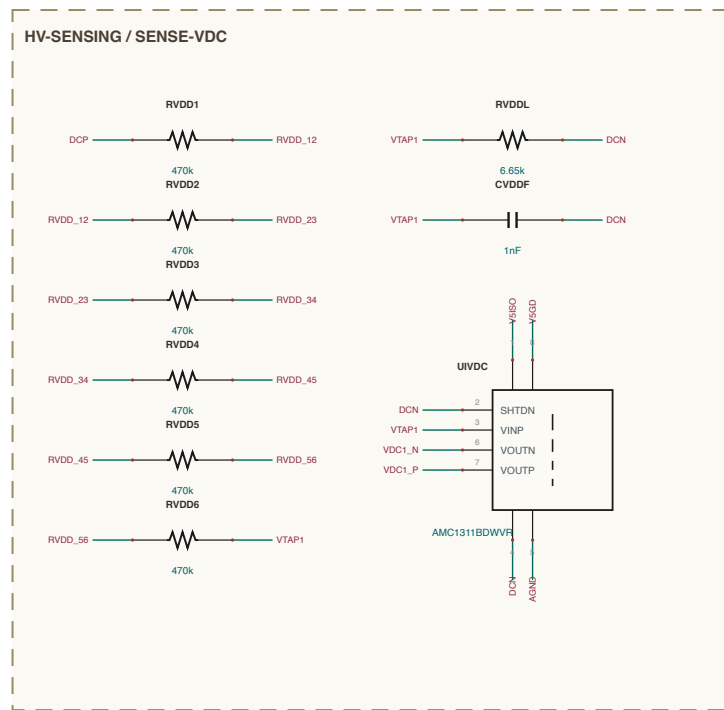
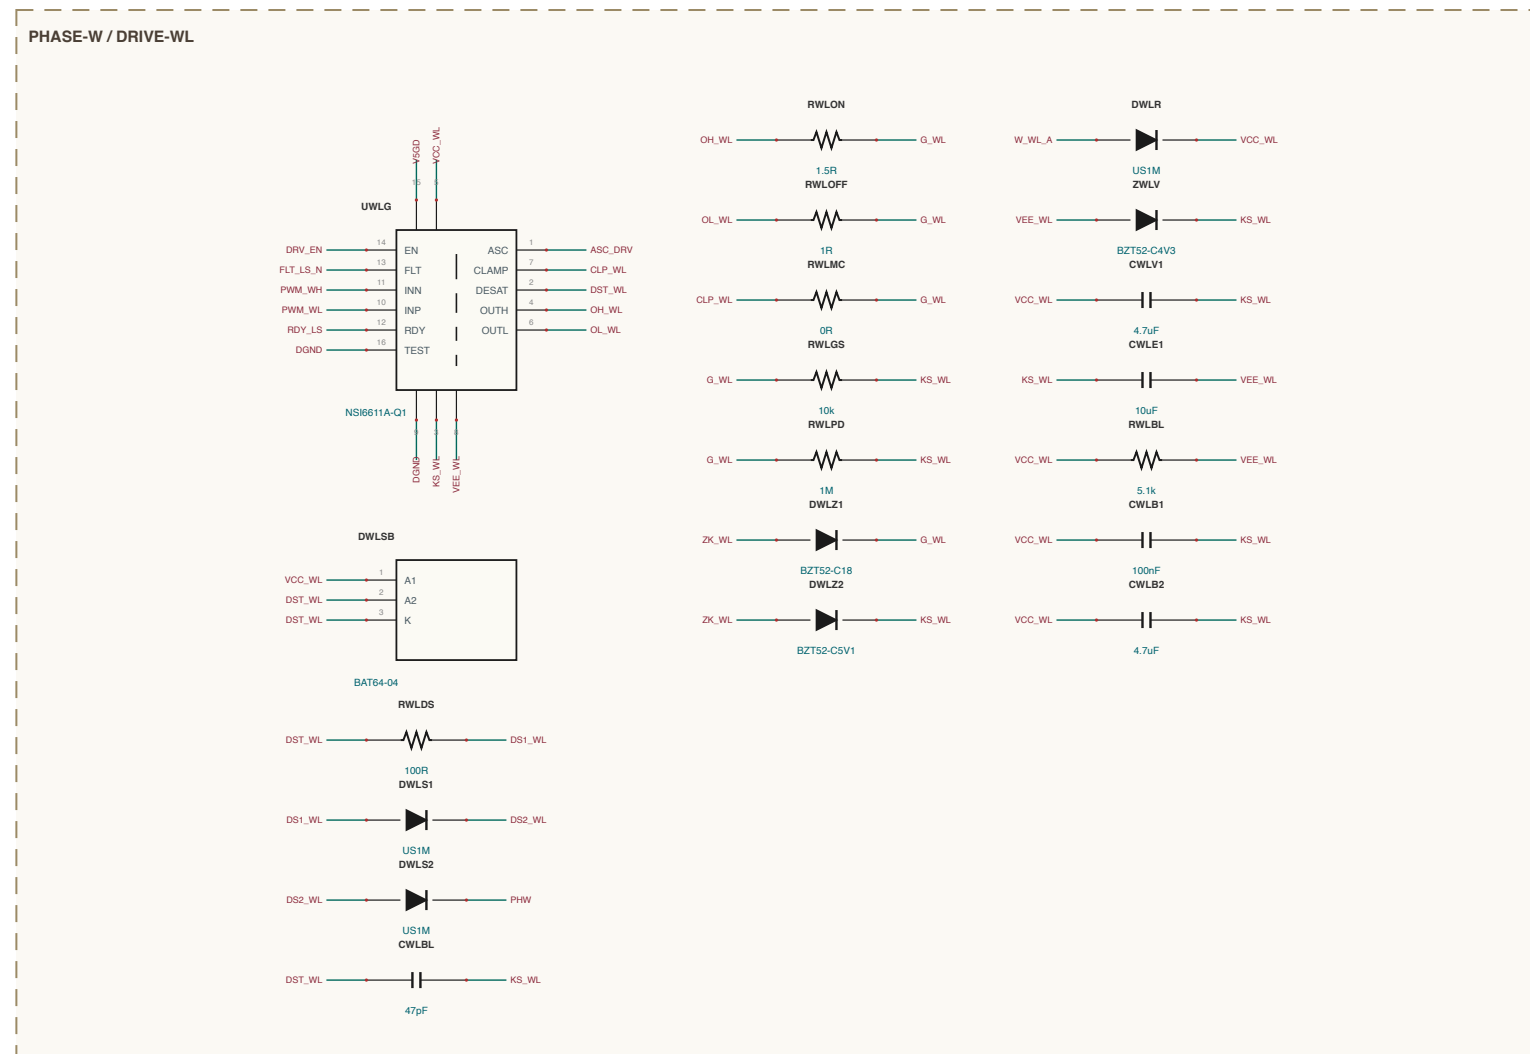
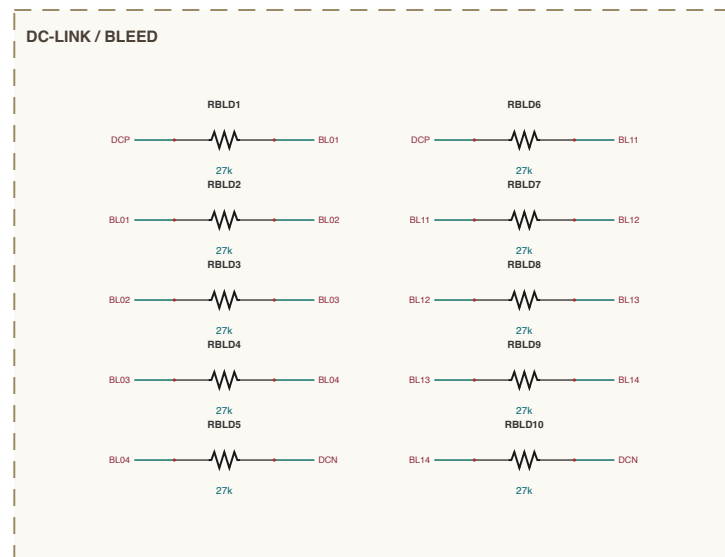
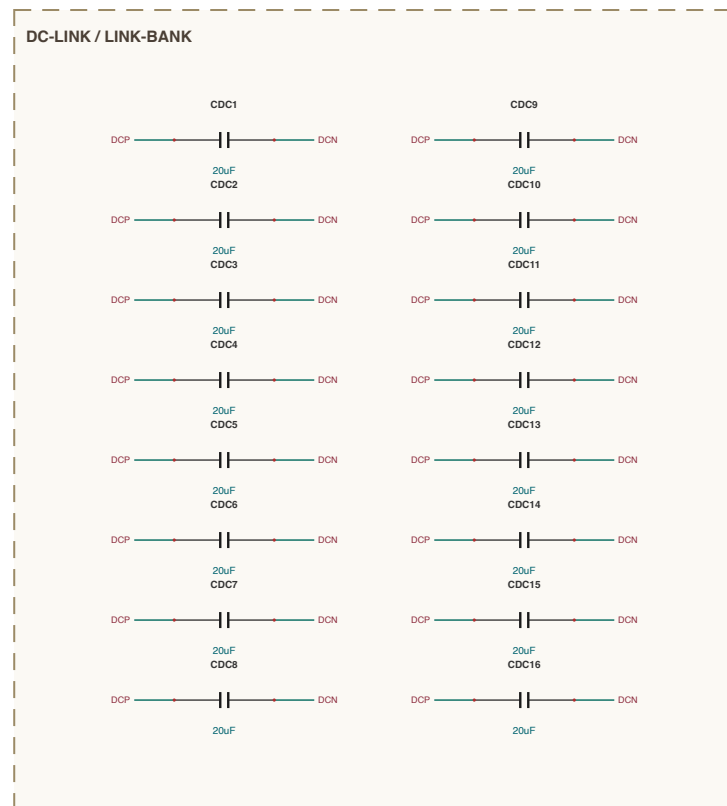
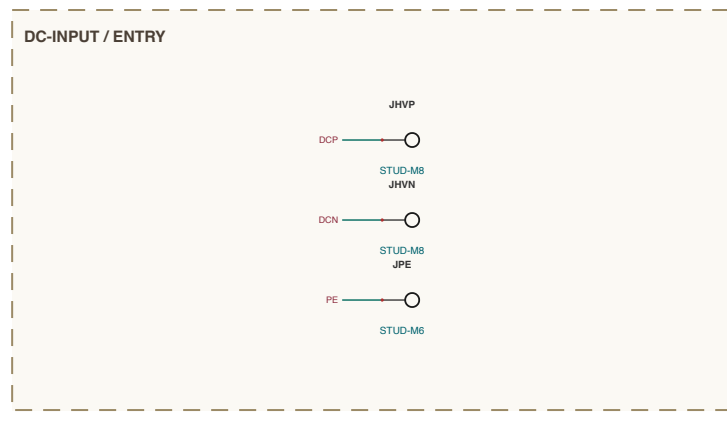
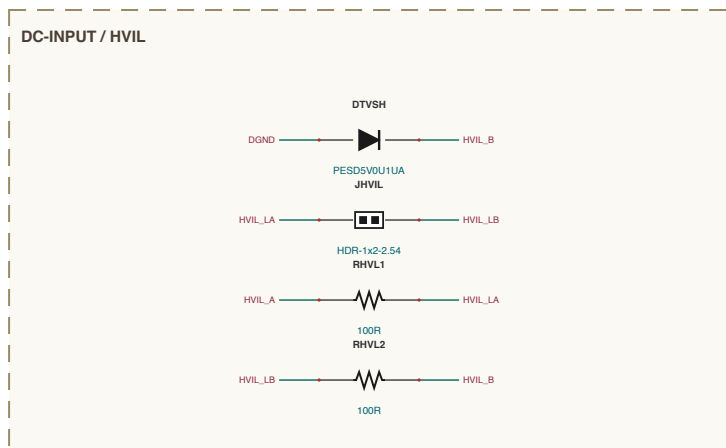


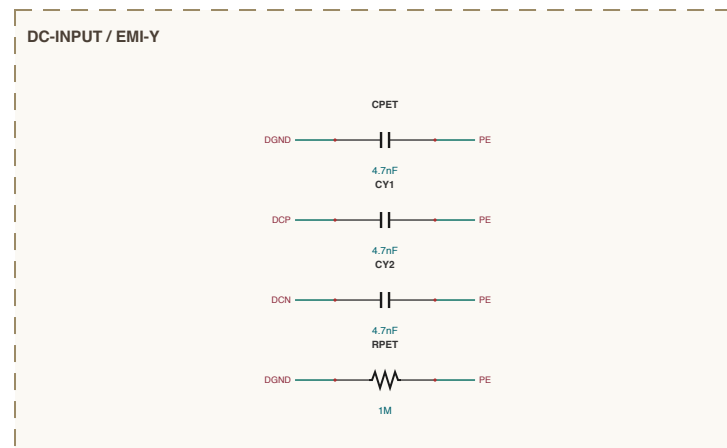

**SHEET INDEX**

238 MP in Power (36) - 1 of 2

IN SEQUENCE - 4 sections

LV-POWER - 4 sections

DC-INPUT - 3 sections

DC-LOAD - 3 sections

PHASE-C - 3 sections

PHASE-D - 3 sections

PHASE-E - 3 sections

PHASE-F - 3 sections

GATE-POWER - 3 sections

CONTROL, OP - 1 section

net A.2 - 38 sections - 383 components

## NET NAMING

Internal junctions are named for what they join

Unch<sub>1</sub>-OffB<sub>1</sub> node at that IC pin e.g. UNF0C, VNF0

Problems: If endpoint of a series pair e.g. PWB3\_A

Rotators: -cmt (tip between Rotator/cmt e.g. RU0D\_12

all others are explicit design items