
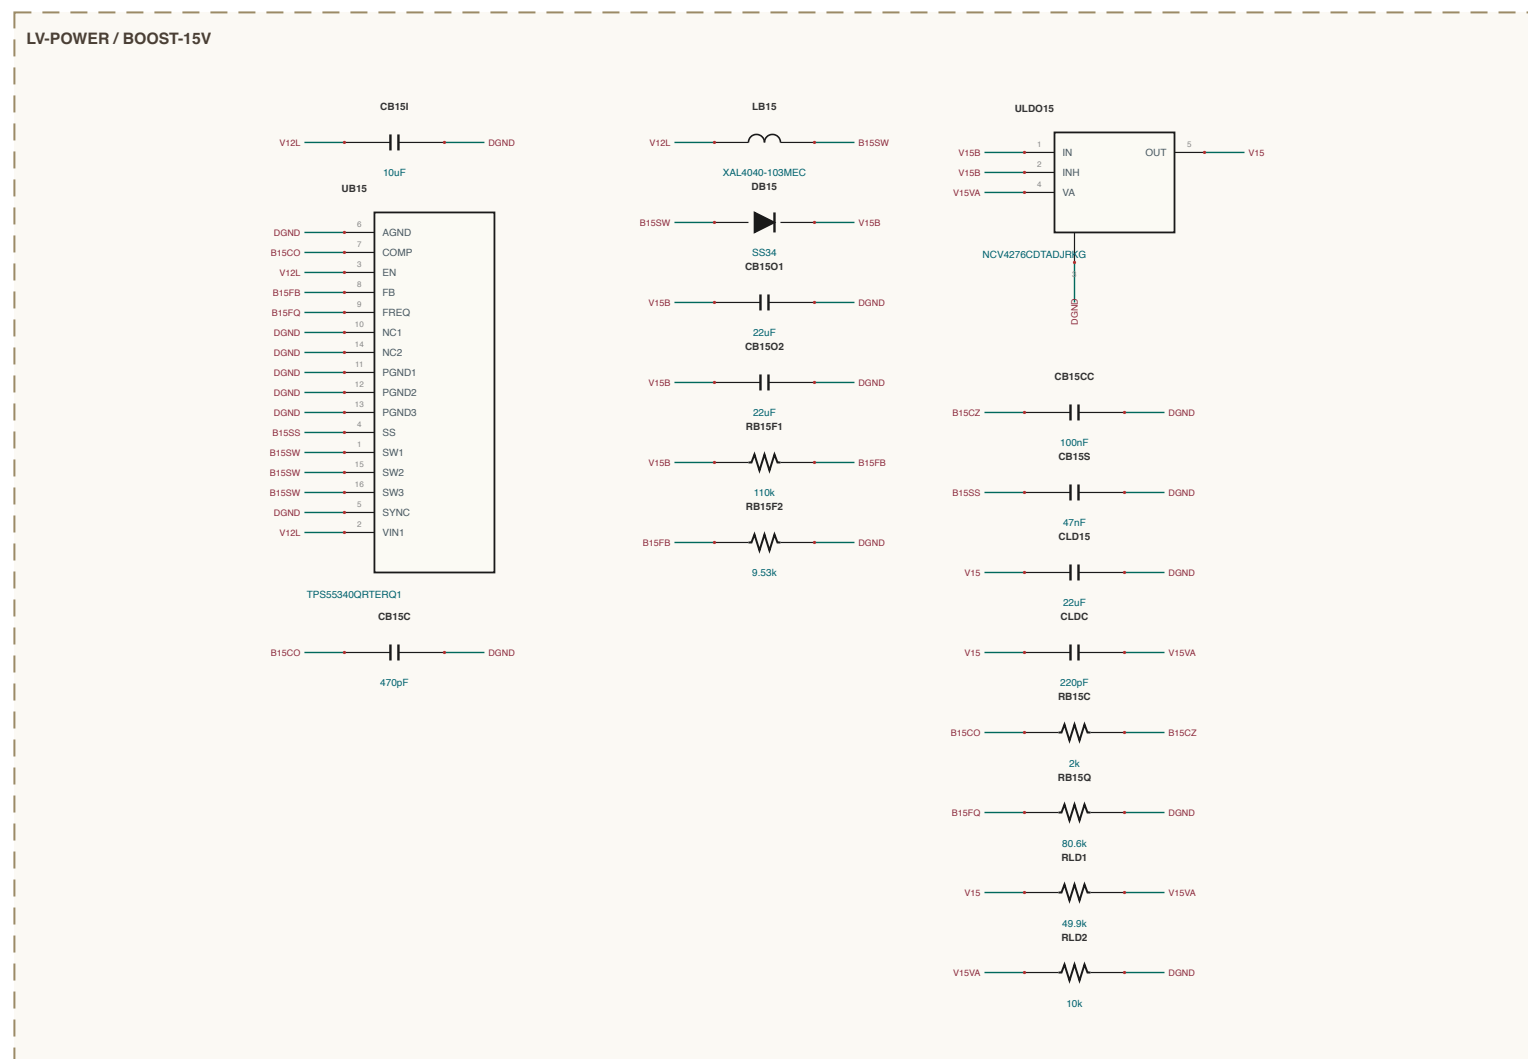
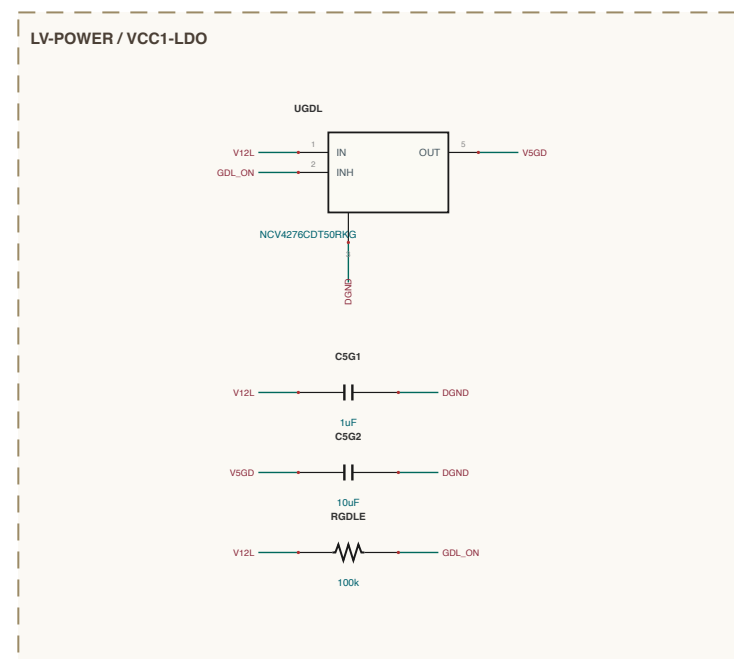
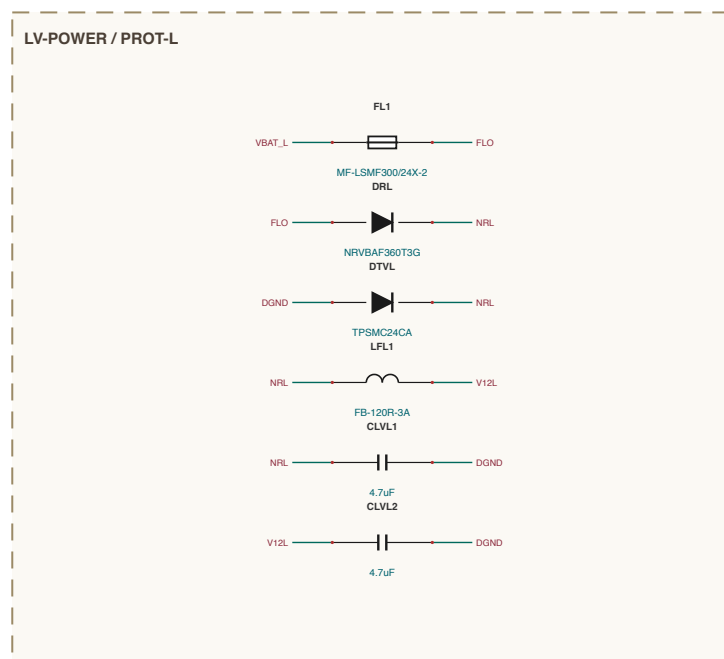
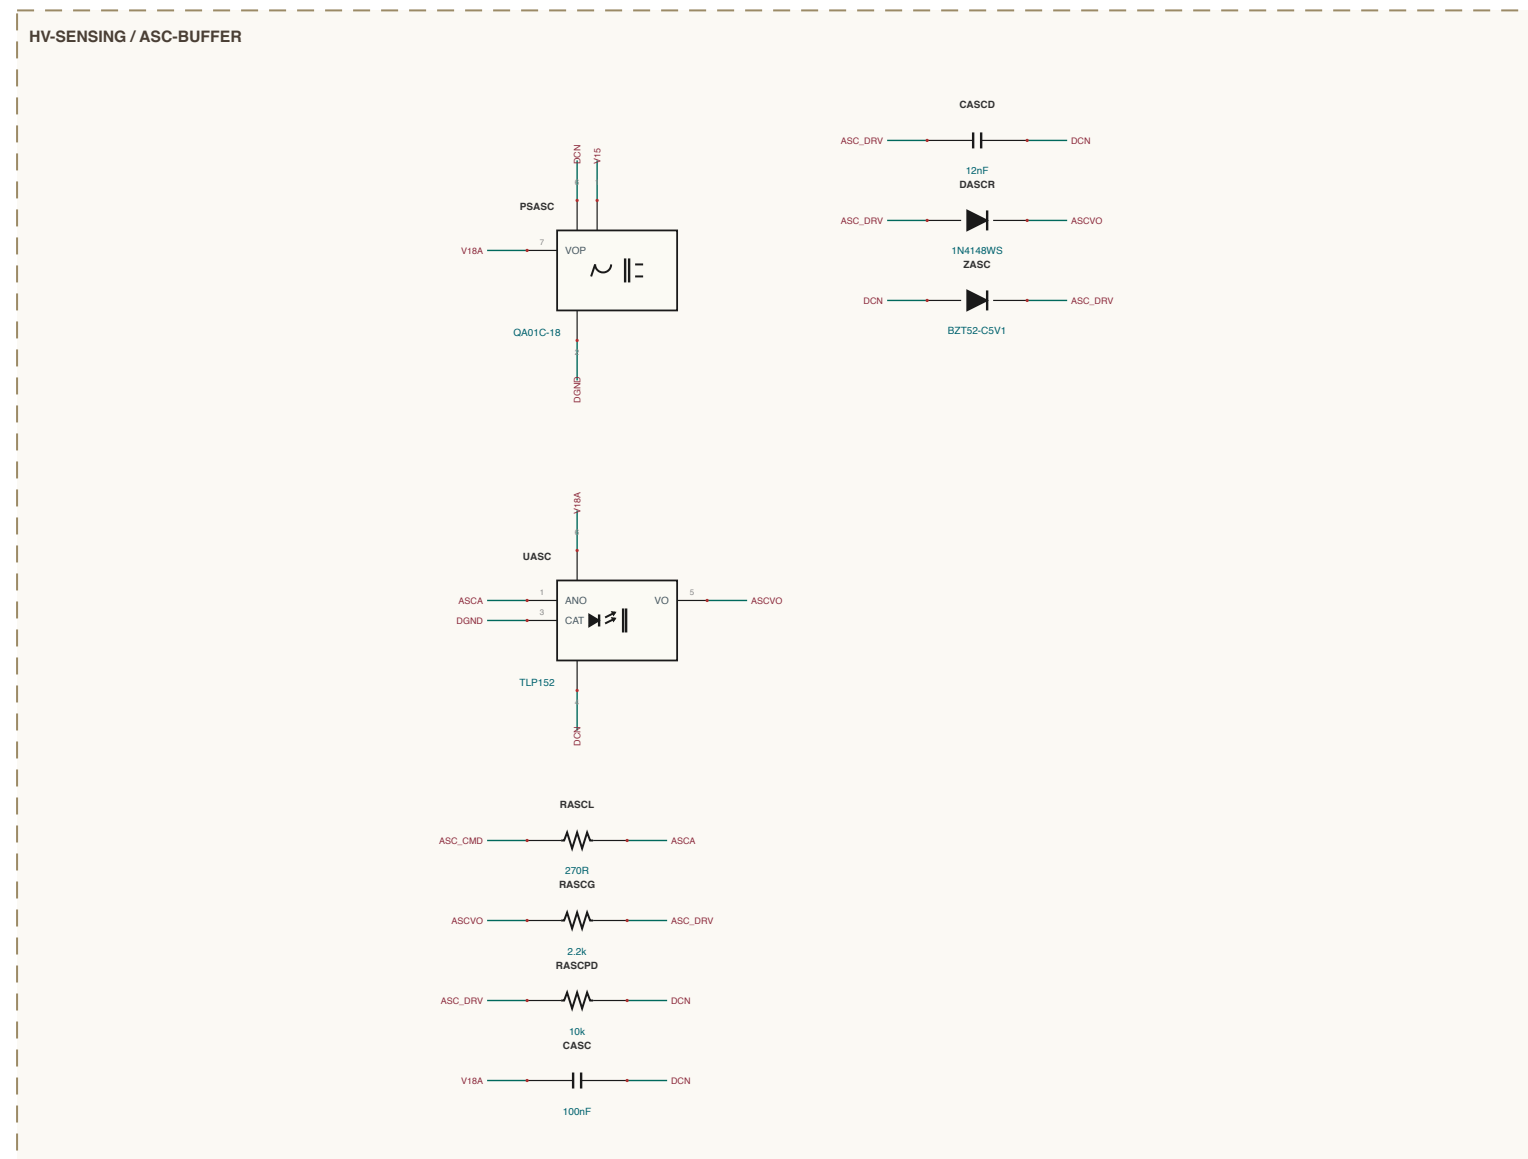
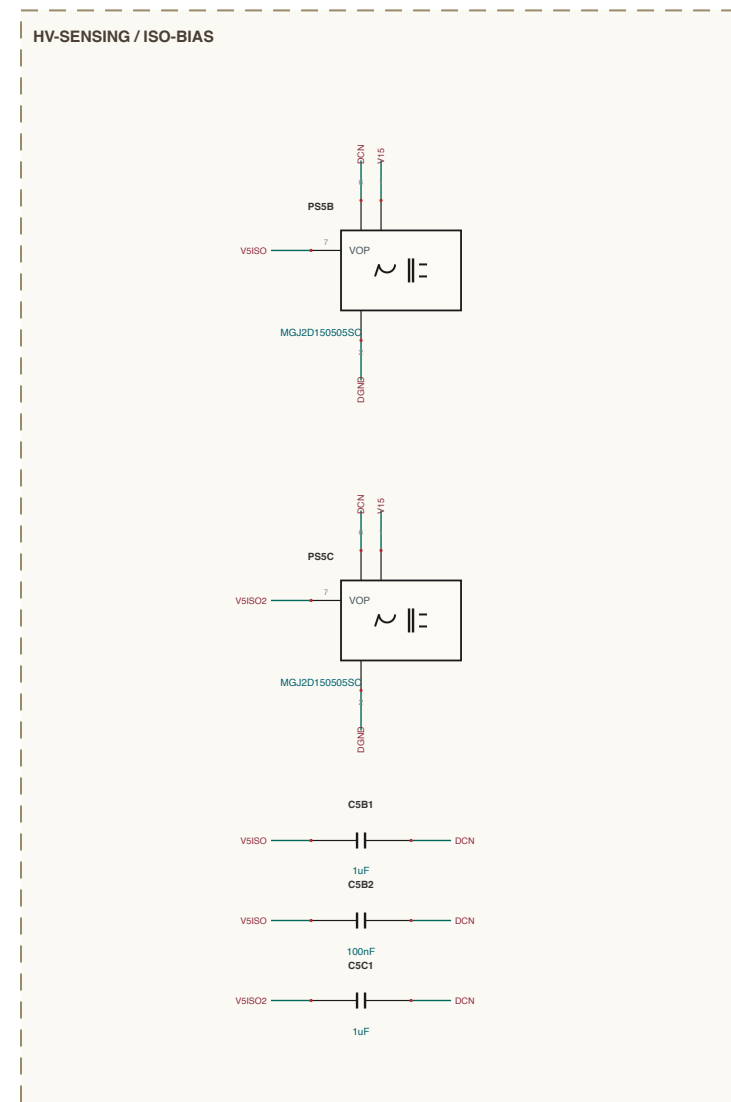
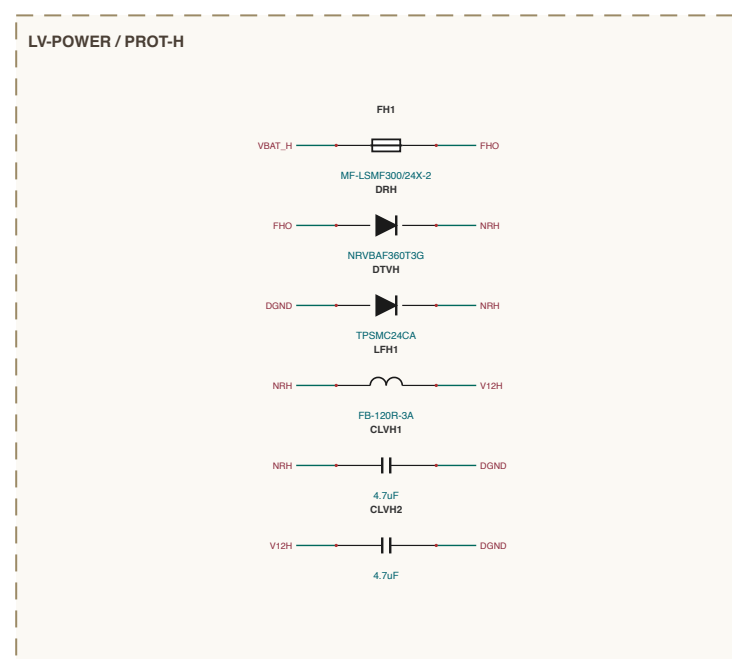
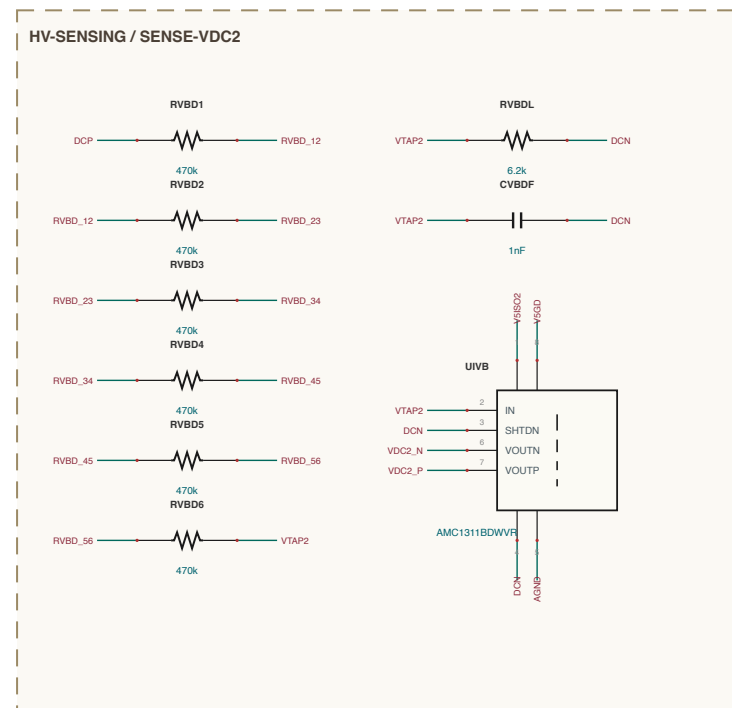
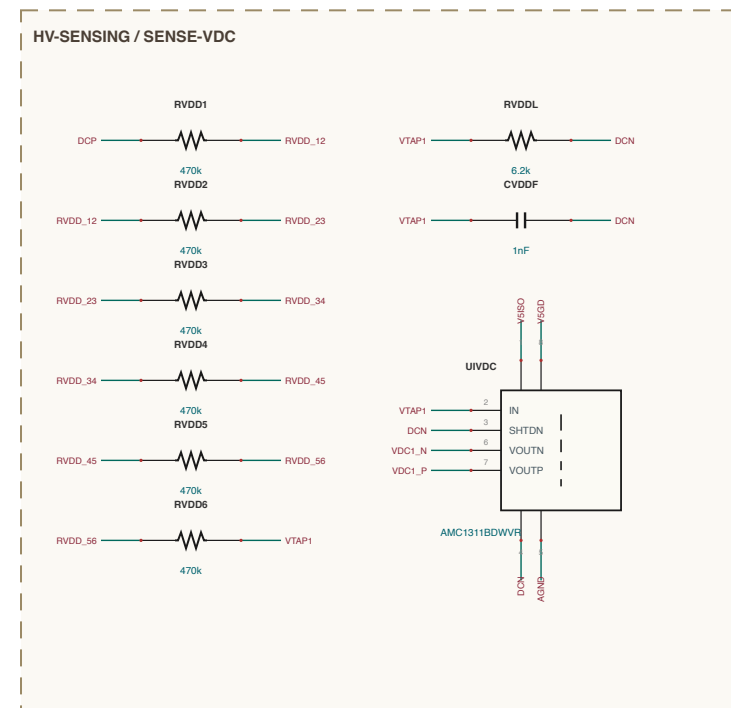
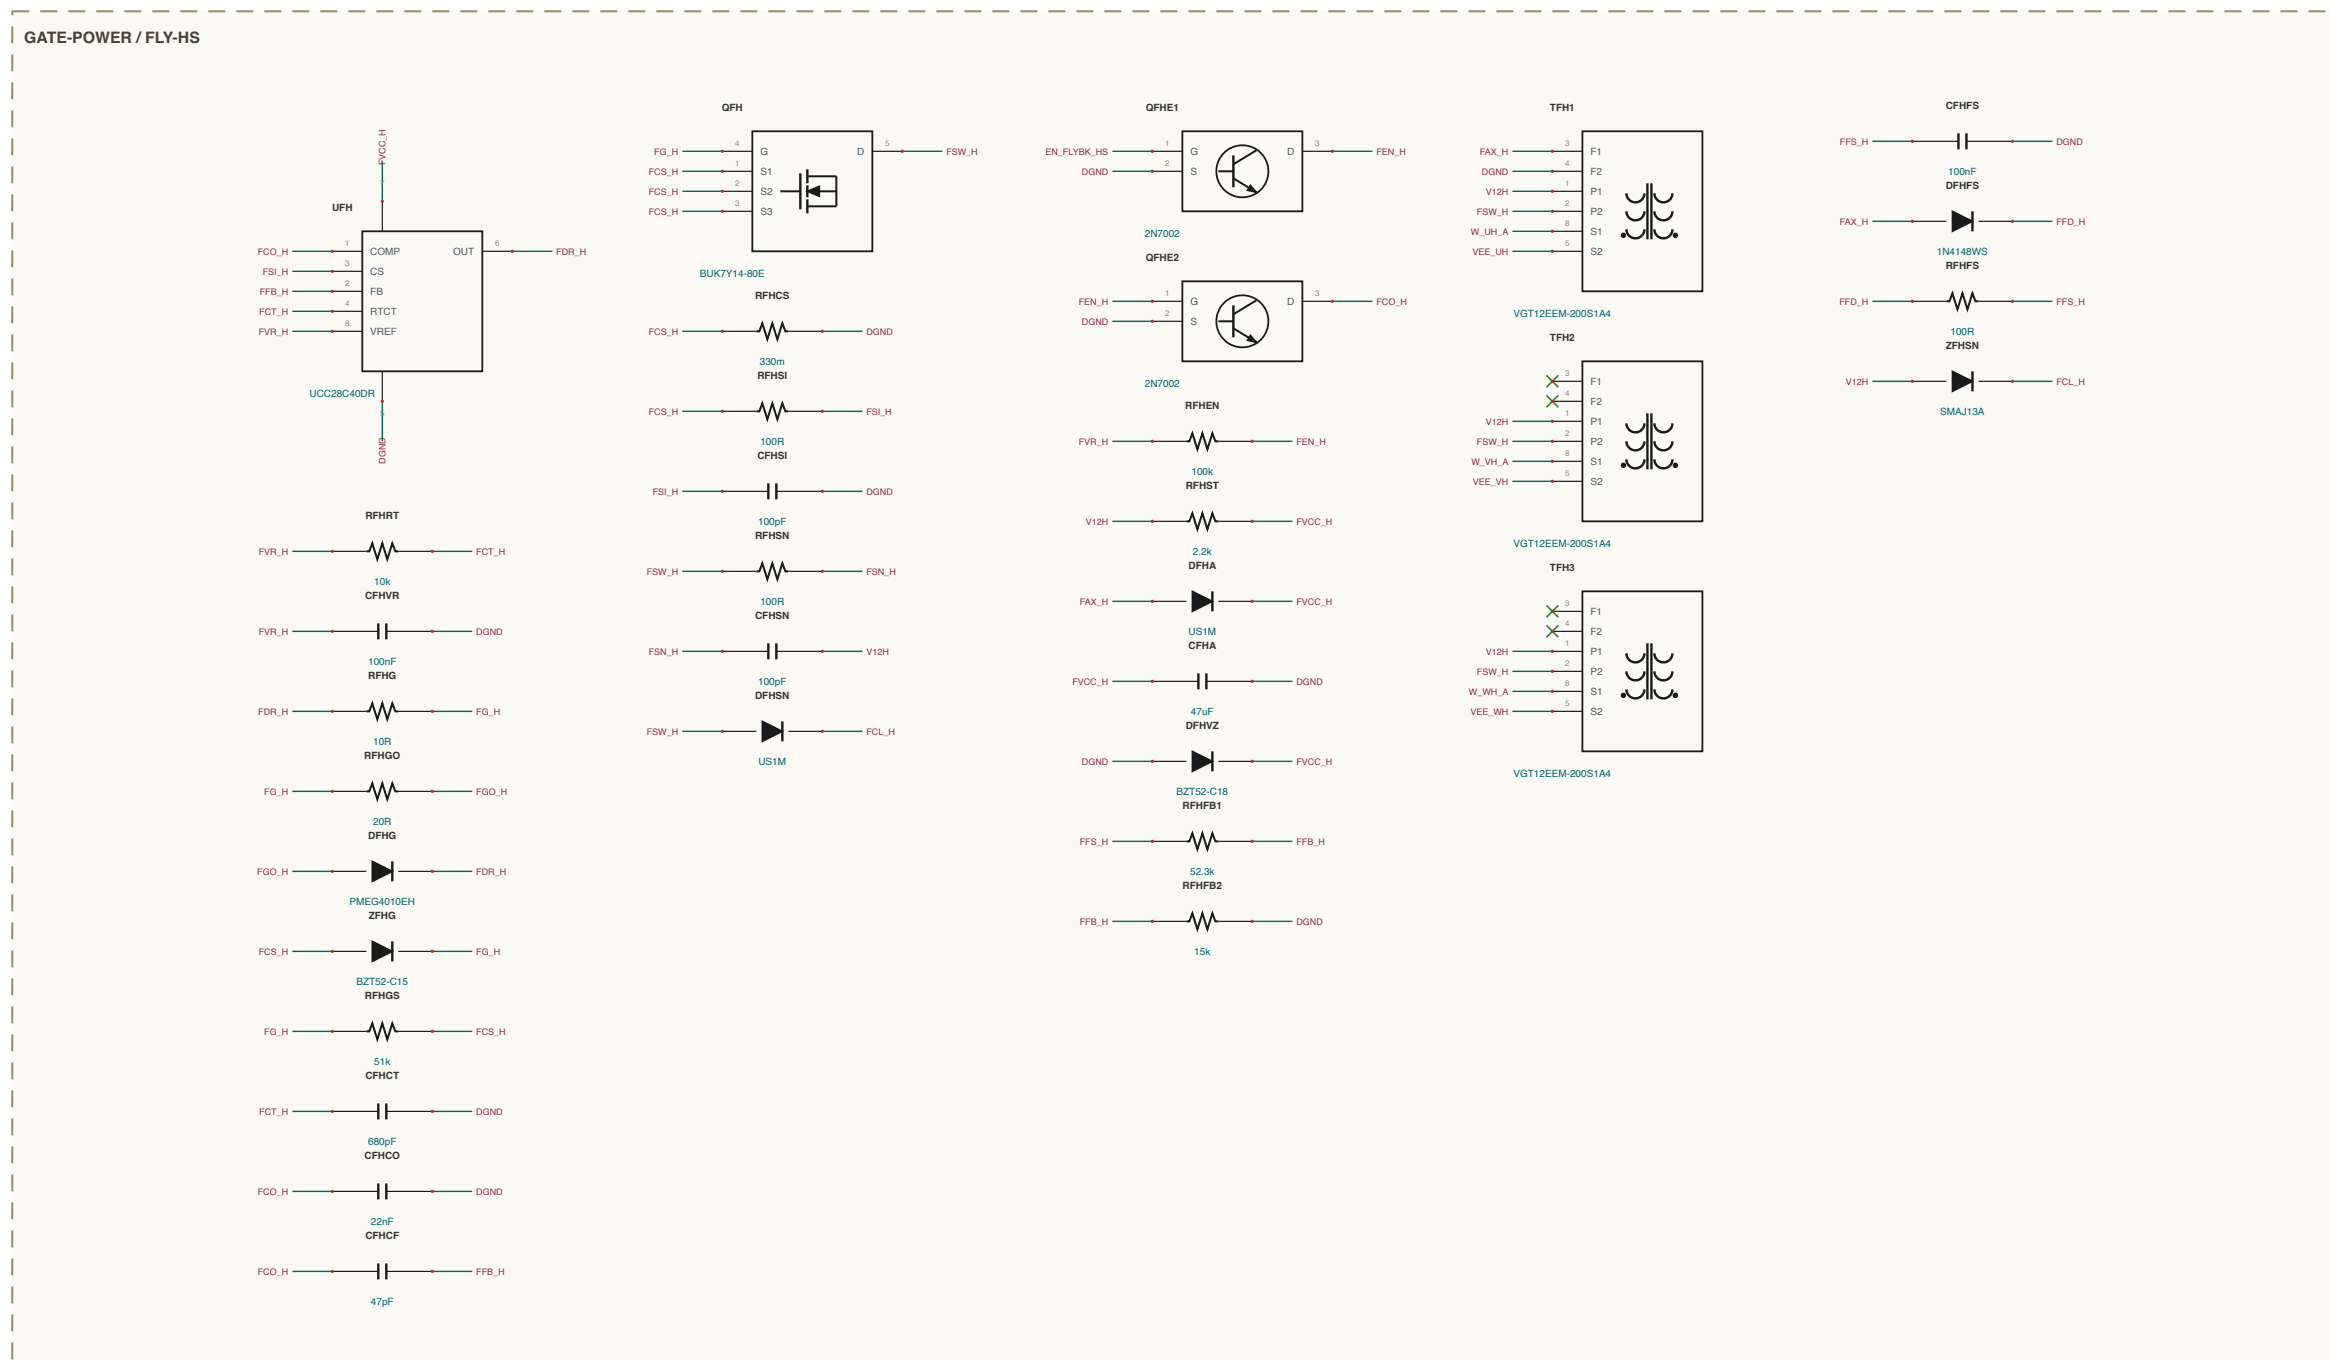
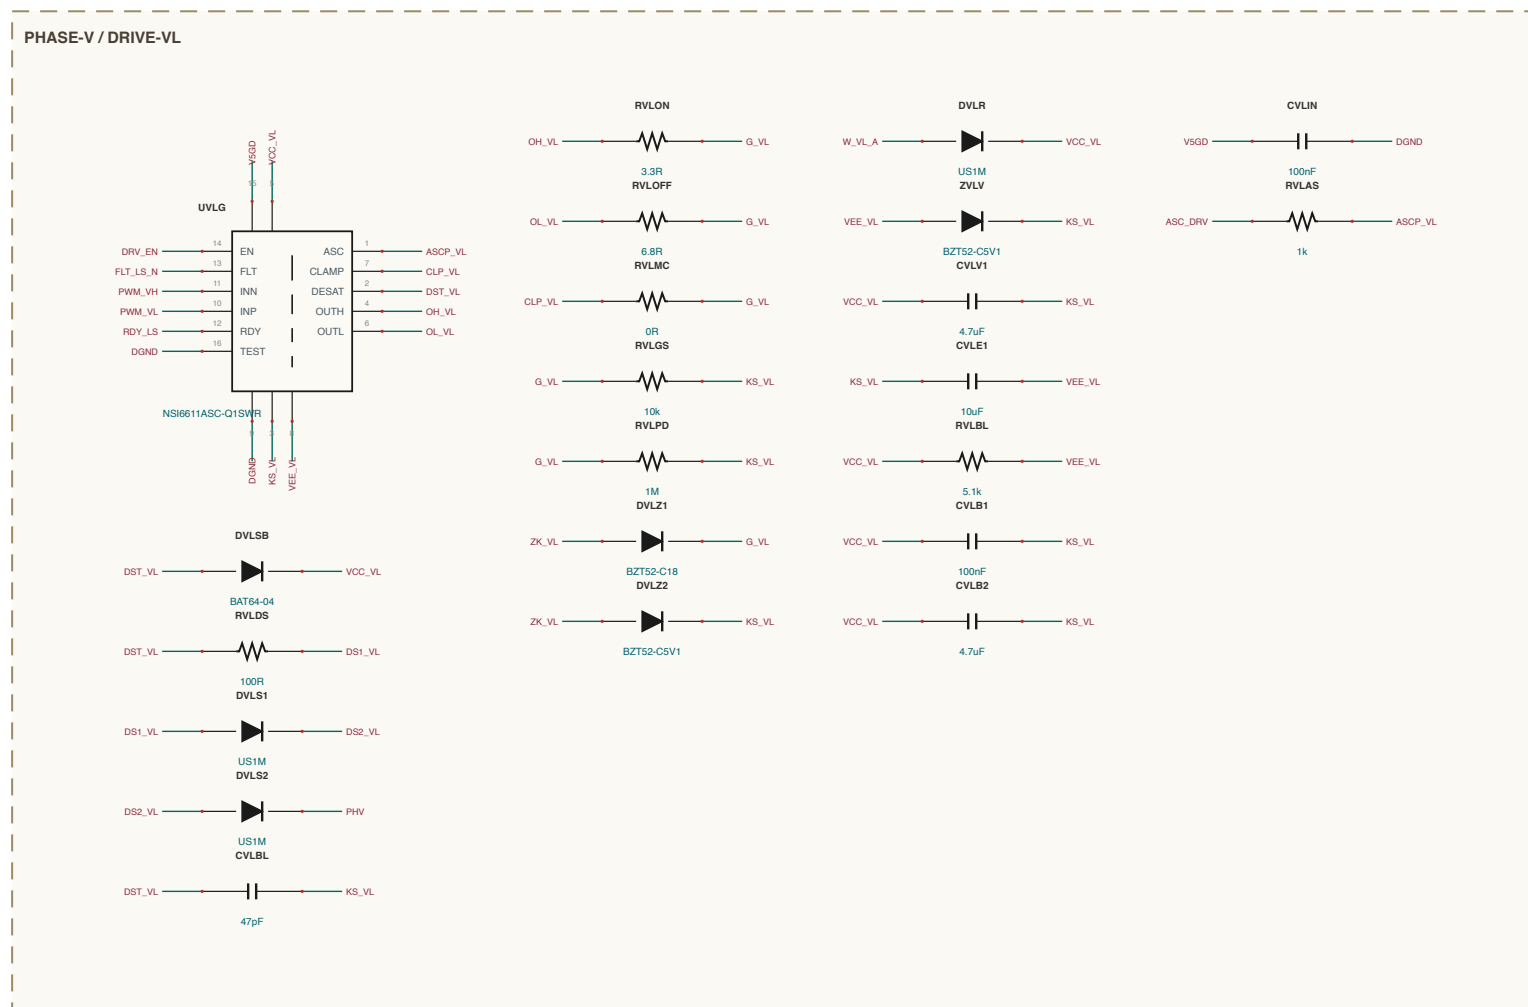
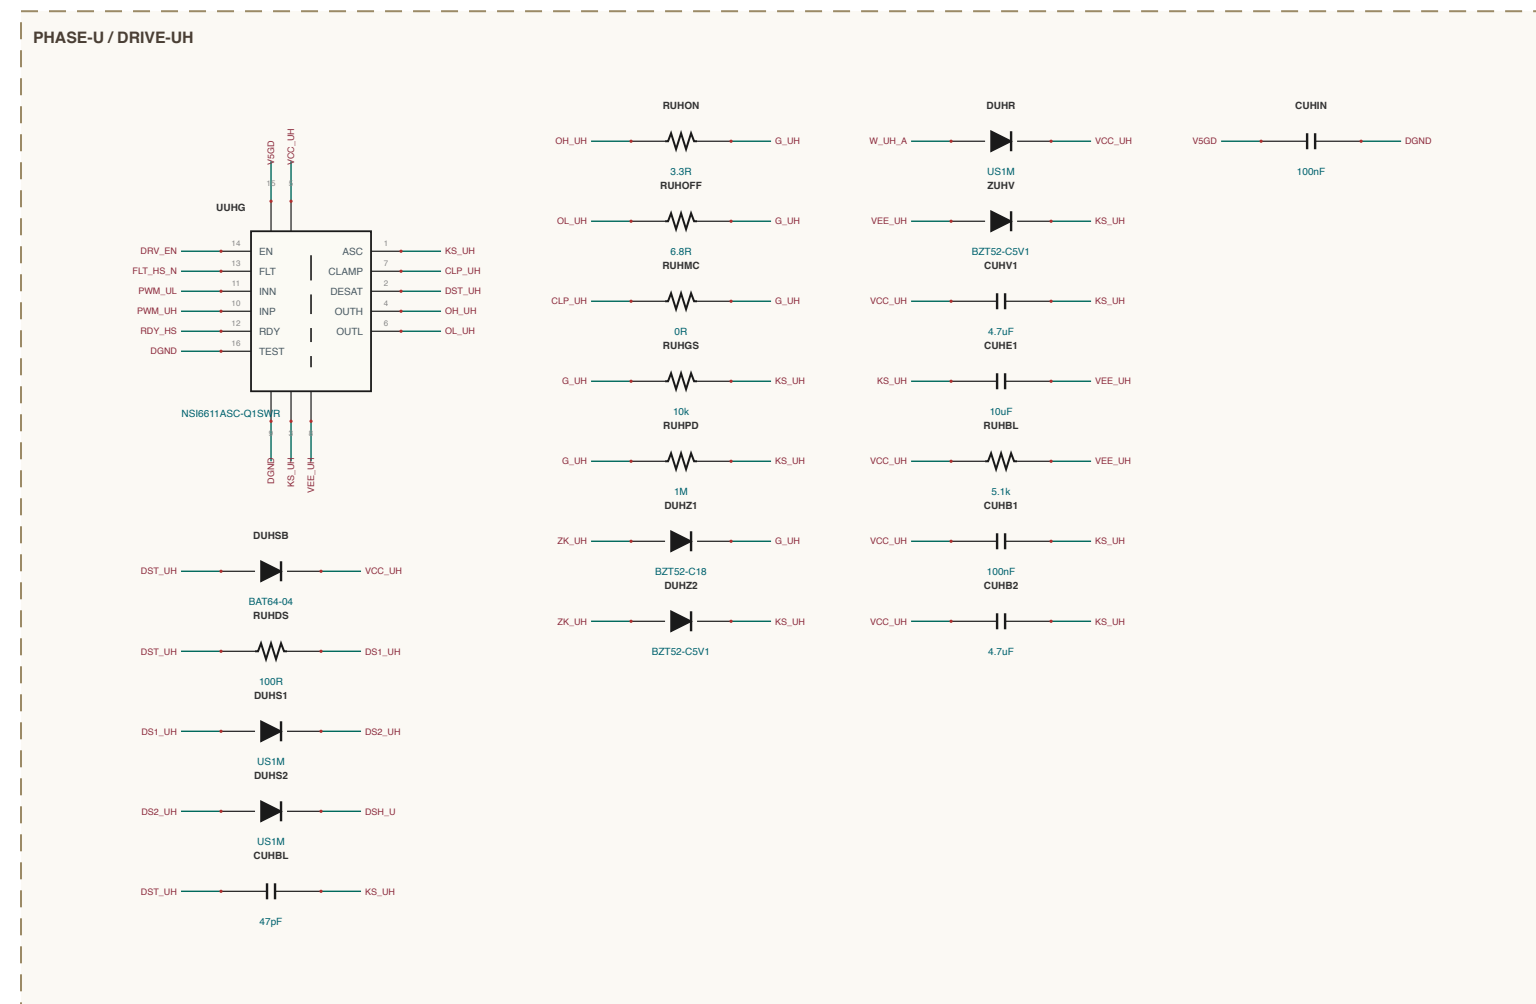
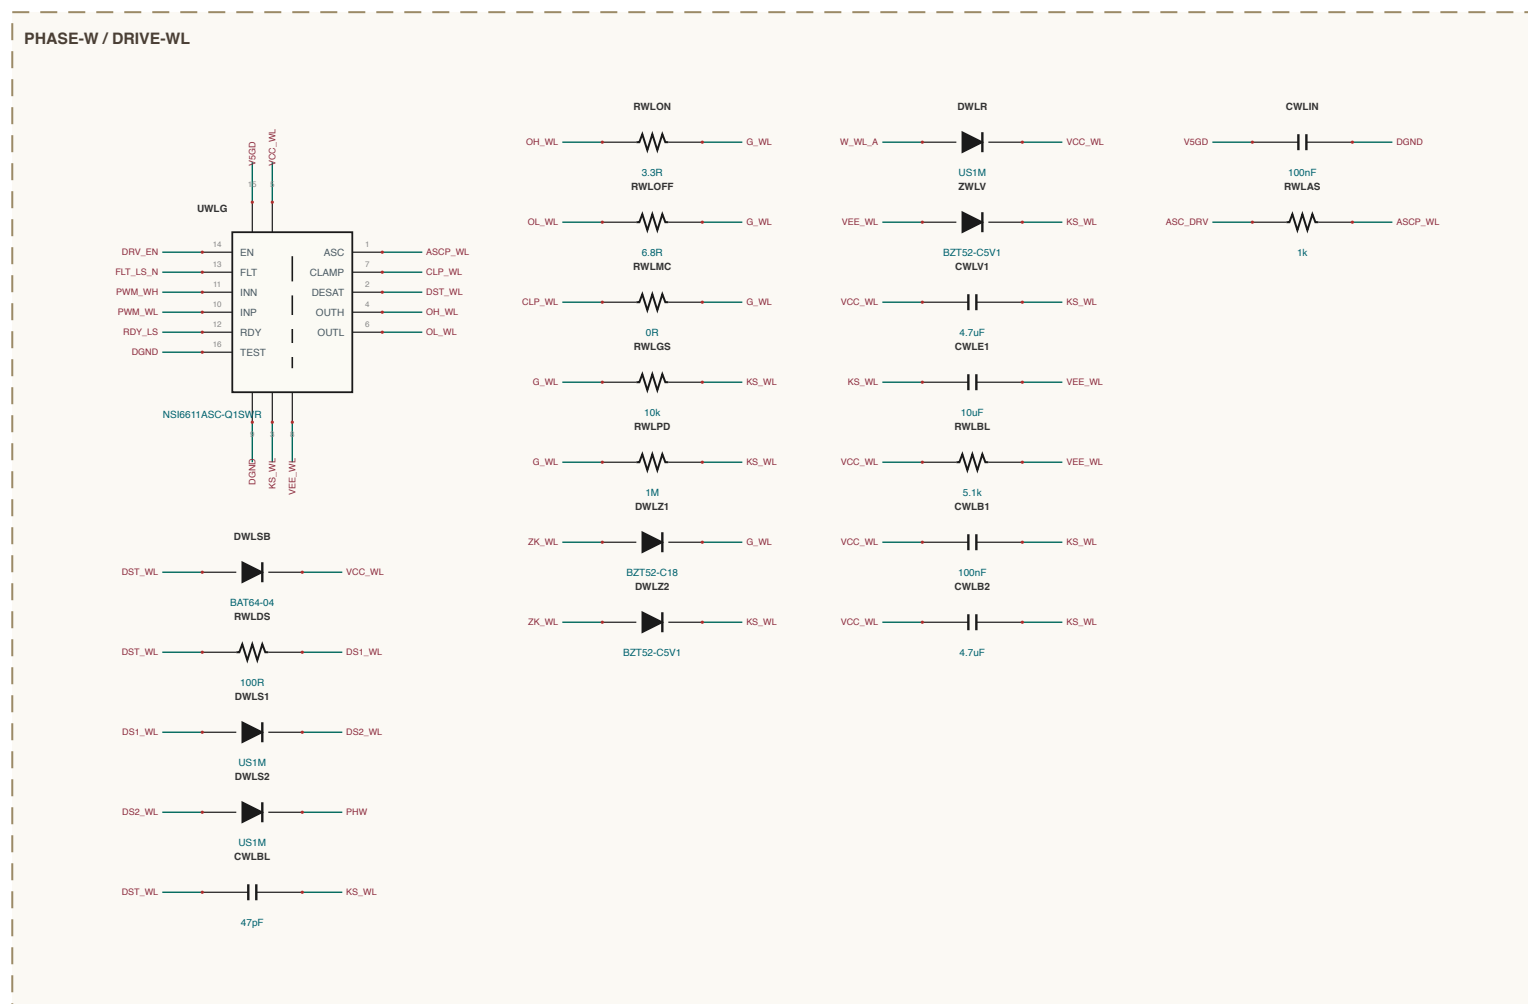
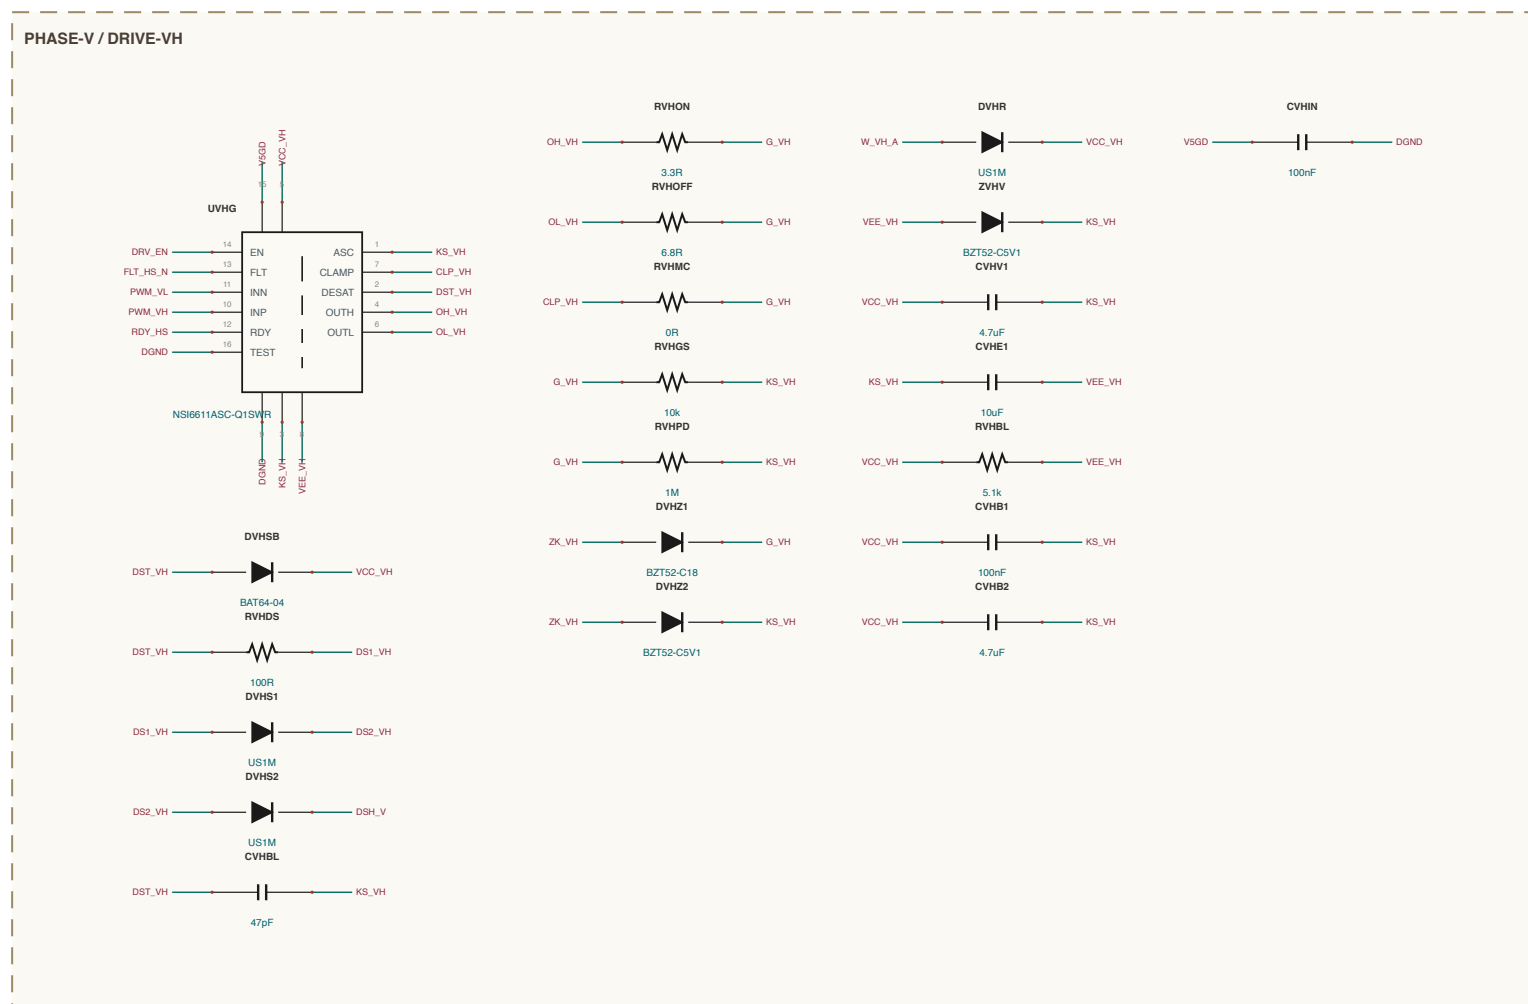
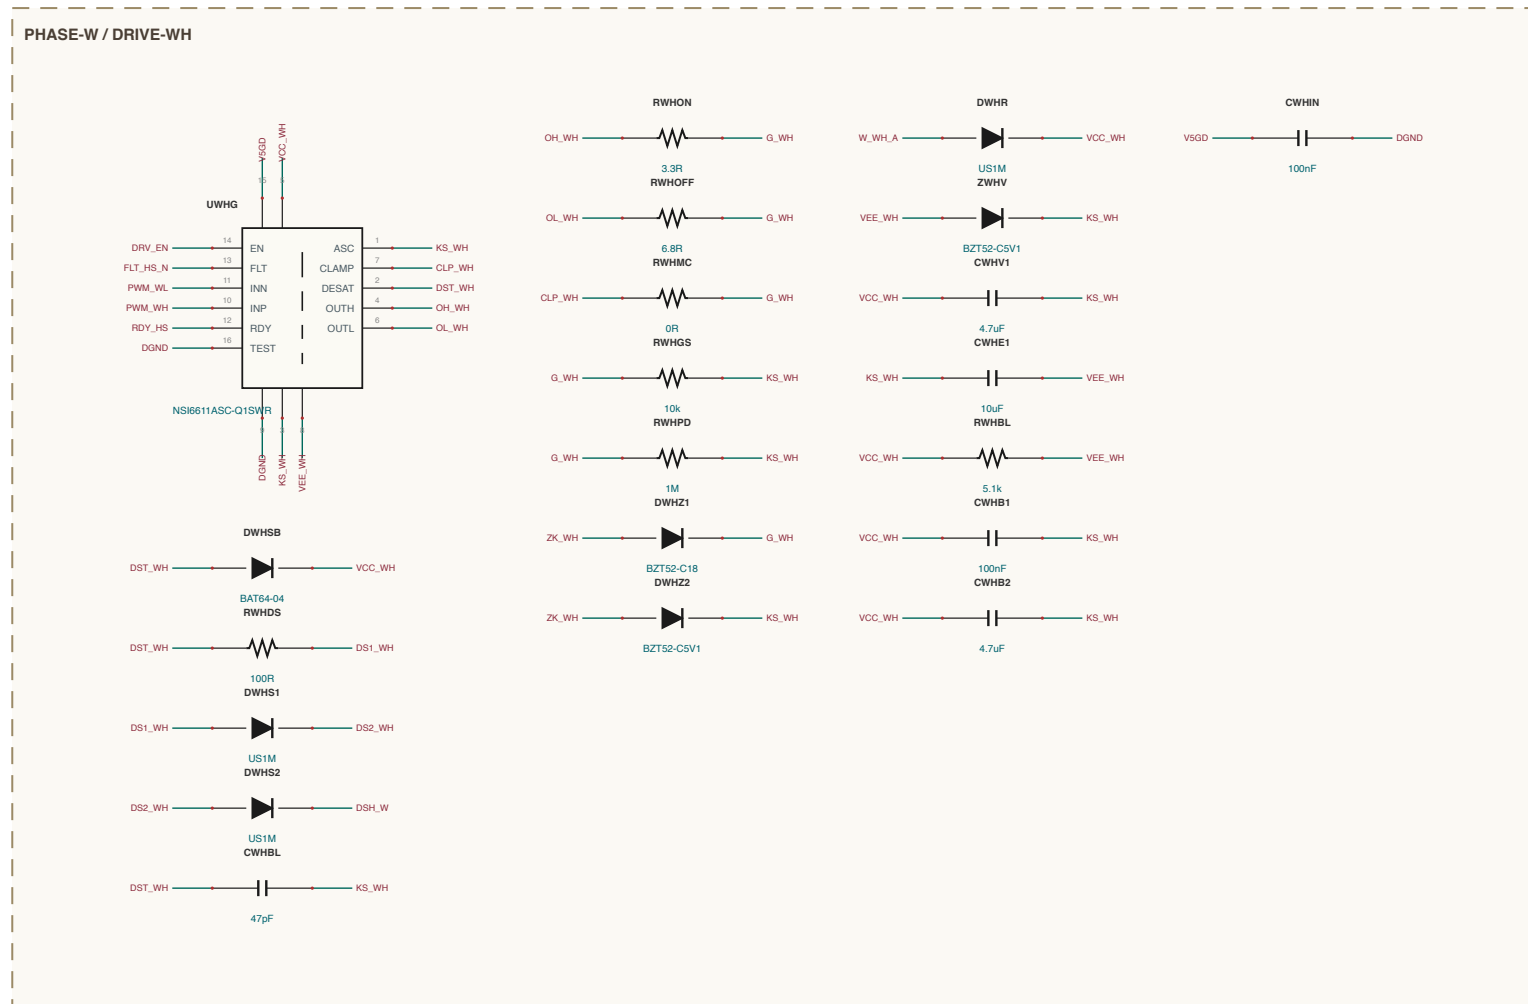
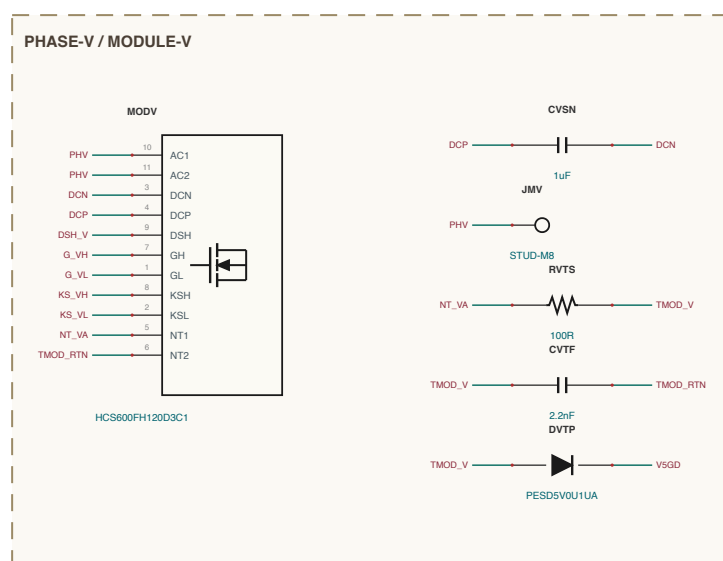
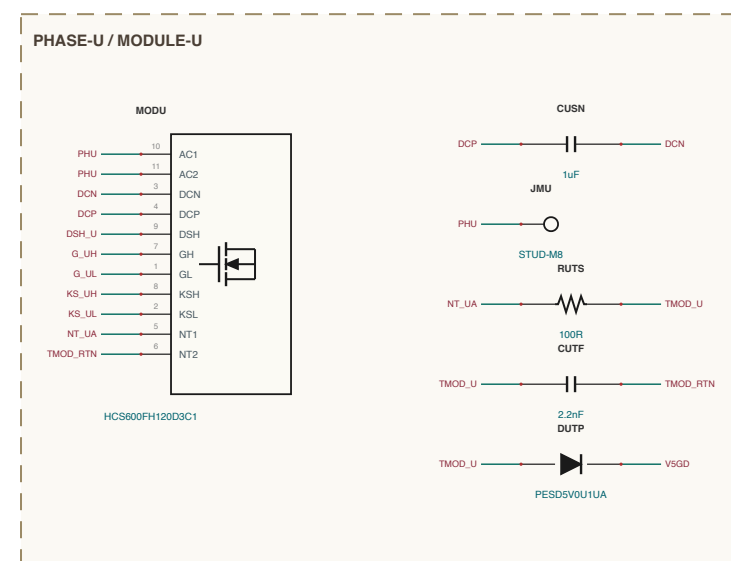
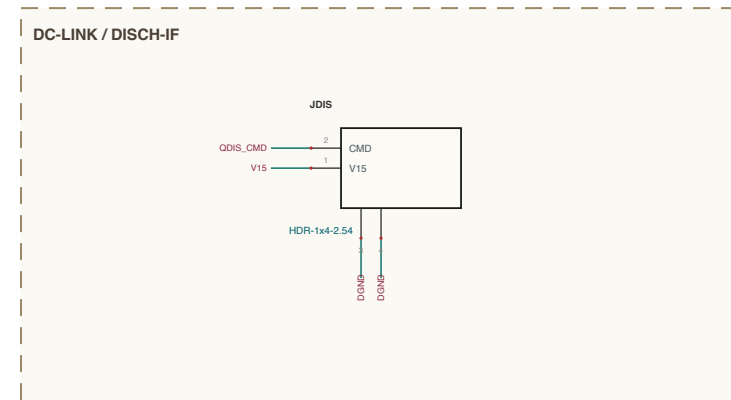
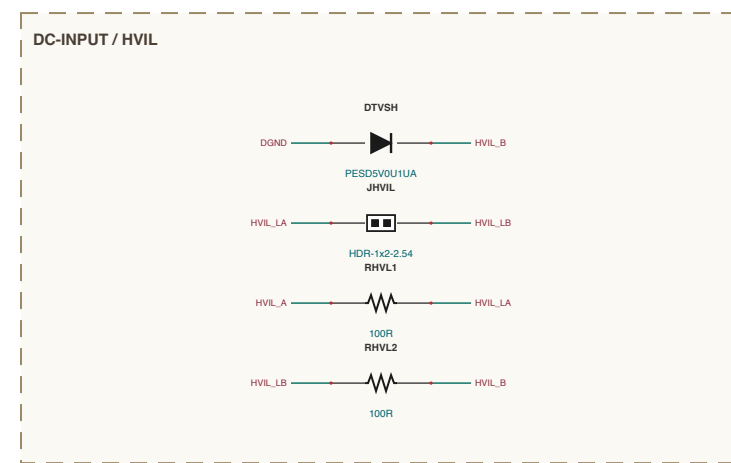
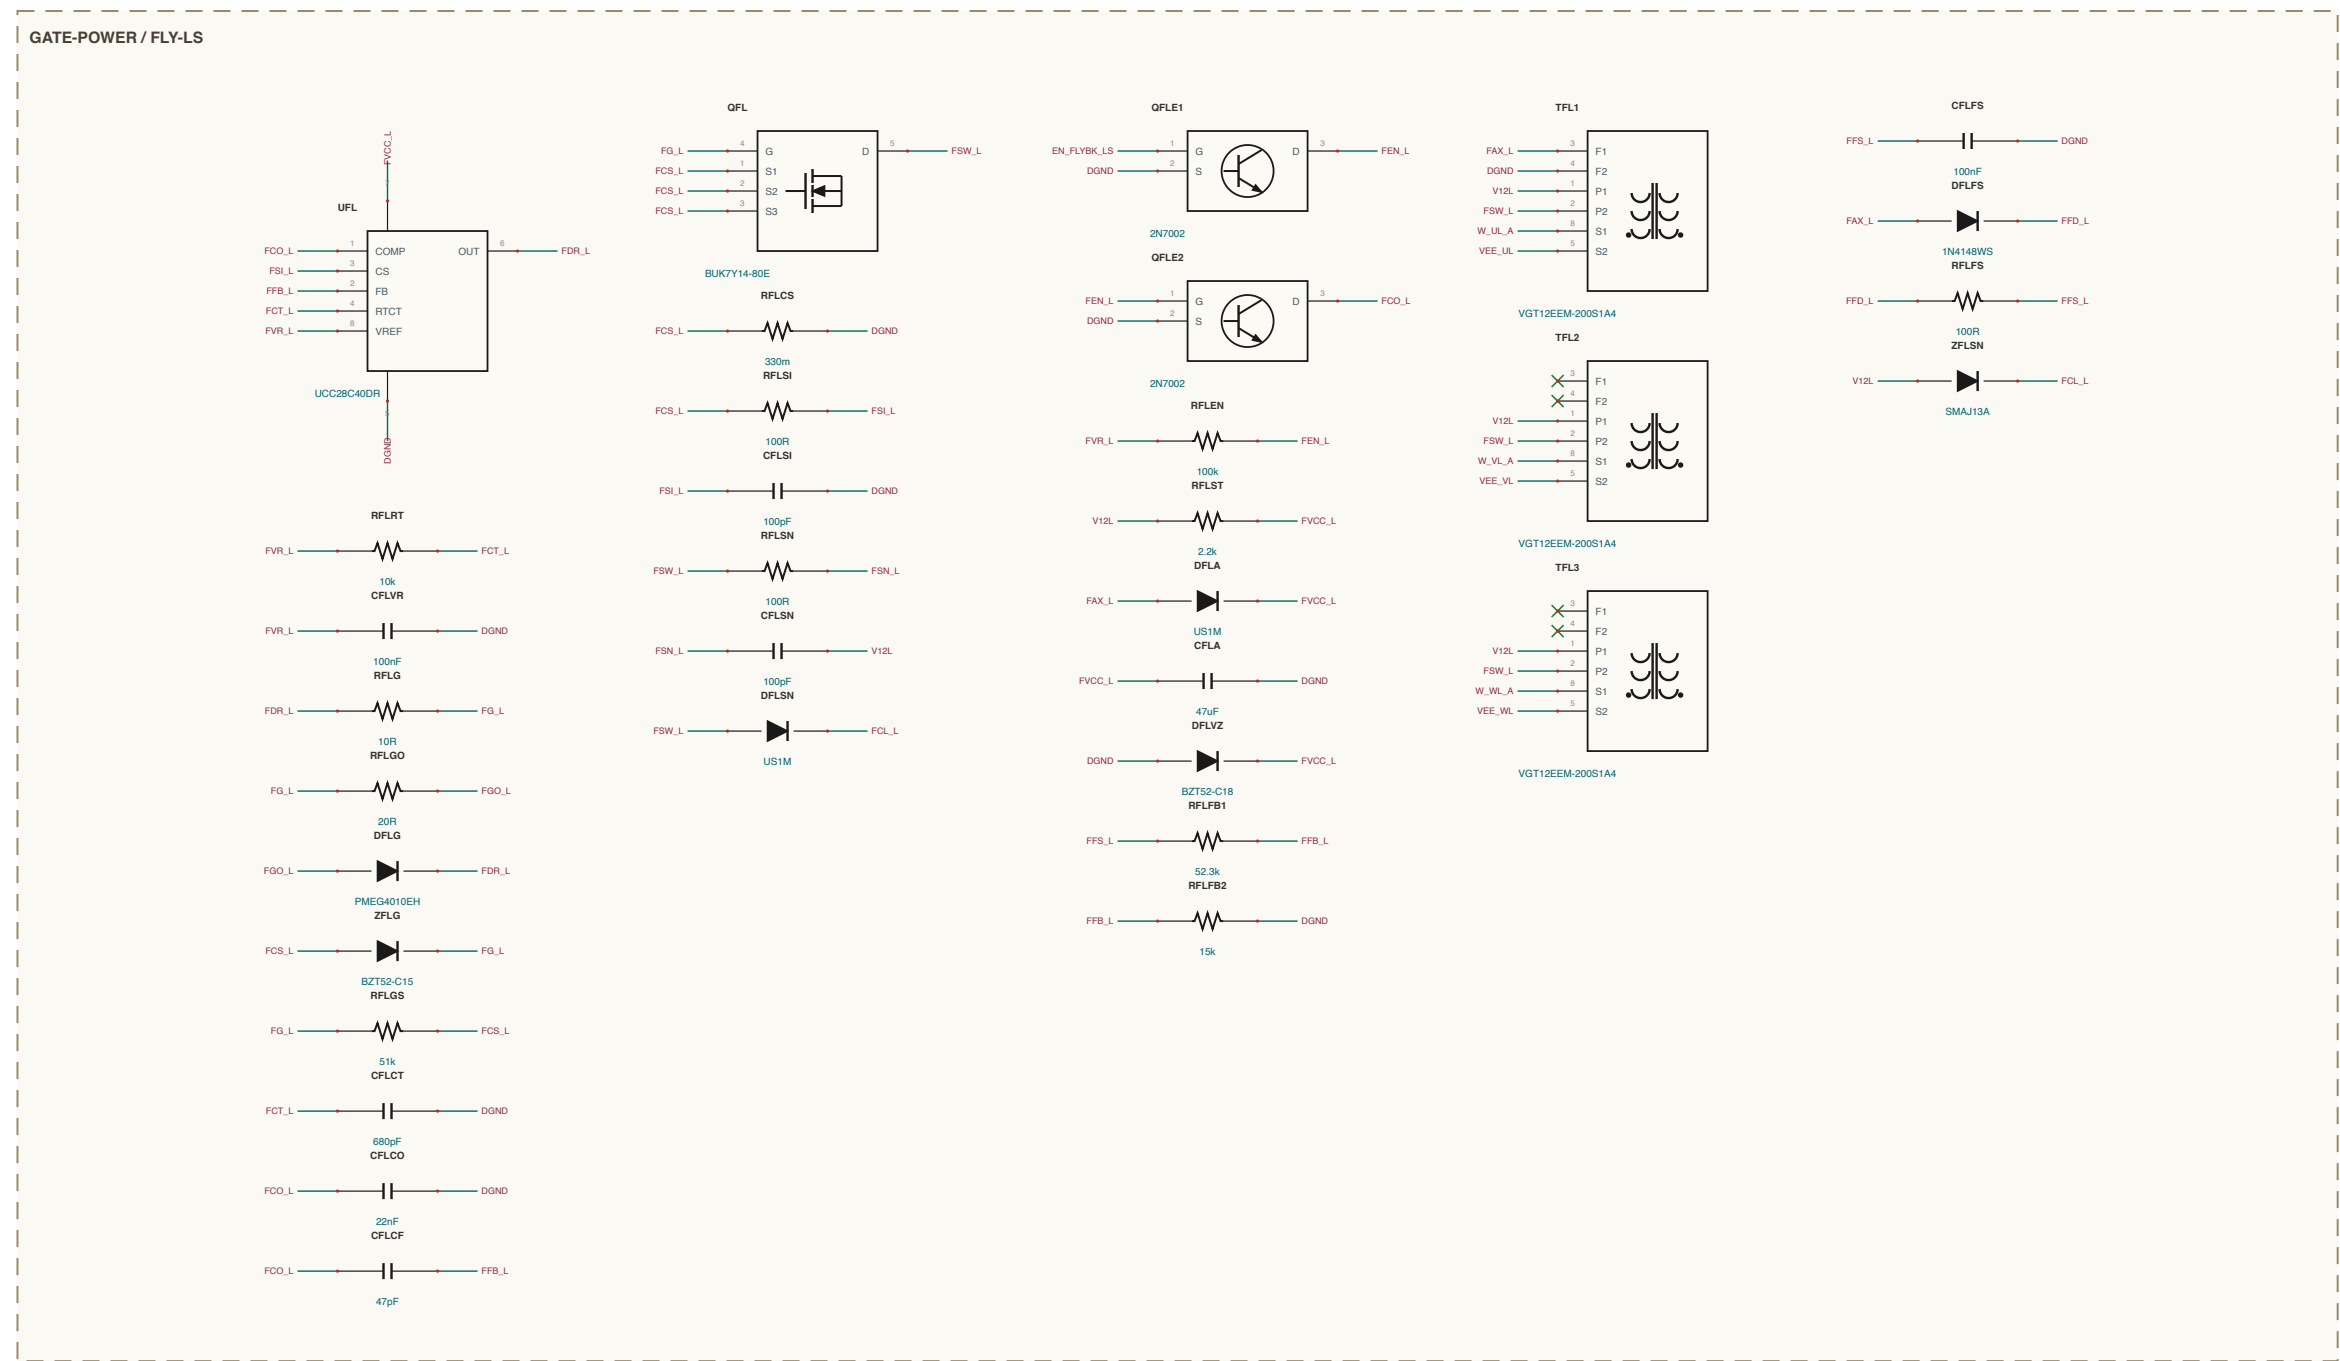
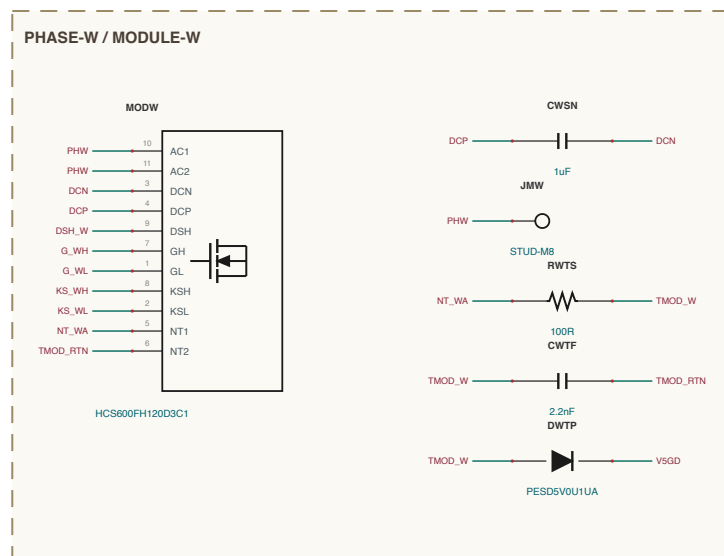
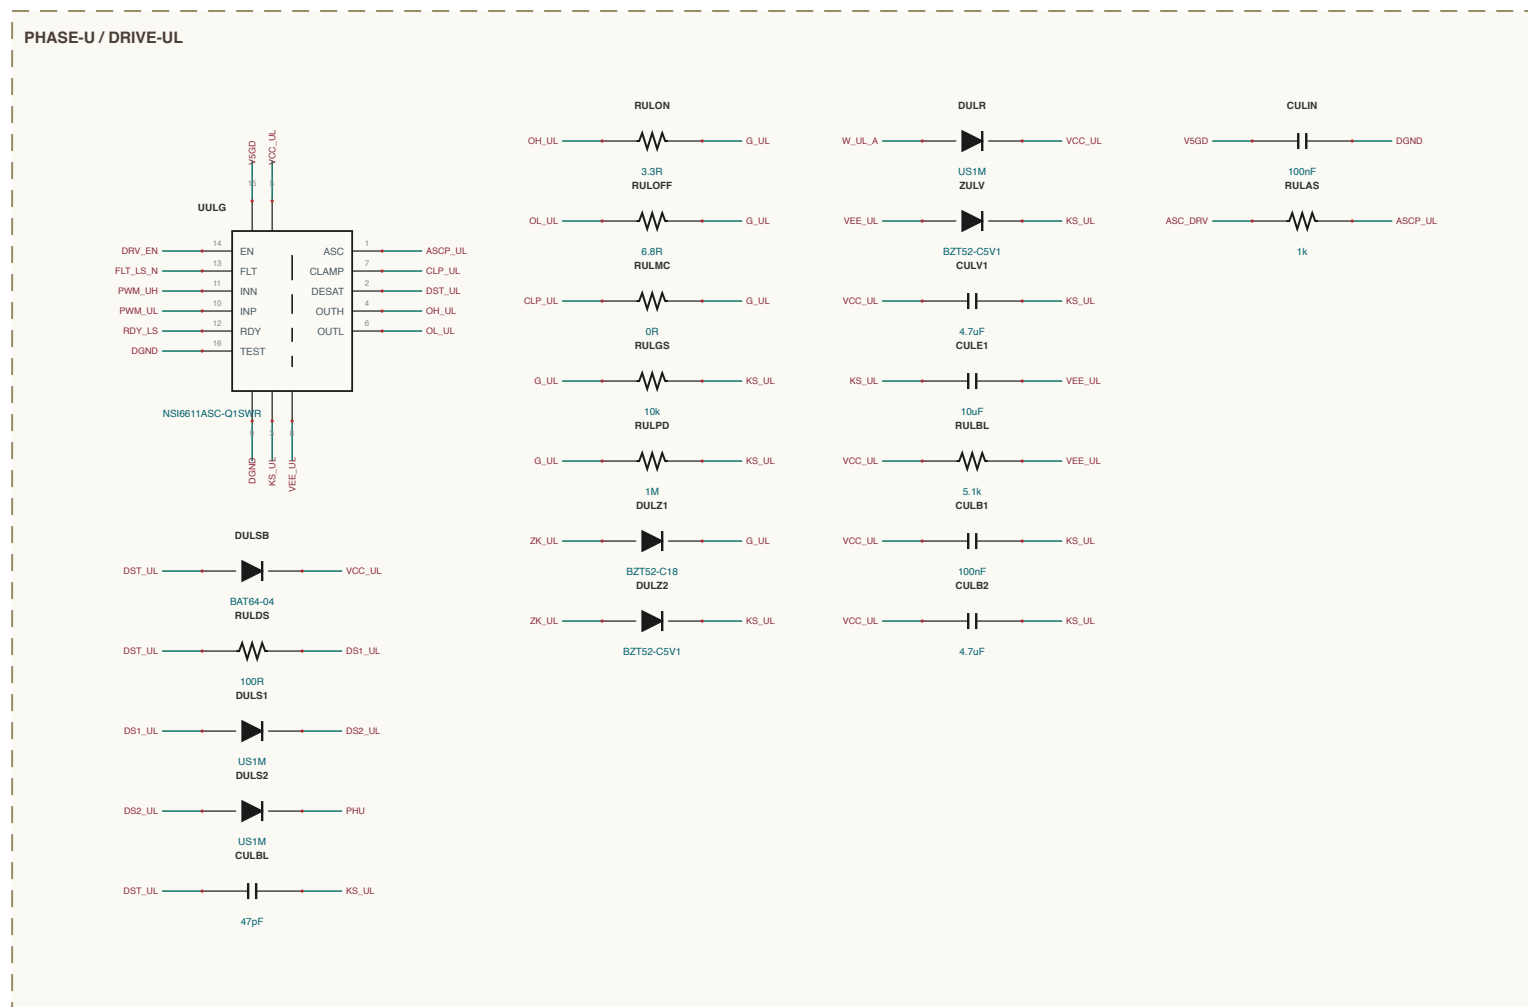
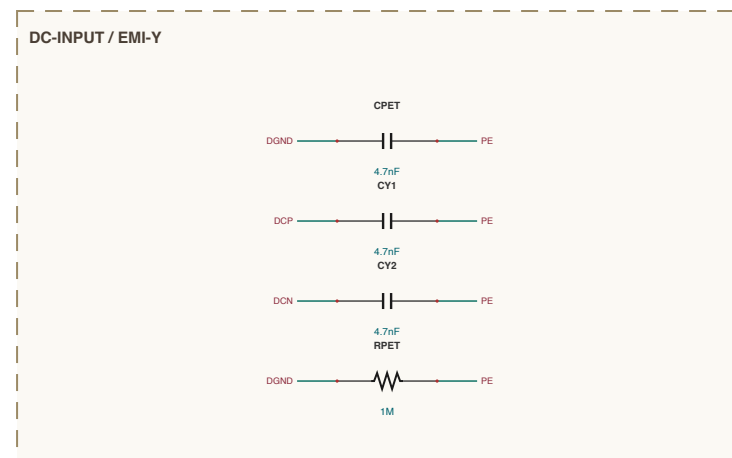


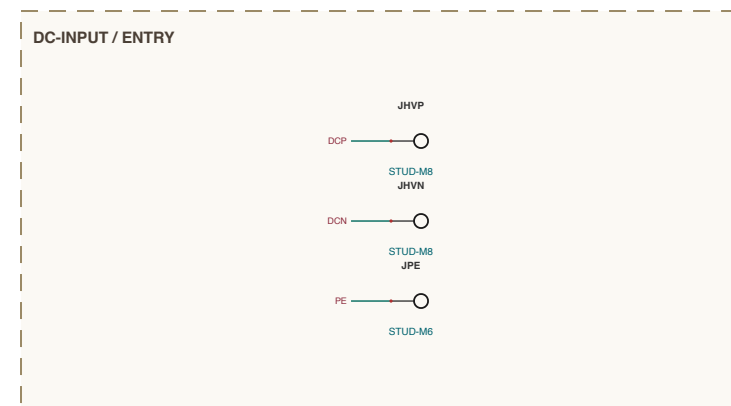

CONTROL-IF / HAIRNESS

The diagram illustrates the wiring for a control system, specifically for the 'CONTROL-IF / HAIRNESS' section. It shows a central 'CONTROL-IF' block with multiple input and output terminals. To the left, a 'HAIRNESS' block is connected to the 'CONTROL-IF' block. To the right, a 'CONTROL-IF' block is connected to a 'HAIRNESS' block. The diagram includes numerous labeled terminals such as 'PWR1_01', 'PWR1_02', 'PWR1_03', 'PWR1_04', 'PWR1_05', 'PWR1_06', 'PWR1_07', 'PWR1_08', 'PWR1_09', 'PWR1_10', 'PWR1_11', 'PWR1_12', 'PWR1_13', 'PWR1_14', 'PWR1_15', 'PWR1_16', 'PWR1_17', 'PWR1_18', 'PWR1_19', 'PWR1_20', 'PWR1_21', 'PWR1_22', 'PWR1_23', 'PWR1_24', 'PWR1_25', 'PWR1_26', 'PWR1_27', 'PWR1_28', 'PWR1_29', 'PWR1_30', 'PWR1_31', 'PWR1_32', 'PWR1_33', 'PWR1_34', 'PWR1_35', 'PWR1_36', 'PWR1_37', 'PWR1_38', 'PWR1_39', 'PWR1_40', 'PWR1_41', 'PWR1_42', 'PWR1_43', 'PWR1_44', 'PWR1_45', 'PWR1_46', 'PWR1_47', 'PWR1_48', 'PWR1_49', 'PWR1_50', 'PWR1_51', 'PWR1_52', 'PWR1_53', 'PWR1_54', 'PWR1_55', 'PWR1_56', 'PWR1_57', 'PWR1_58', 'PWR1_59', 'PWR1_60', 'PWR1_61', 'PWR1_62', 'PWR1_63', 'PWR1_64', 'PWR1_65', 'PWR1_66', 'PWR1_67', 'PWR1_68', 'PWR1_69', 'PWR1_70', 'PWR1_71', 'PWR1_72', 'PWR1_73', 'PWR1_74', 'PWR1_75', 'PWR1_76', 'PWR1_77', 'PWR1_78', 'PWR1_79', 'PWR1_80', 'PWR1_81', 'PWR1_82', 'PWR1_83', 'PWR1_84', 'PWR1_85', 'PWR1_86', 'PWR1_87', 'PWR1_88', 'PWR1_89', 'PWR1_90', 'PWR1_91', 'PWR1_92', 'PWR1_93', 'PWR1_94', 'PWR1_95', 'PWR1_96', 'PWR1_97', 'PWR1_98', 'PWR1_99', 'PWR1_100'. The diagram also shows various electrical symbols for switches, relays, and connectors.

SHEET INDEX

238 VRLA Pb Power (PVL) - 1 of 4

VV-BATTERY - 4 sections

L-POWER - 1 section

OCCUPANT - 1 section

PHASE-D - 3 sections

PHASE-H - 3 sections

PHASE-W - 3 sections

GATE-PONDED - 2 sections

CONTROL-F - 1 section

DCLINK - 1 section

see A.7 - 24 sections - 306 components

NET NAMING

Internal functions are named for what they *join*

Locals: offer mode at that C pin e.g. UNLOC, WIP

Problems: M endpoint of a series join e.g. RSLA, M

Problems: series join between Problems e.g. RUCD, L2

all others are explicit design aims

same name on another sheet = same net, joined (ONLY at the

named connection/label) (see RETROGRADE) (LINE, design basis)

```

ASD-0 SAFETY CONCEPT & DC-LINE DISCHARGE VERIFICATION

with state = 3 phase open (ATC drive overtemp), discharge per ECU #102-6489

1 lockout 320X236 (ASD-0 cmi) turn torque path
2 F238 (BA switching + monitor) = F208 (in 300)
3 F208B00C1_133A07104123 1 lock = DRV_0N = 7-pH open
4 F238 strip = L3.00C fault J28 diagnosed OVF
5 F238B01_001_001 (BA F238 F208) (ATC gate power)
6 1 to full = non-collid. (parallelity (torque path)
7 2 to bus (DC sensor off = bus), V238 monitored
8 E238C per switch (SC = 1 or 0 as state), switching
9 V238, open = V2000D signature = torque off (F238)

--DISCHARGE--

PASSIVE 12h 23h 23h 10h = 2h + 10h; 9h = 10 V
ACTIVE 00h = 4h 47h 00h = 1.8h; 1.6 h = 10 V

E = 102 + 1050 + 32 area worst; 433; 2200V/1h
V238F: MCU from ASD, switches BOTH VDC channels

P238: sensor error give the DISCHARGE BOARD fixed

```