
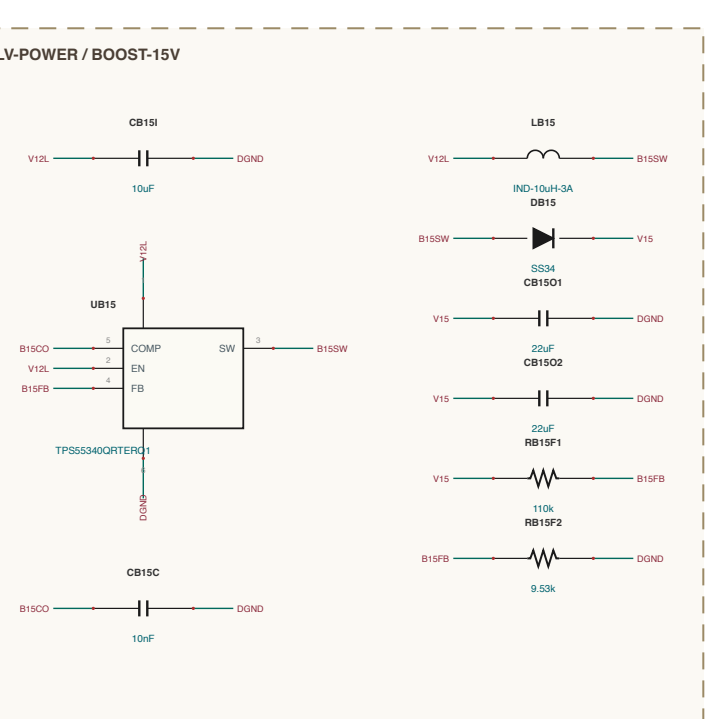
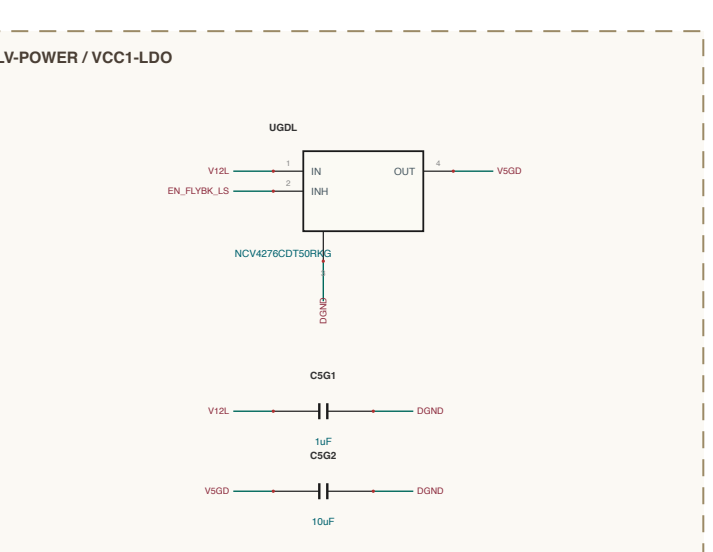
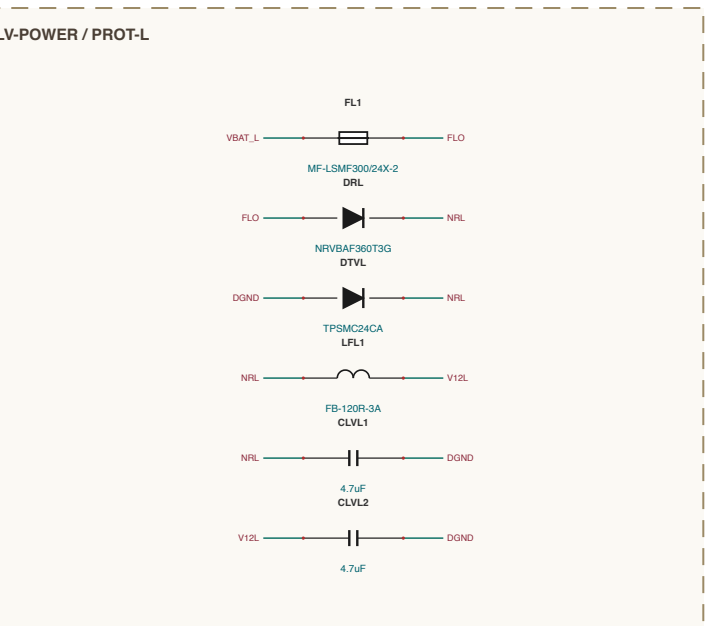
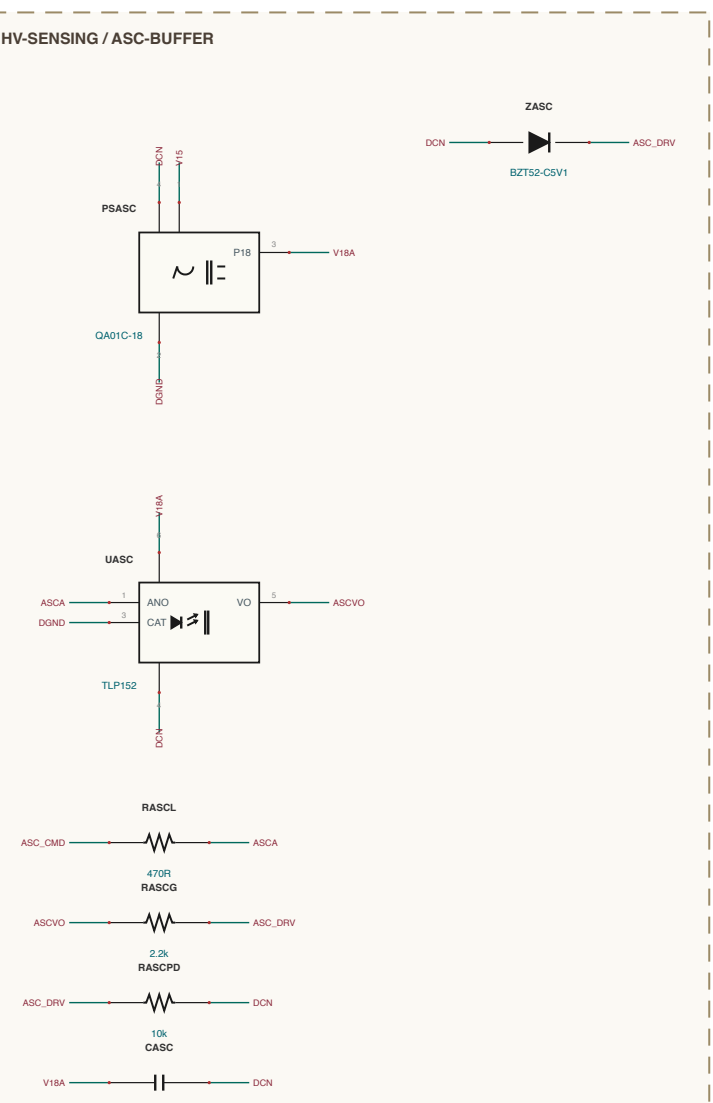
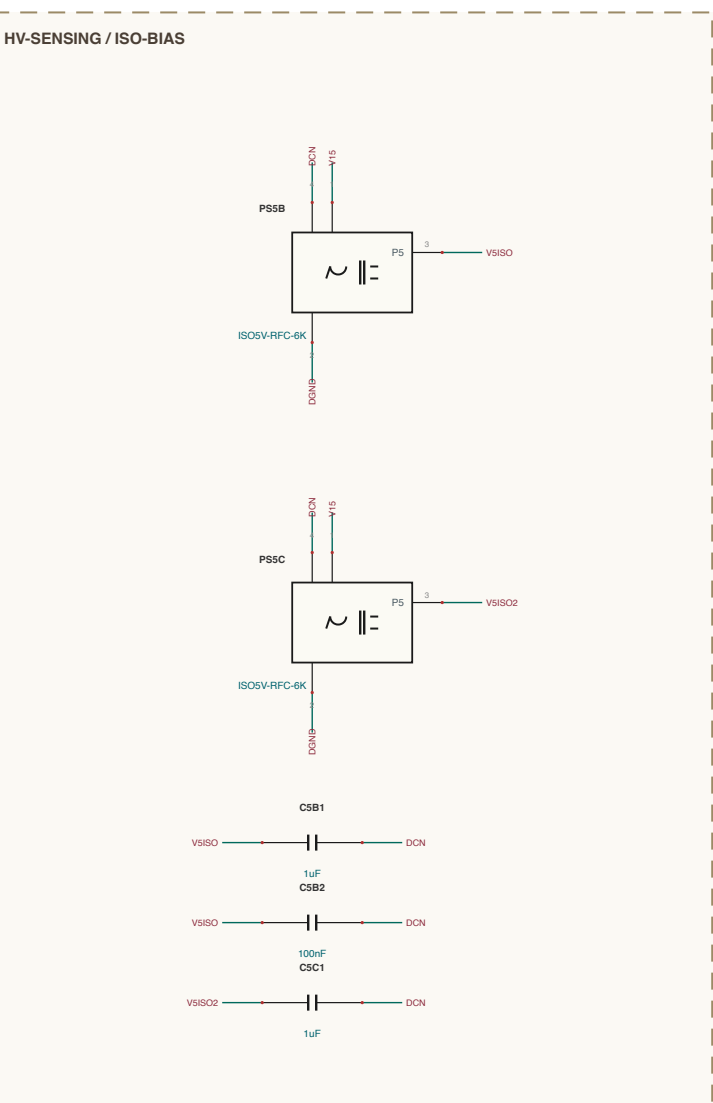
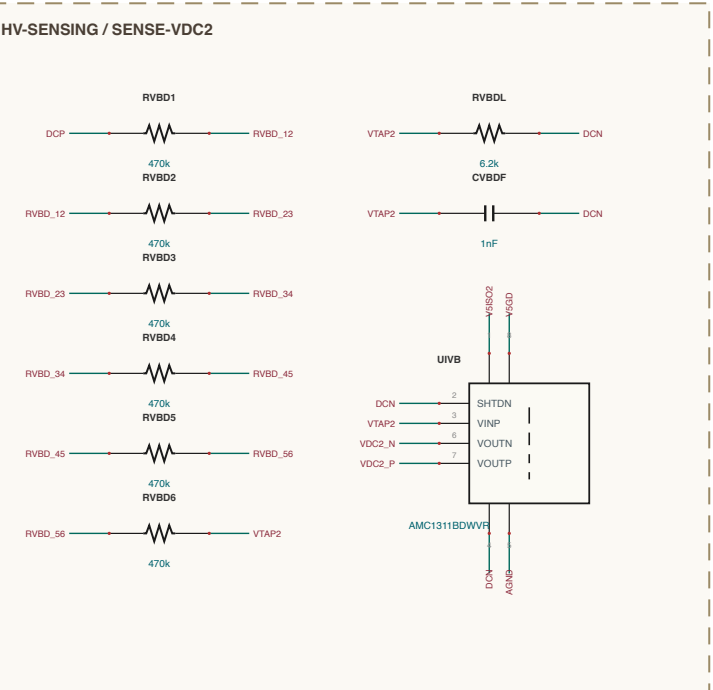
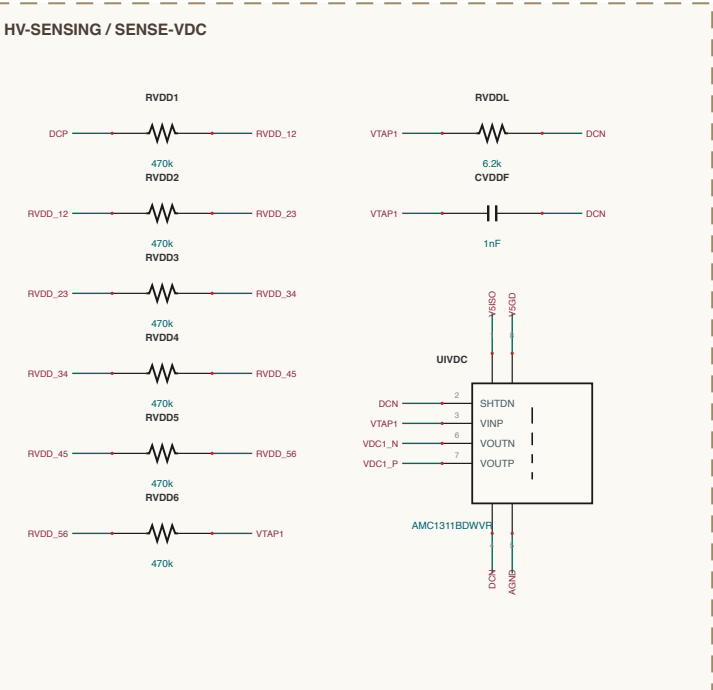
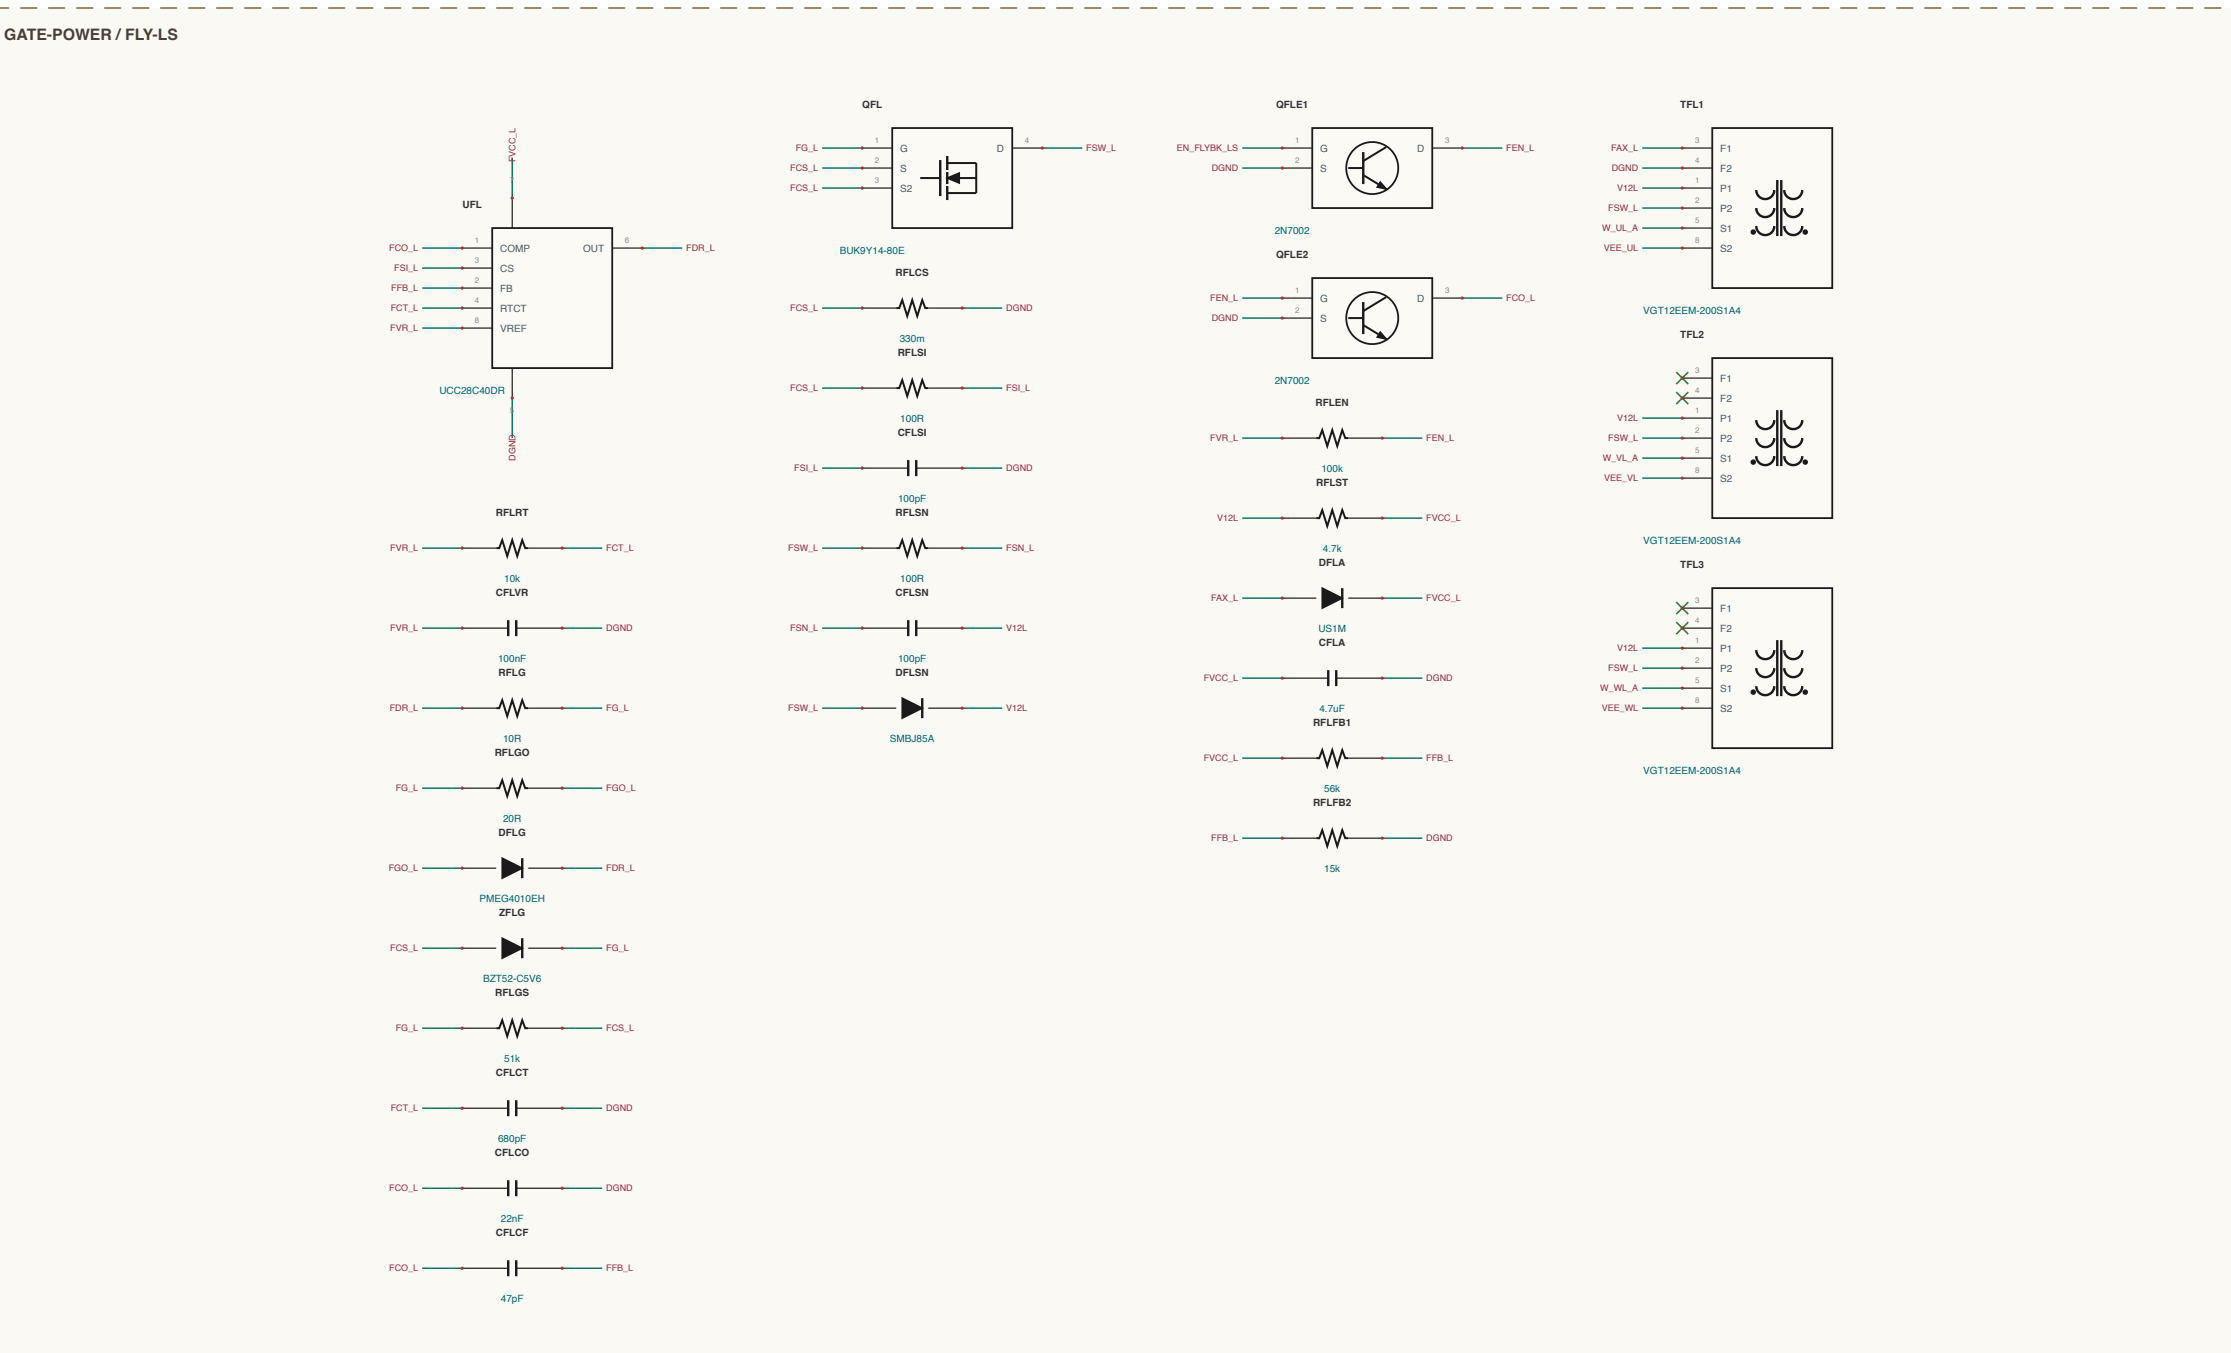
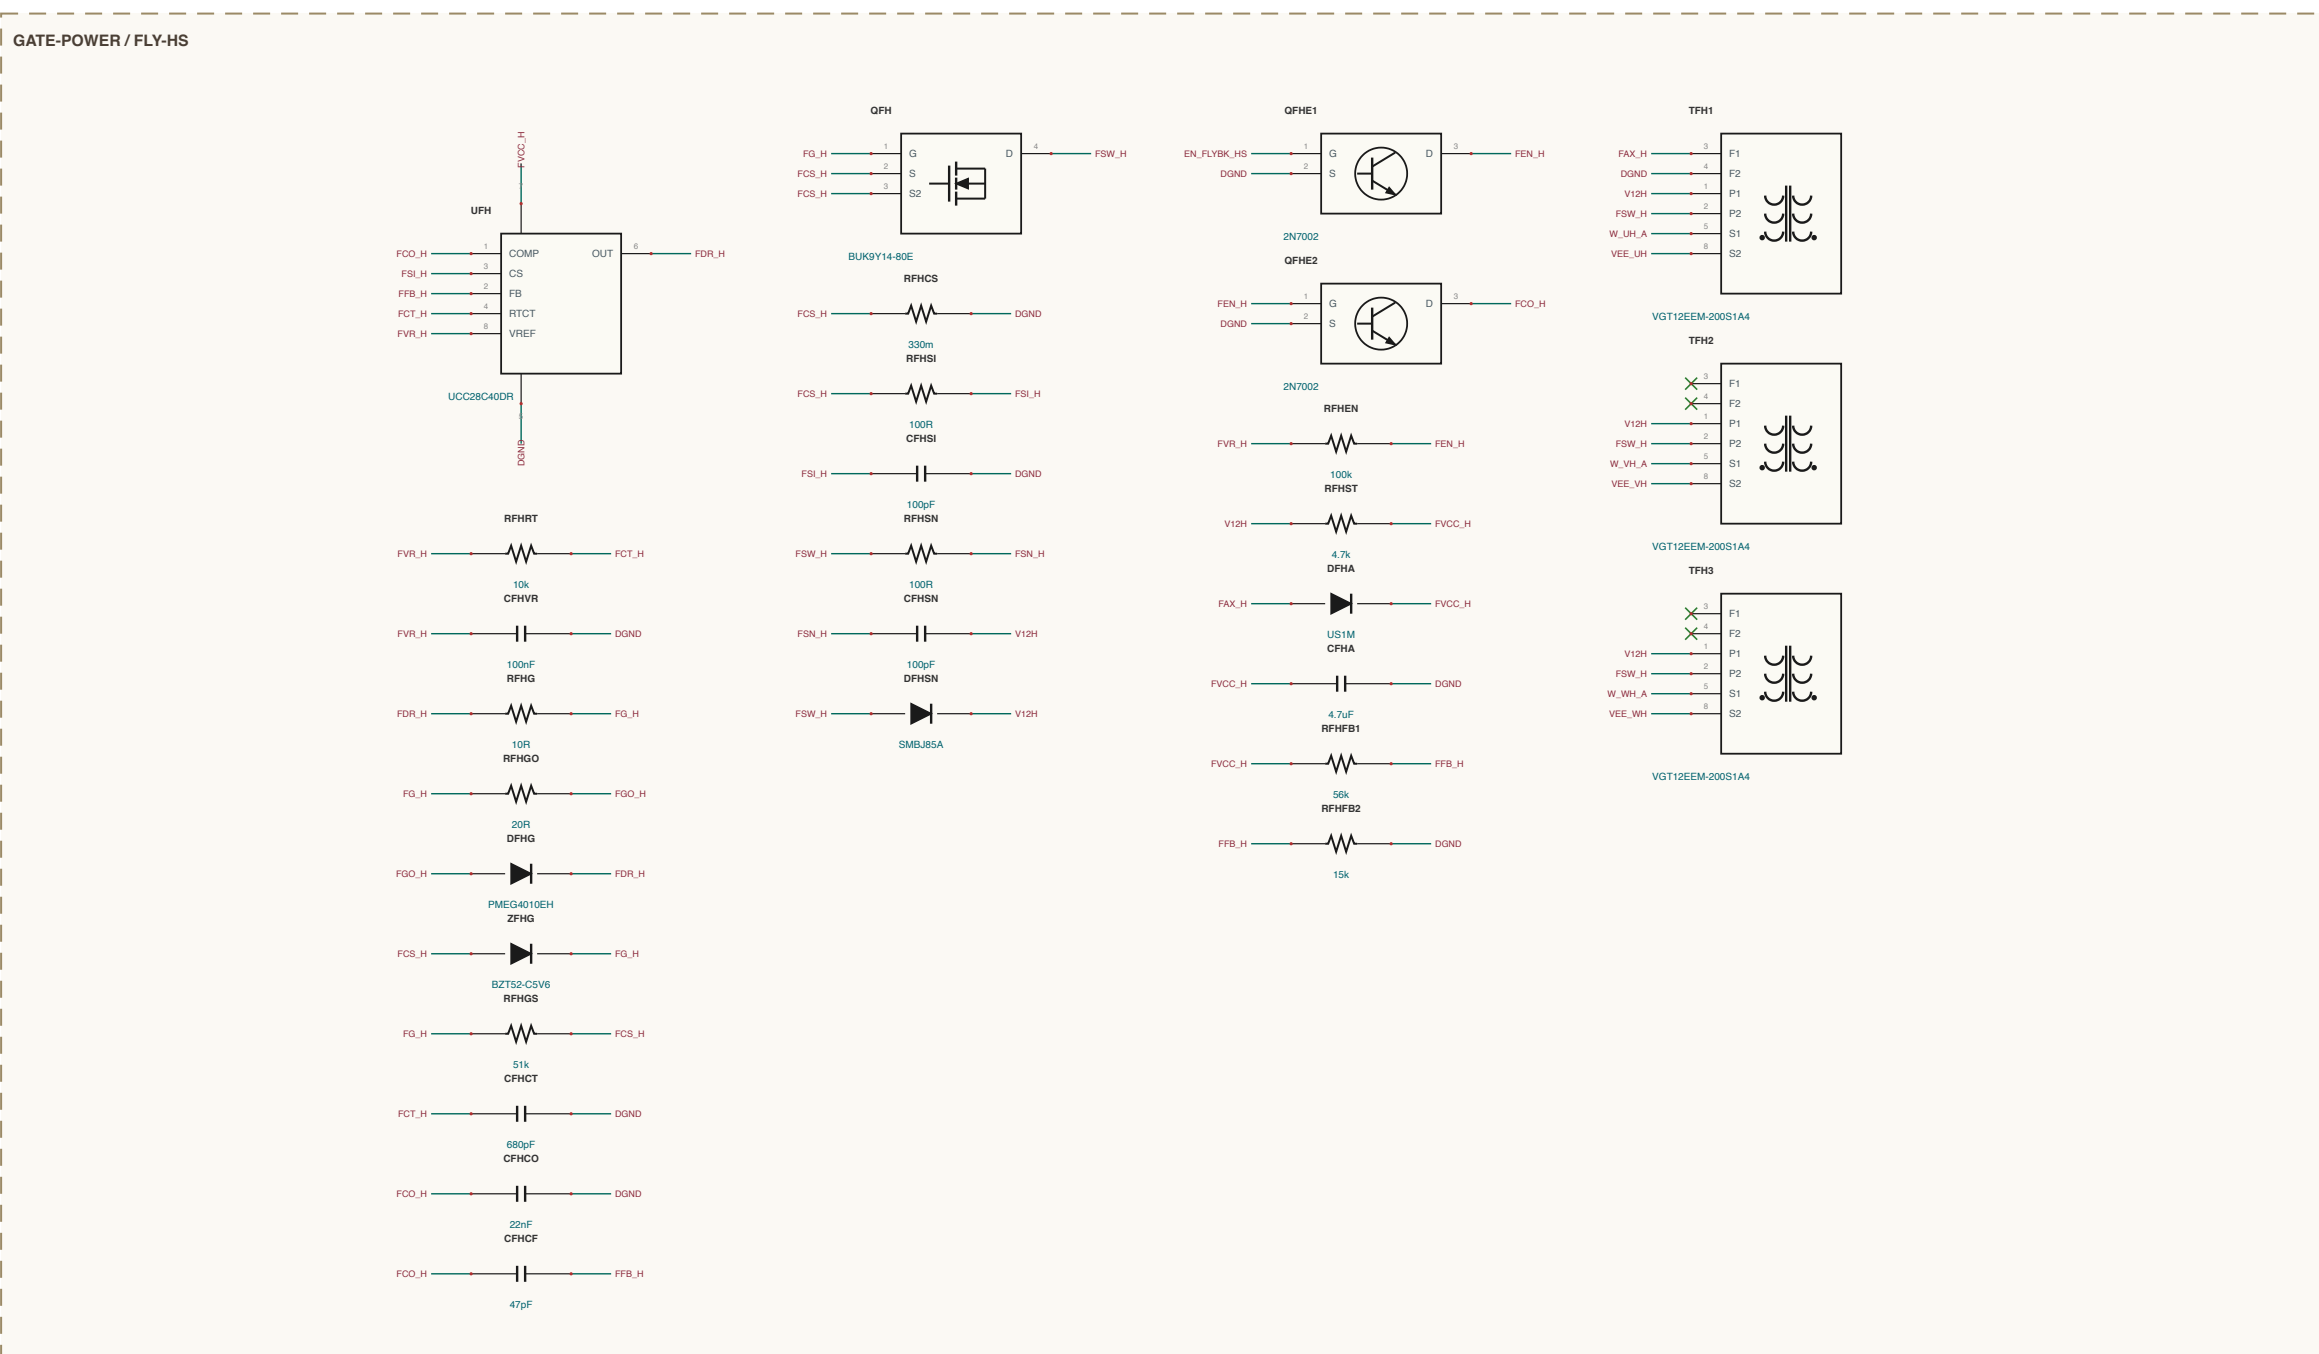
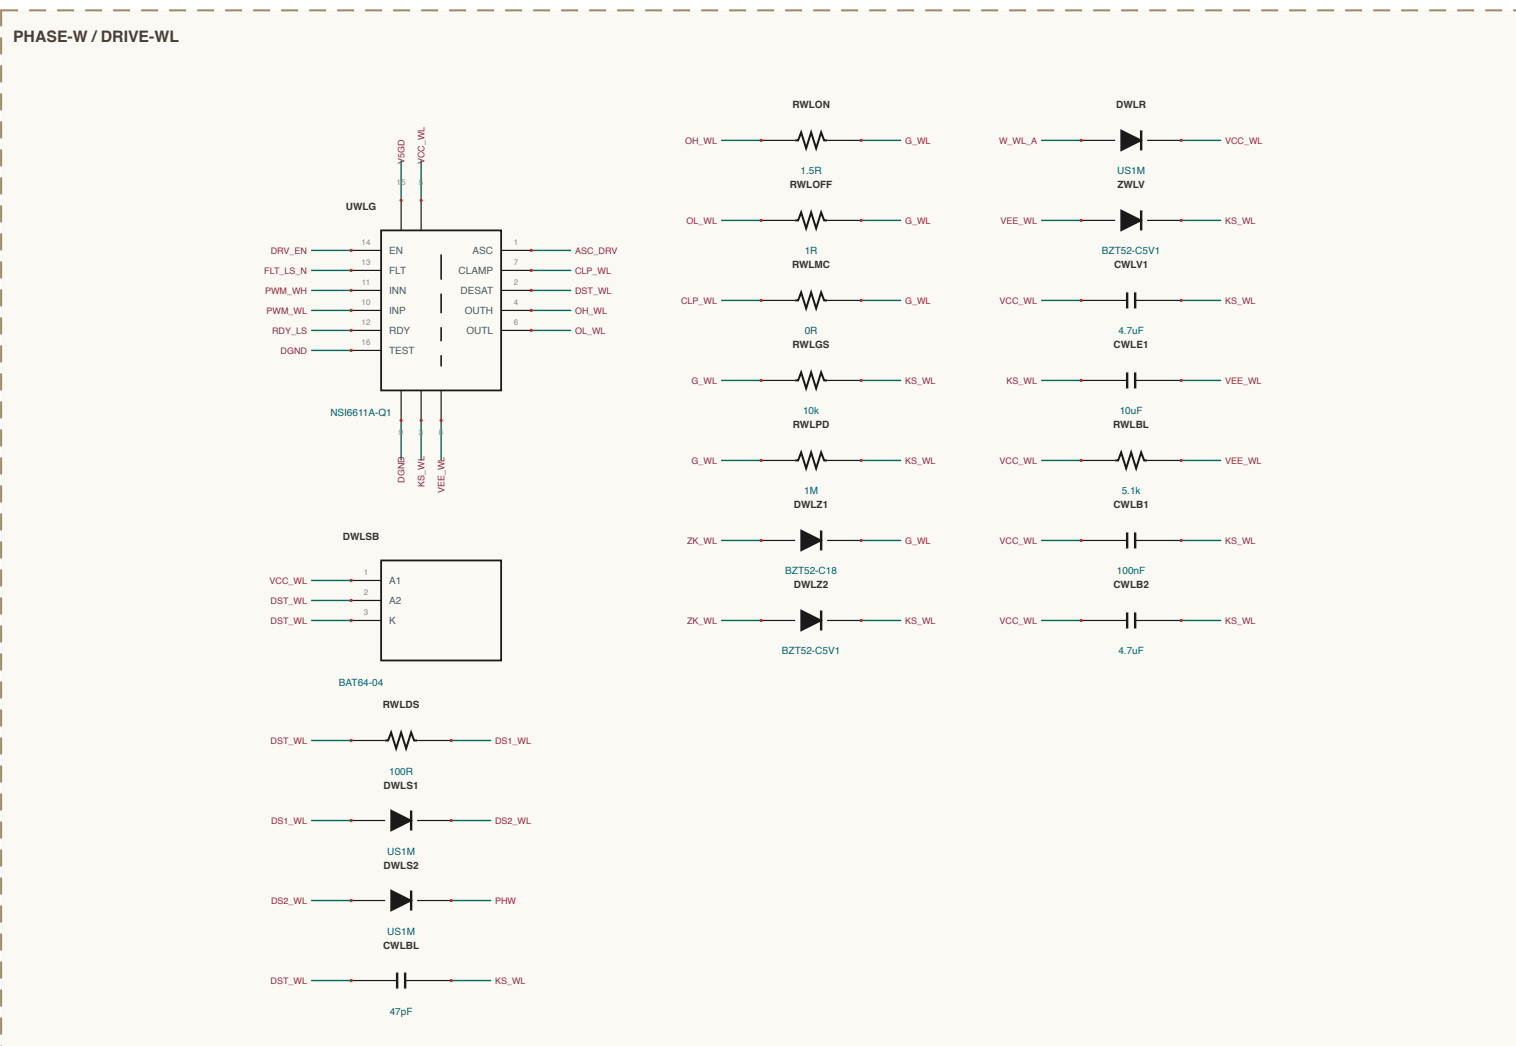
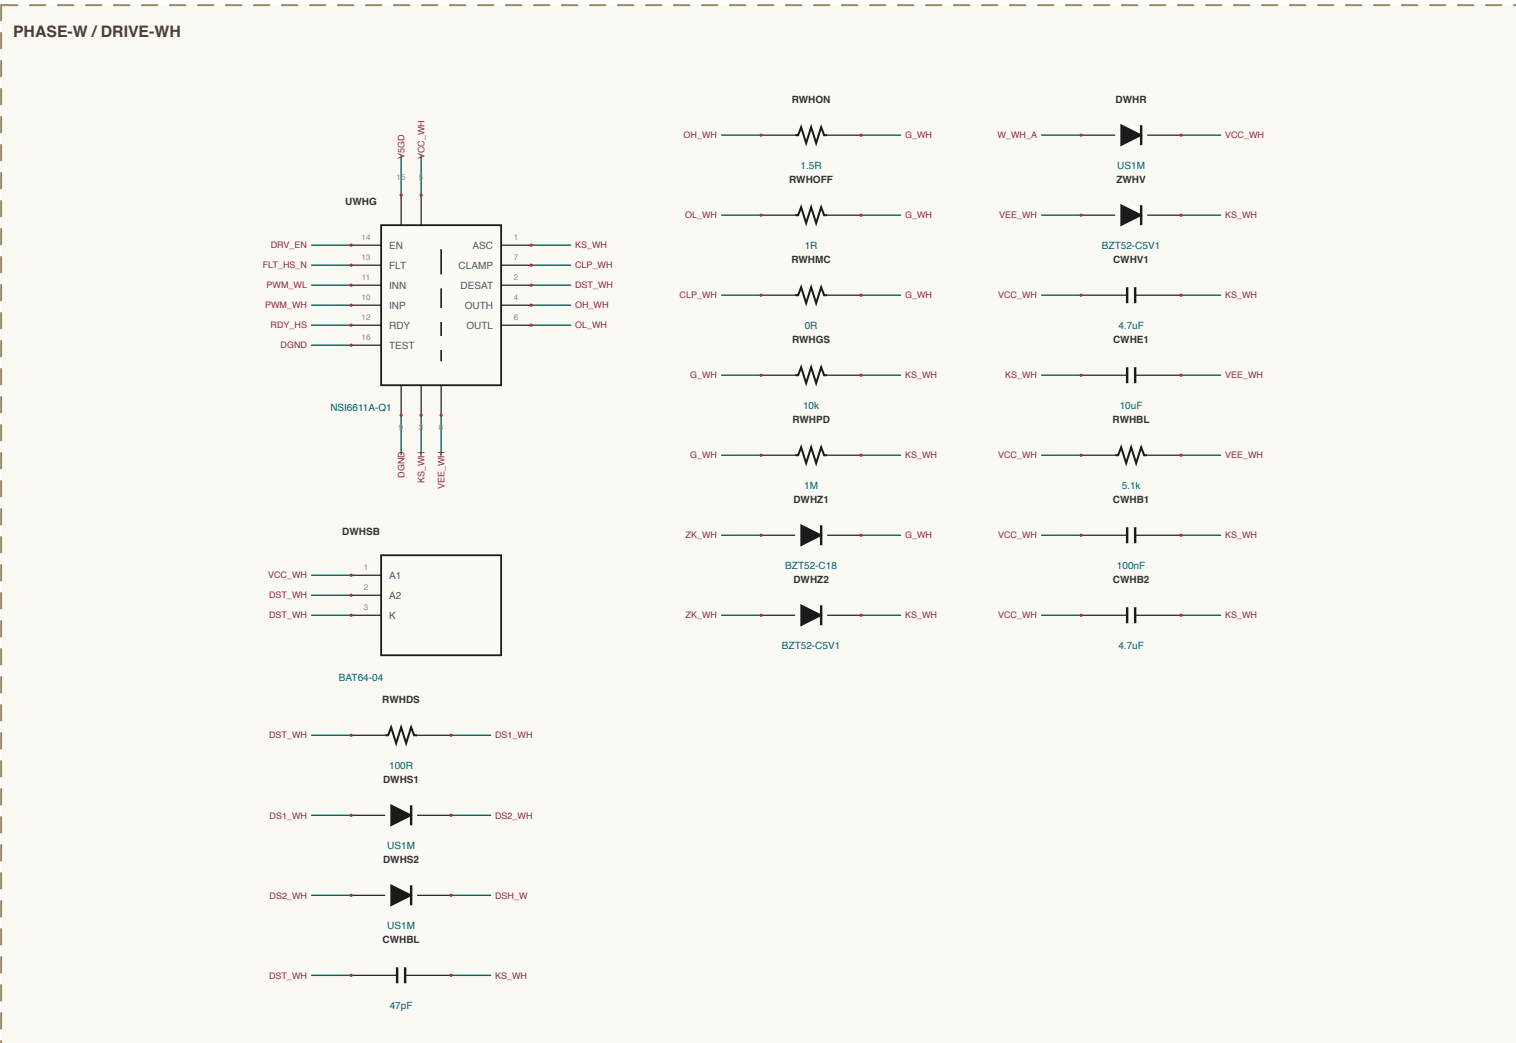
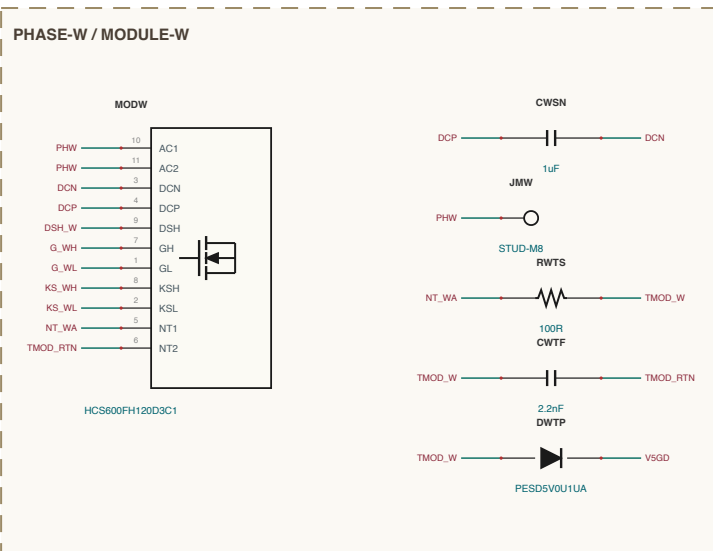
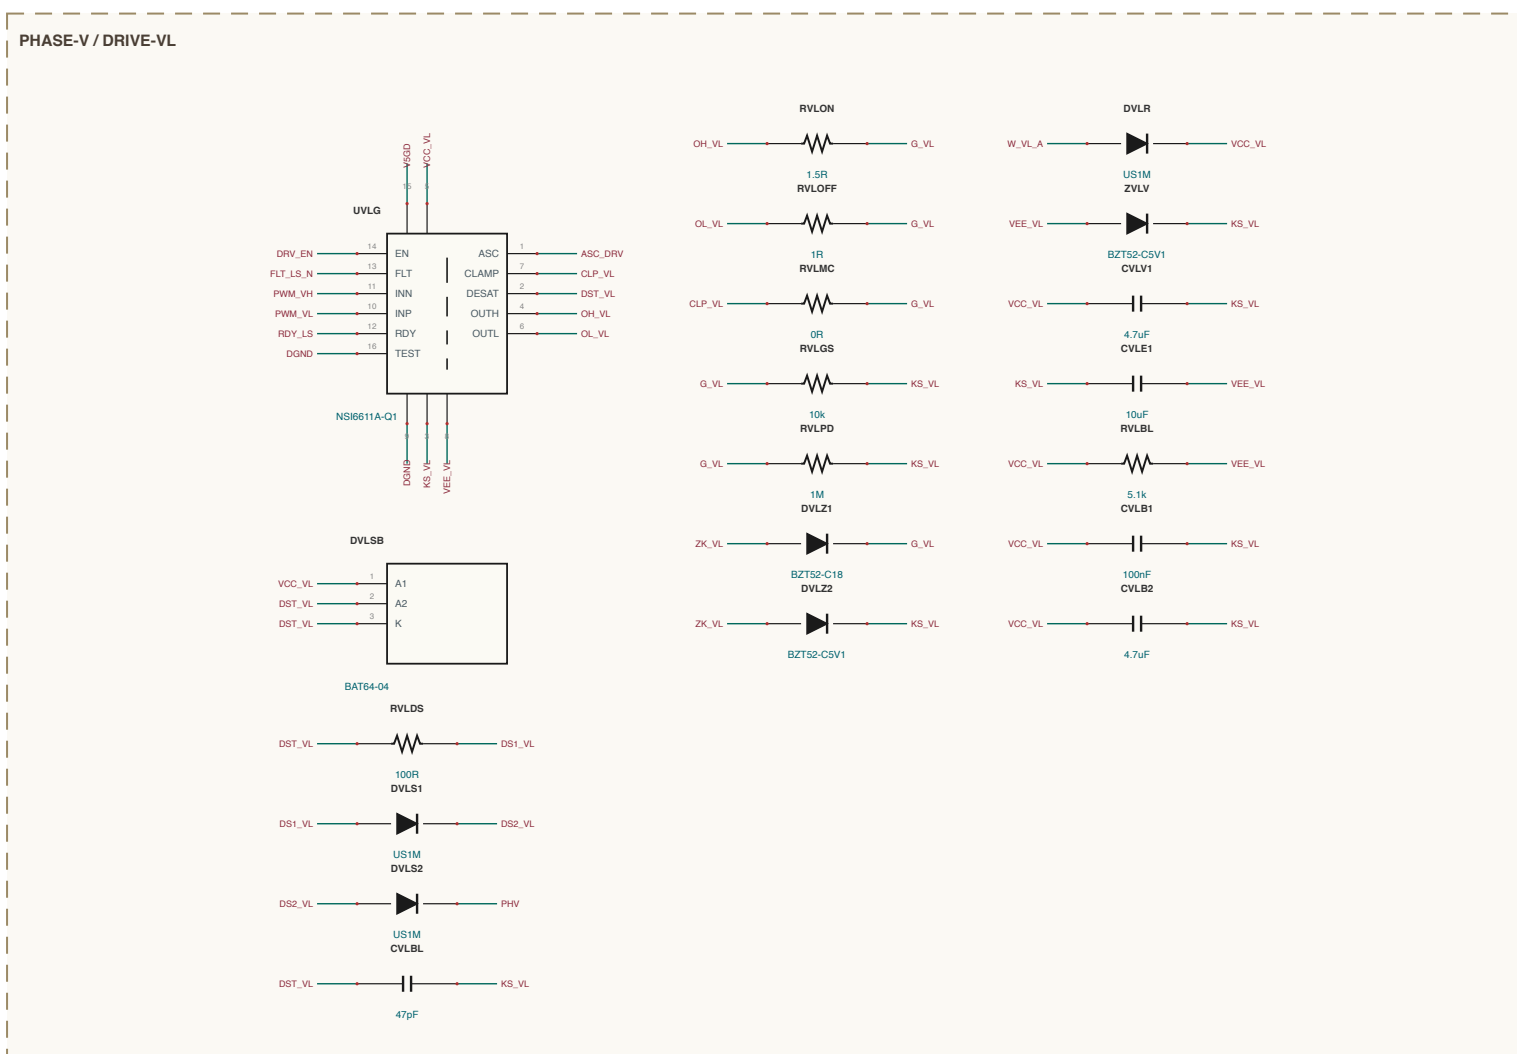
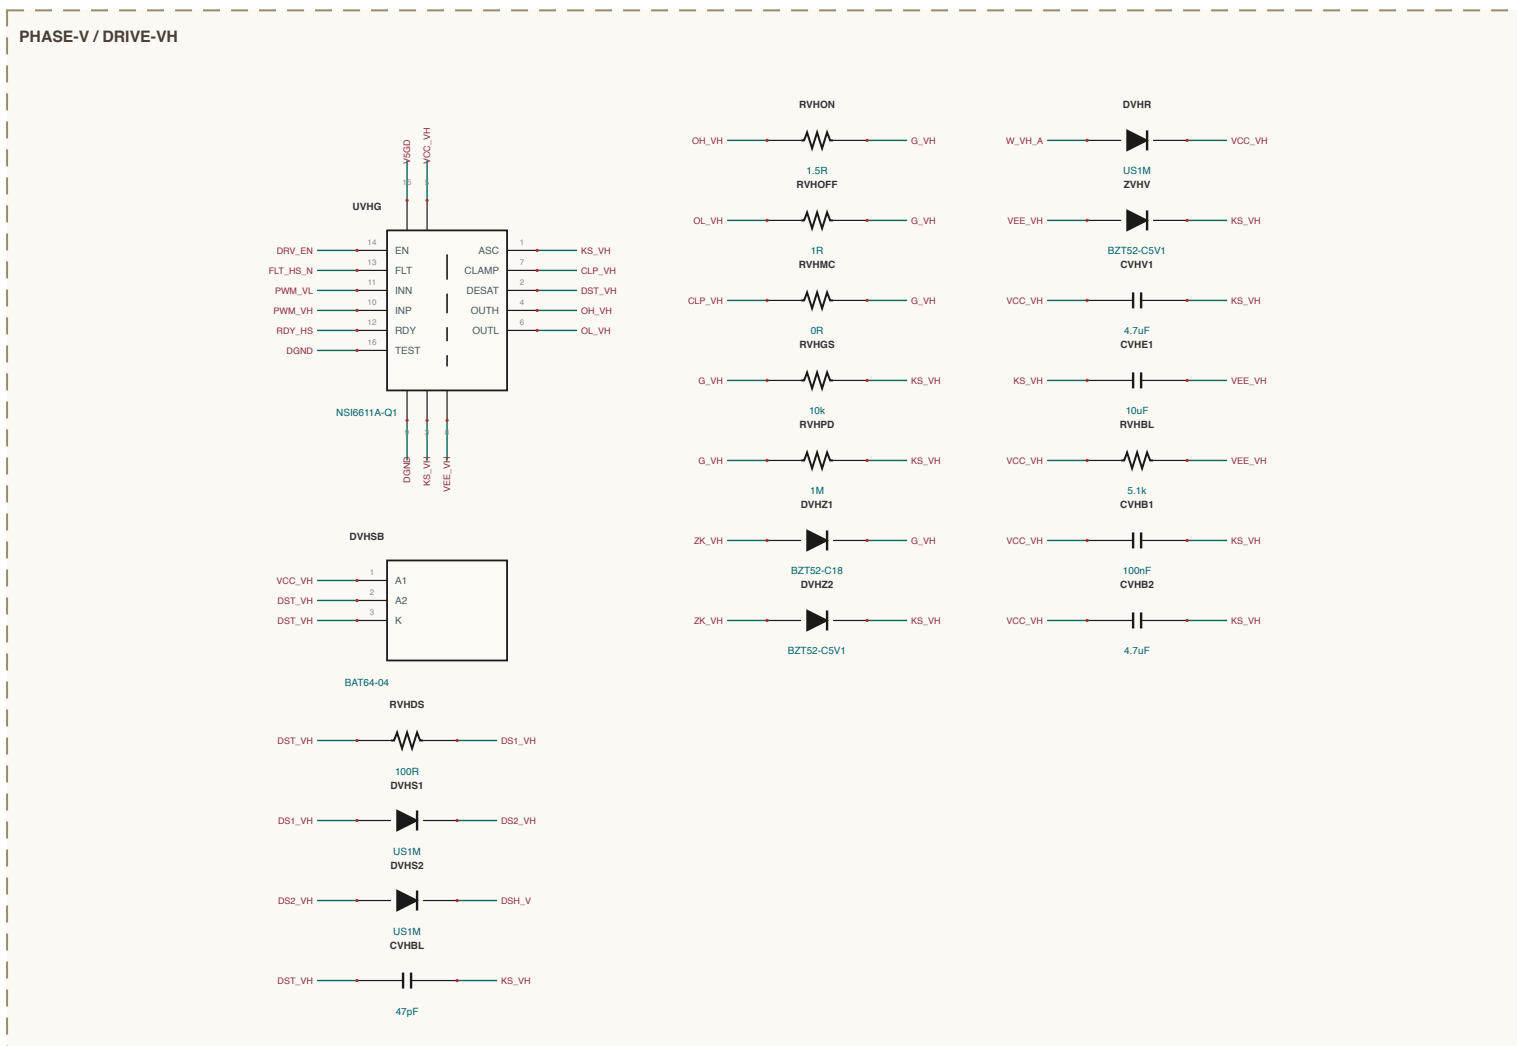
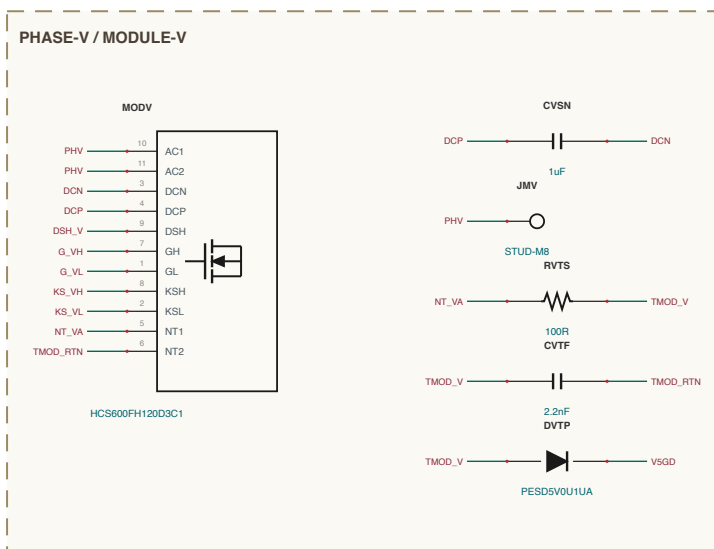
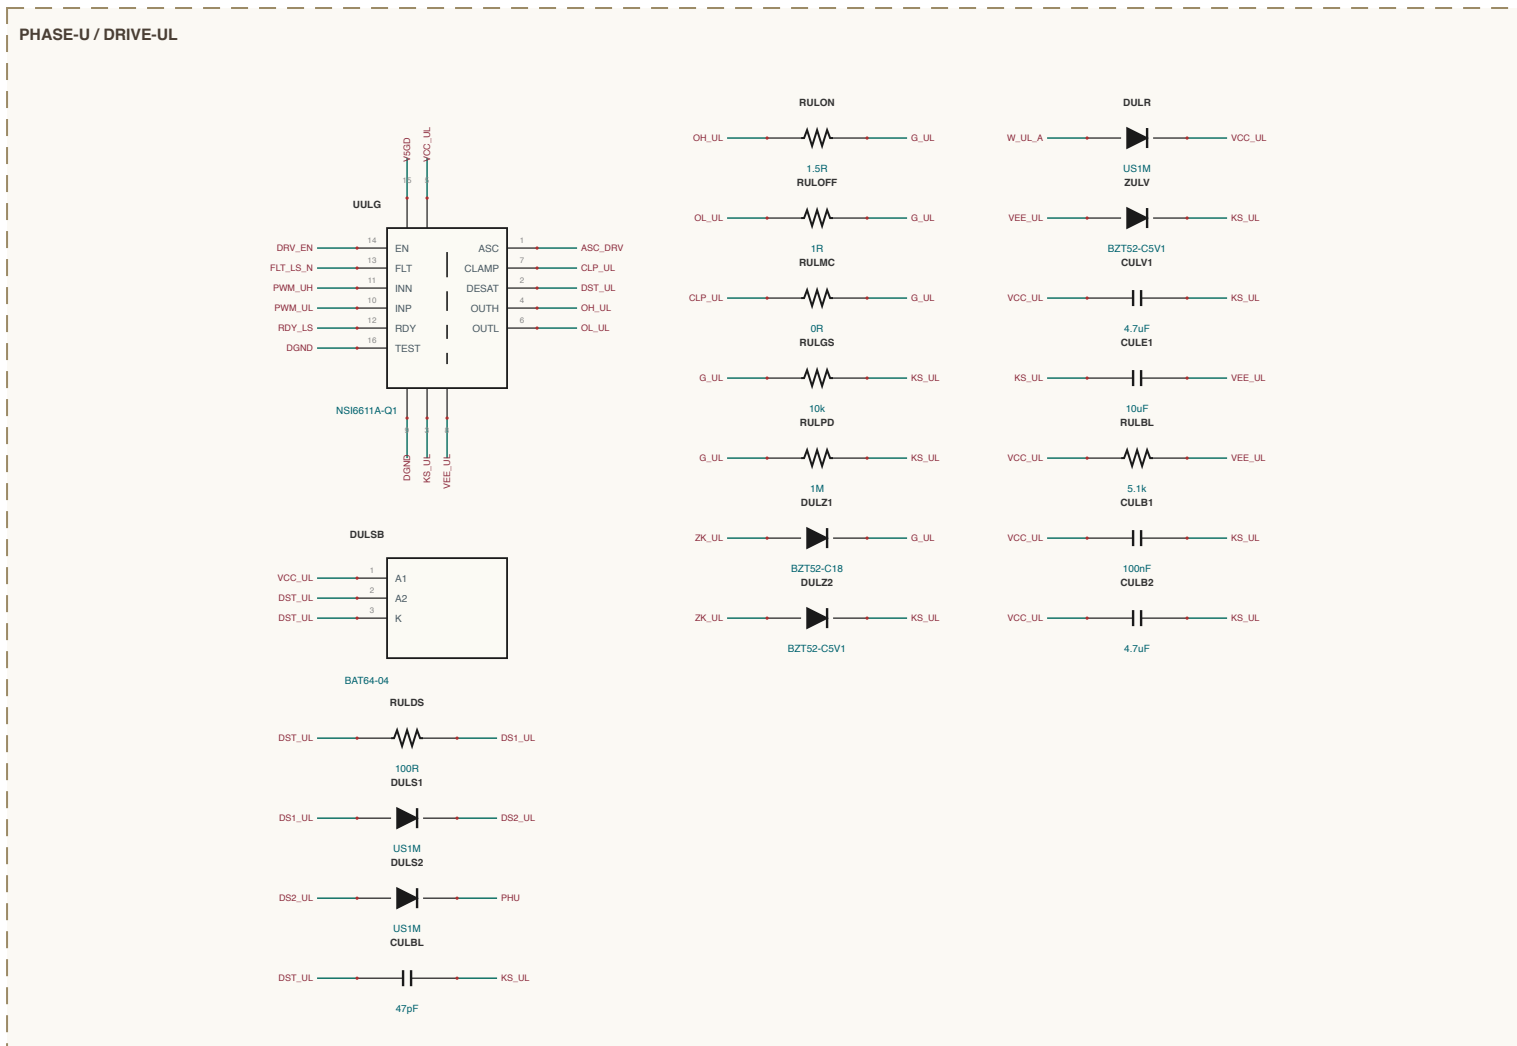
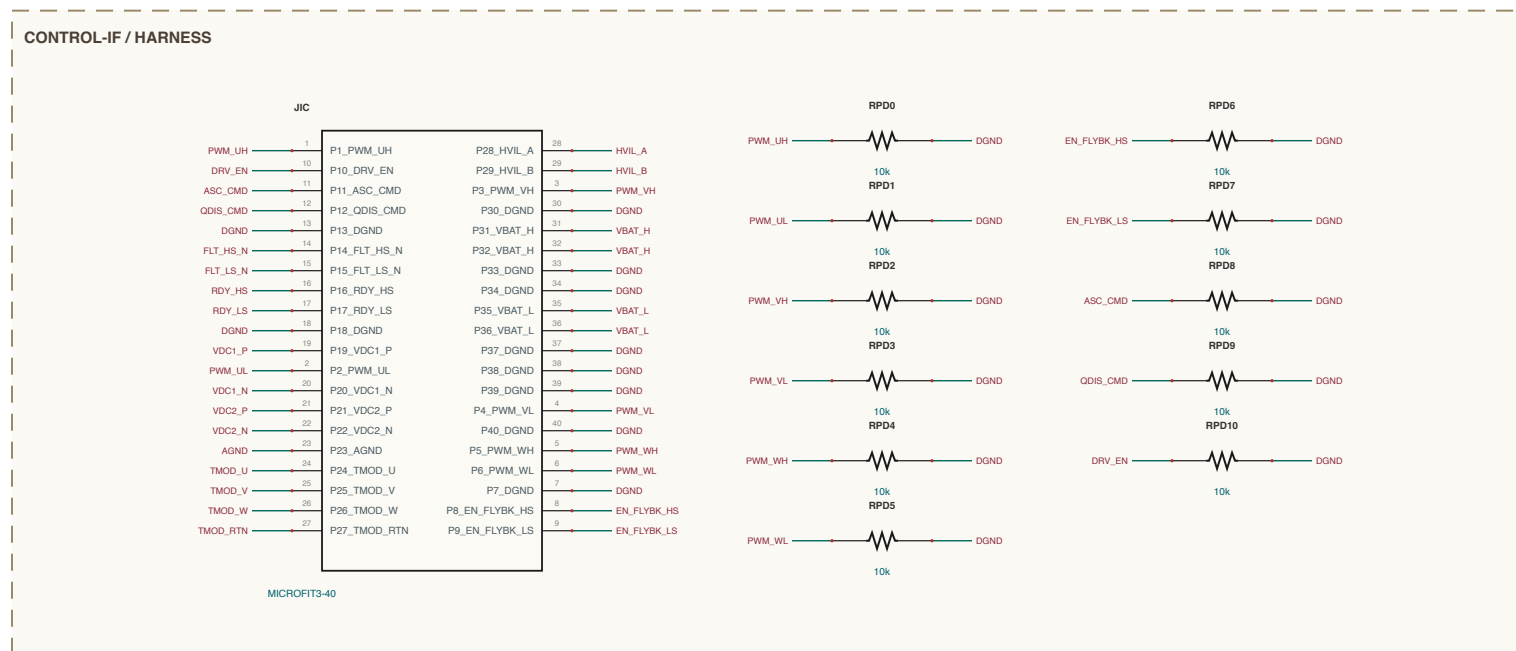
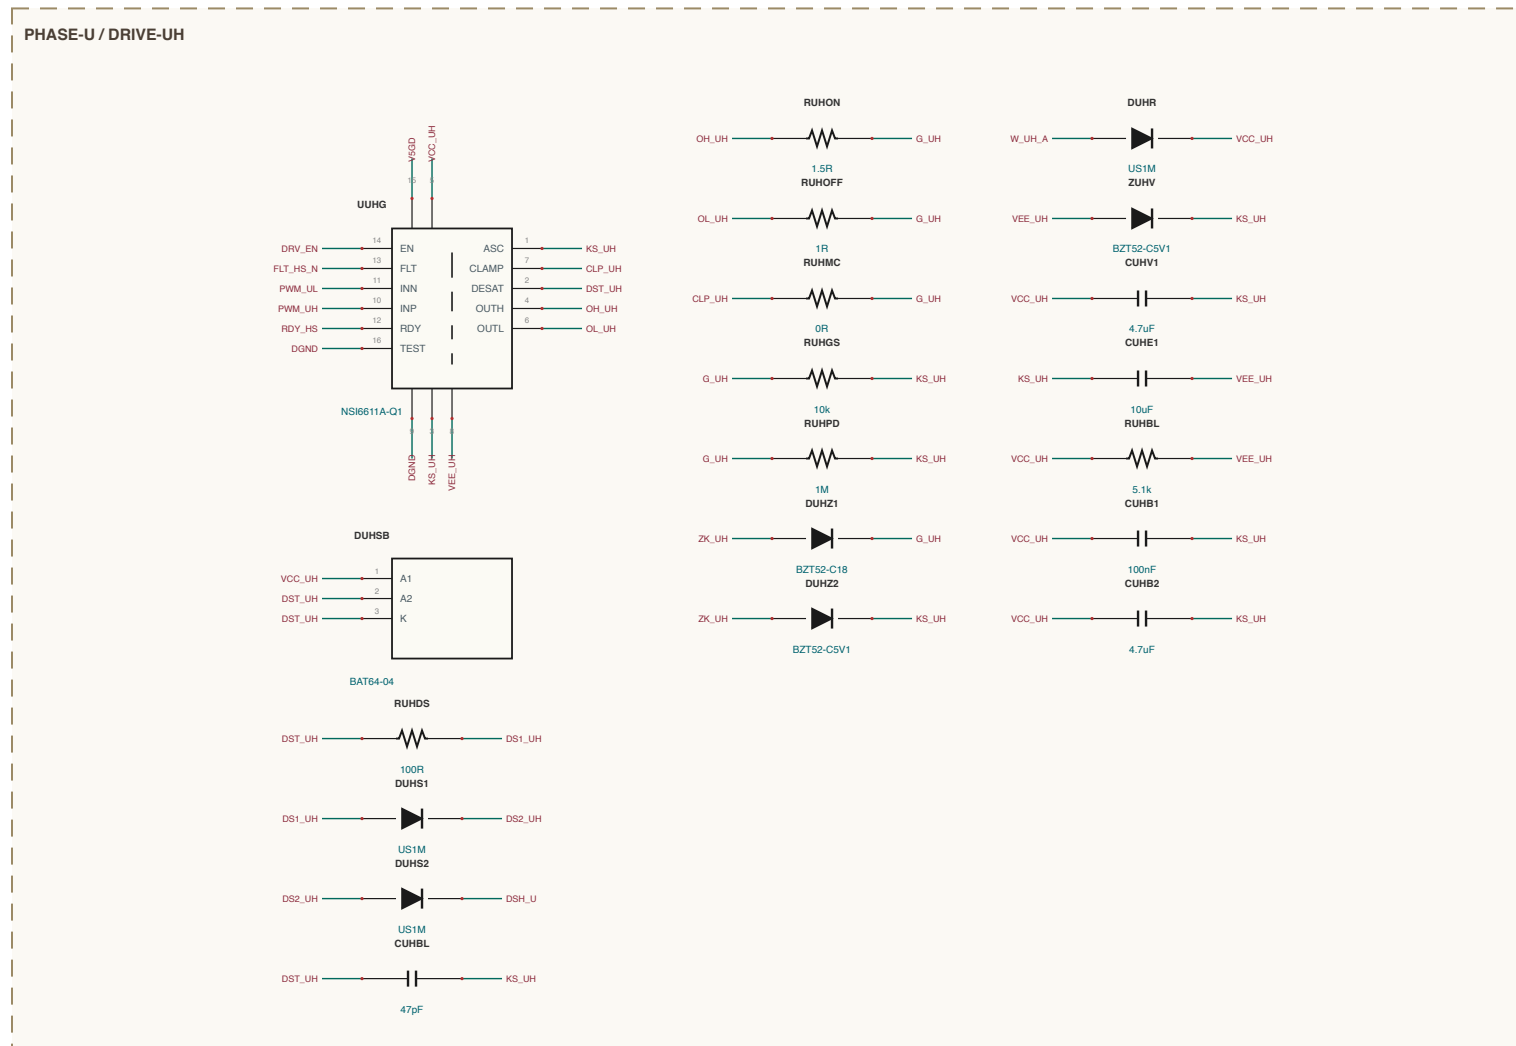
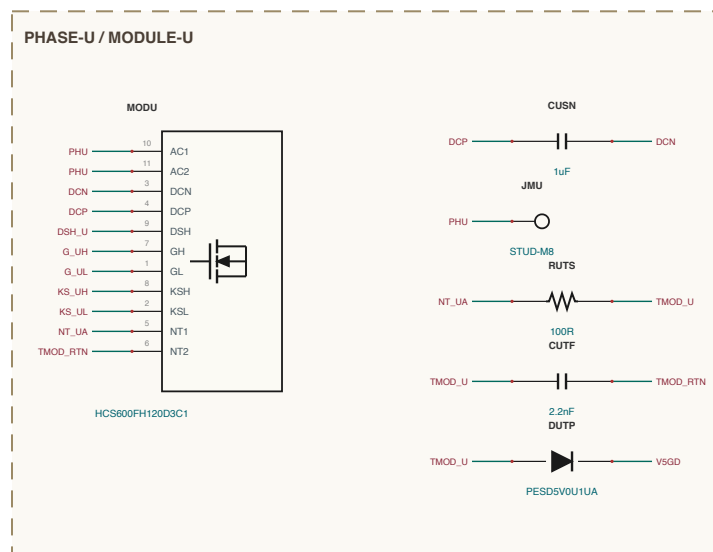
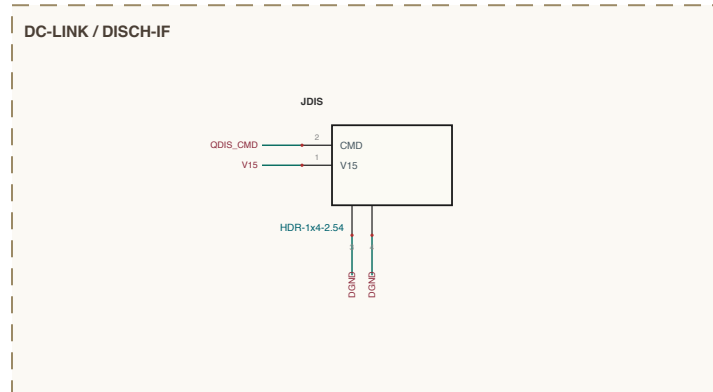
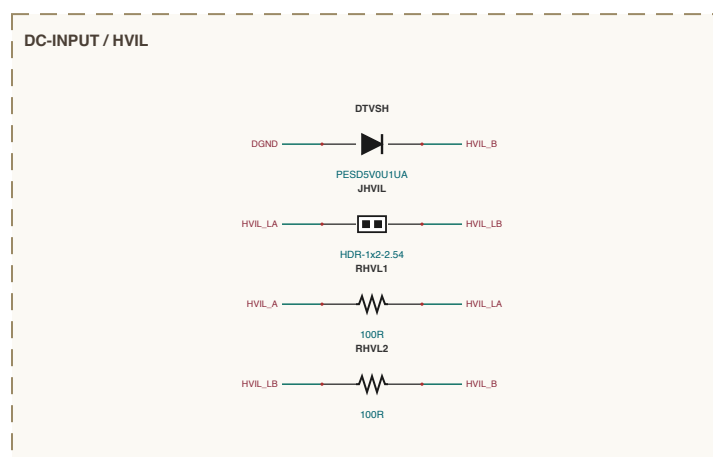
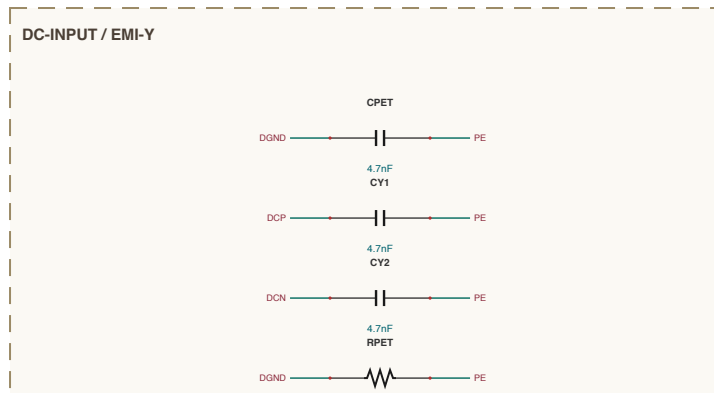


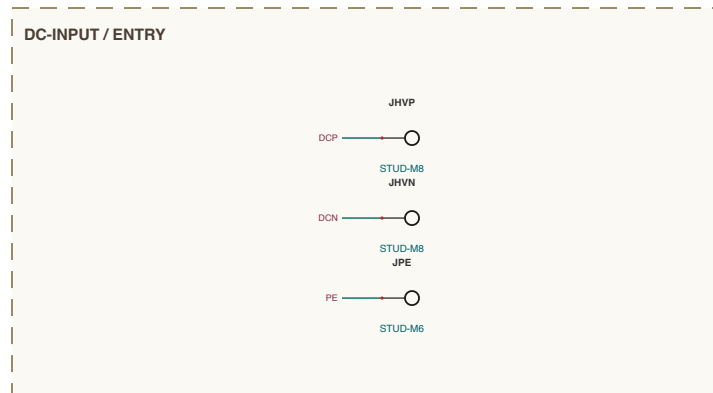

ASIL-D SAFETY CONCEPT + DC-LINK DISCHARGE VERIFICATION

safe state = 3-phase-open (ASO above overspeed); discharge vs ECE R100 / ISO 6469

1 lockstep (C2K396 (A3L-0 core) raw torque path

2 F505 Q&A watchdog + monitors → F506 (no SW)

3 F00B AND MCU_EN => all 6 driver EN = 3-ph open

4 F51B strap -> L5 ASC latch (H5 strapped OFF)

5 Byback EN = MCU OR F826-GPIO1 (ASC gate power)

+ 99 more