


MPZ2012S101AT000

Applications  Commercial Grade

Feature  Power Line

Series MPZ Series / MPZ2012 Type

Status Production

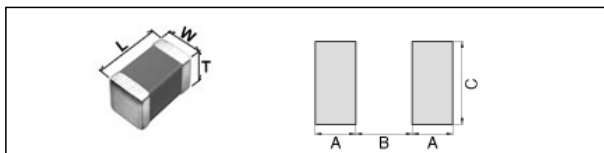


Size	
Length(L)	2.00mm +/-0.20mm
Width(W)	1.25mm +/-0.20mm
Thickness(T)	0.85mm +/-0.20mm
Recommended Land Pattern (A)	0.80mm Nom.
Recommended Land Pattern (B)	1.00mm Nom.
Recommended Land Pattern (C)	1.20mm Nom.

Electrical Characteristics	
Impedance at 100MHz	100Ω +/-25%
Rated Current	4A
DC Resistance [Max.]	20mΩ


Other	
Operating Temp. Range (Including Self-Temp. Rise)	-55 to 125degC
Soldering Method	Reflow, Iron Soldering
AEC Q200	No
Packing	Punched (Paper)Taping [180mm Reel]
Package Quantity	4000Pcs Min.
Weight	0.008g

MPZ2012S101AT000



Characteristic Graphs (This is reference data, and does not guarantee the product's characteristics.)

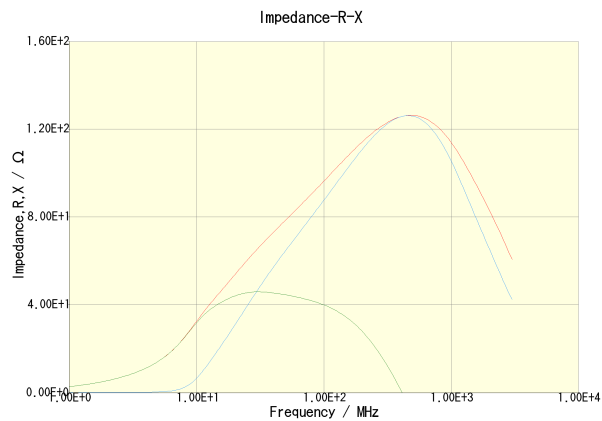

MPZ2012S101AT000(I)MPZ2012S101AT000(R)MPZ2012S101AT000(X)

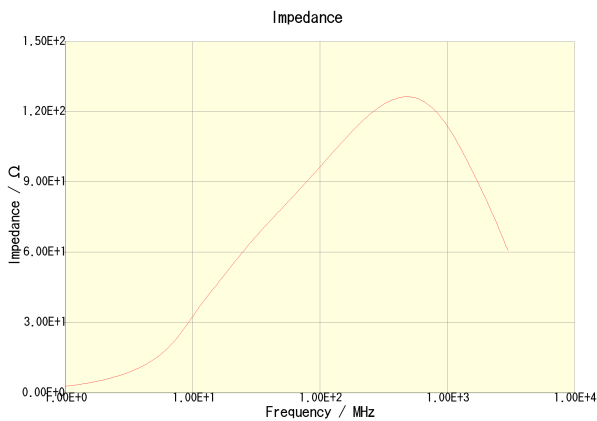

MPZ2012S101AT000

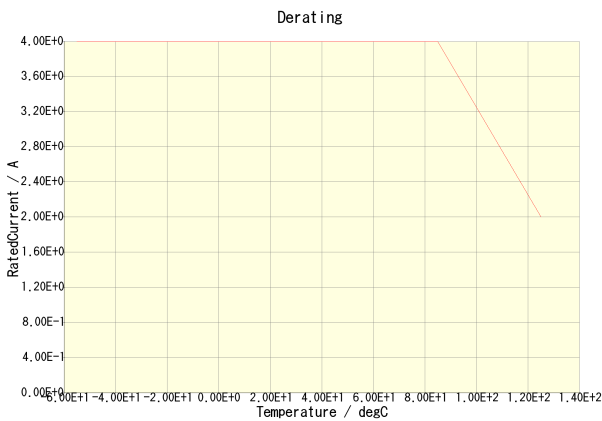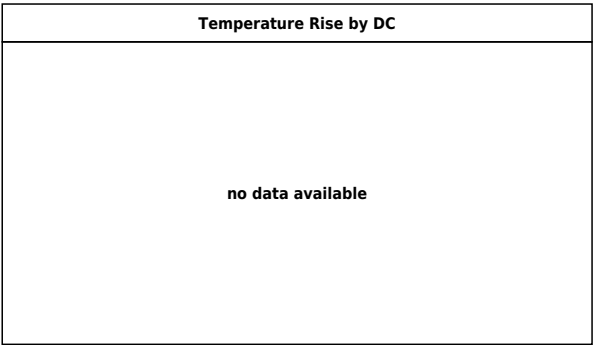

MPZ2012S101AT000

•This PDF document was created based on the data listed on the TDK Corporation website.
•All specifications are subject to change without notice.