
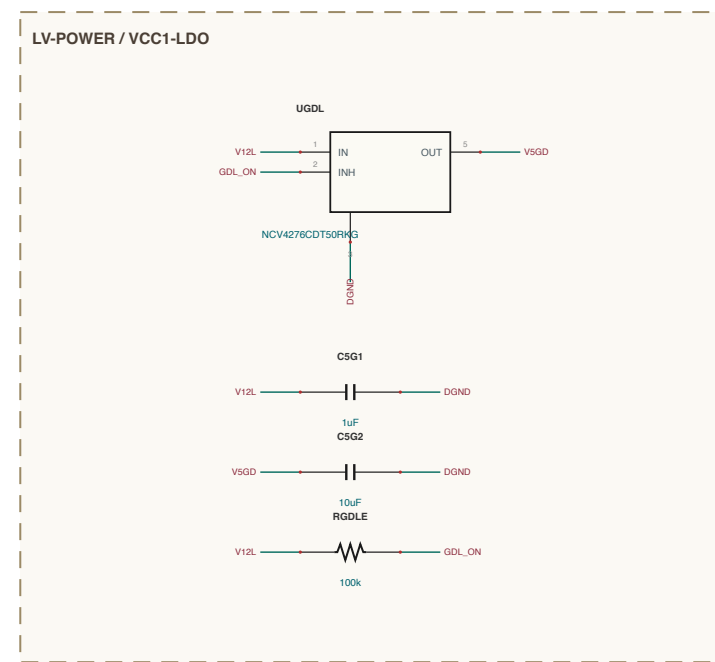
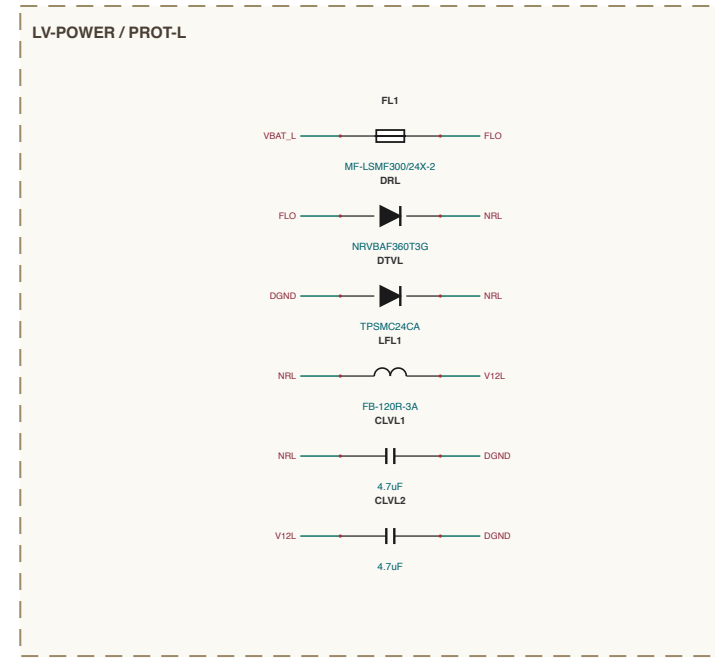
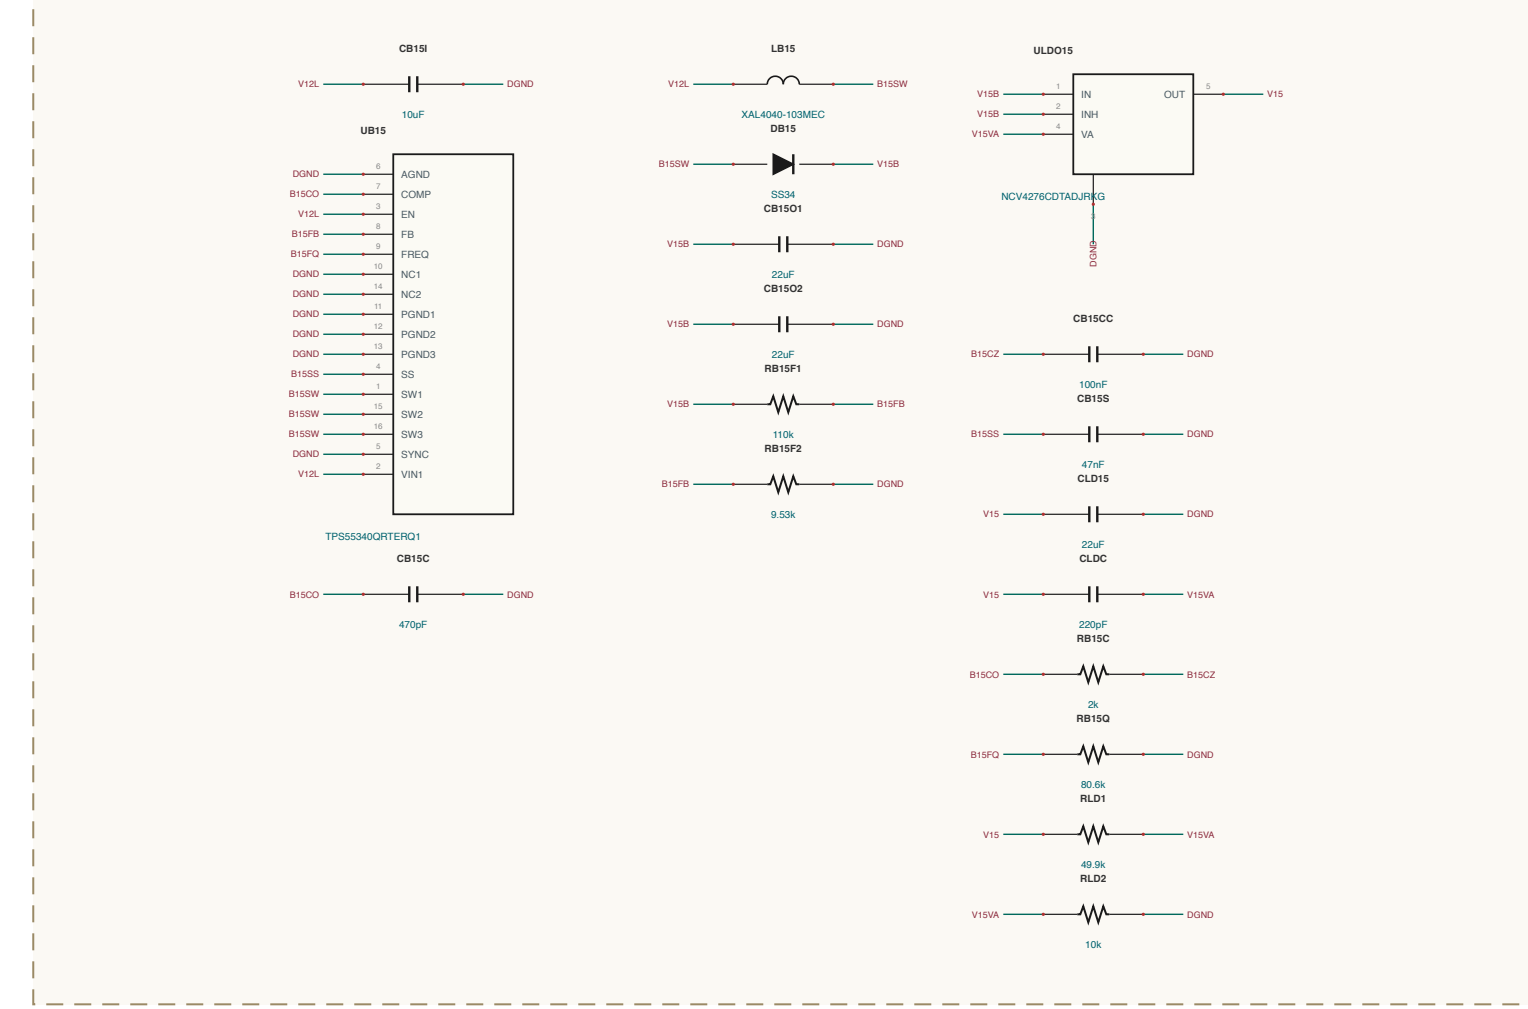
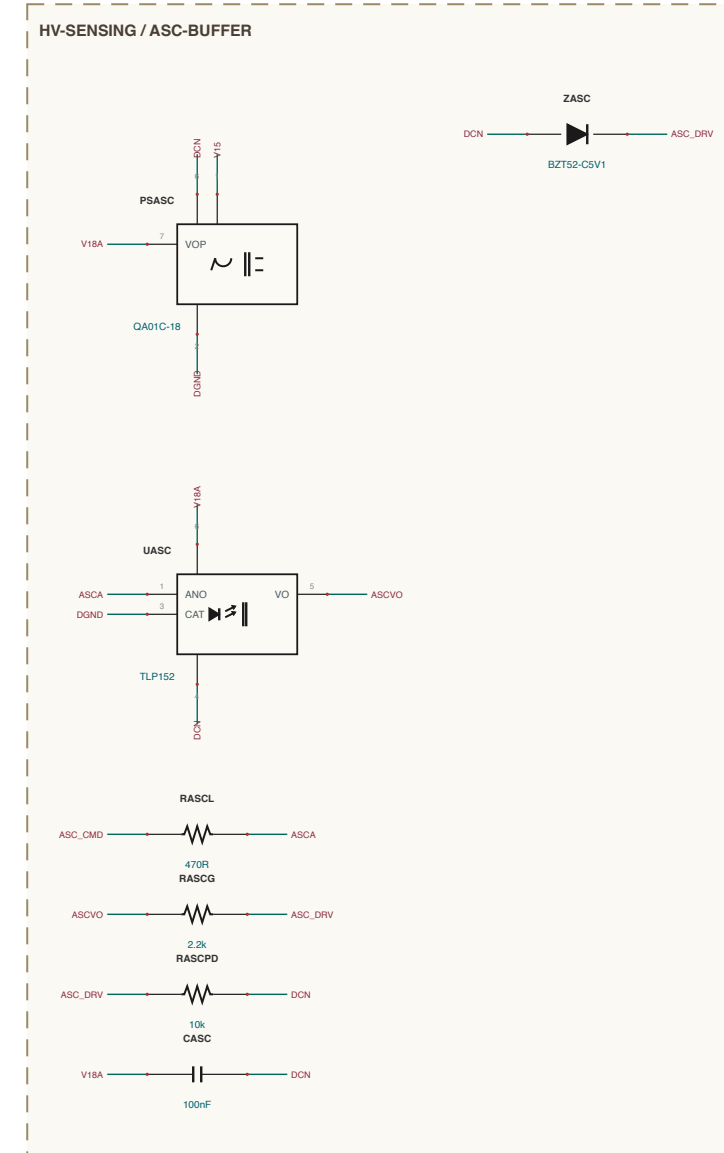
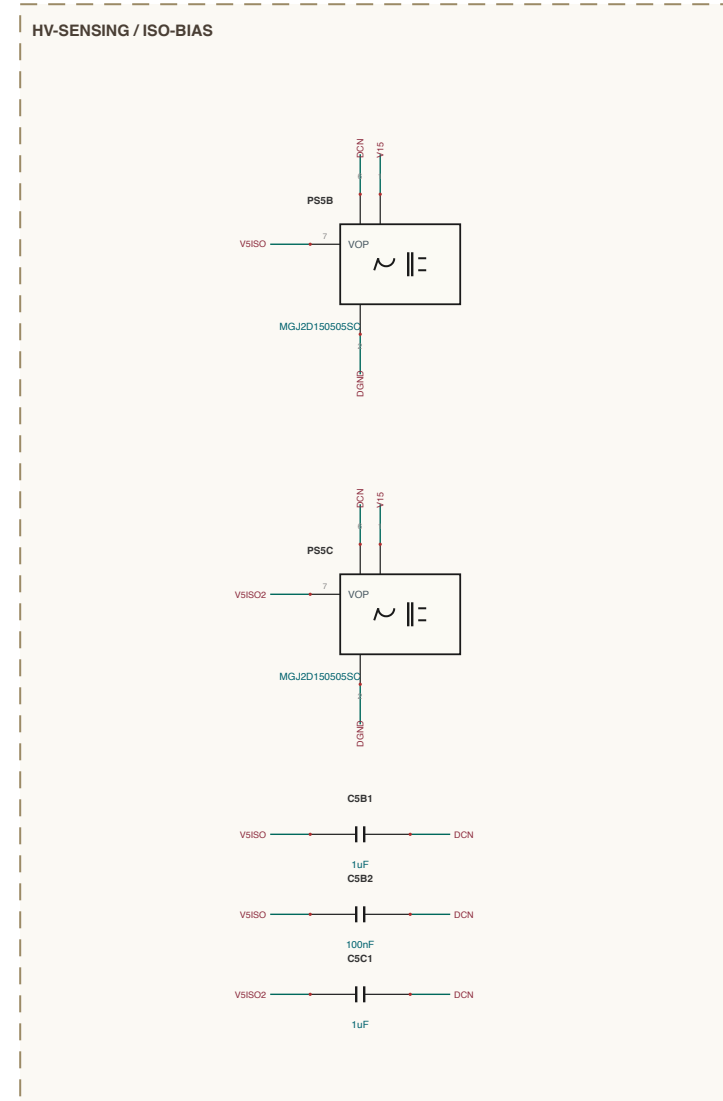
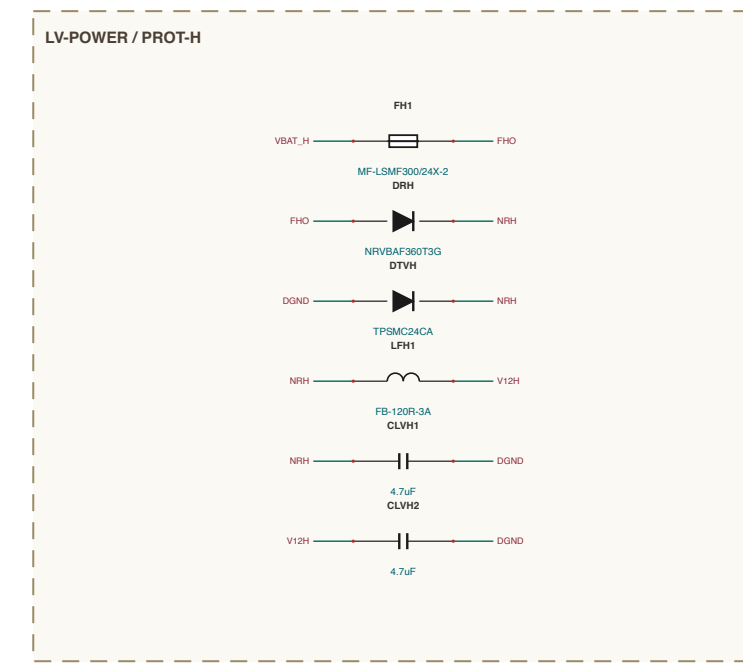
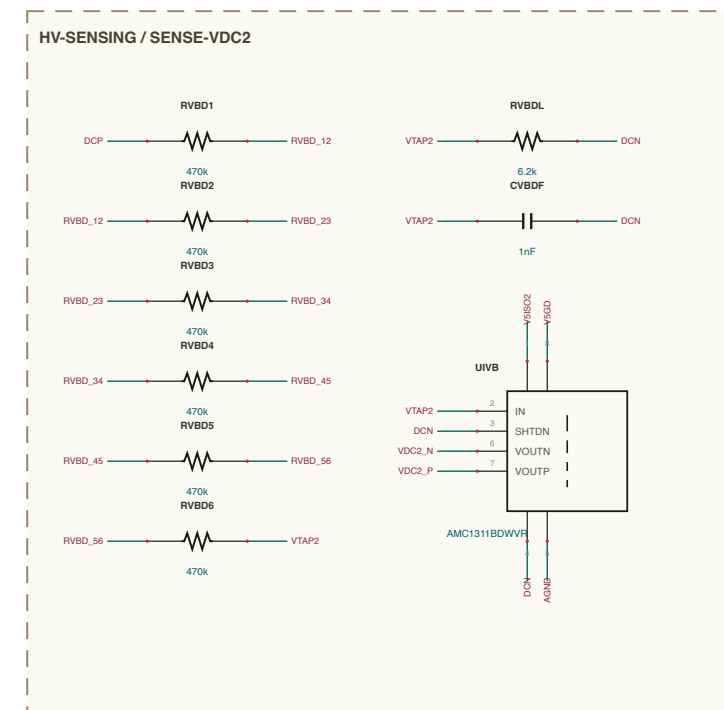
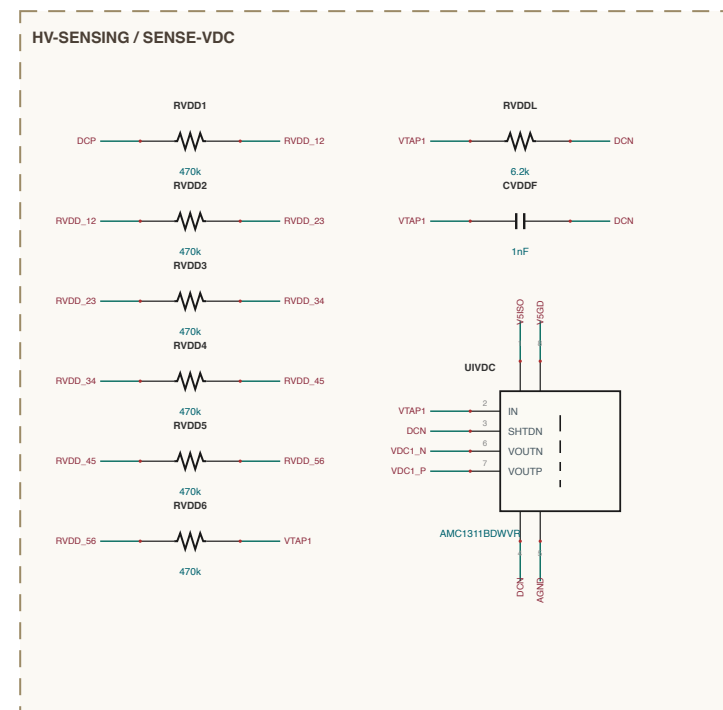
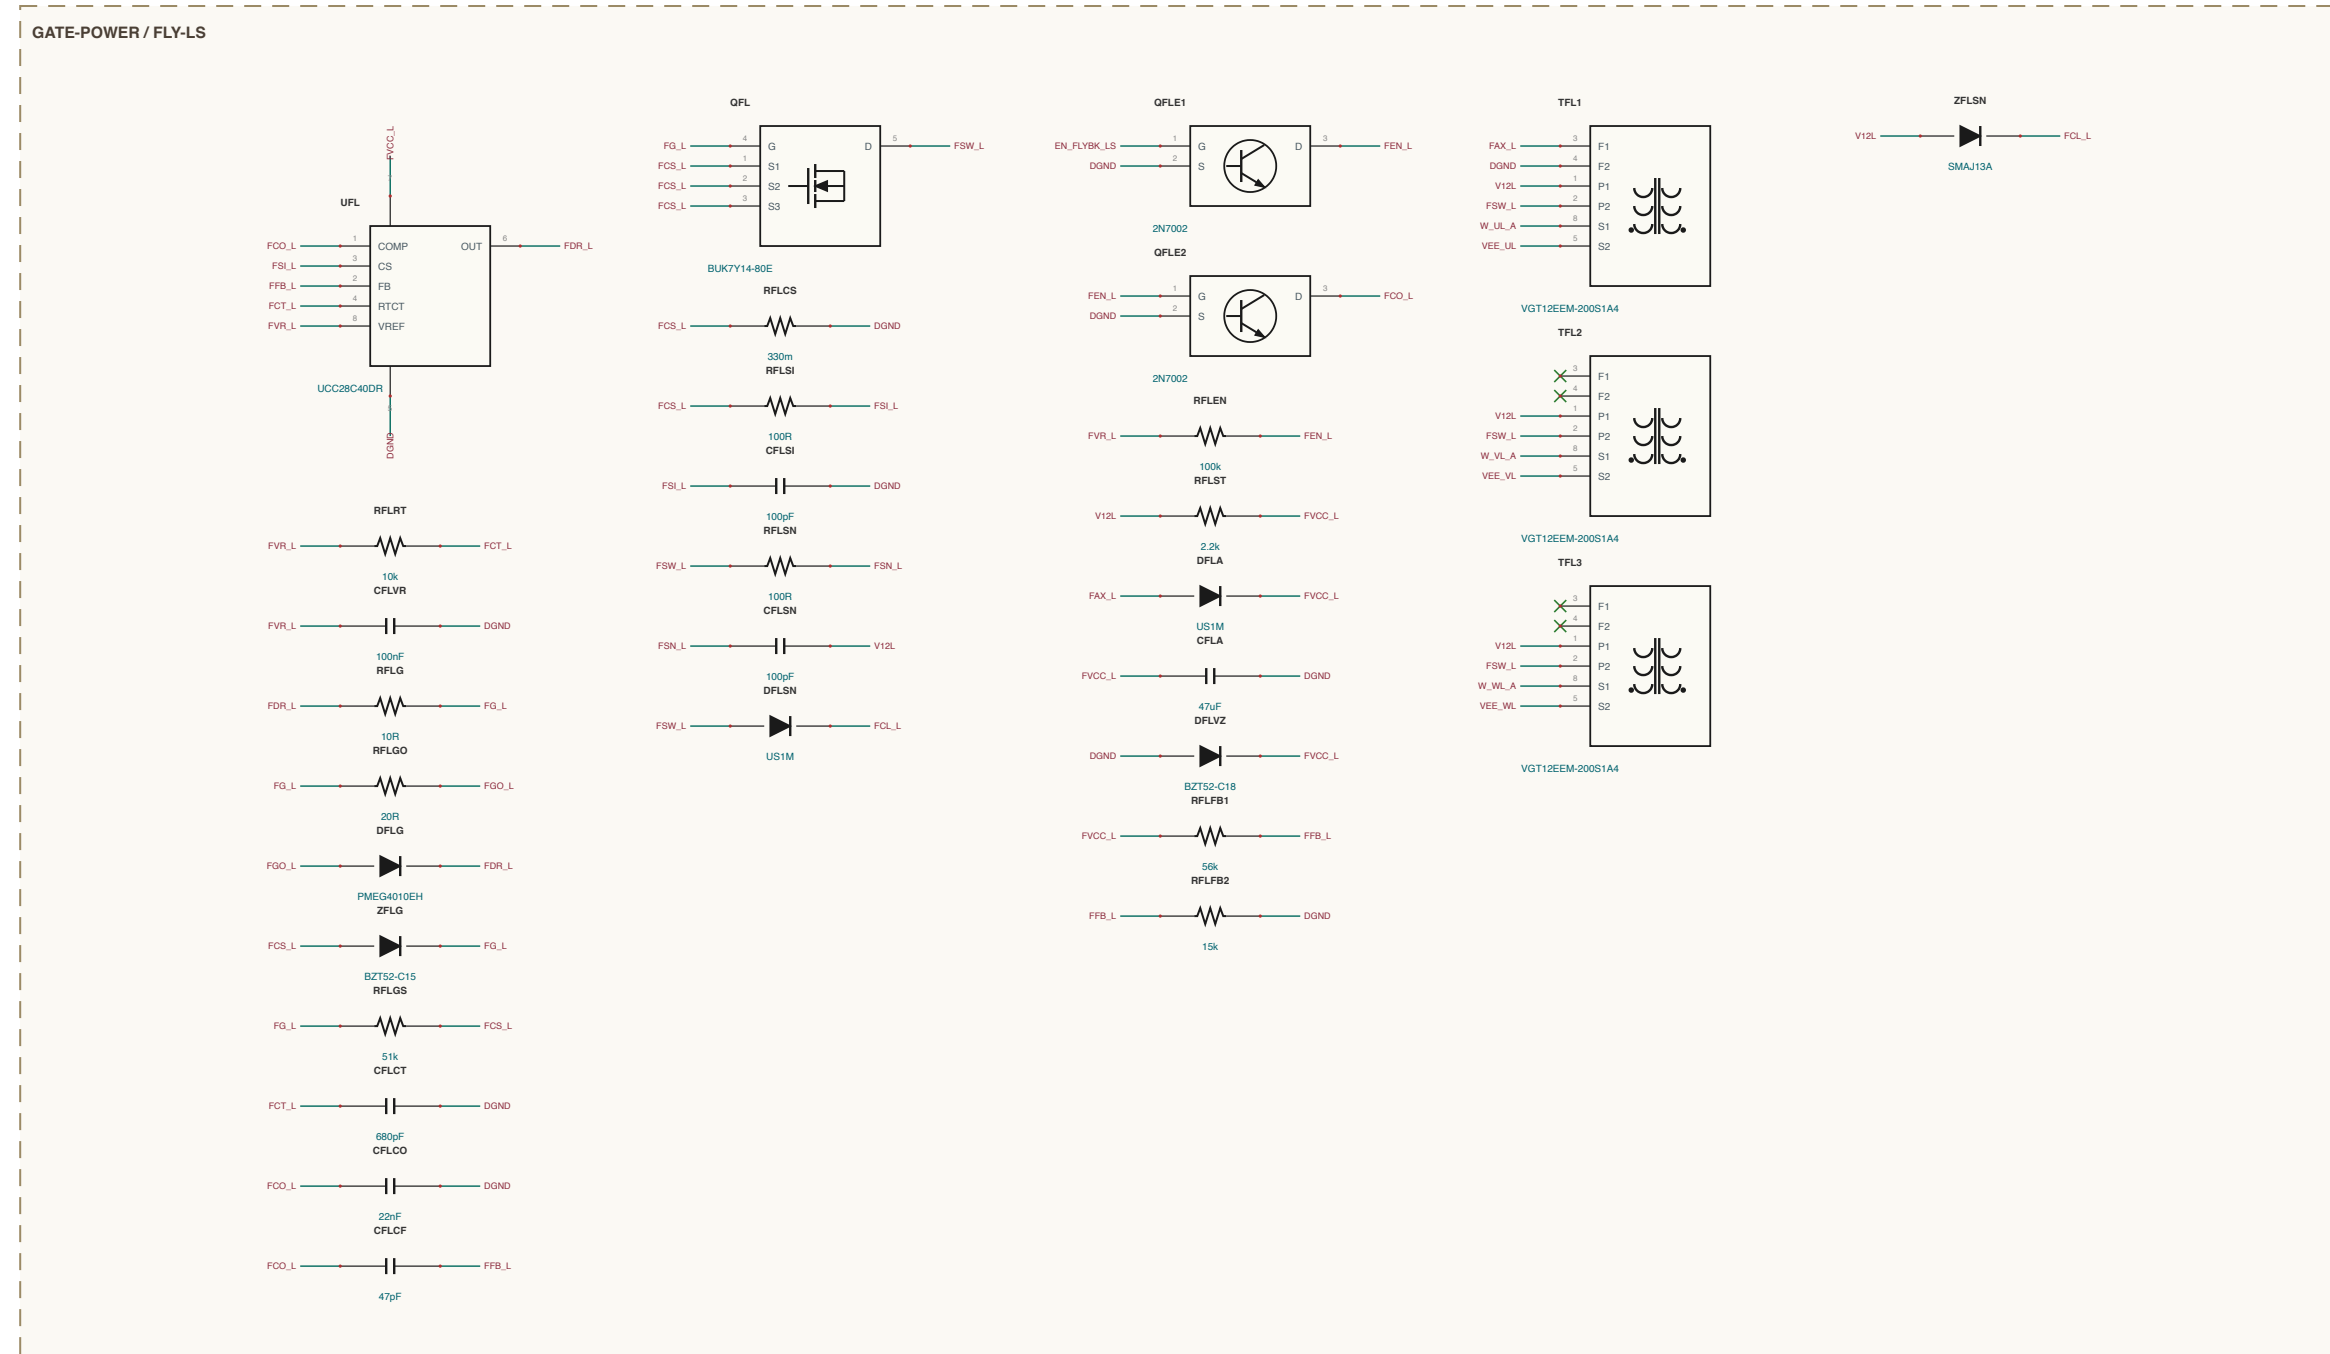
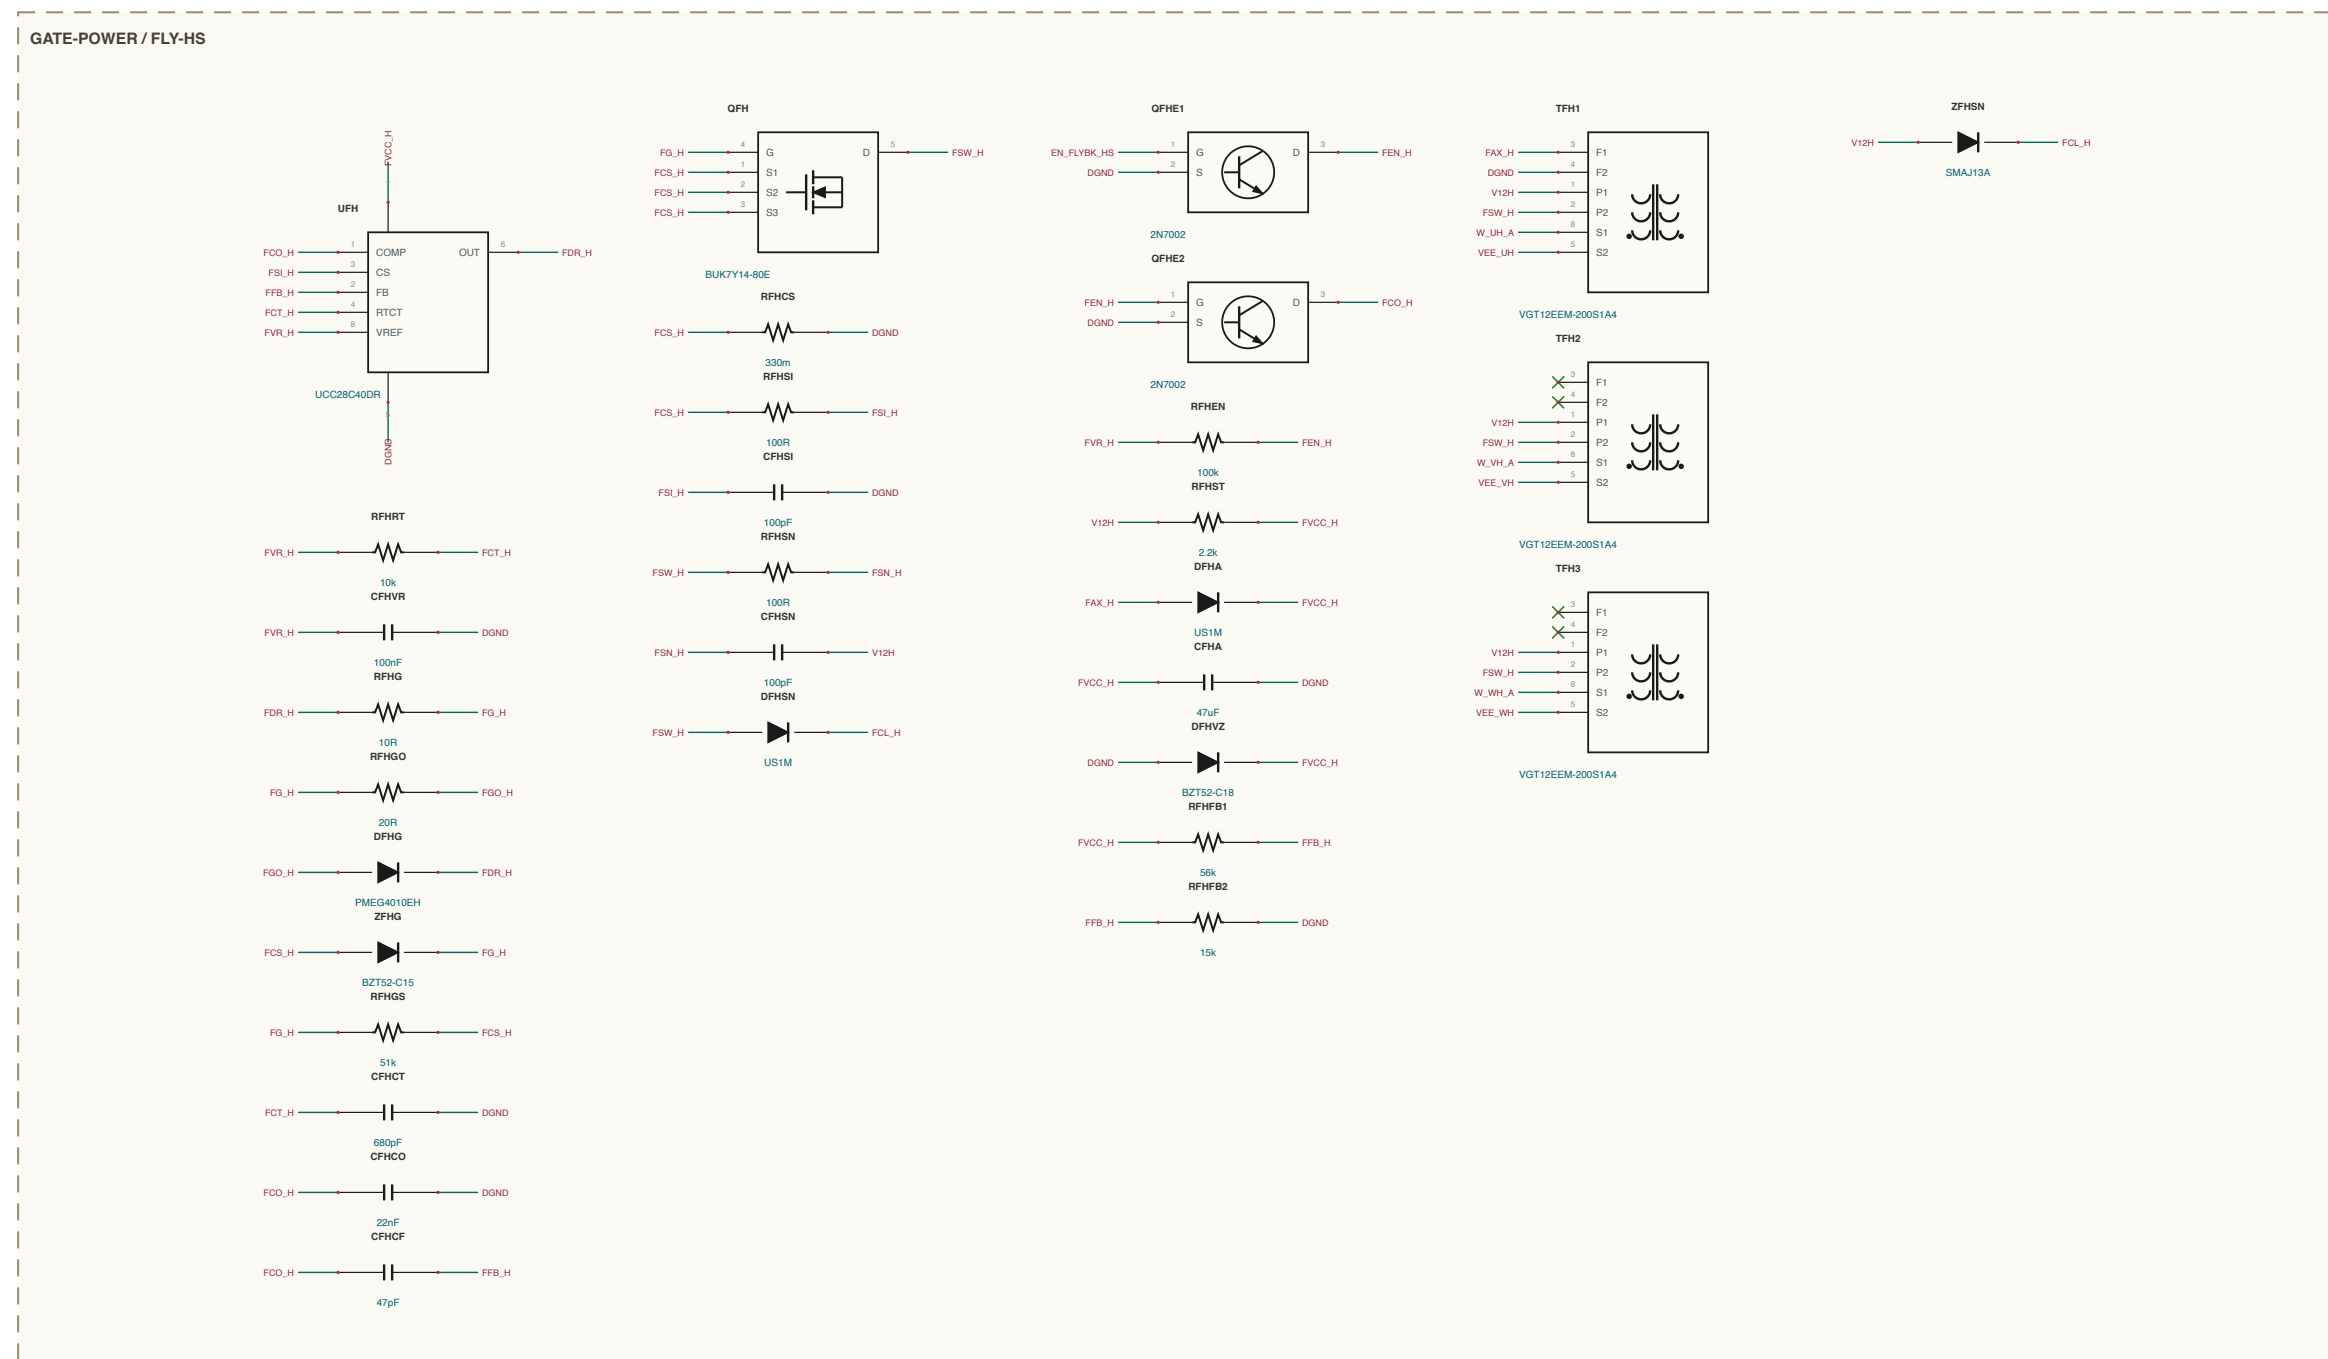
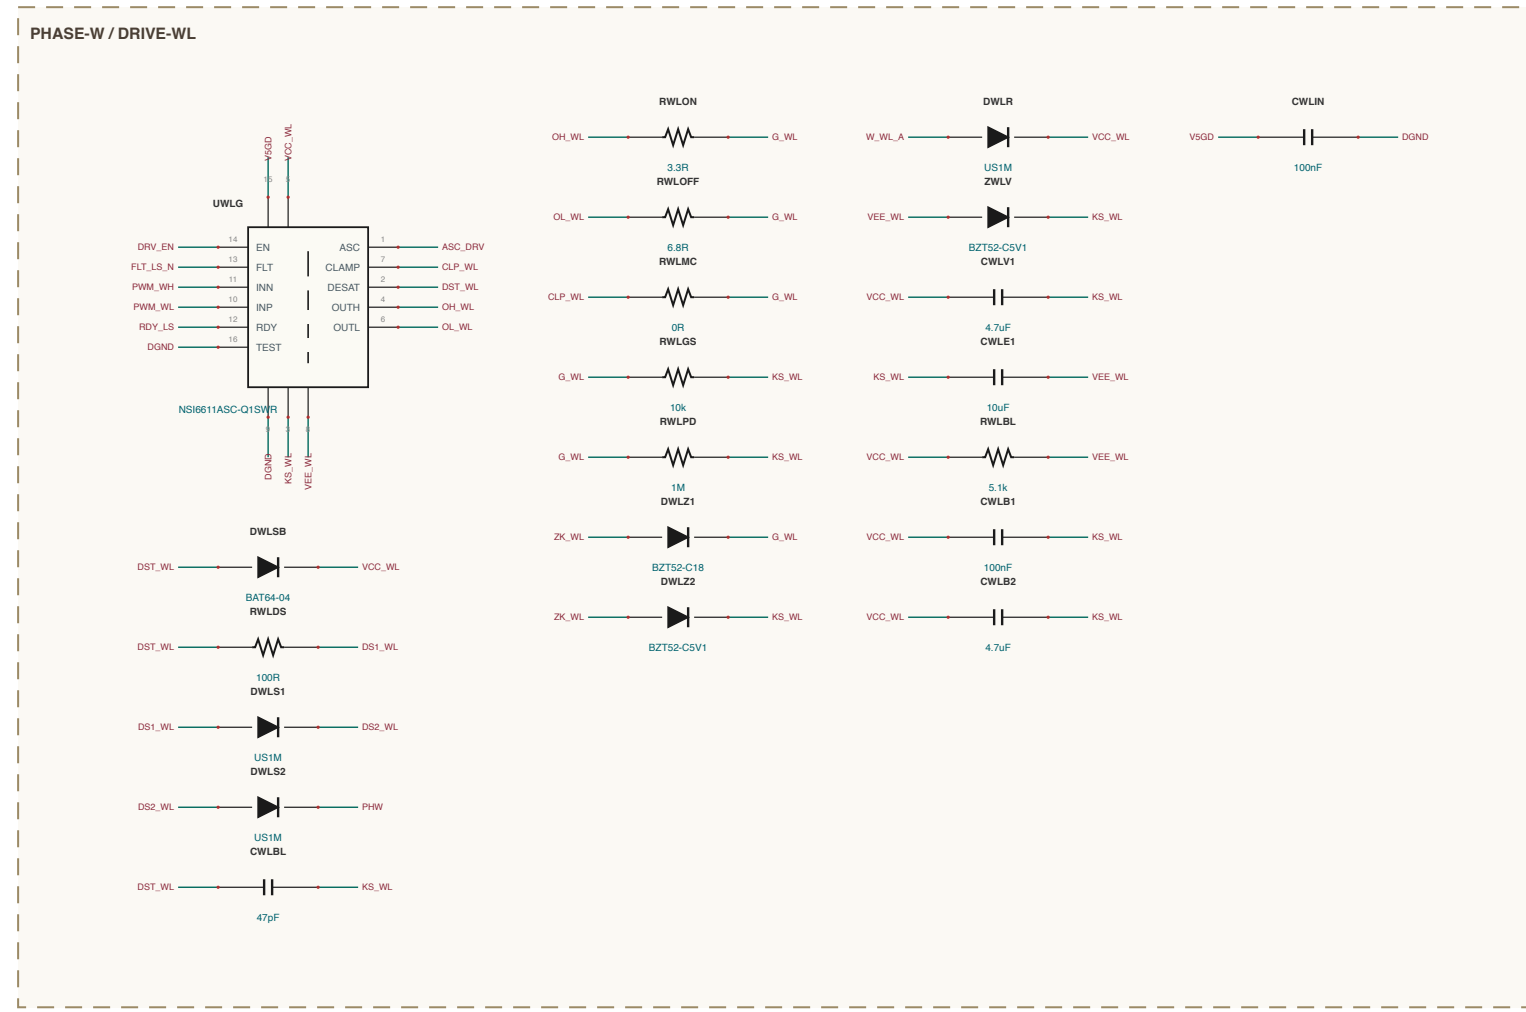
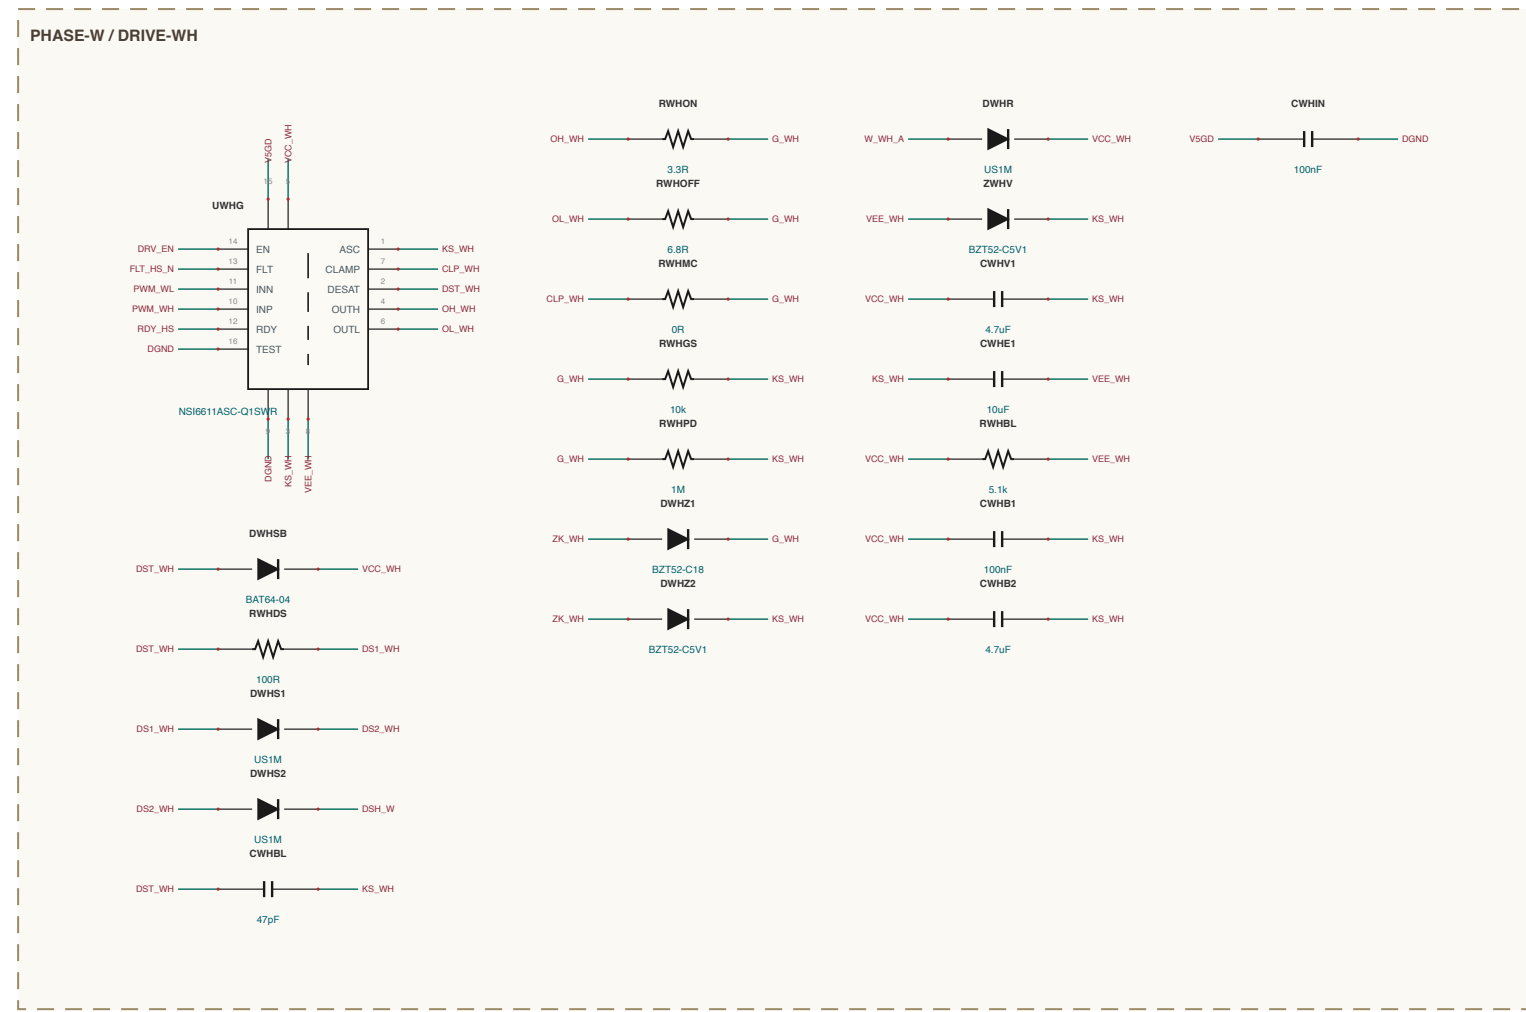
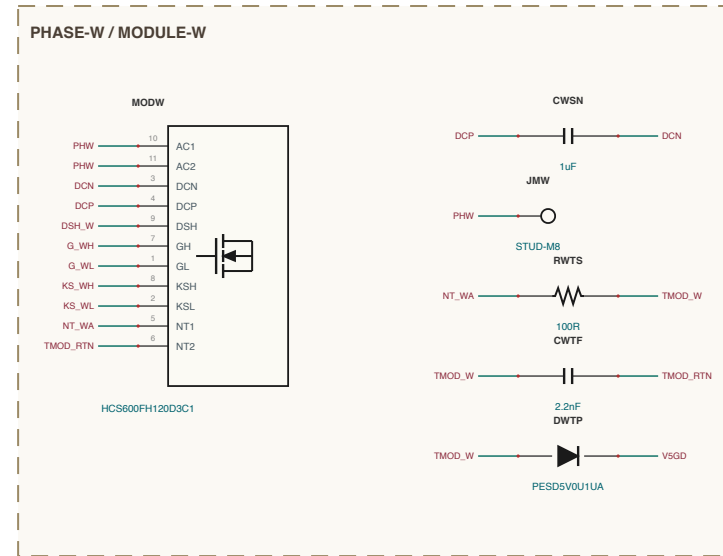
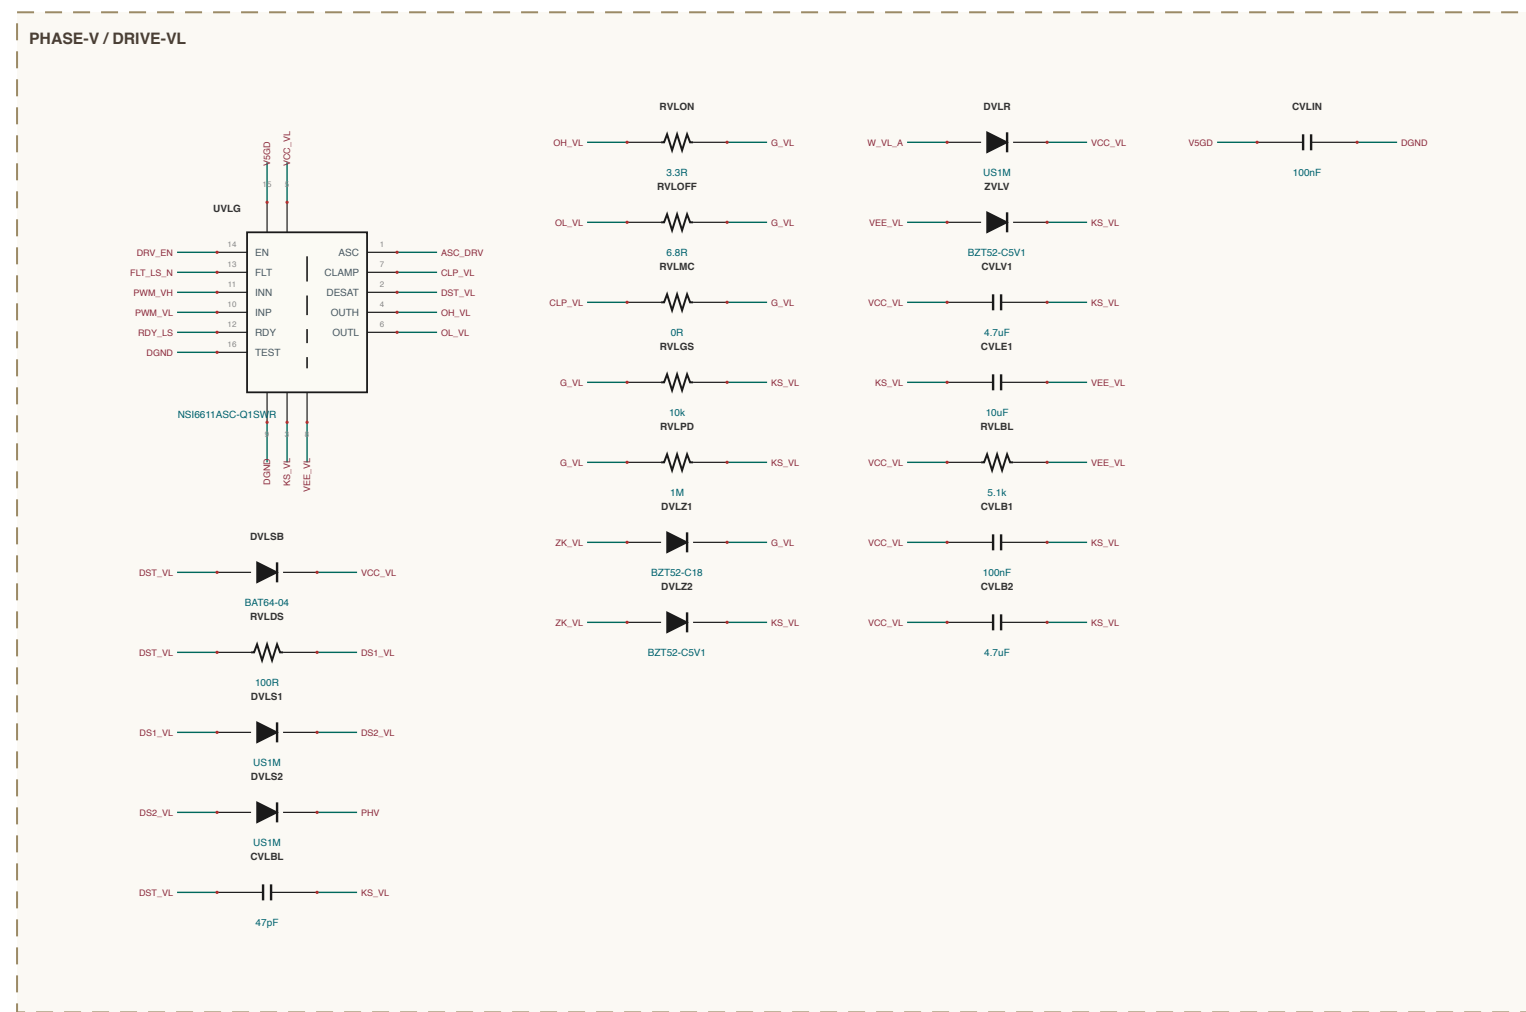
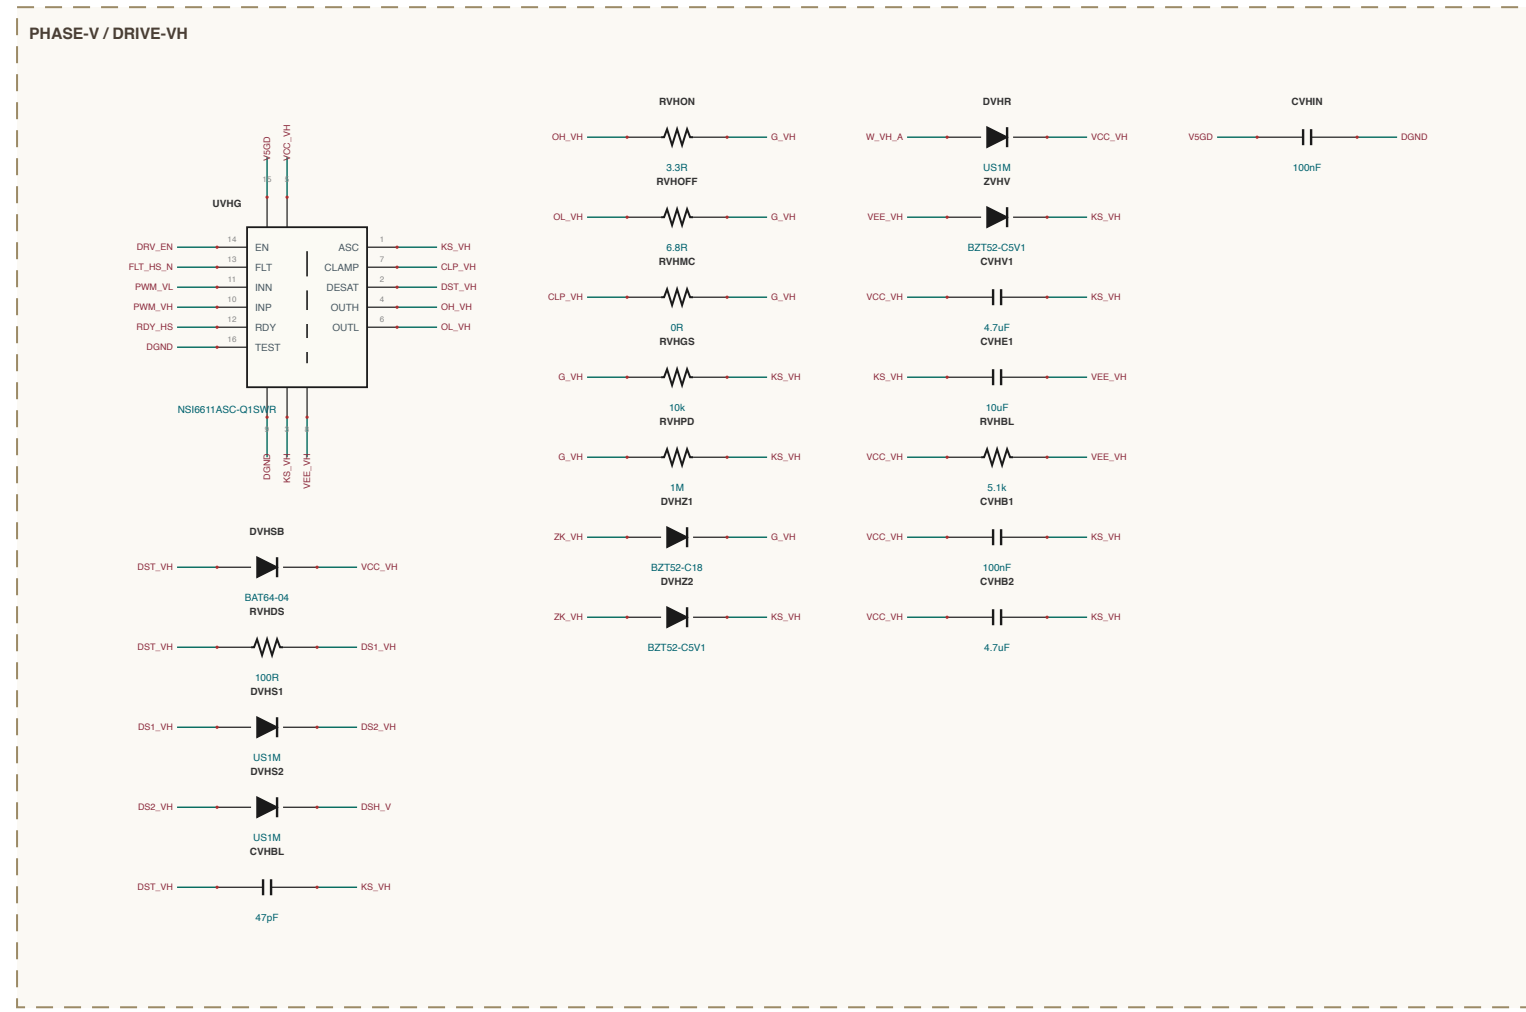
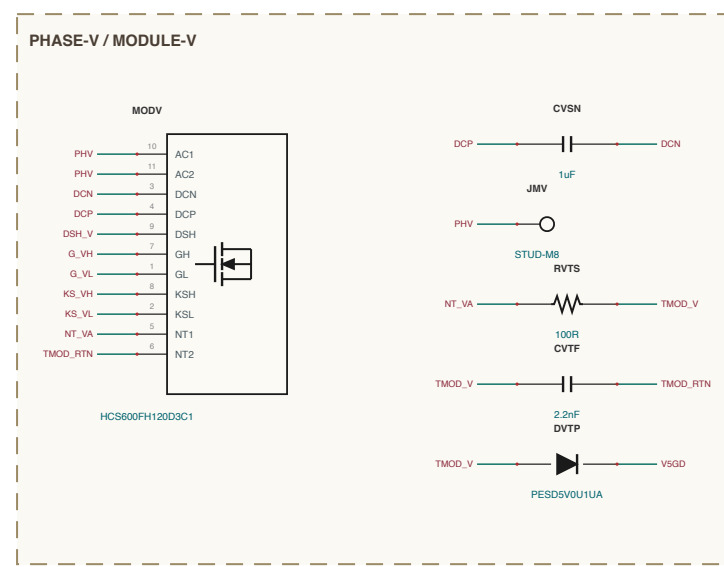
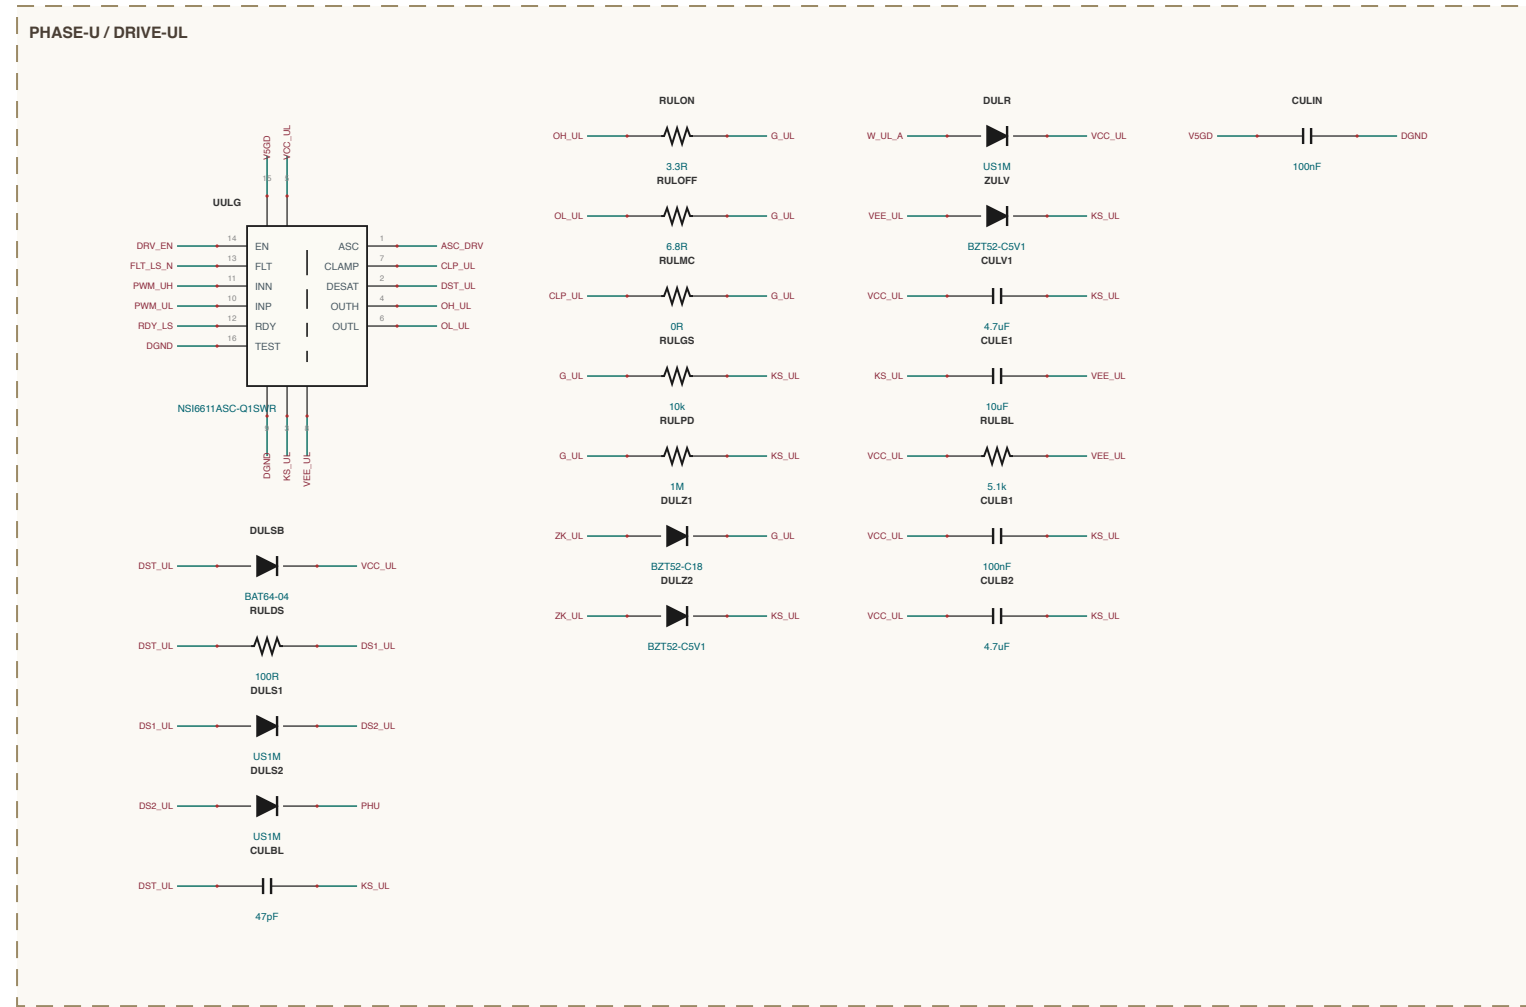
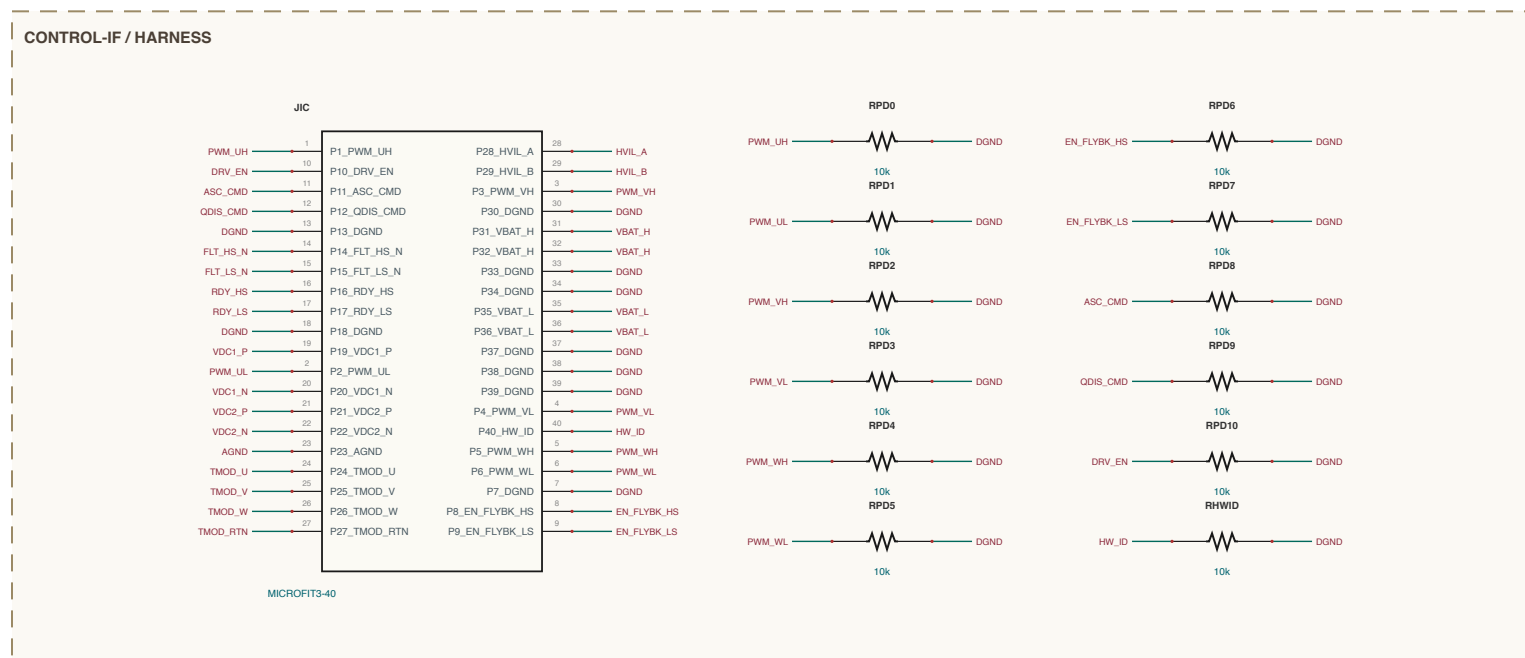
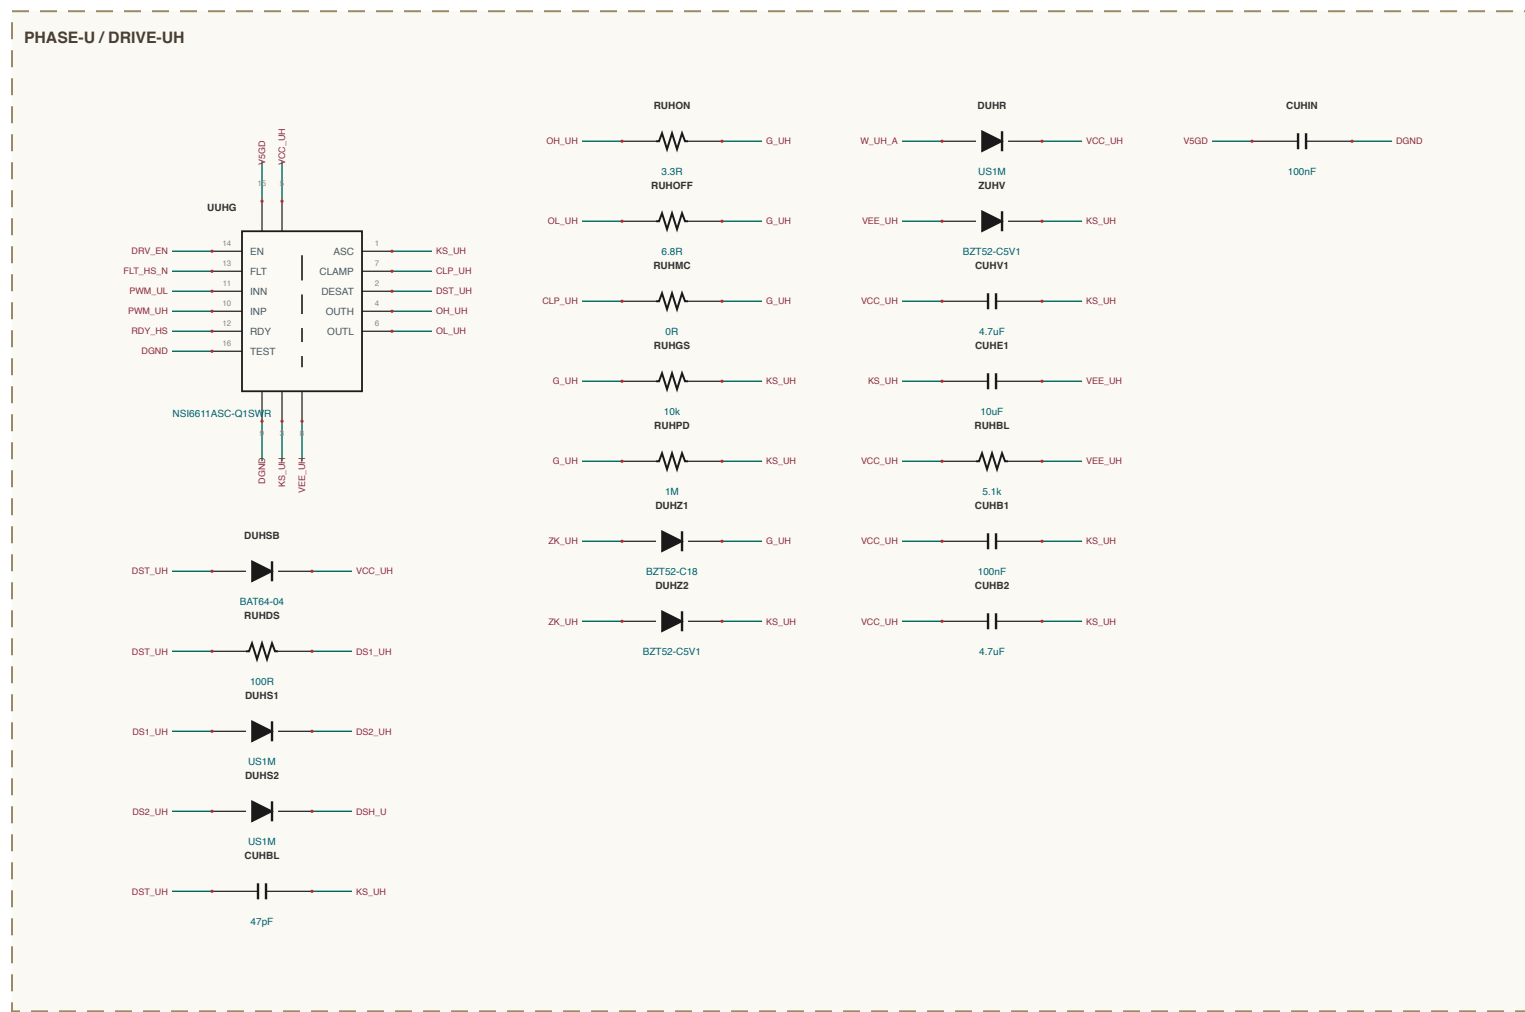
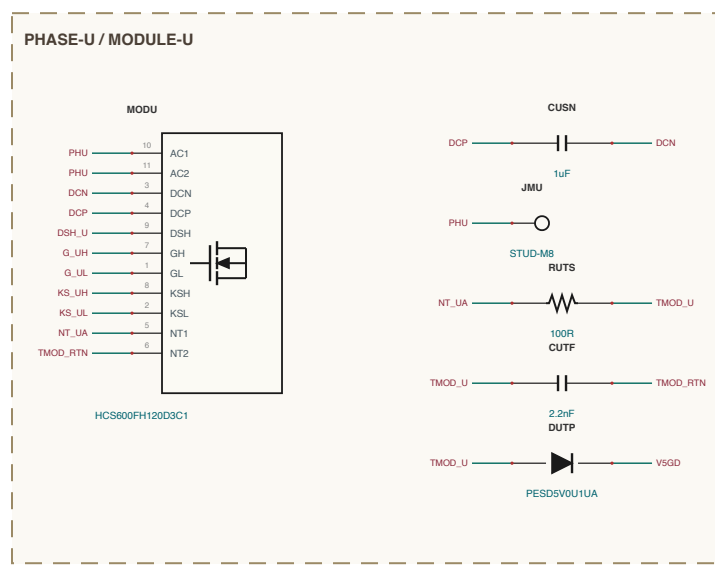
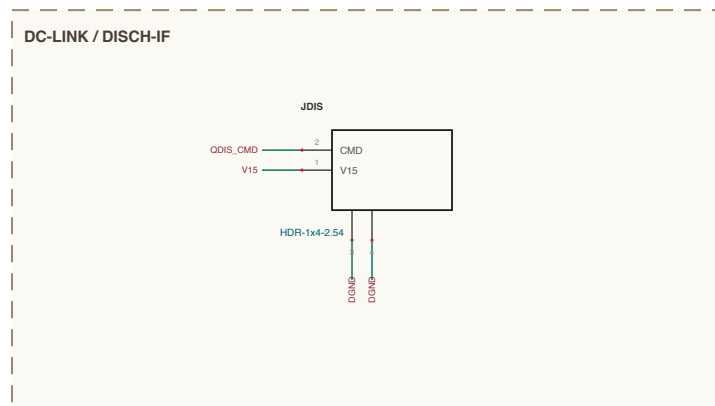
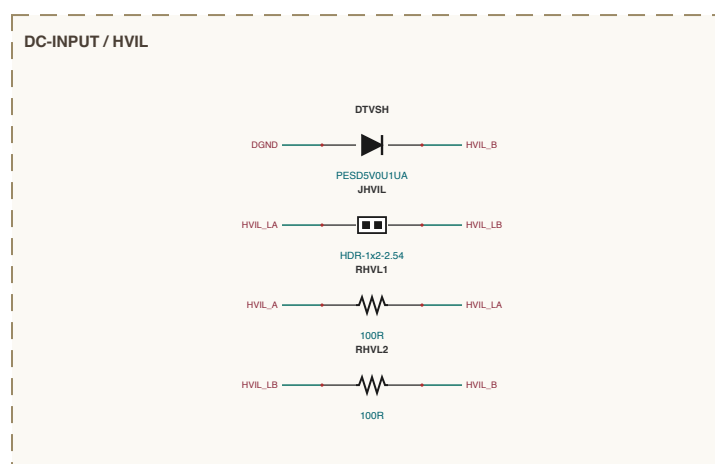
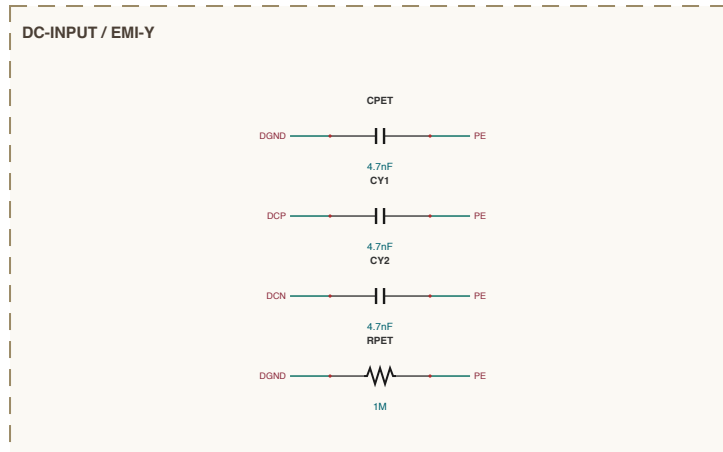


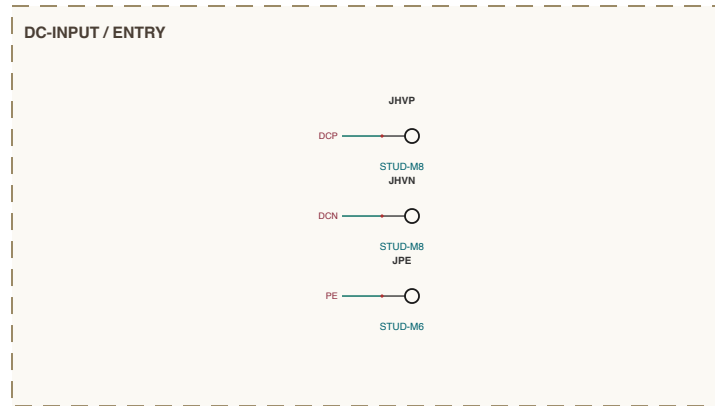

ASIS-01 SAFETY CONCEPT + DC-LINK CONNECTION VERIFICATION	
cell state = 3 phase-open (ASC state completed), discharge via DCB F1016 + DCB F0165	
1) battery (V _{bat} = 1.5 ASC, each 100 V supported (400 V))	5) F1016 open + V _{bat} 0165 negative + torque off (F016)
2) F016 ASC switching + monitors + F1016 (pre GPH)	--- DISCHARGE ---
3) F016M011, EMAN0107 F1016 + GPH (2h = 1 min open)	PRESTATE (In 20h 2010-20h 10h = 30h) (SE to 60 V)
4) F1016 (pre = 1.5 ASC, each 100 V supported (400 V))	ACTIVE G001 = 10 20h 100 V + 10h = 10 V
5) Network (IN = M01 OF F016-GPH) (ASC, GPH present)	E = 10 V 1000 V = 10 20h active, ASC = 2000 V
6) In 1 = 1 min 0.5 s availability (torque path)	WARNING: M01 IN GPH, switches N010 VDC channels
7) In 20 VDC network 0% = 10h, V0165 monitoring	RULE: never energize via the DISCHARGE BOARD fixed
8) G001AT pre monitor (G01 = 3 s detect), switching	

SHEET INDEX

230 kW pk Power (PW)	1
HF-SENSING - 4 sections	2
LV-POWER - 4 sections	3
DC-INPUT - 3 sections	4
PHASE-U - 3 sections	5
PHASE-V - 3 sections	6
PHASE-W - 3 sections	7
GATE-POWER - 2 sections	8
CONTROL-B - 1 section	9
DC-LINK - 1 section	10
rev A & B - 24 sections - 2	25

NET NAMING

Internal junctions are named for what they join

Uareb- >P96- node at that IO pin e.g. UVIOC_WIMP

Evaptem-3H midpoint of a series pair e.g. FOLA_3H

Evaptem-2mm- tap between Evaptem-4e e.g. FVDC_12

all others are explicit design notes

same name on another sheet = same net, joined ONLY at B

named connectors/shelf (see INTERBOARD LINKS, Assg)

