
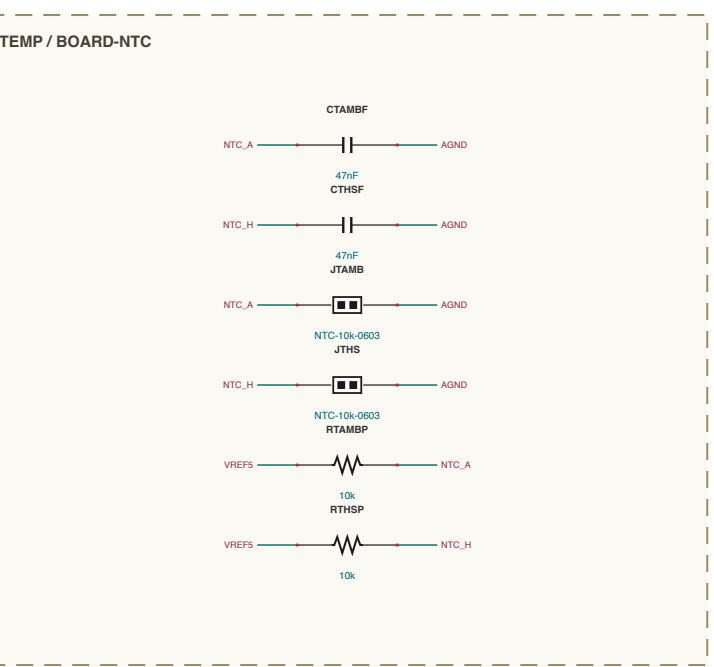
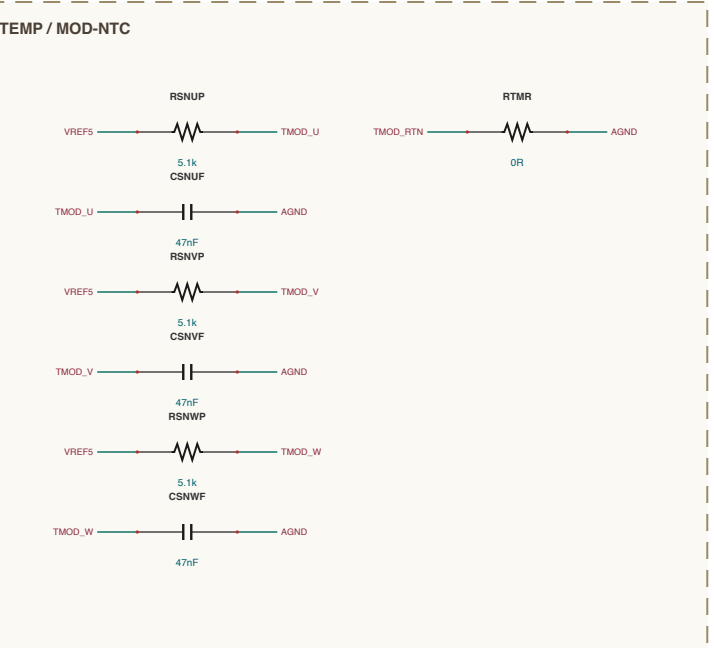
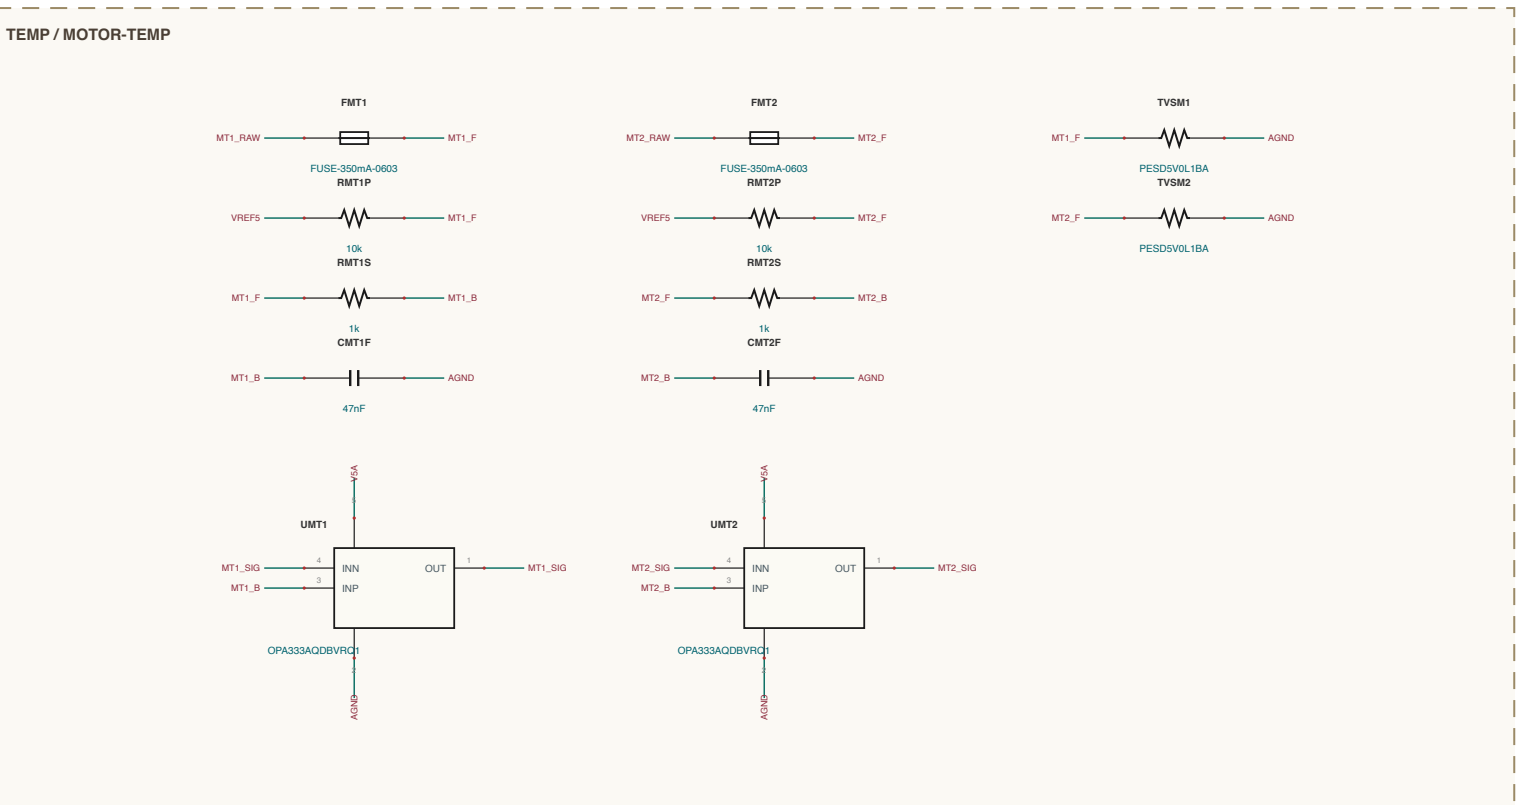
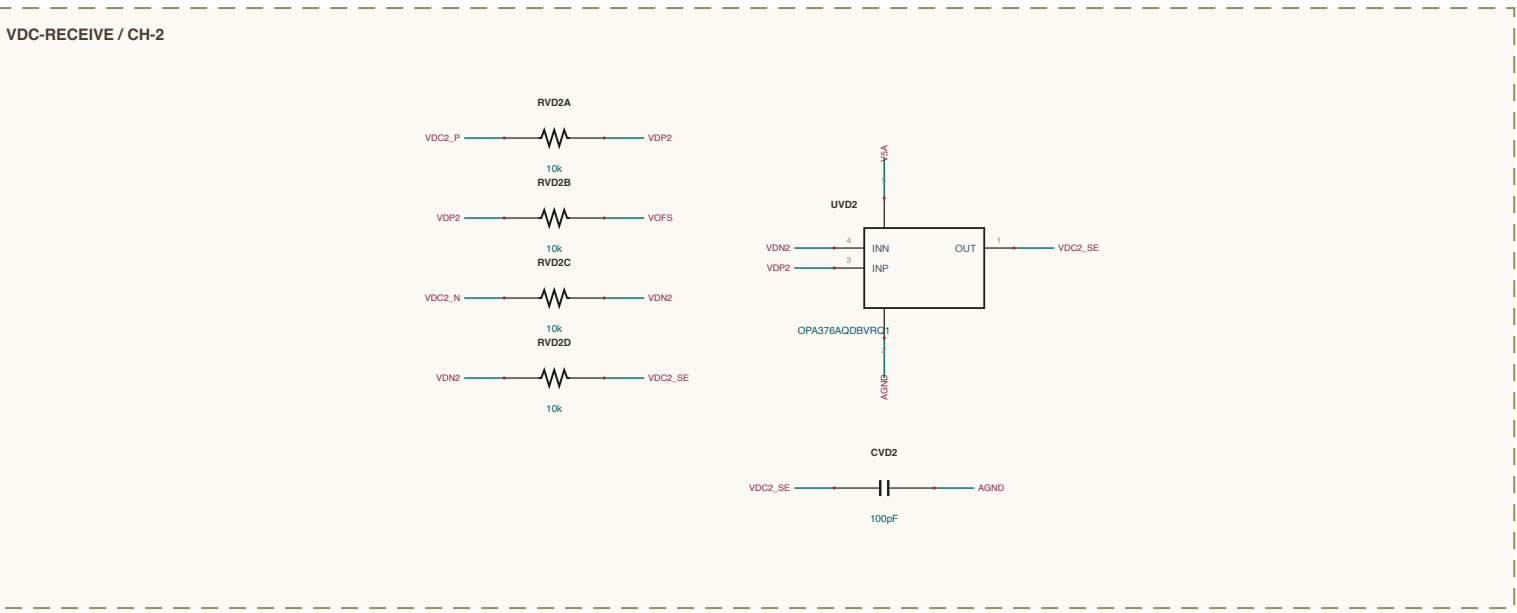
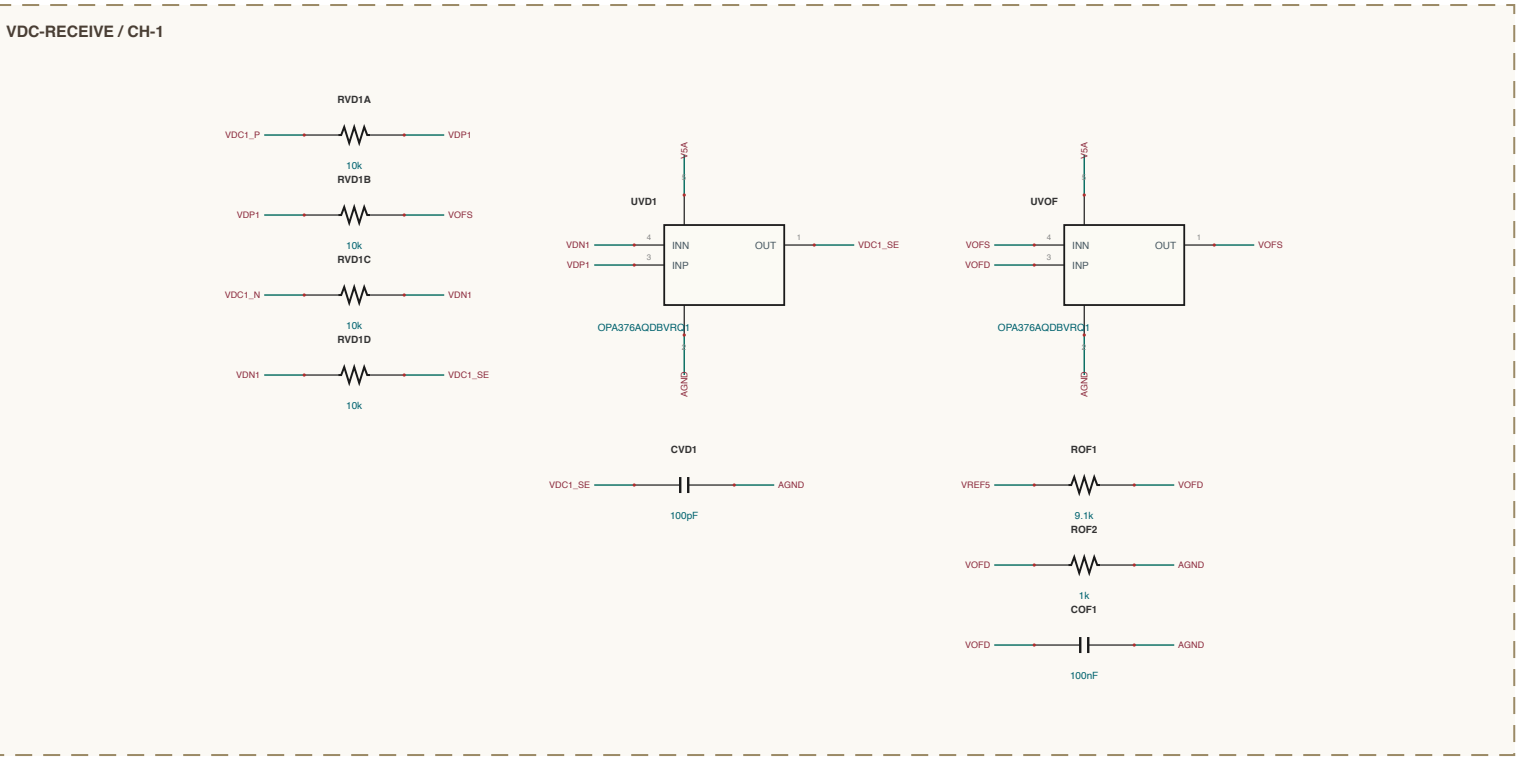
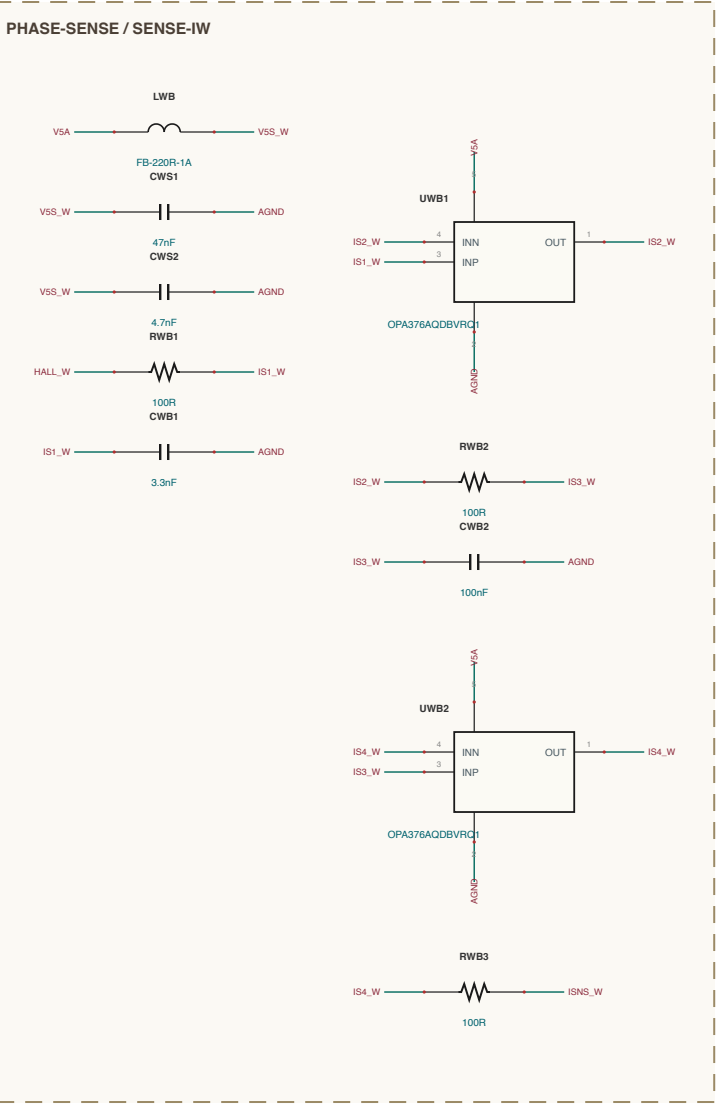
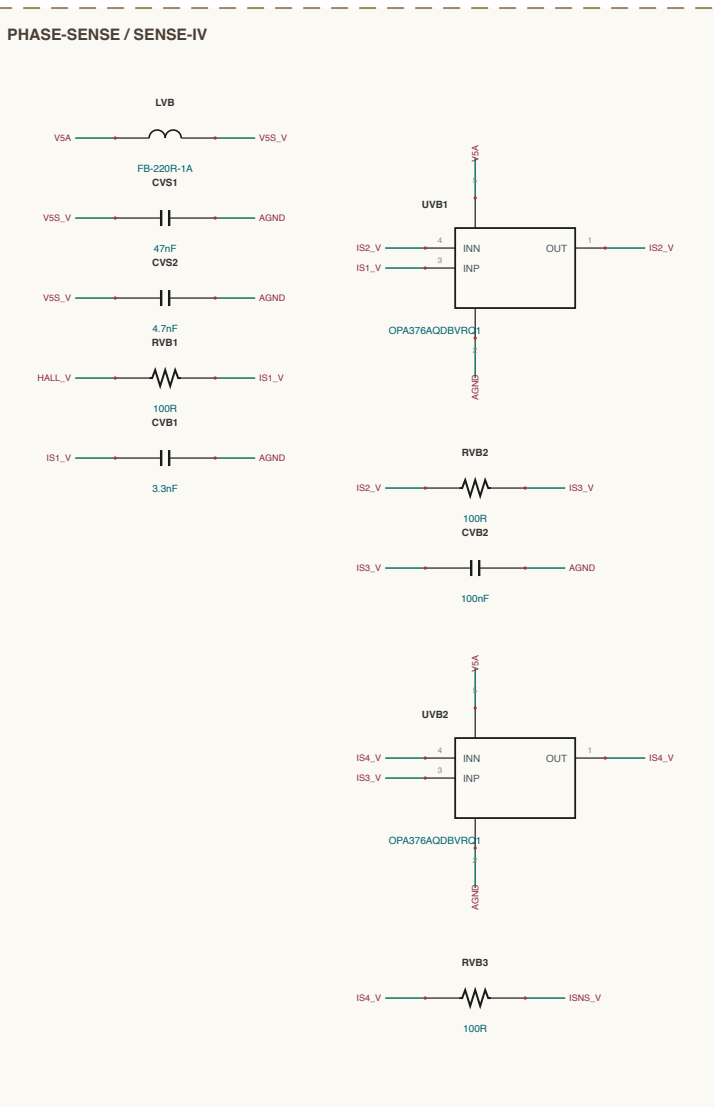
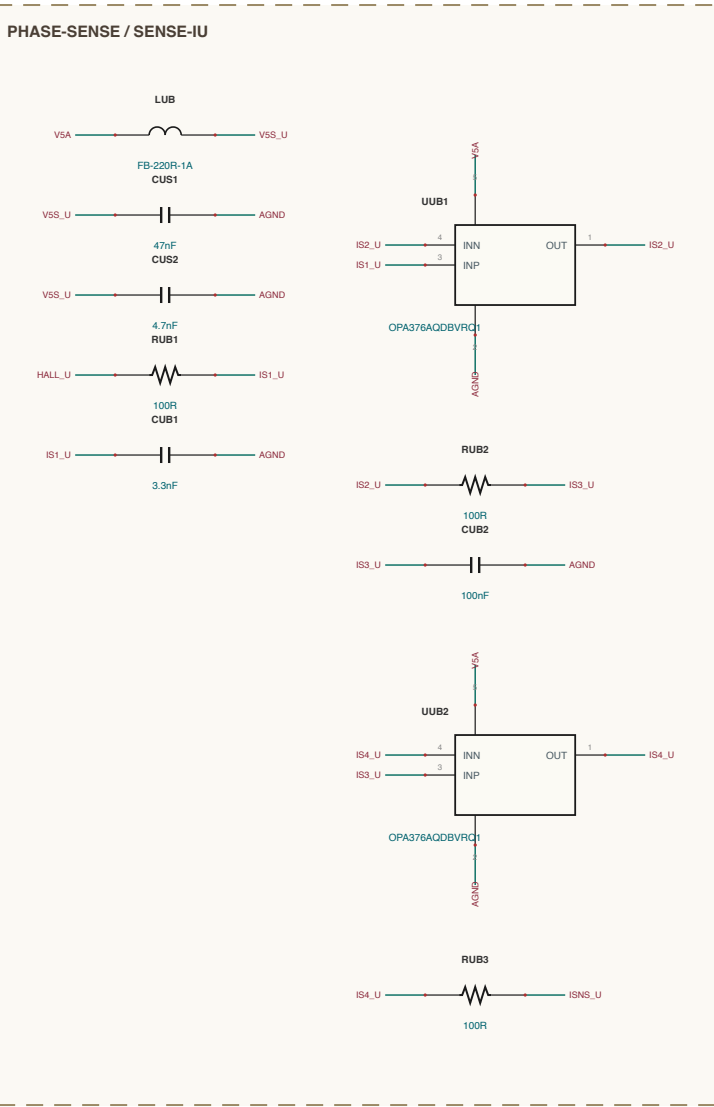
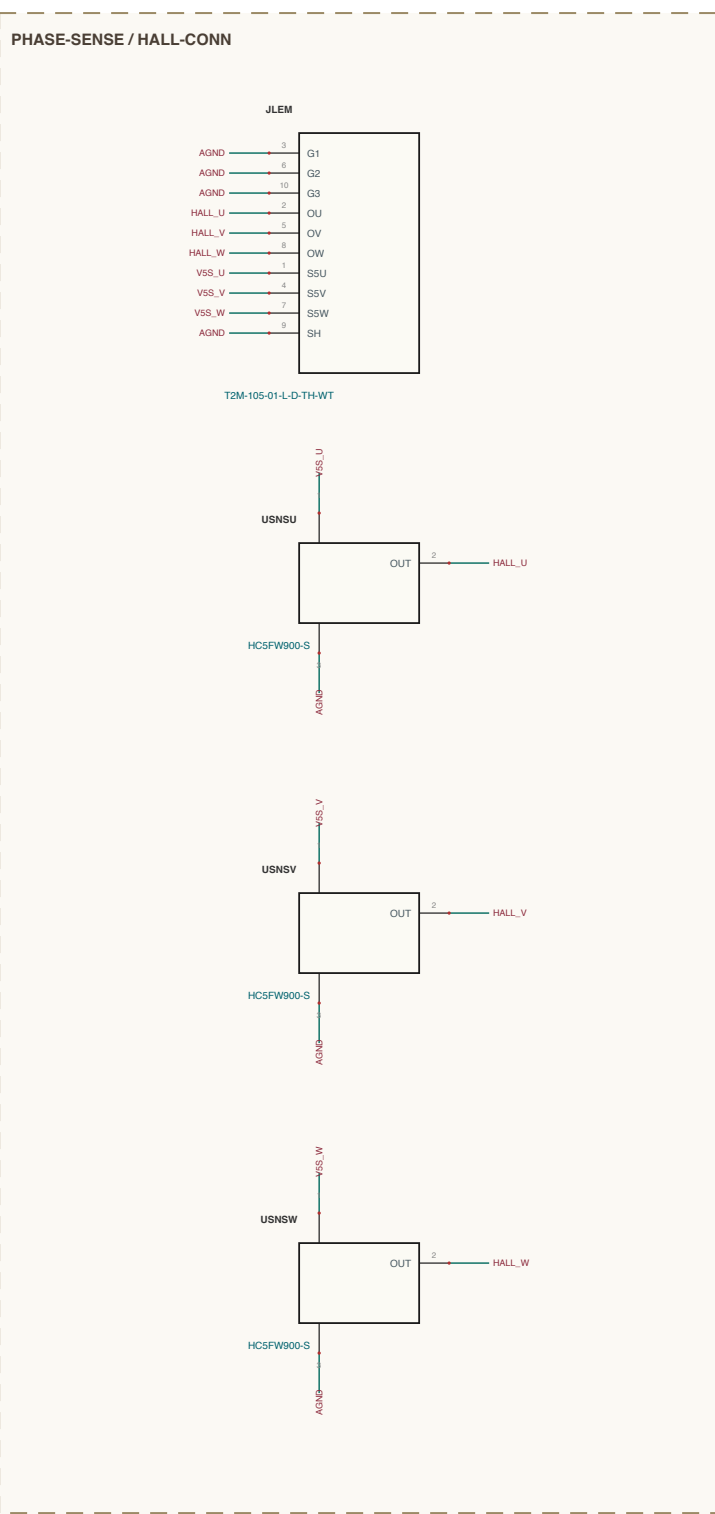
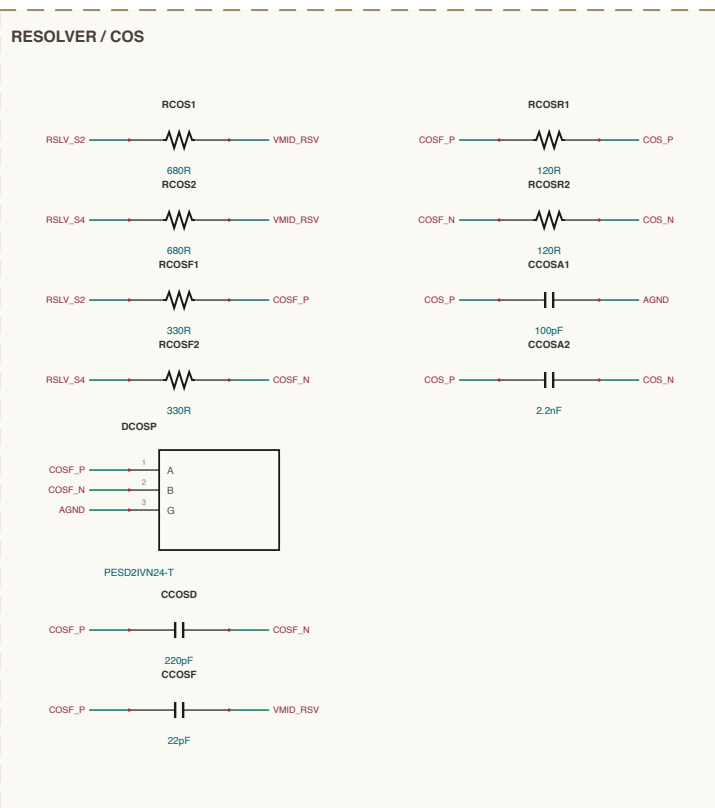
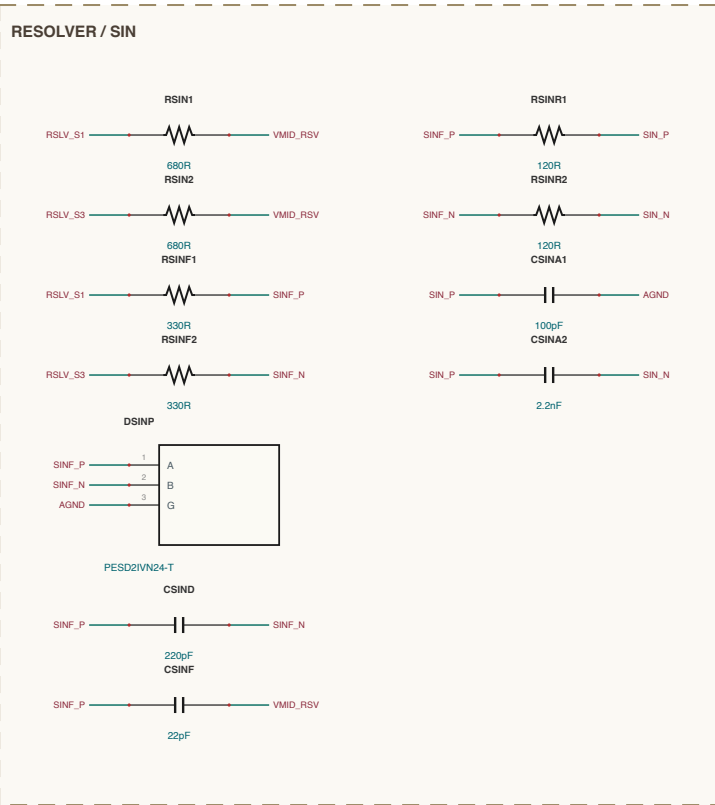
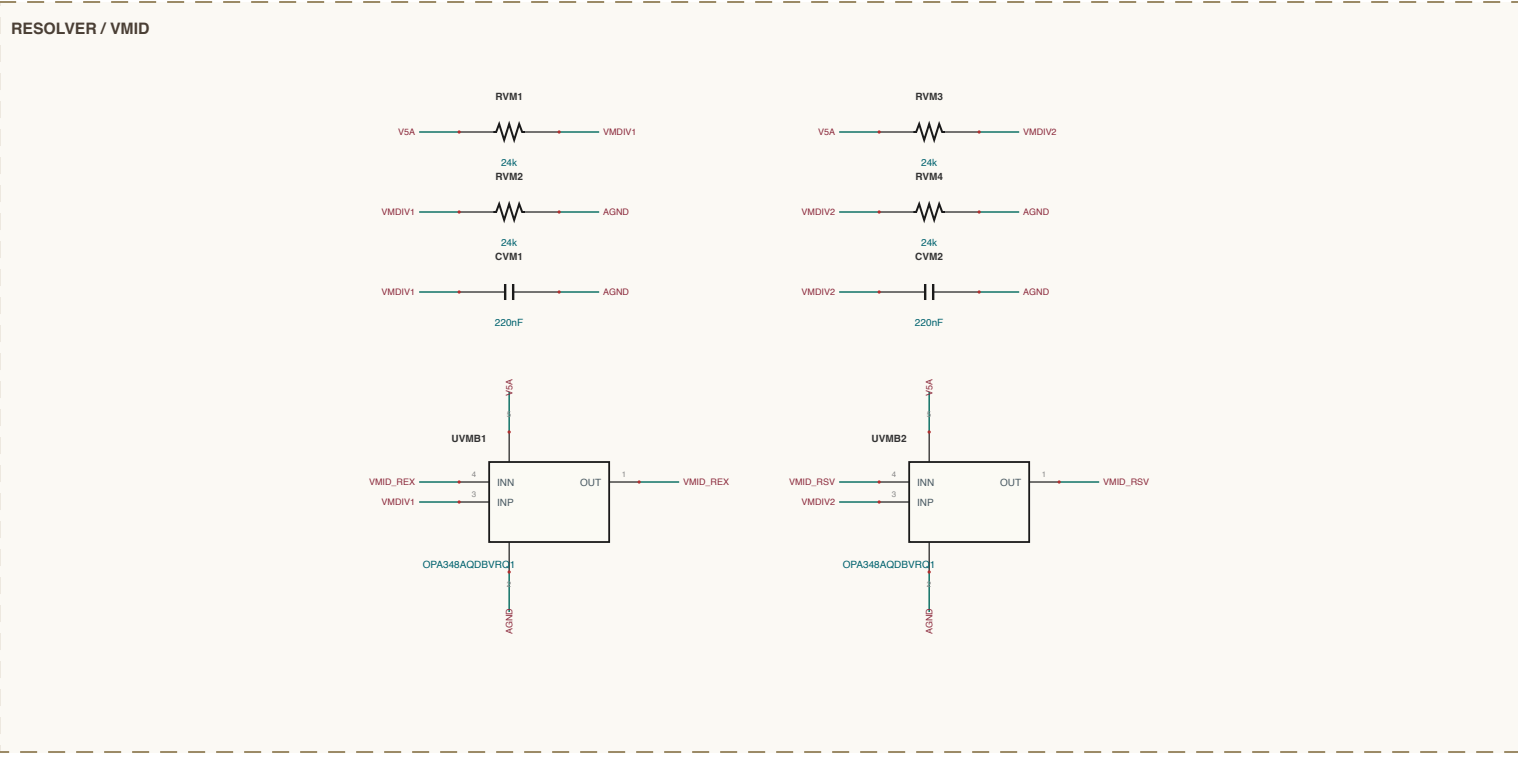
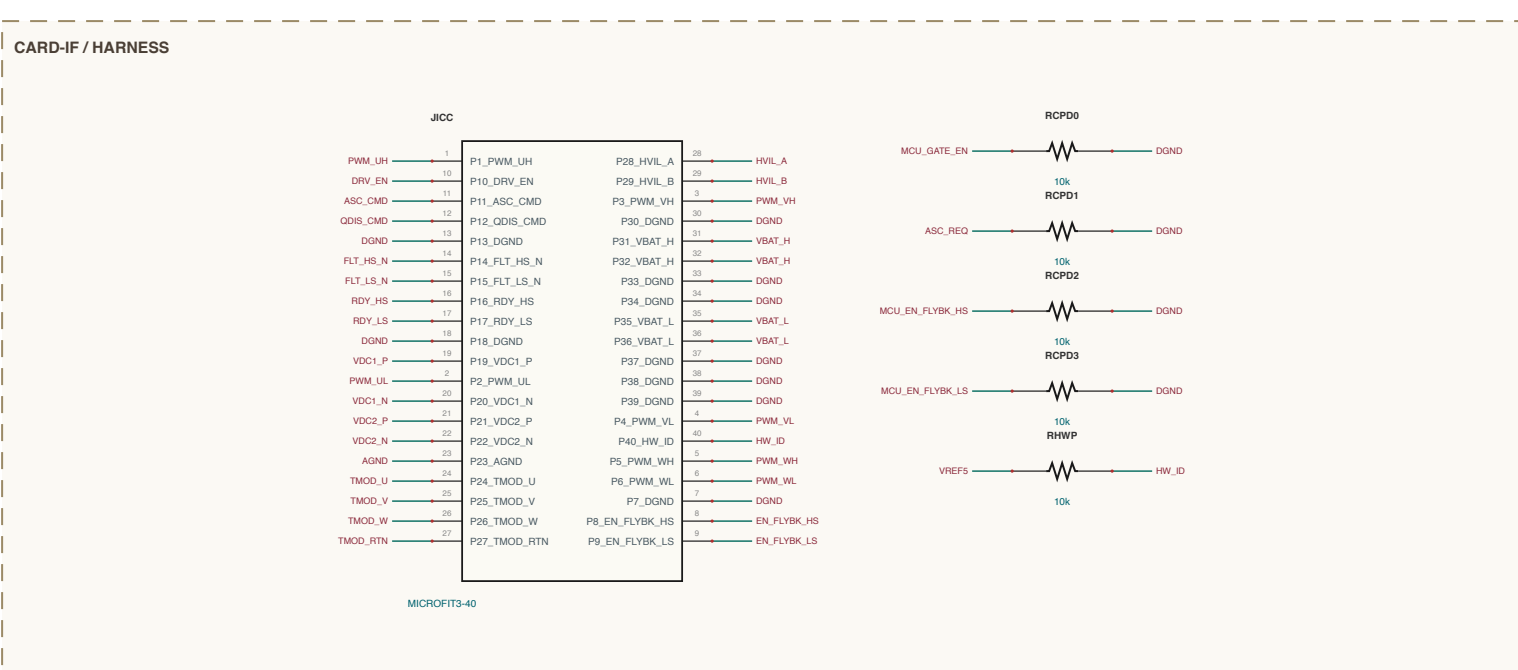
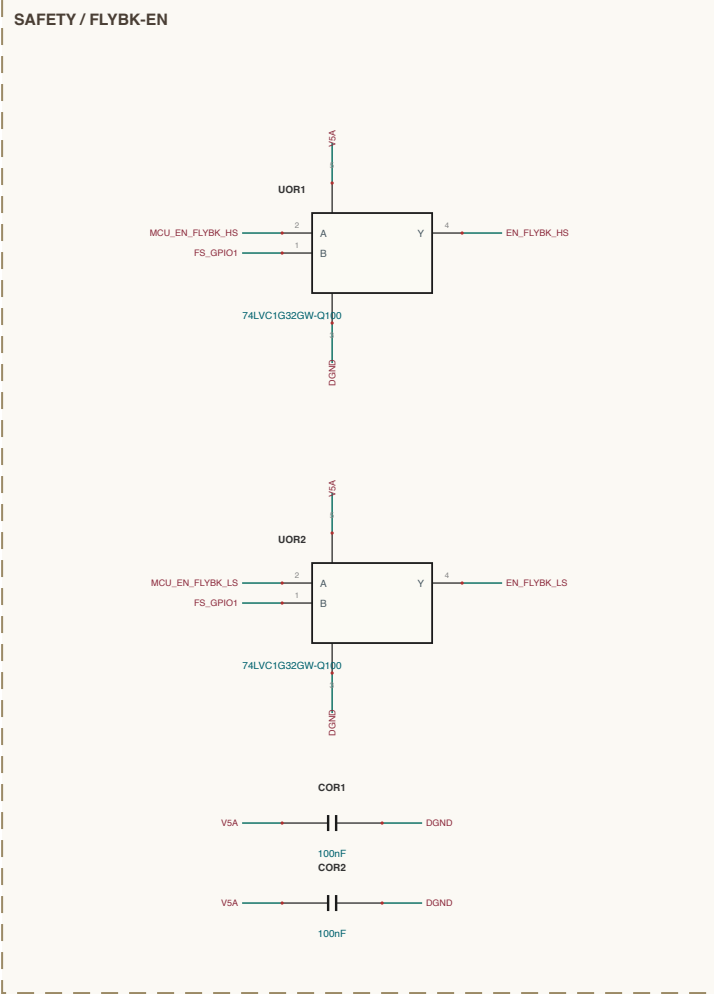
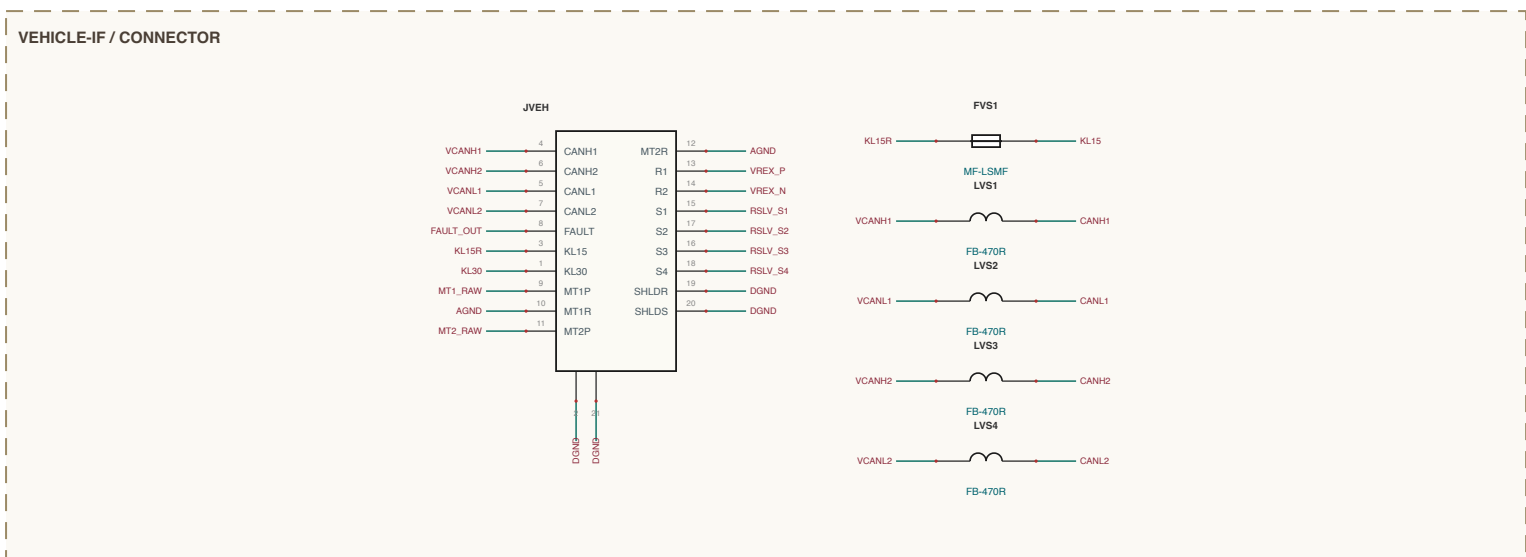
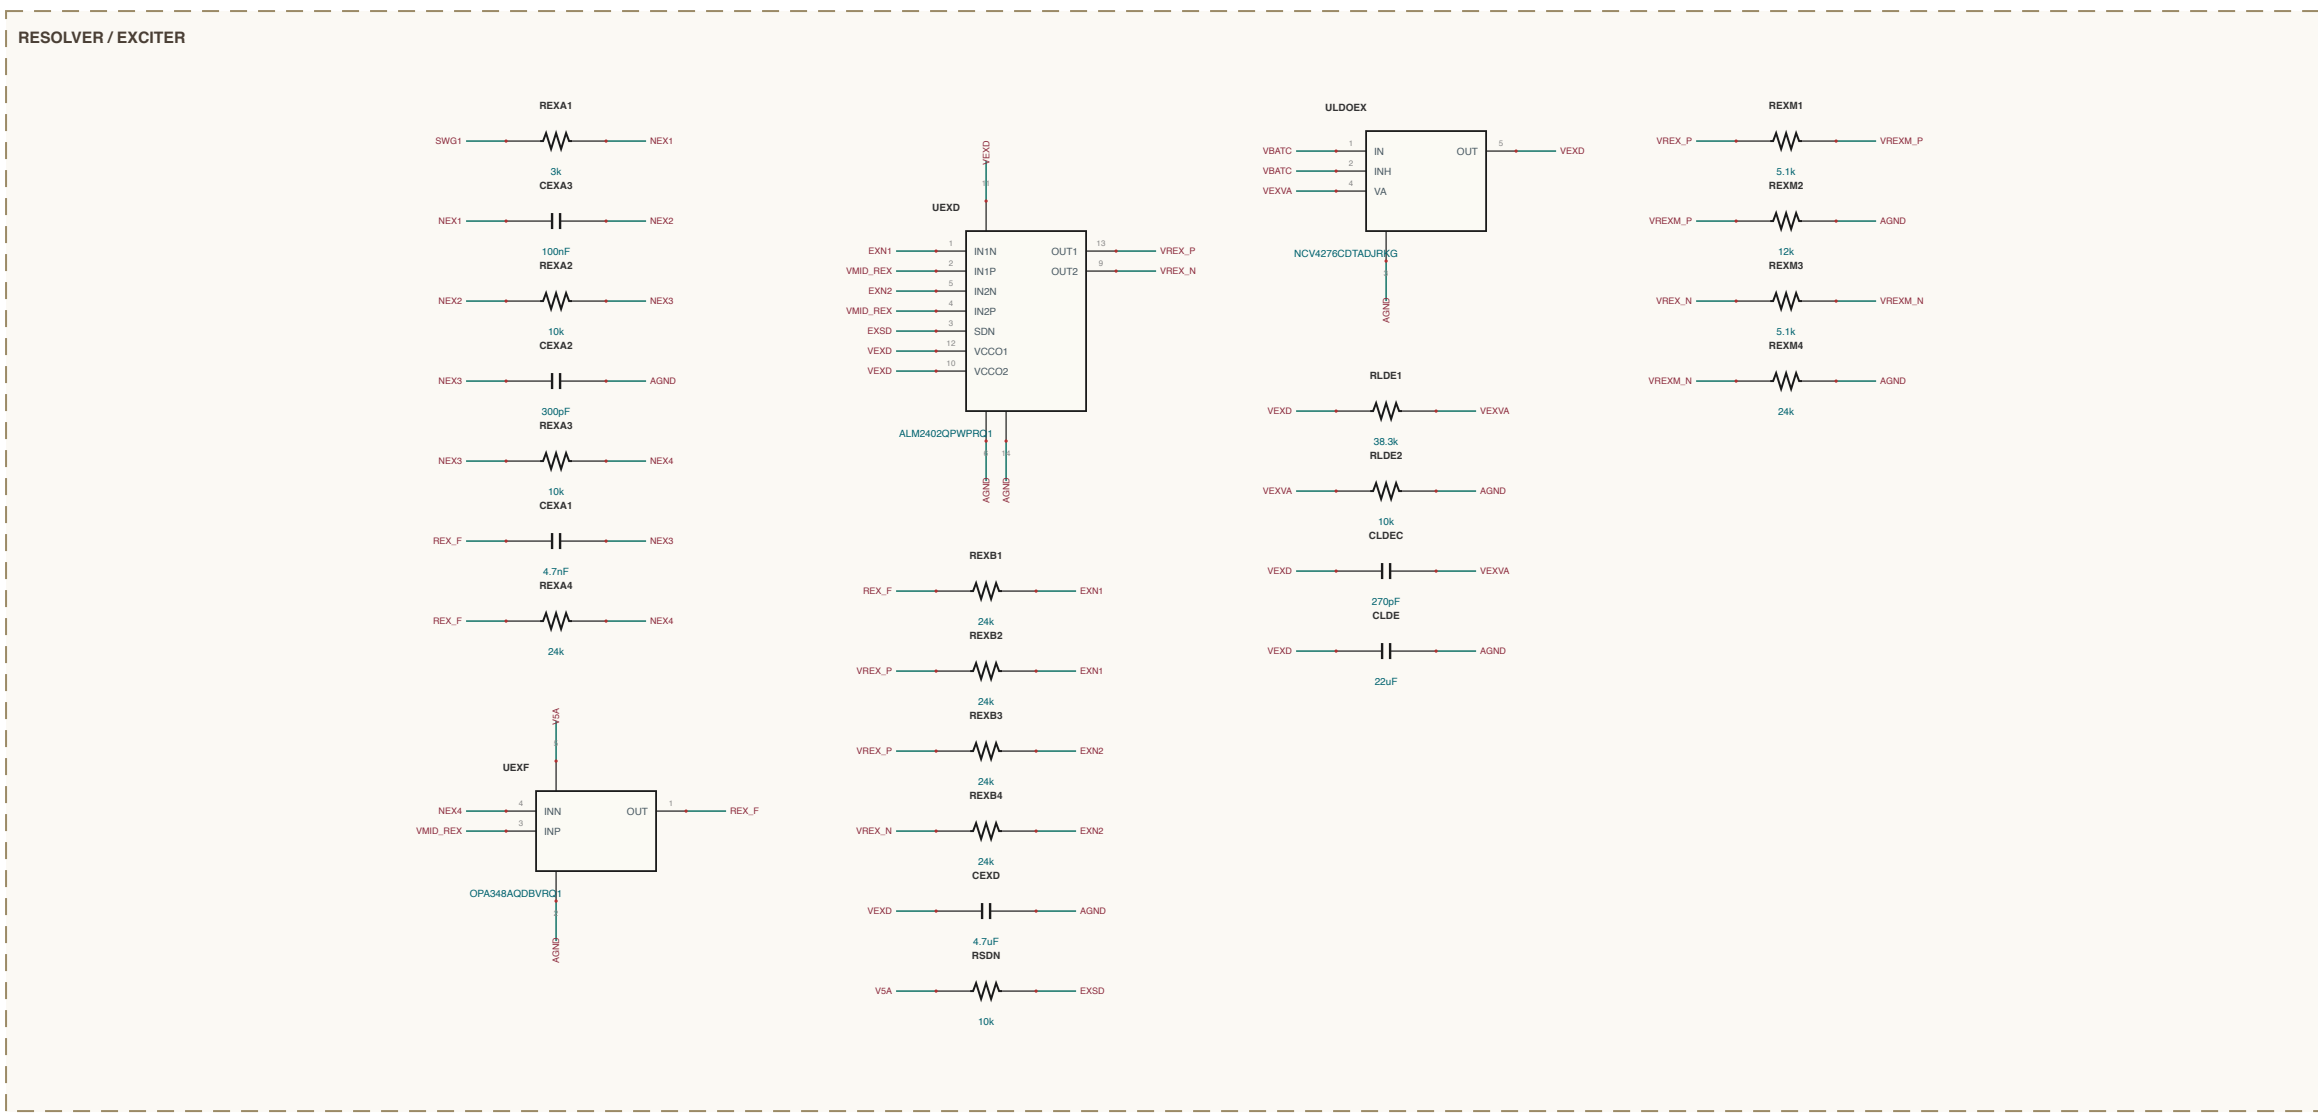
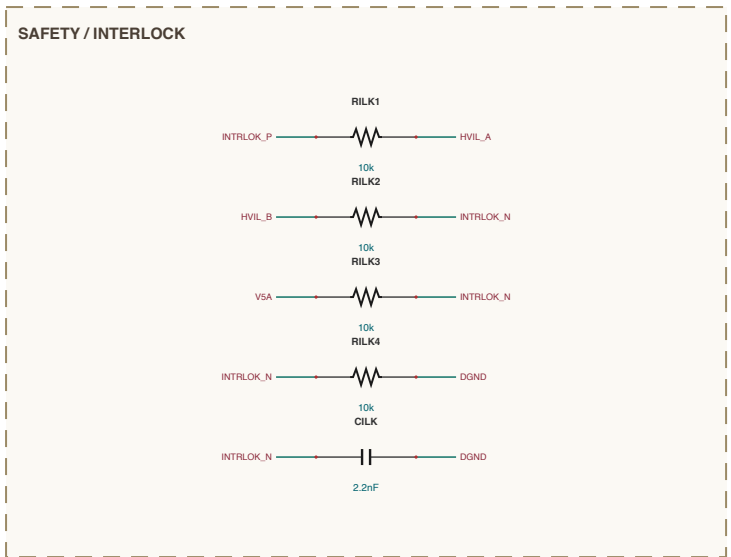
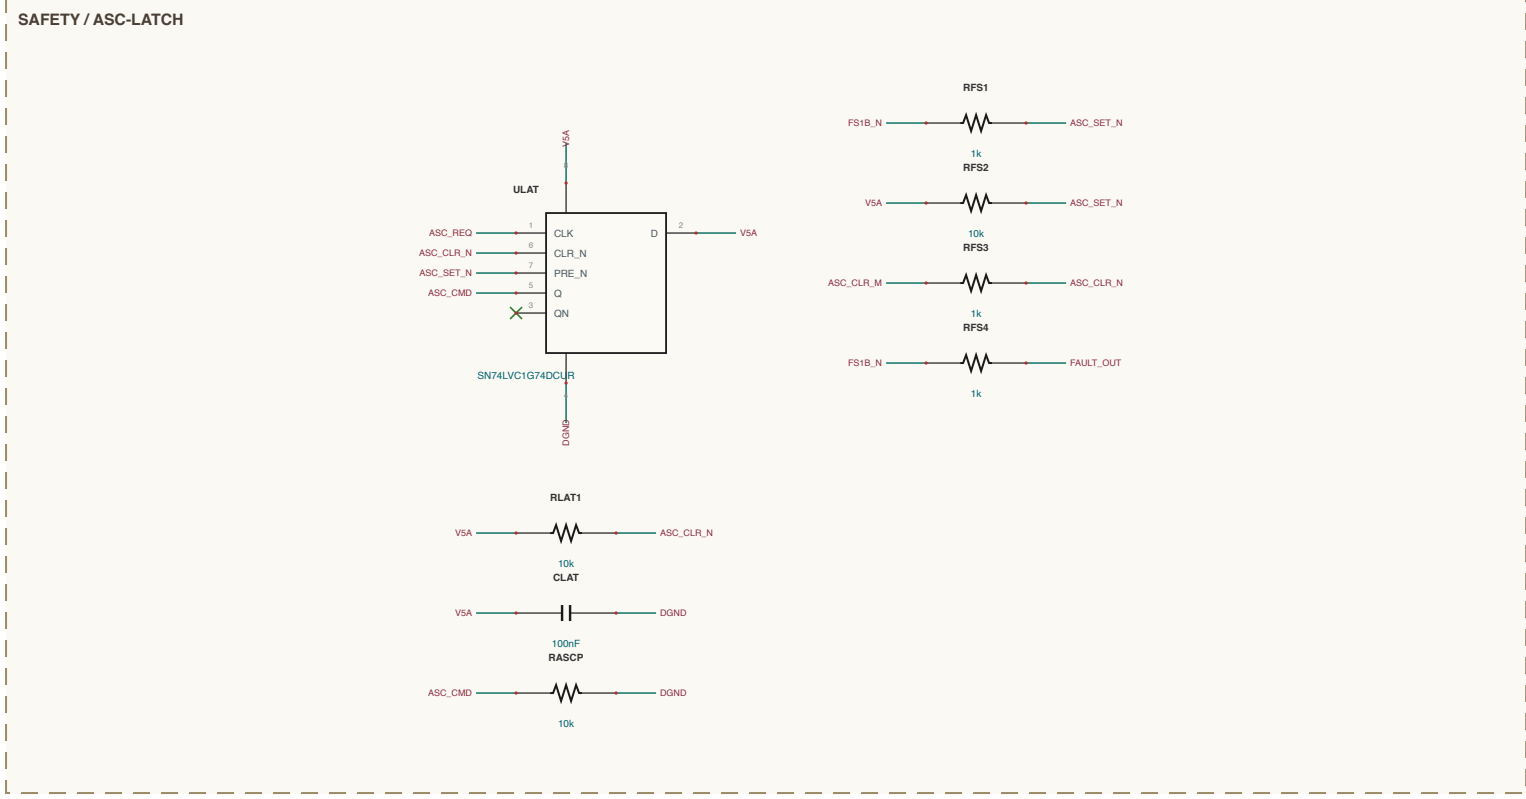
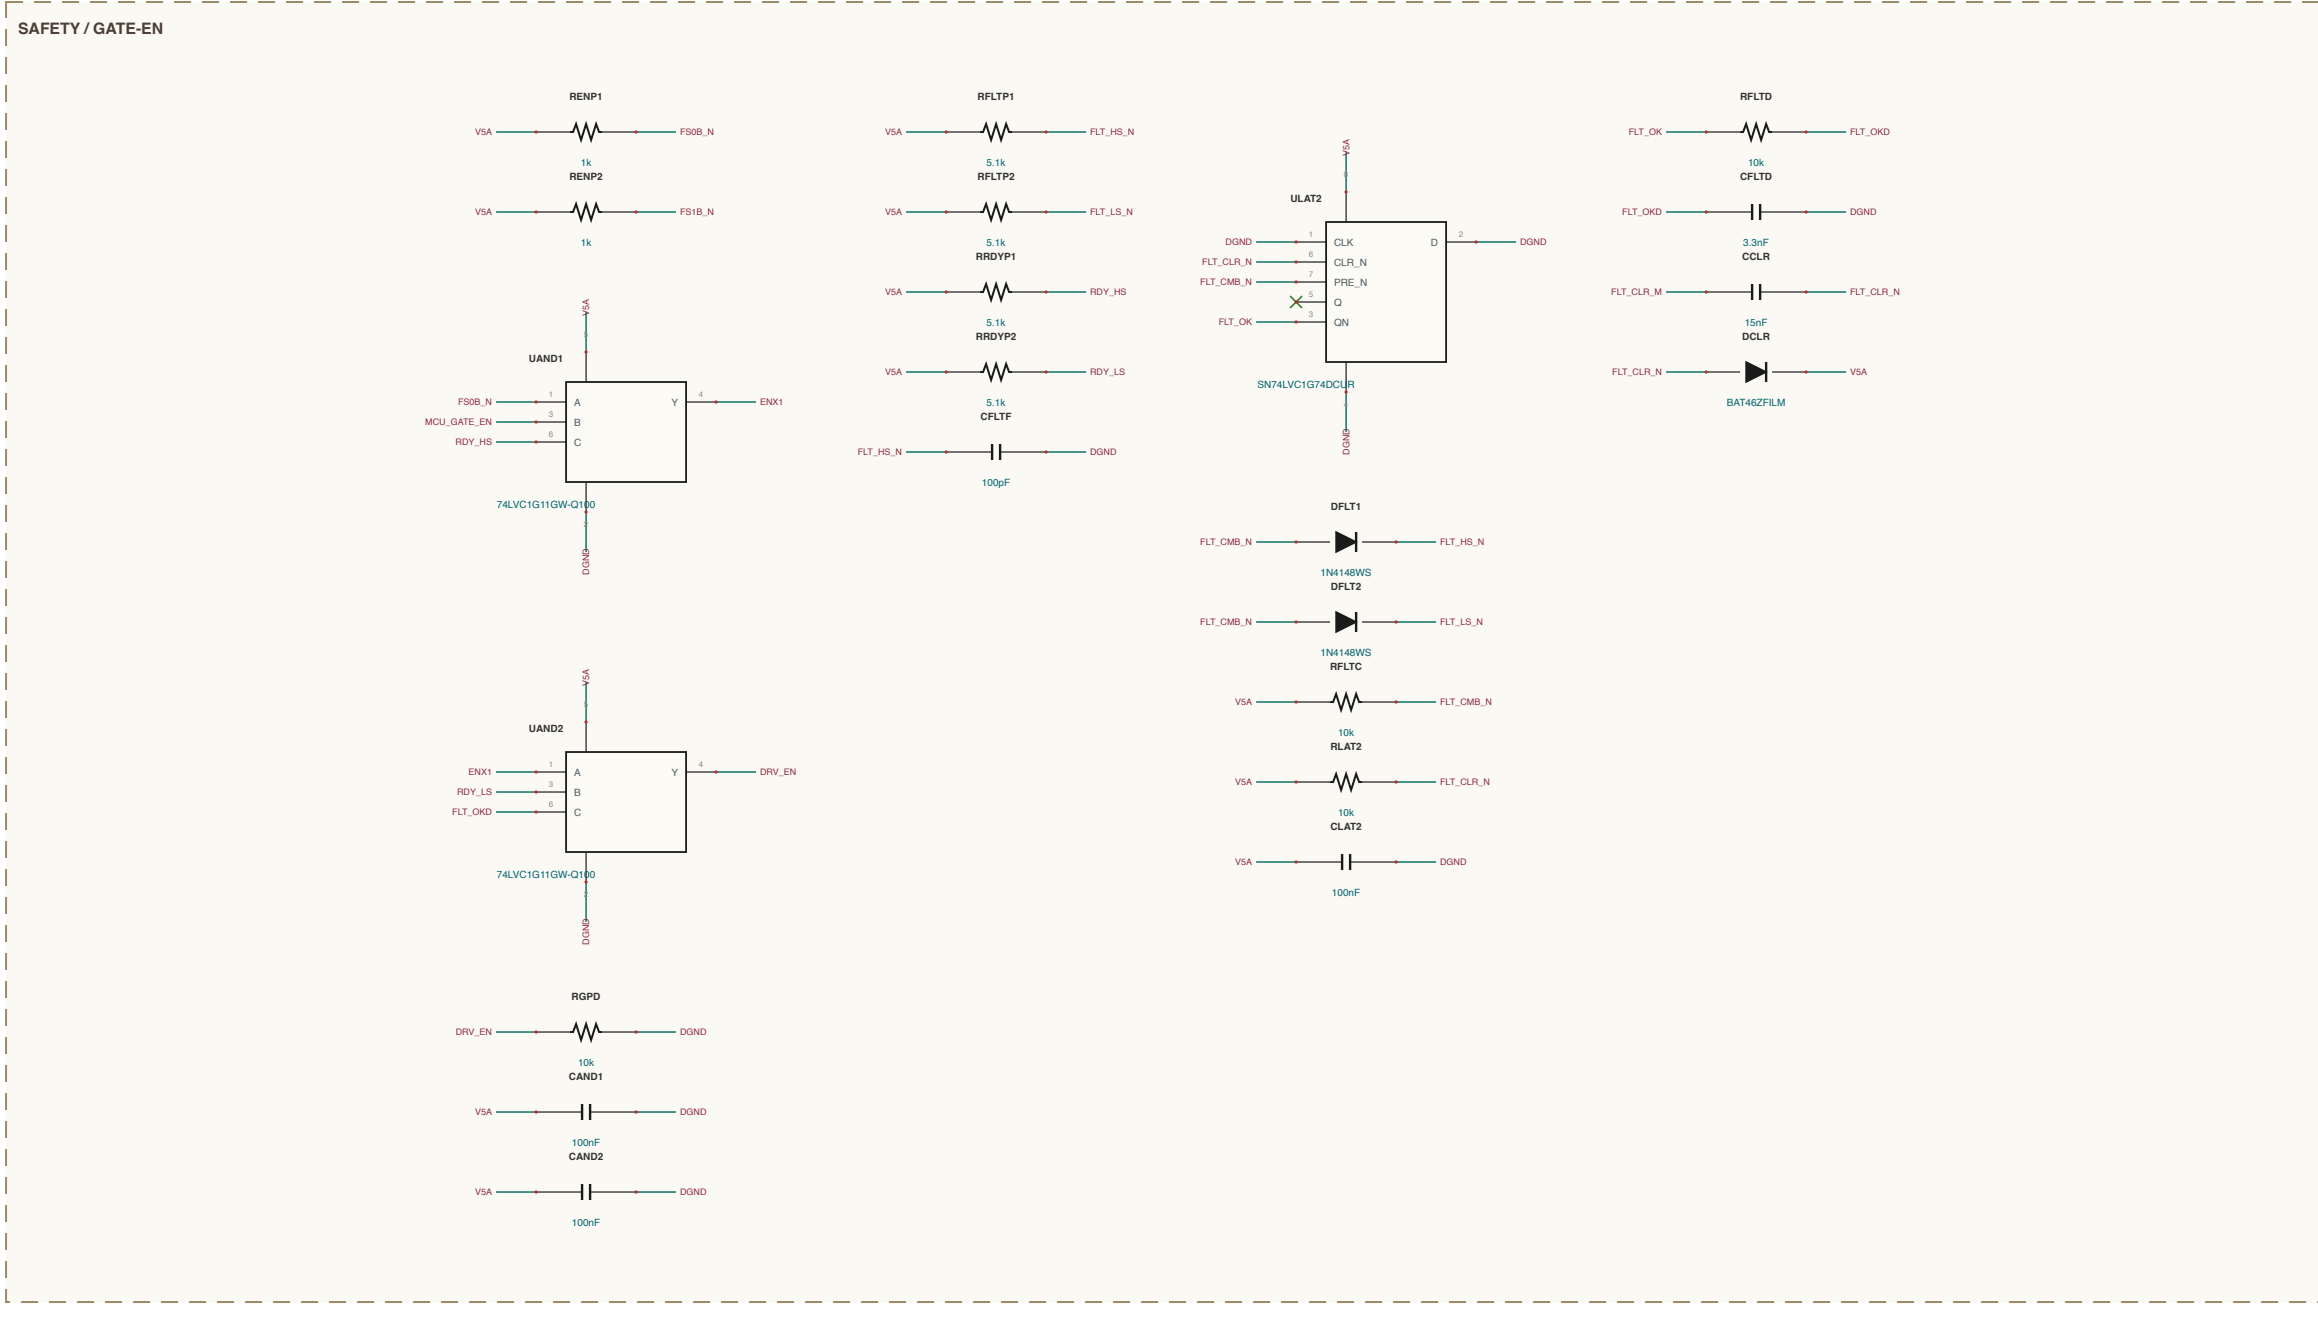
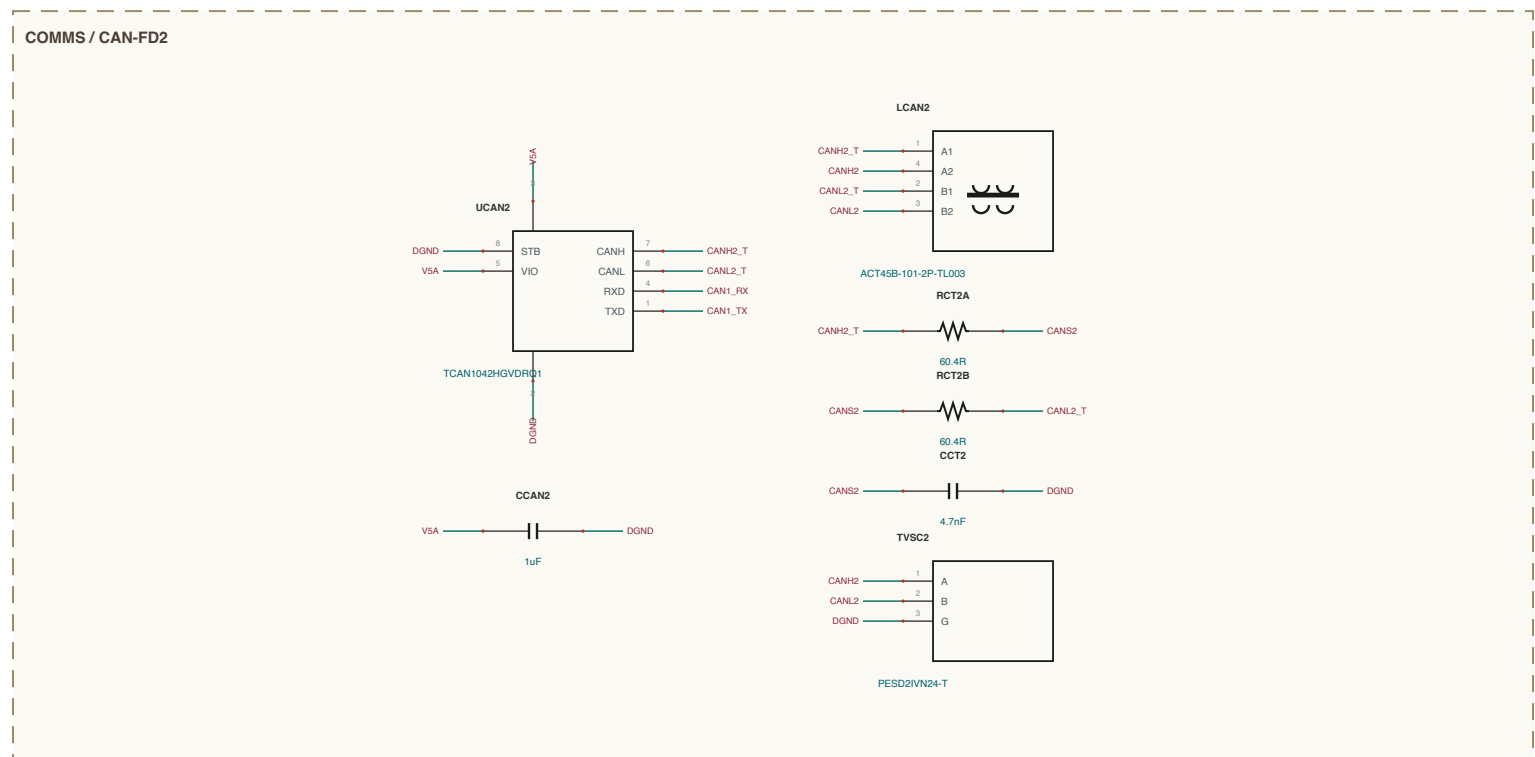
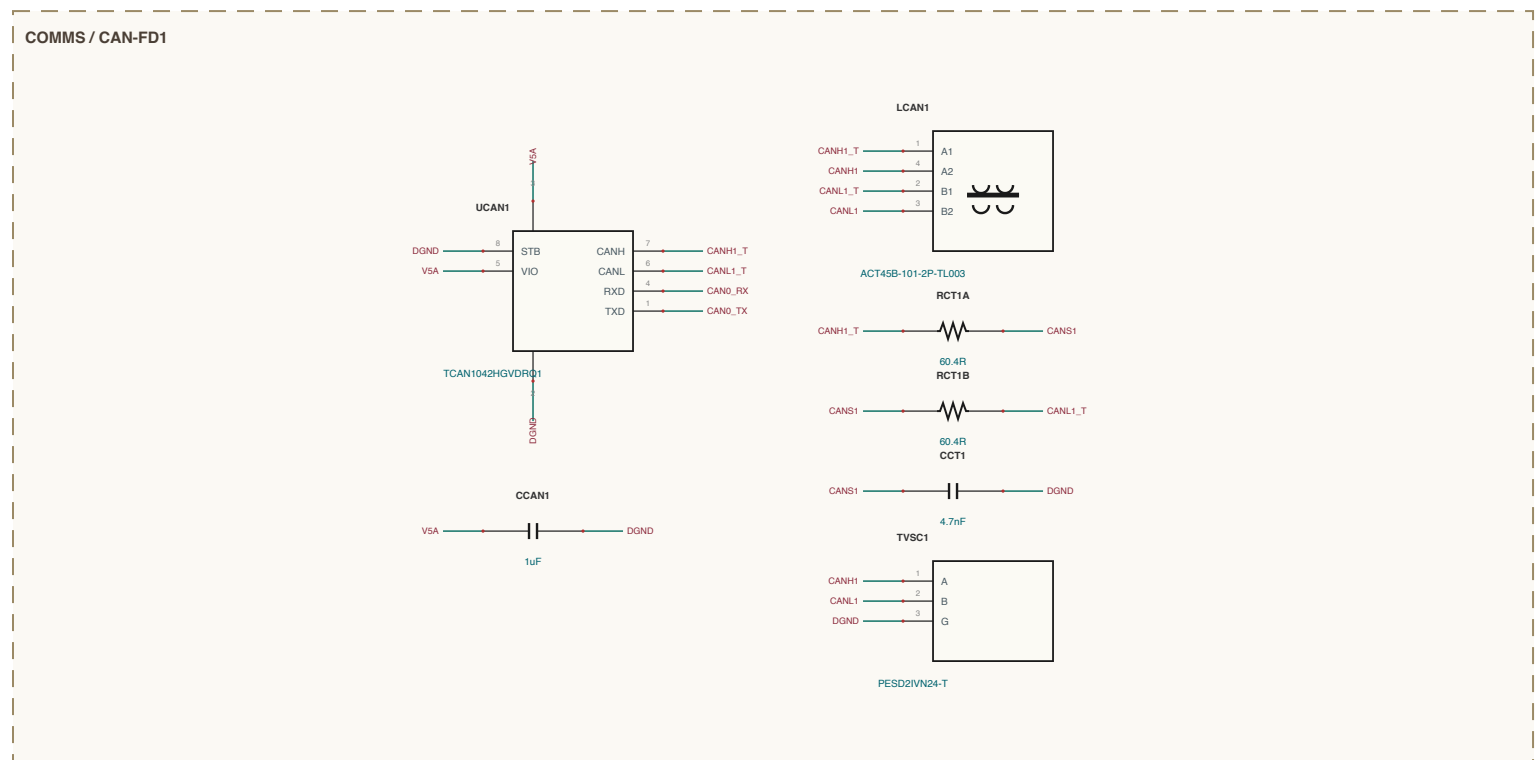
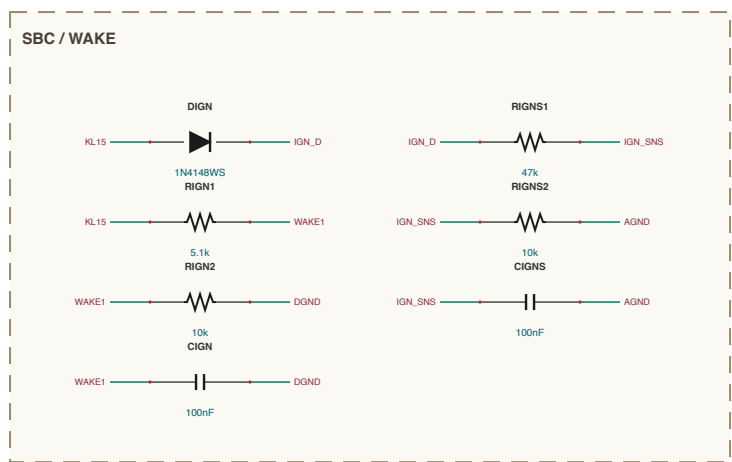
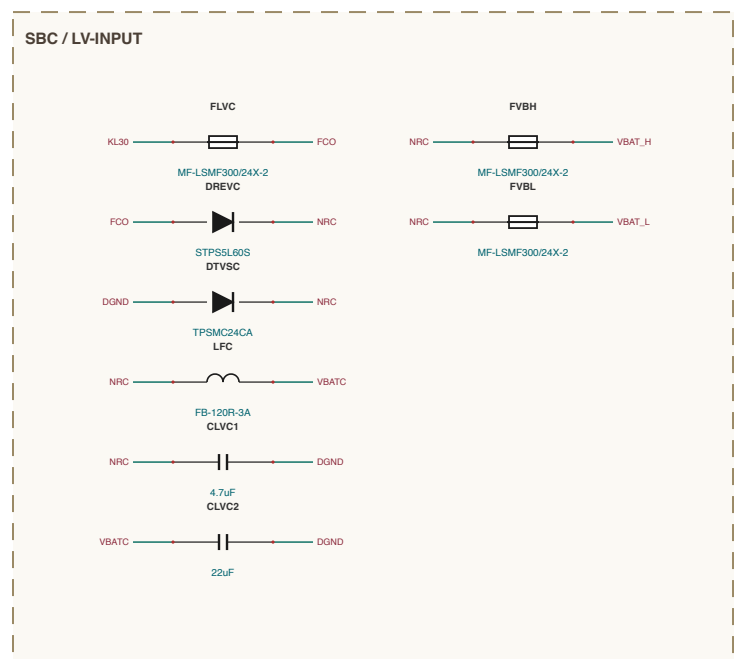
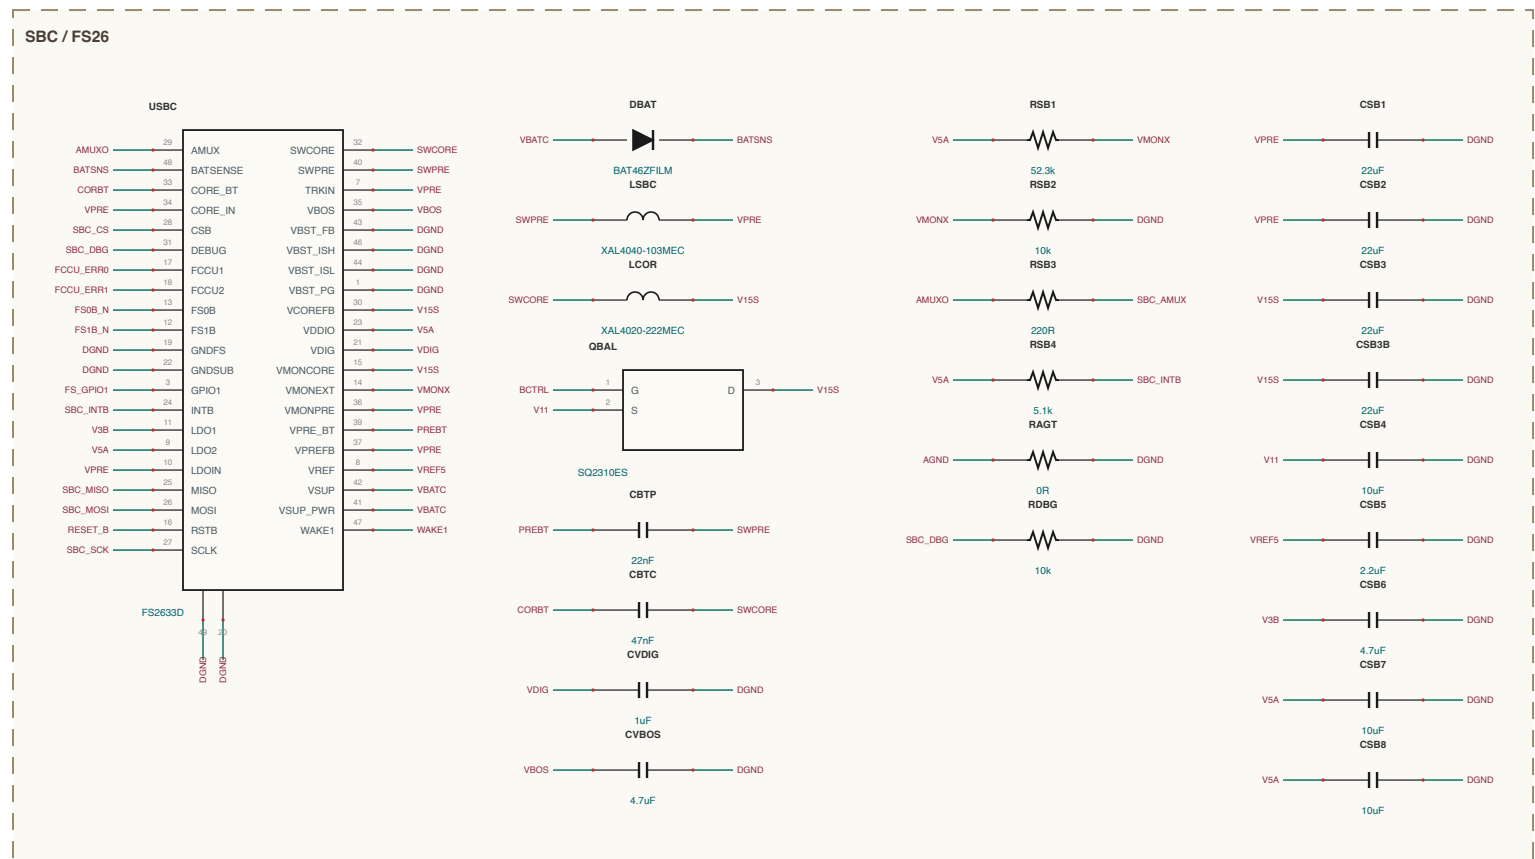
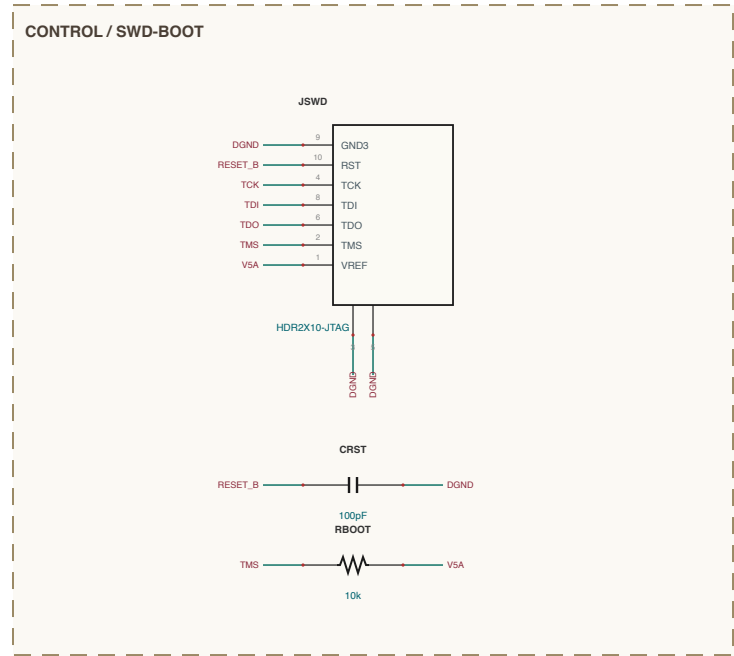


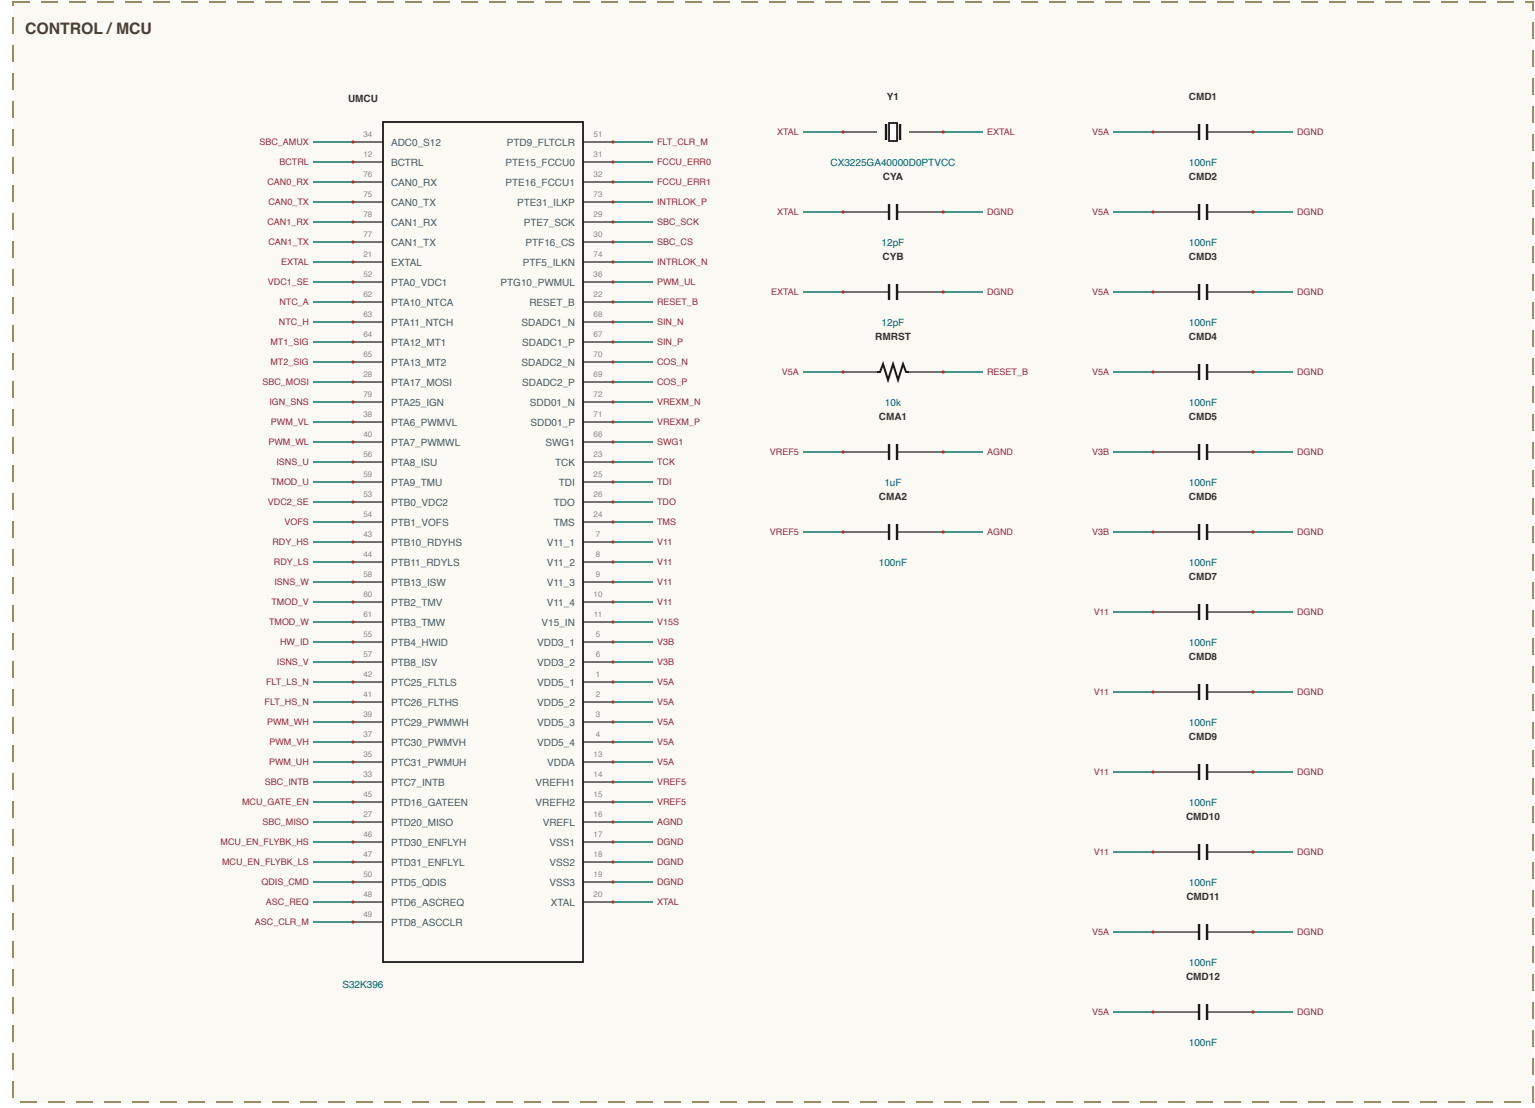

SHEET INDEX

220 kW pk Control card (LV) - 4 of 4
PHASE-SENSE - 4 sections
RESOLVER - 4 sections
SAFETY - 4 sections
SBC - 3 sections
TEMP - 3 sections
COMMS - 3 sections
CONTROL - 2 sections
VOC-RECEIVE - 1 section
CAN-FD - 1 section
VEHICLE I/F - 1 section
HW A/E - 18 sections - 288 components

NET NAMING

Internal junctions are named for signal group pins

Locality, often made at the IC pin e.g. VDDIC, VDDP

Function, at midpoint of a series pair e.g. SWA, SW

Position, across top between functions e.g. RESIN, V2

All others are explicit design notes

Note names on another sheet - none not joined ONLY at the

Internal connection labels (see INTERNAL LABELS Design Issues)