
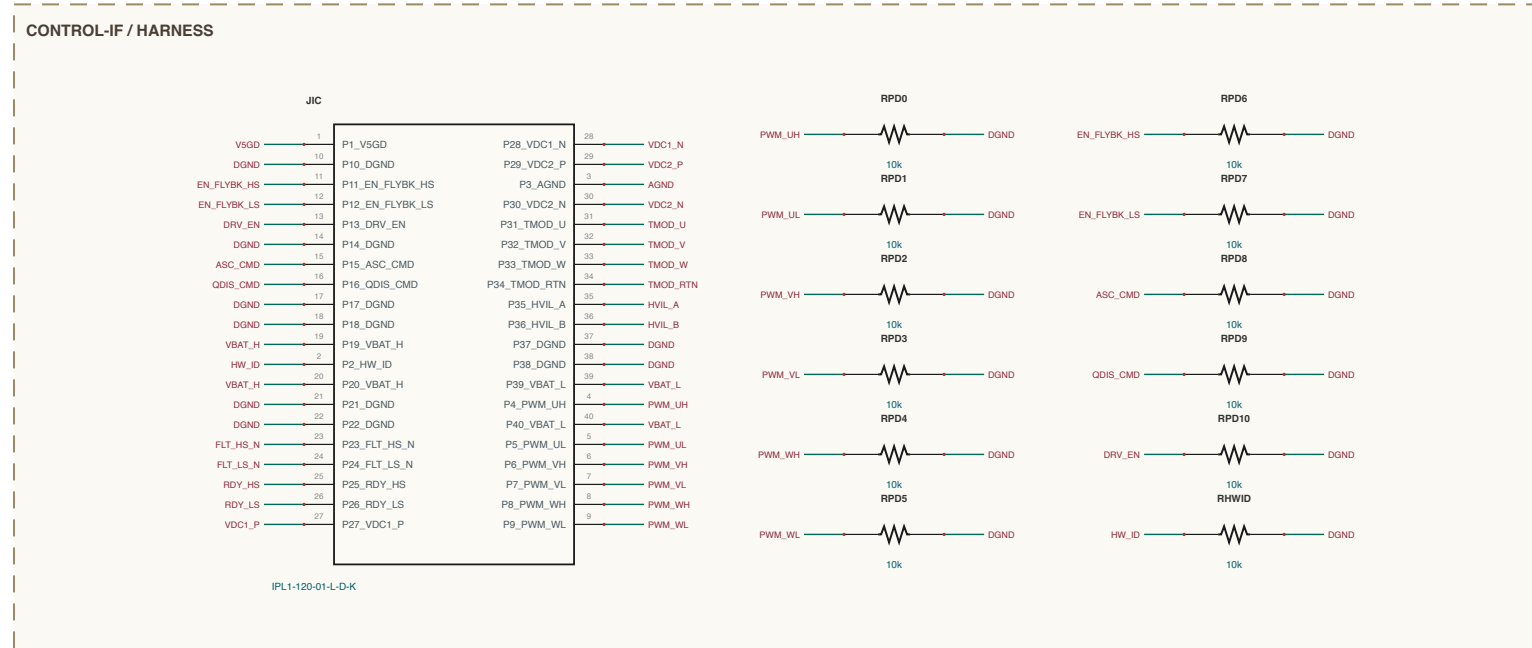
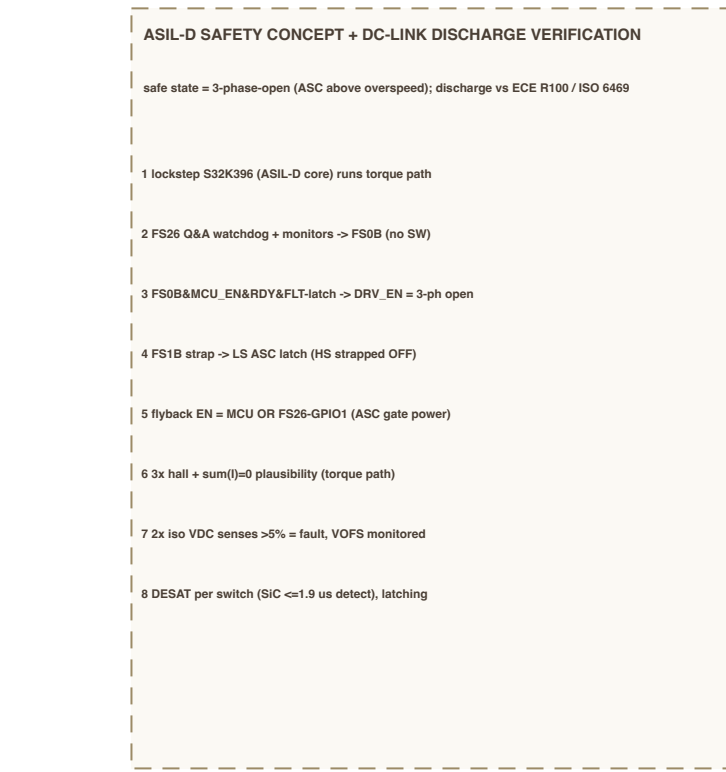
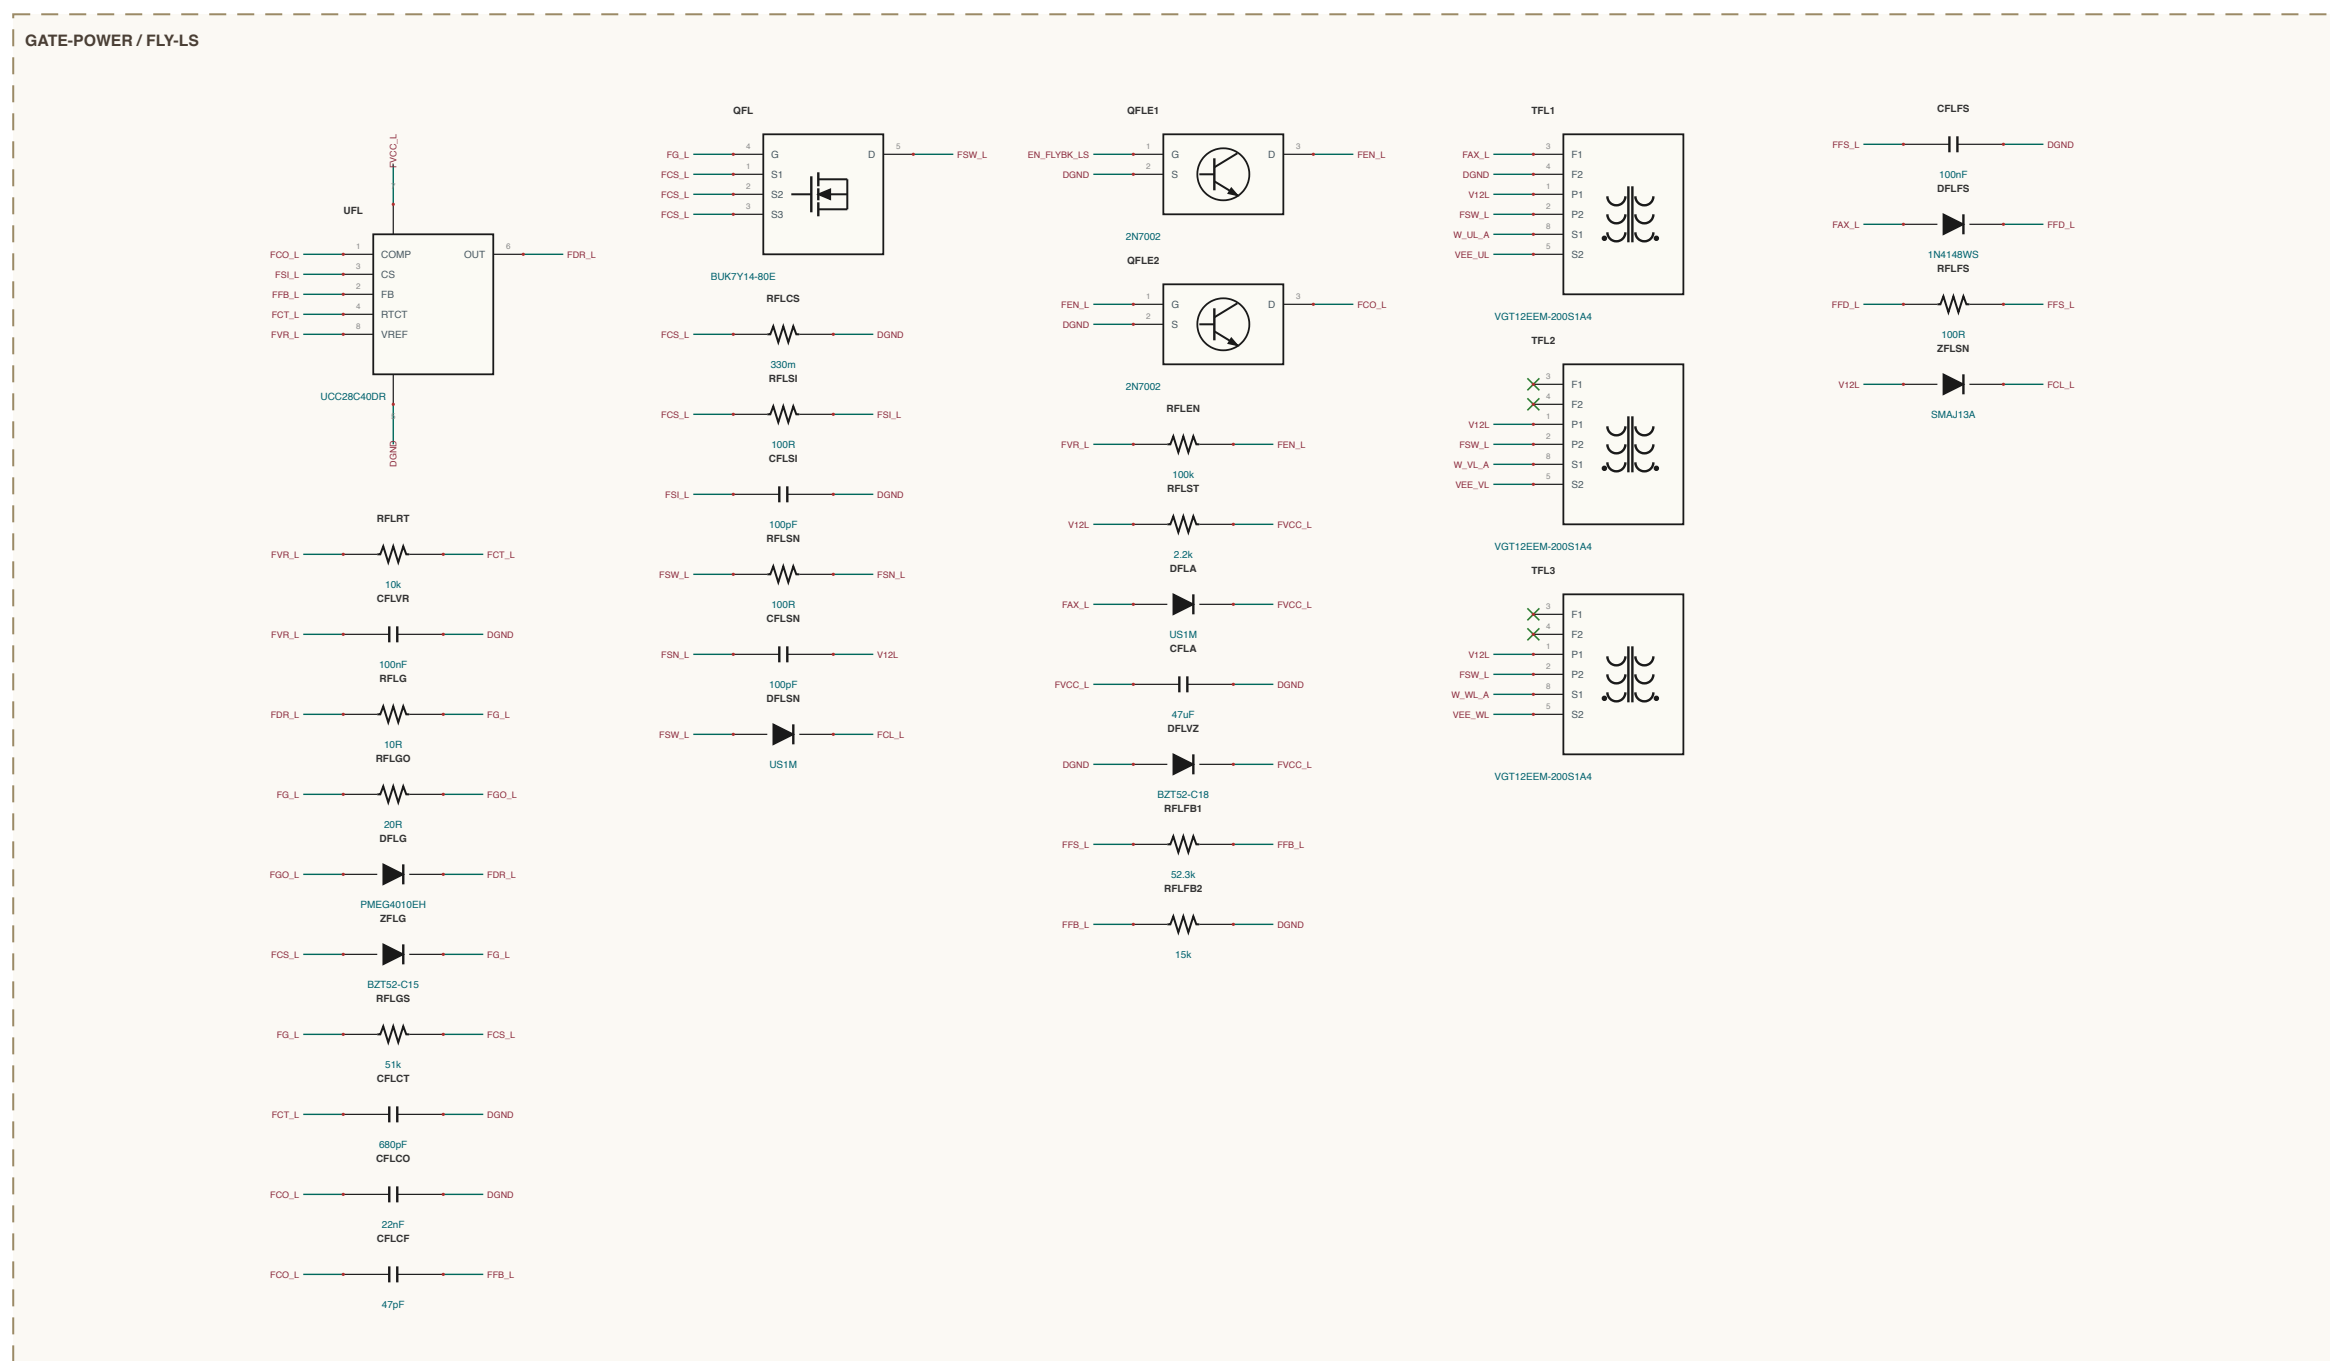
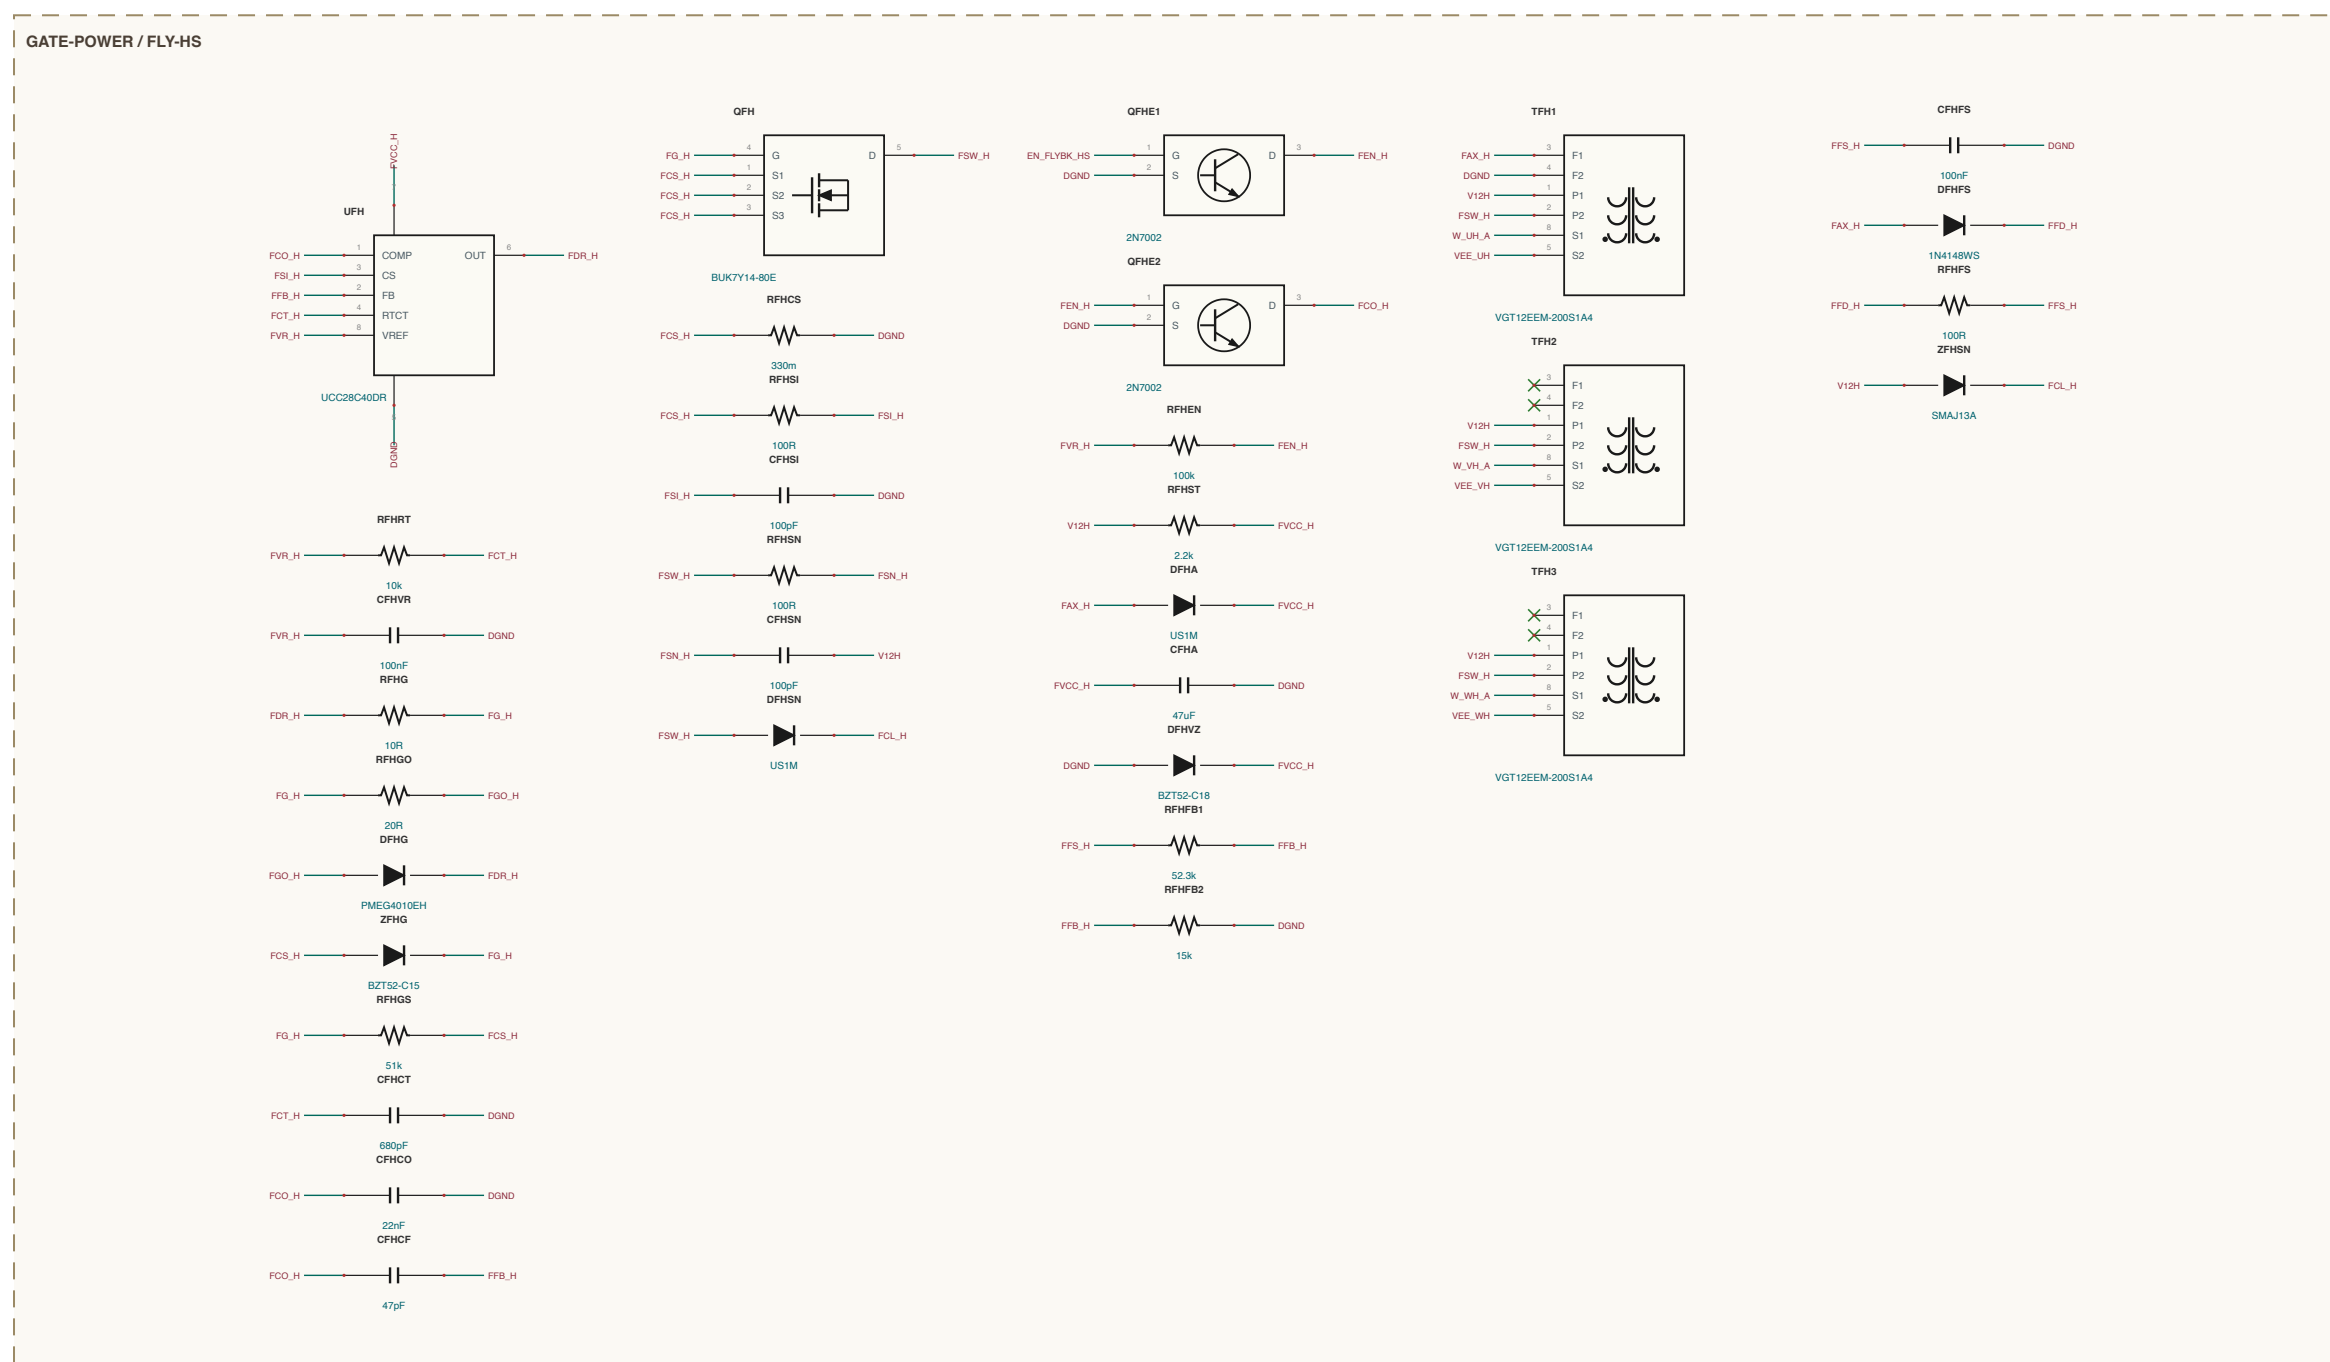
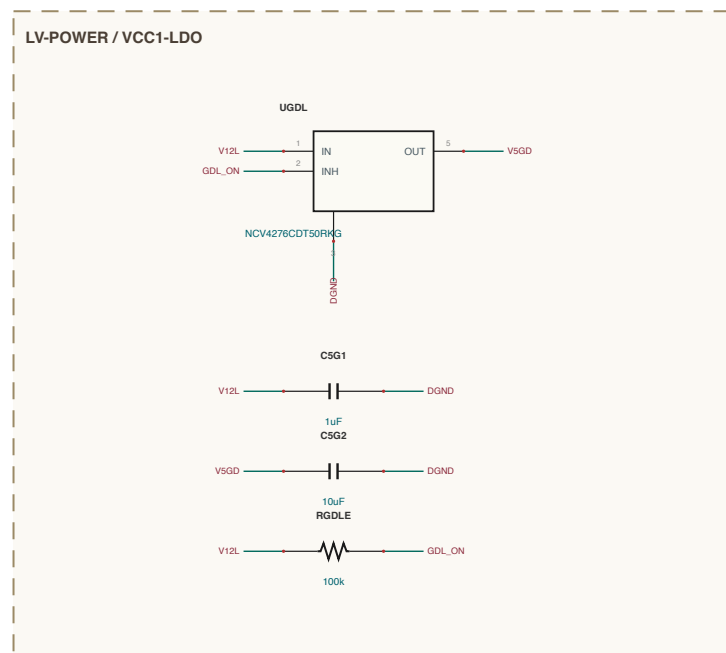
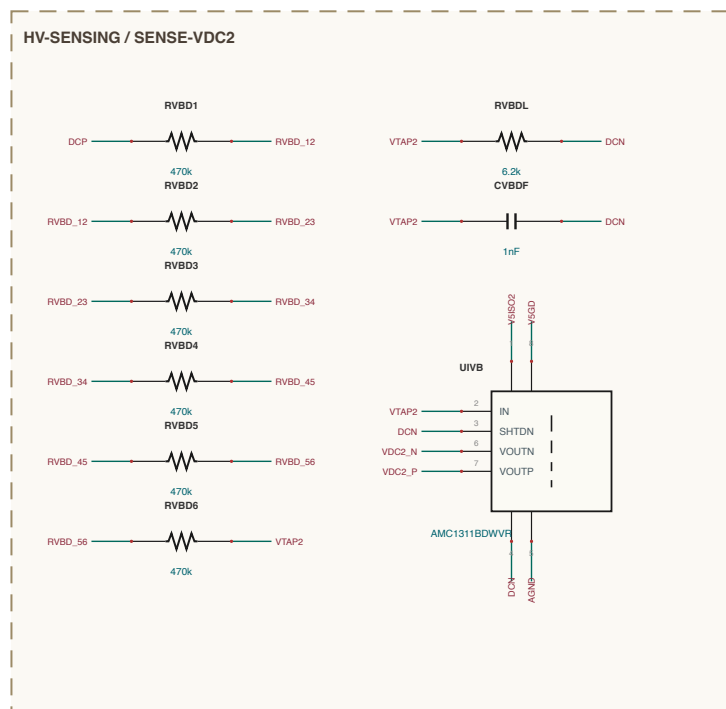
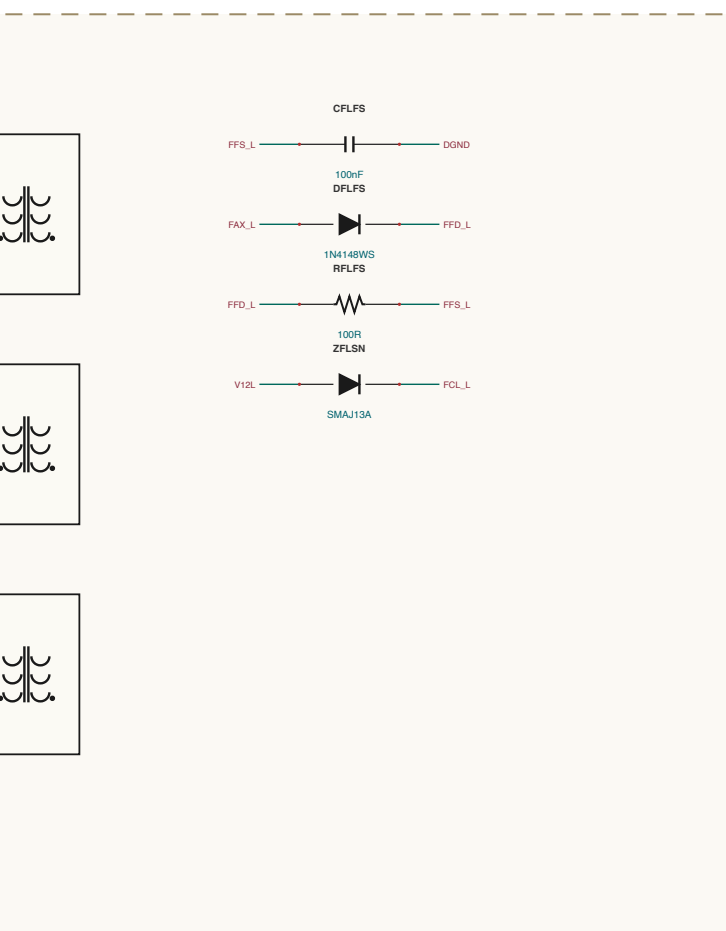
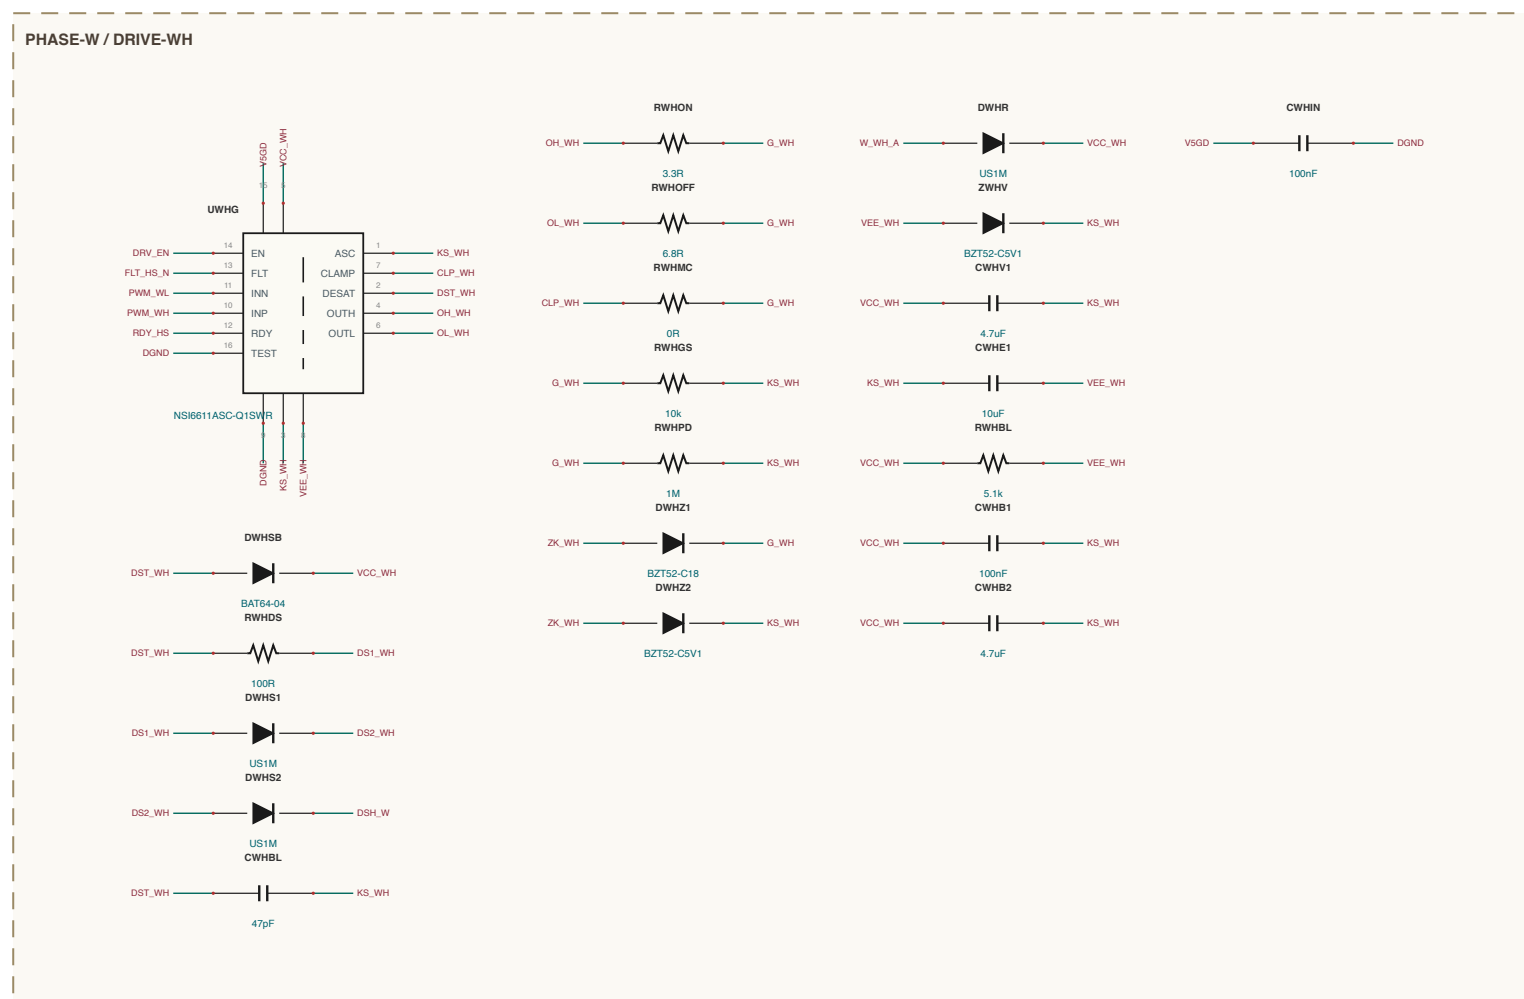
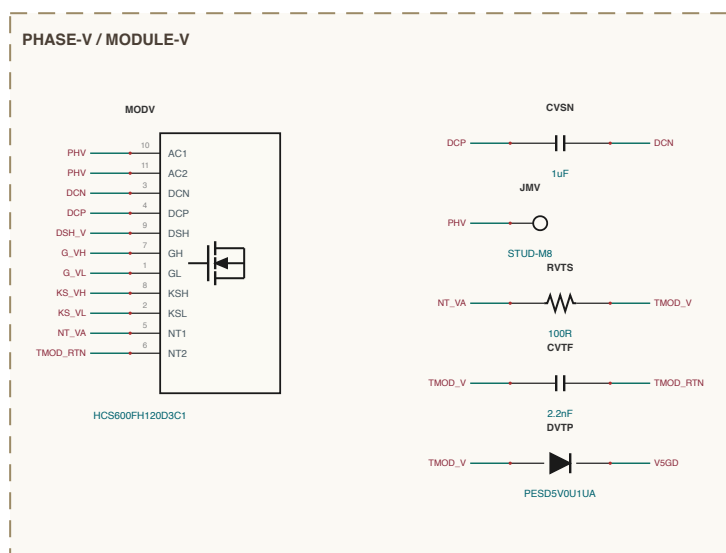
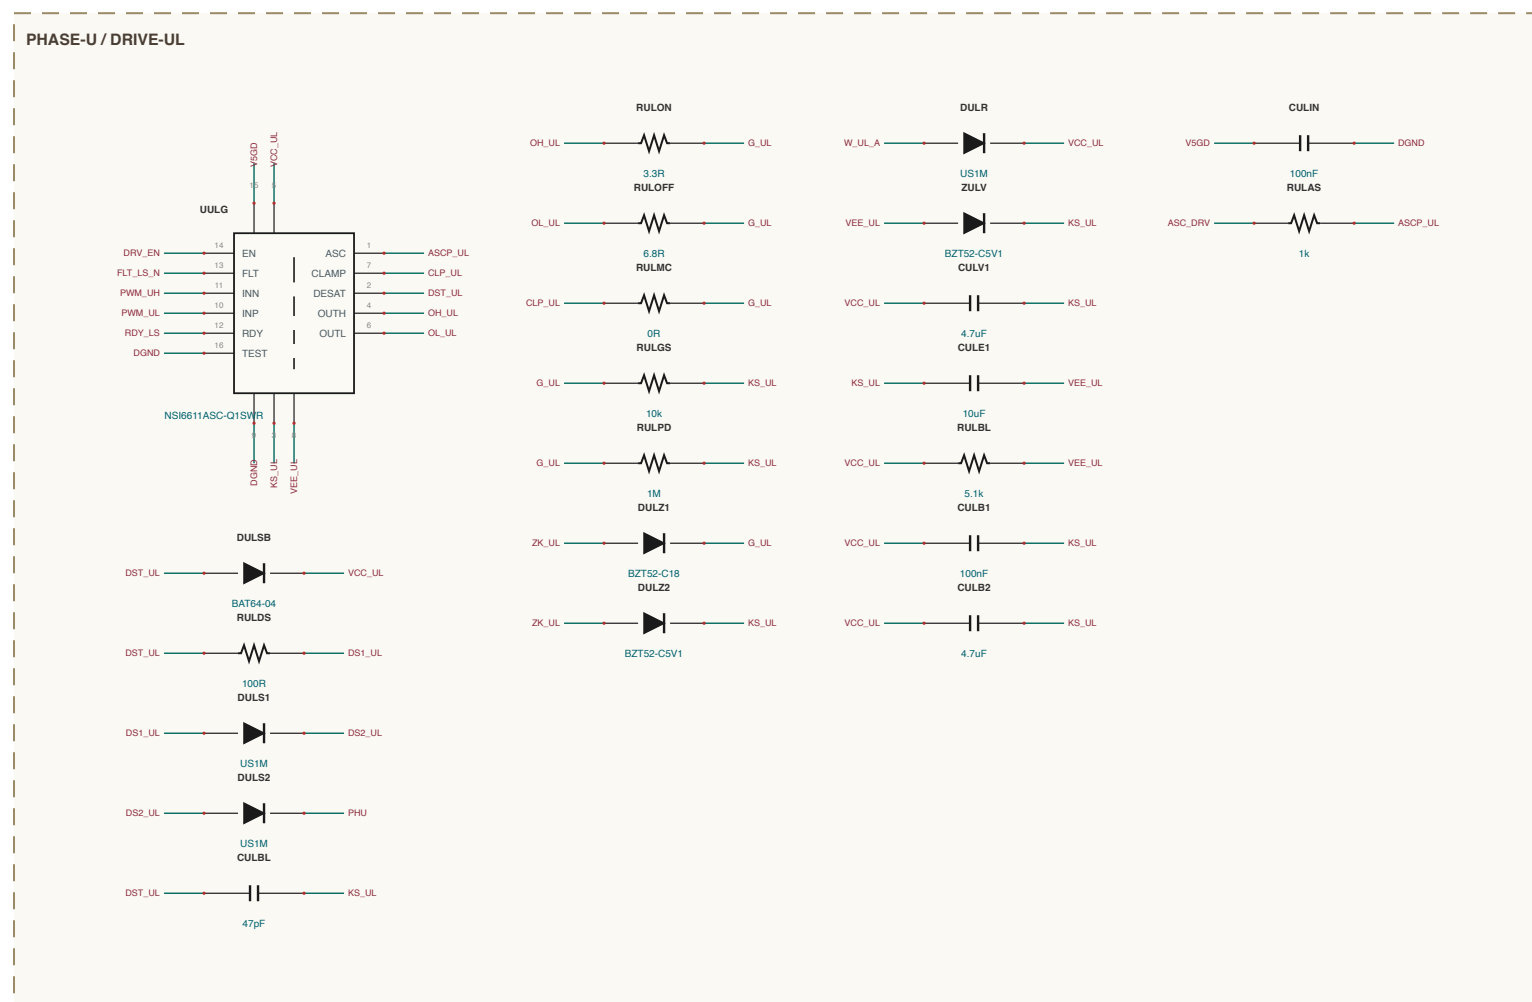
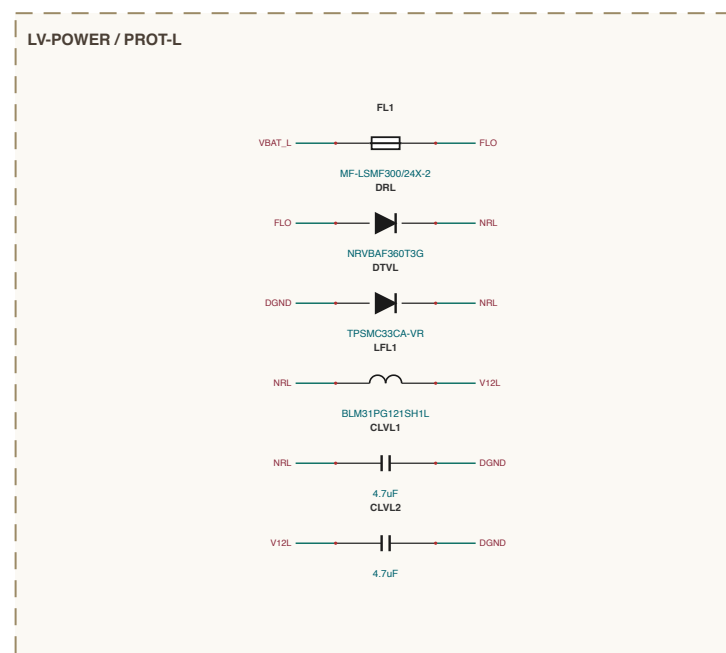
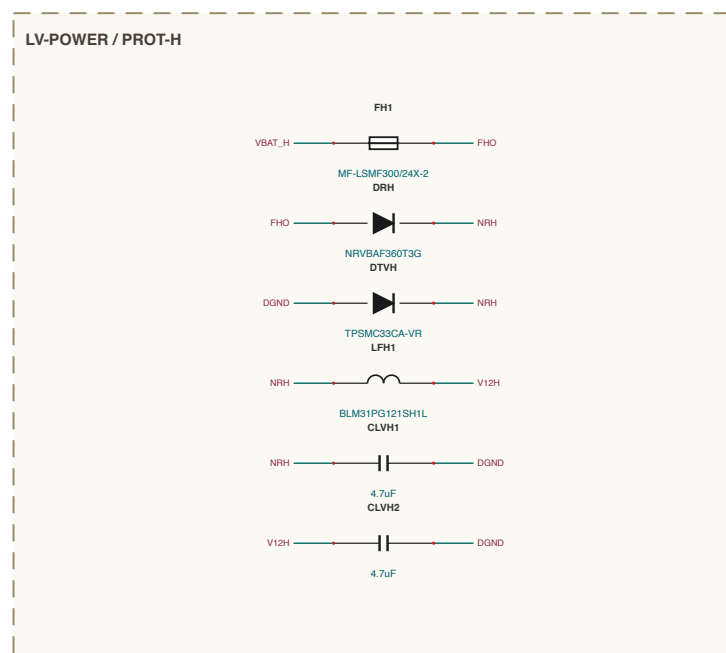
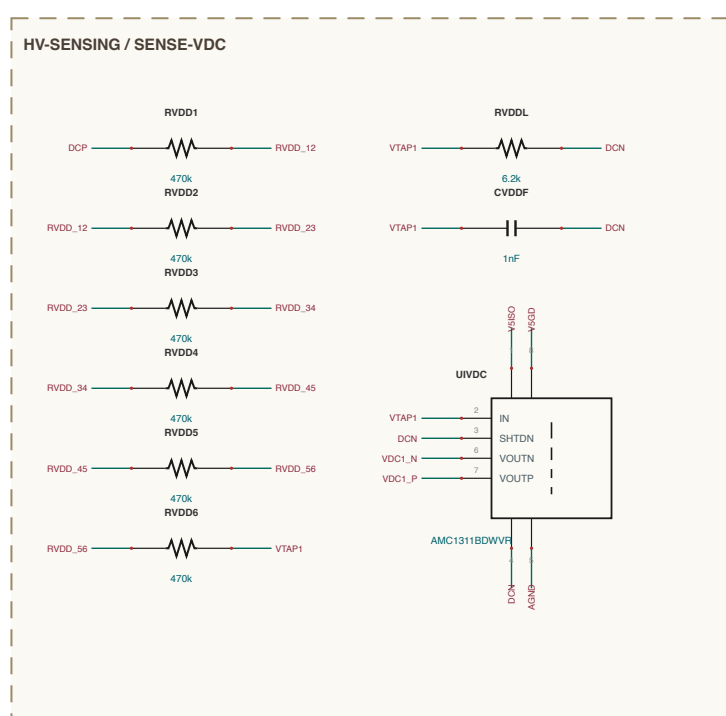
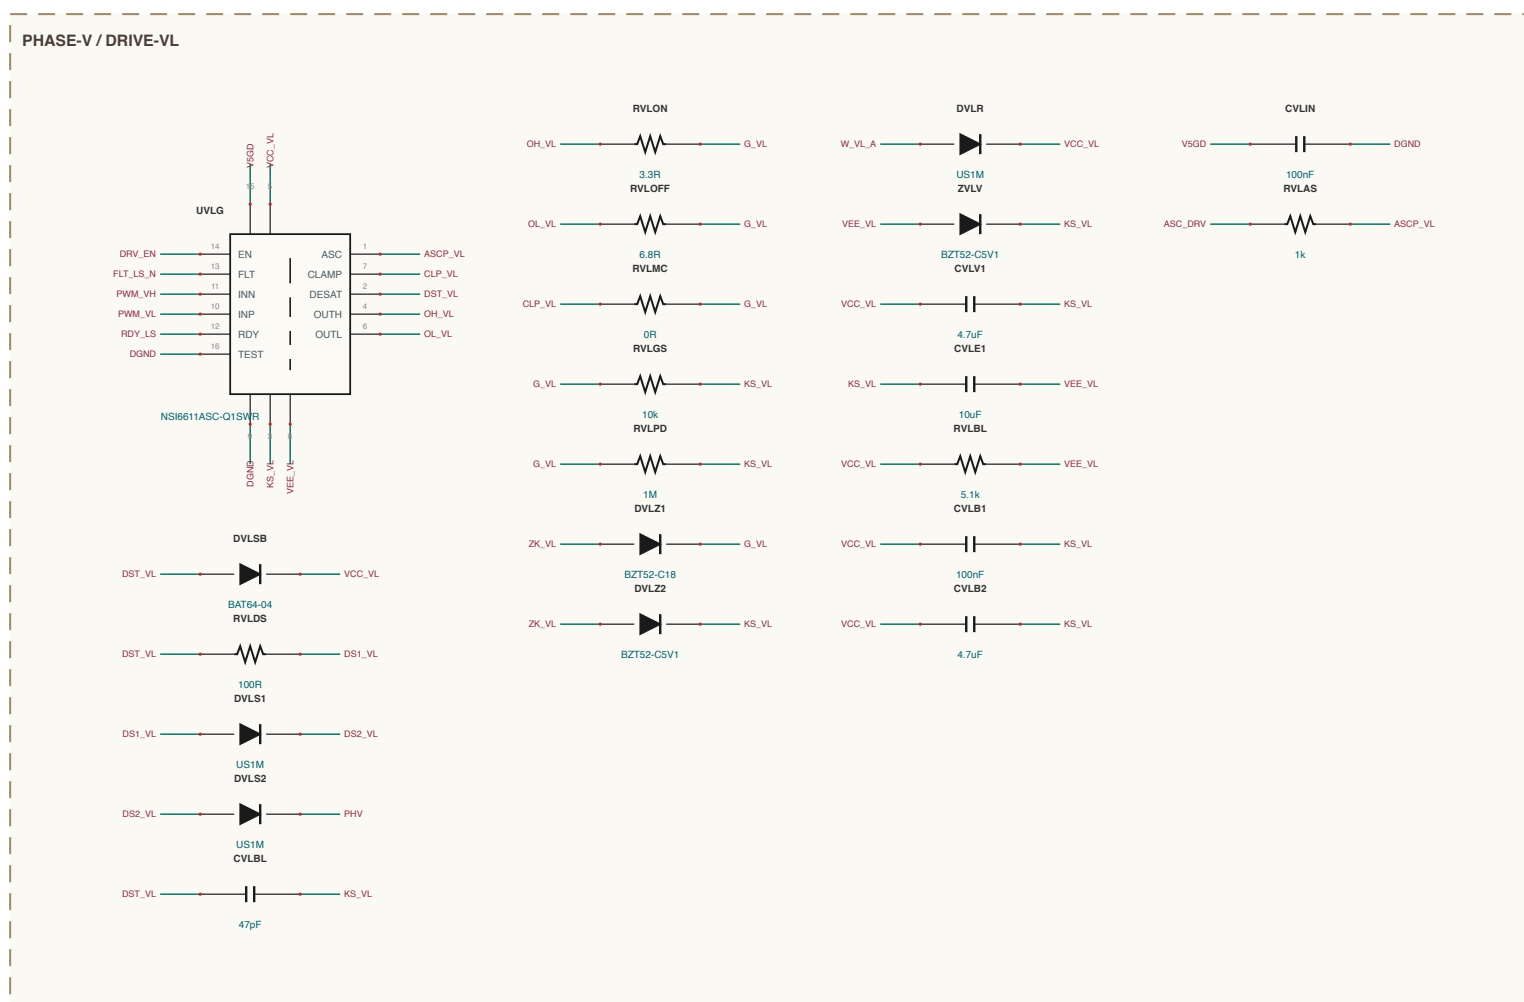
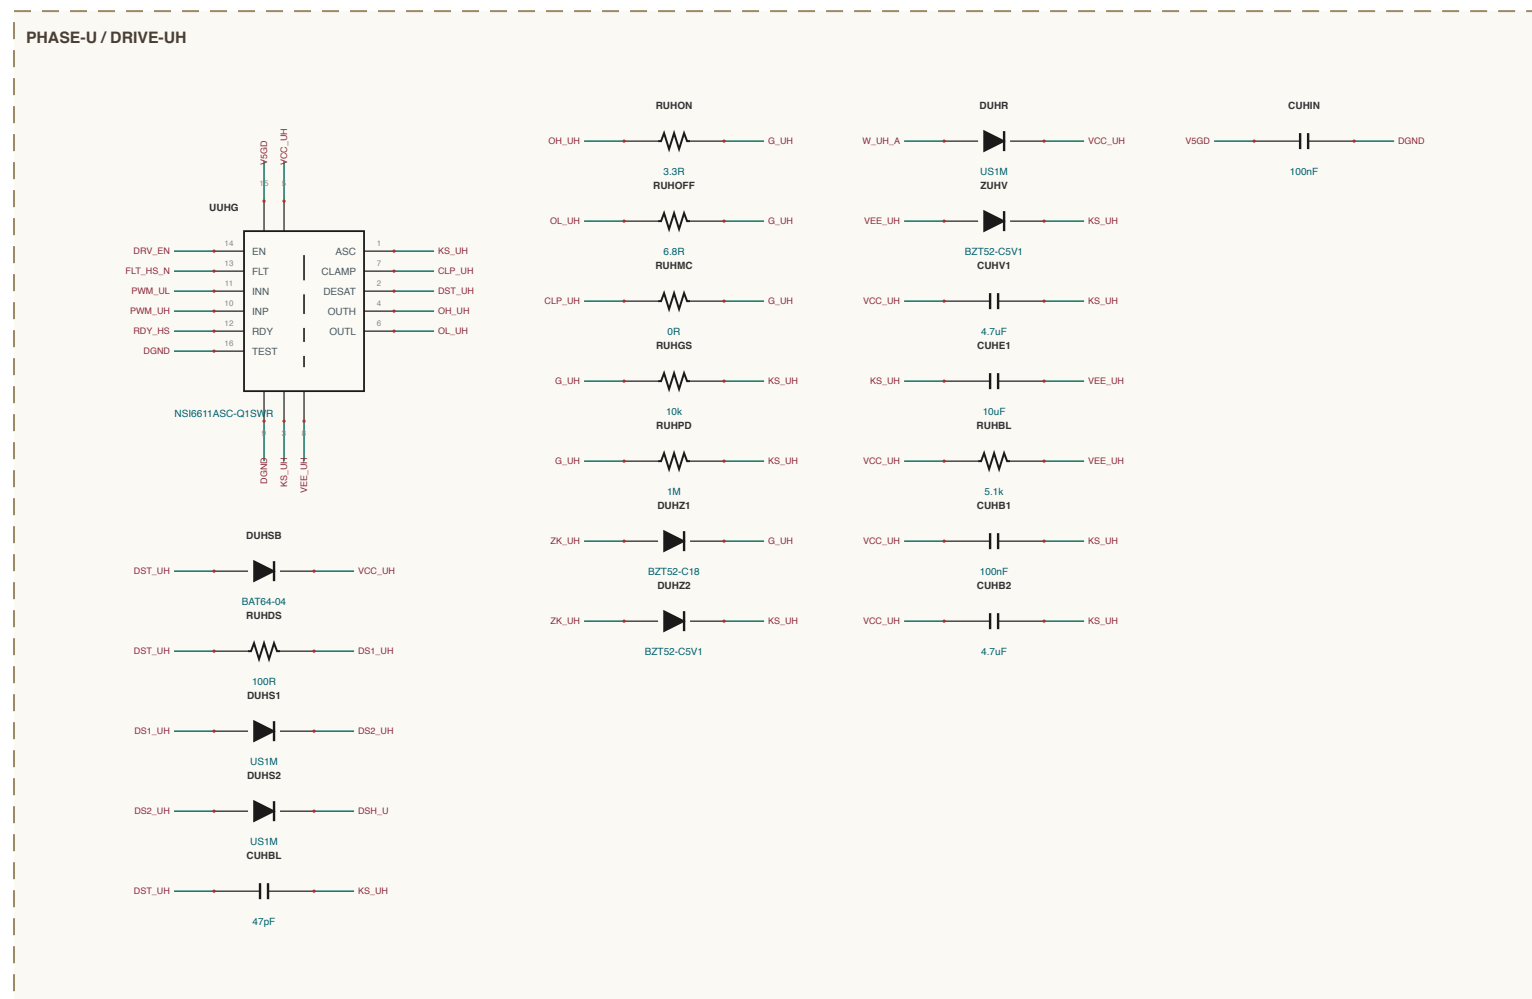
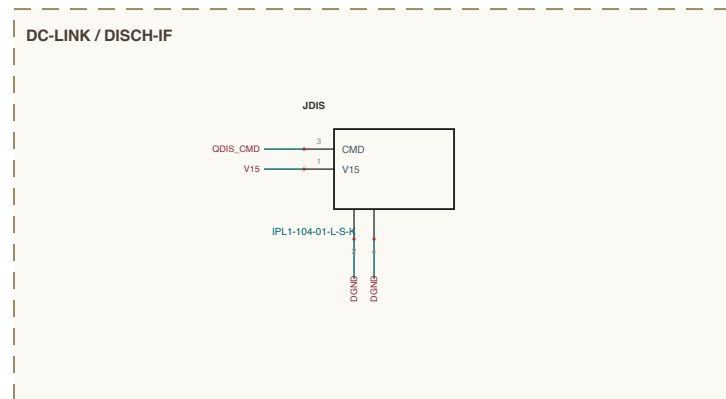
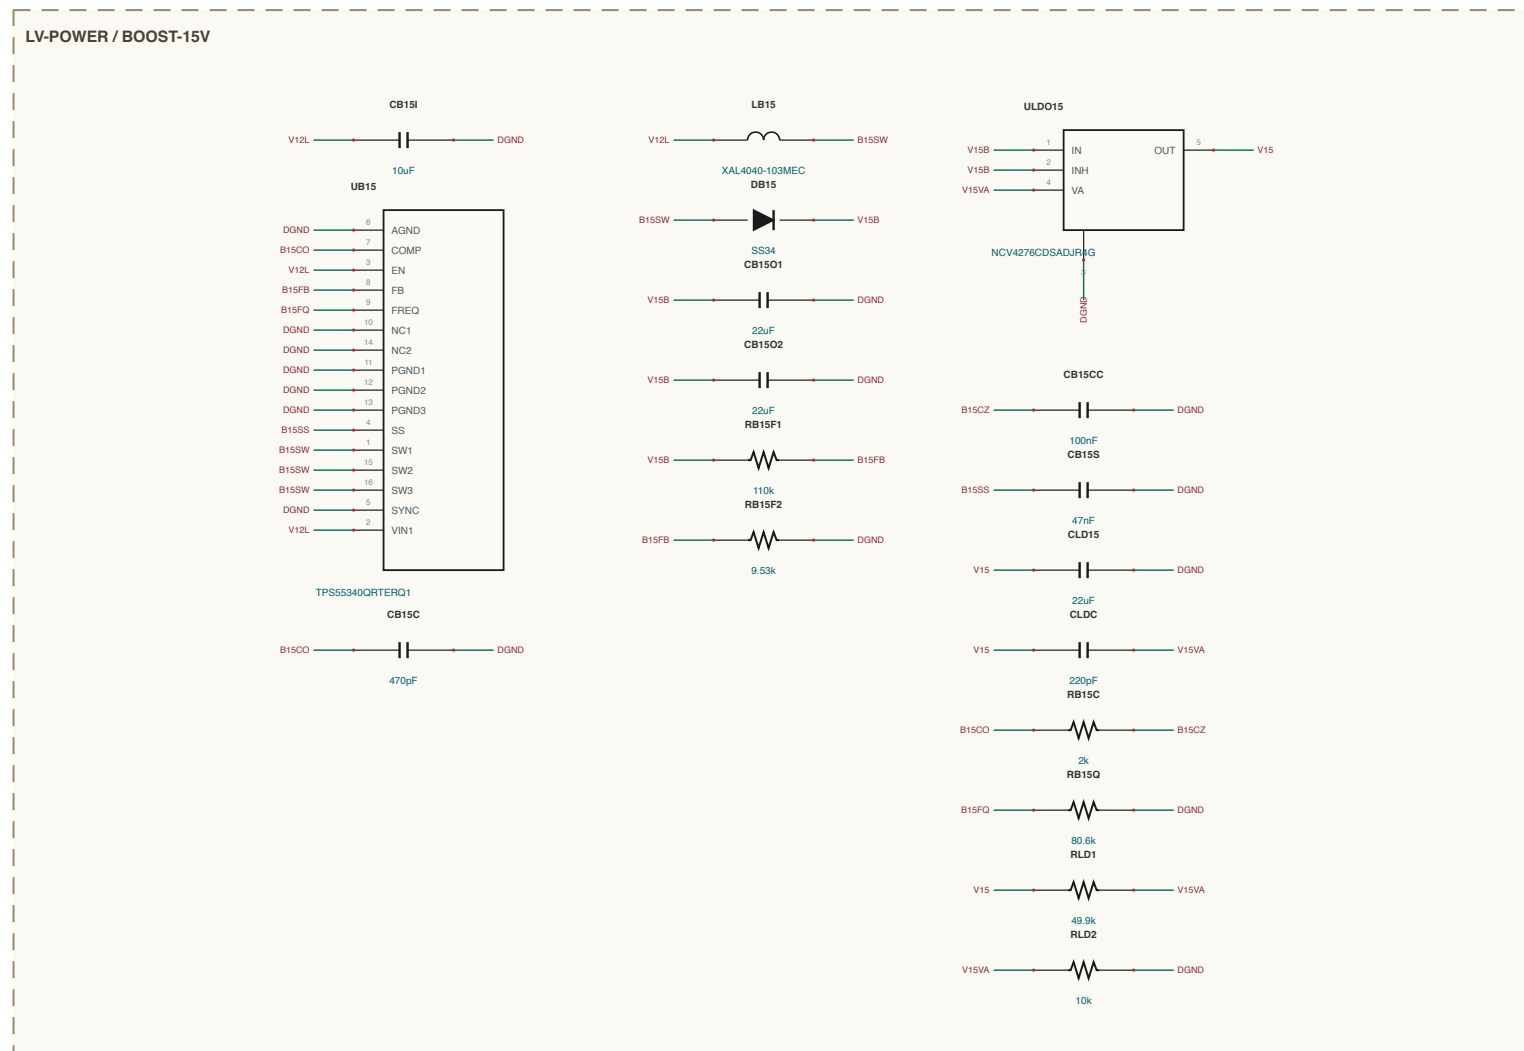
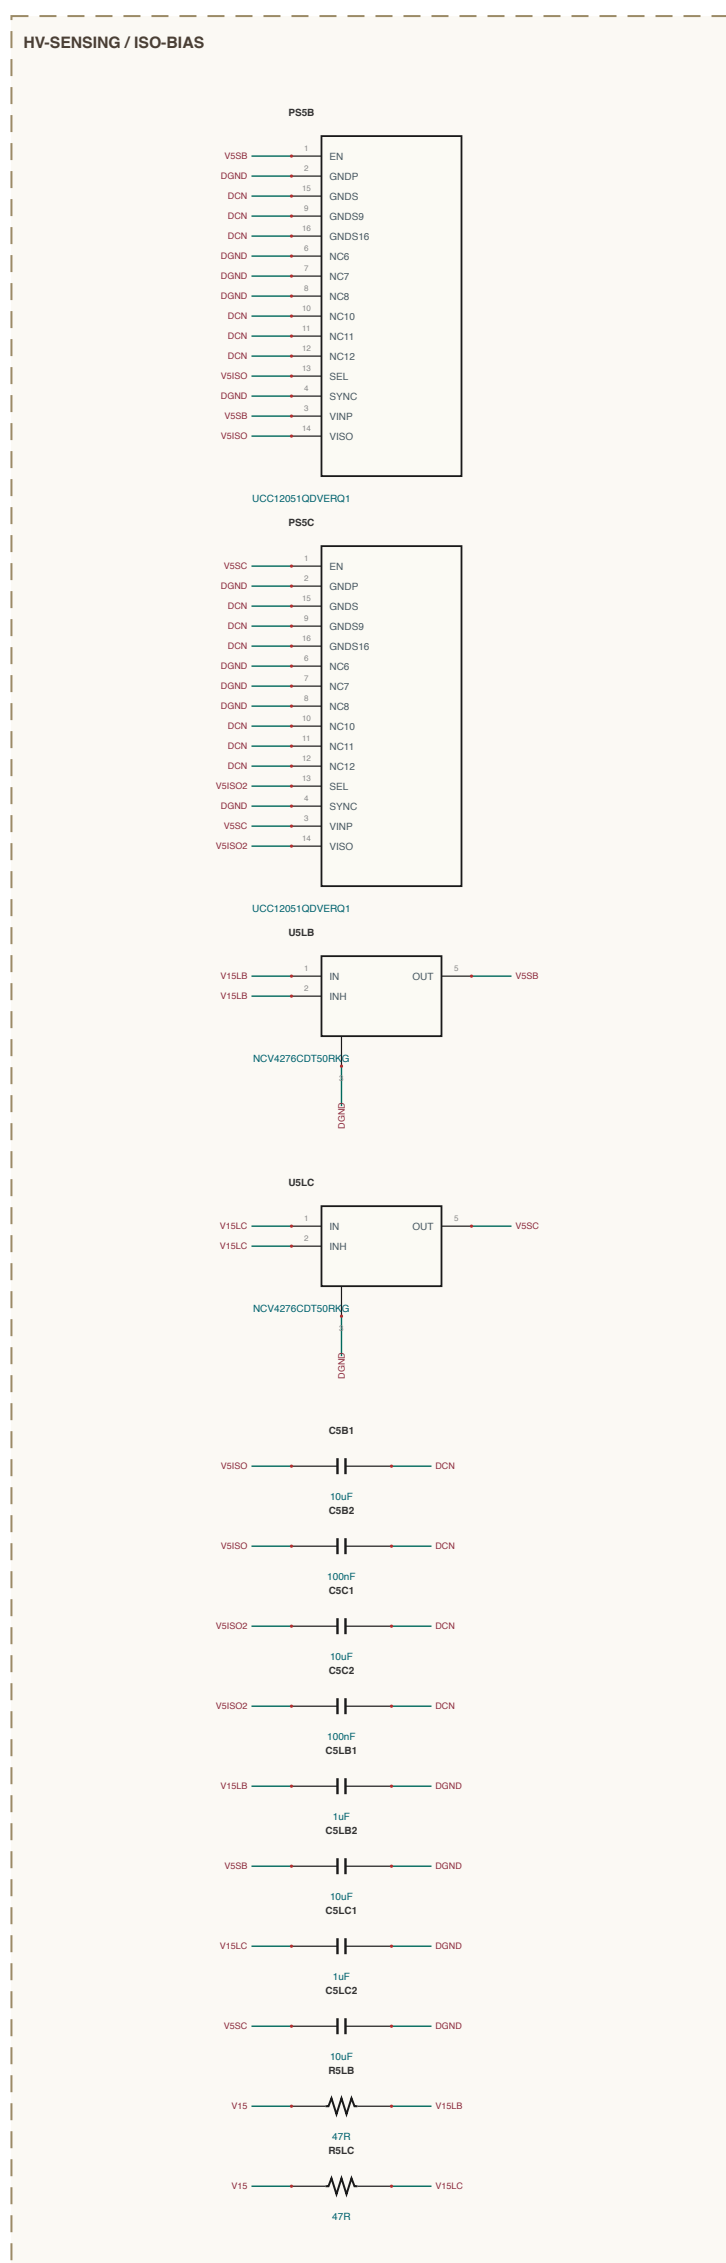
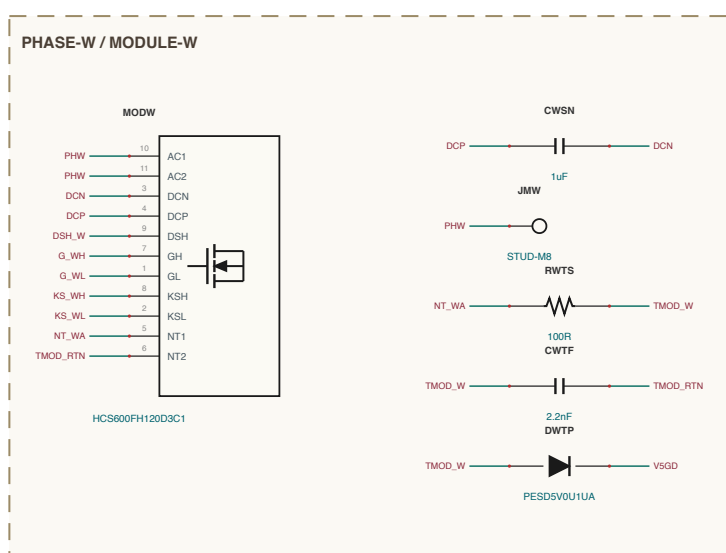
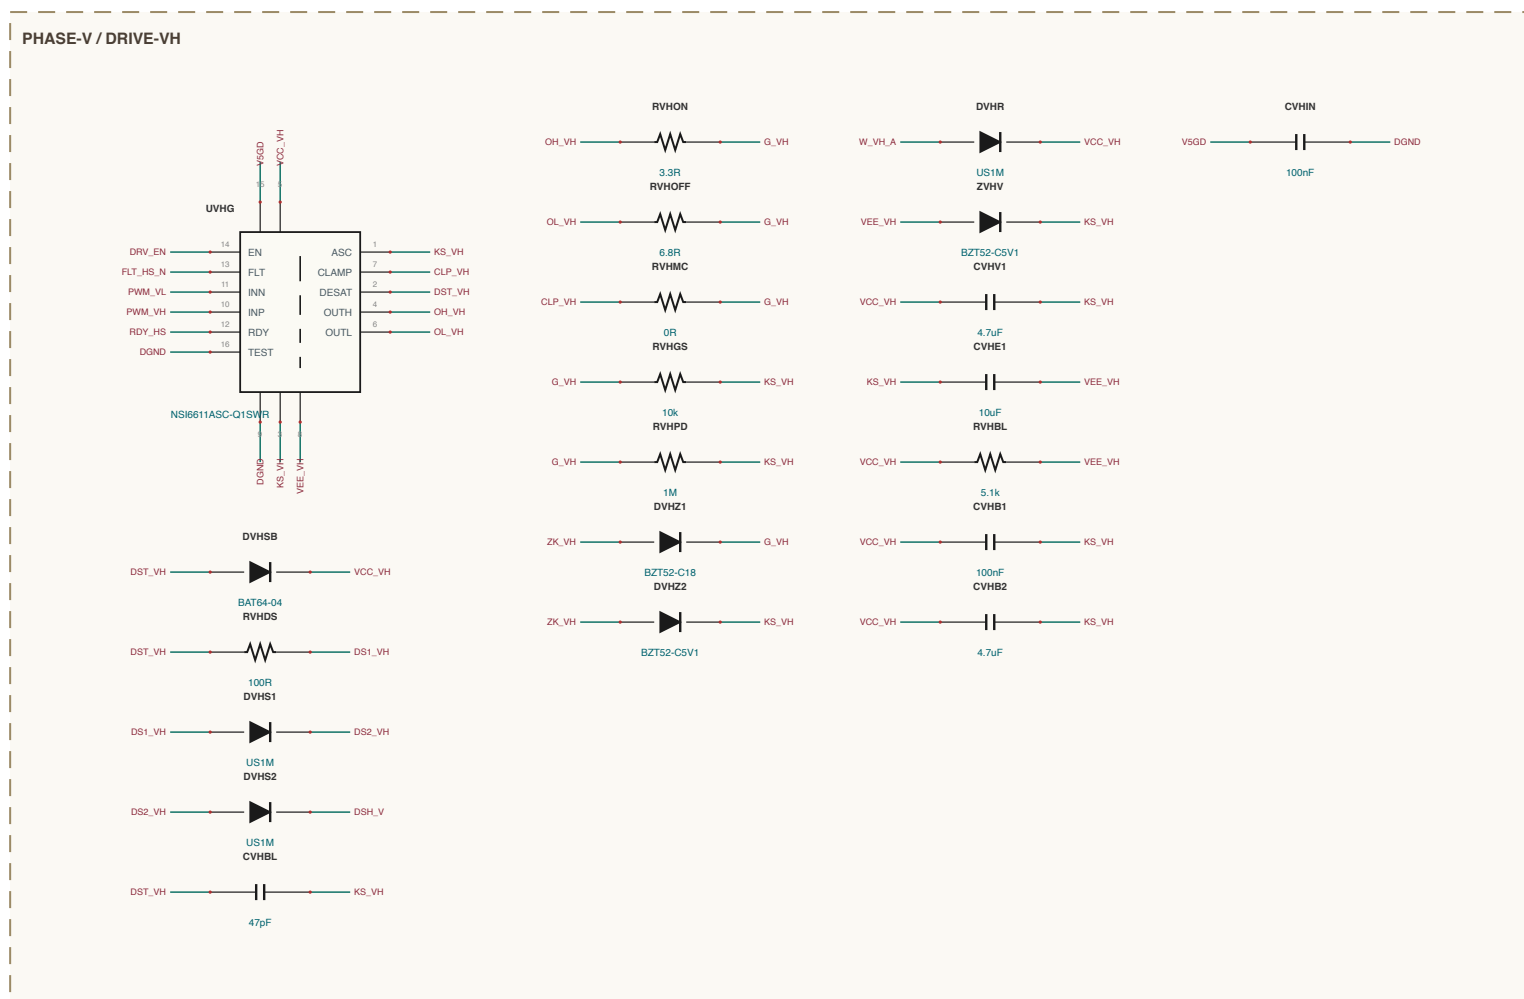
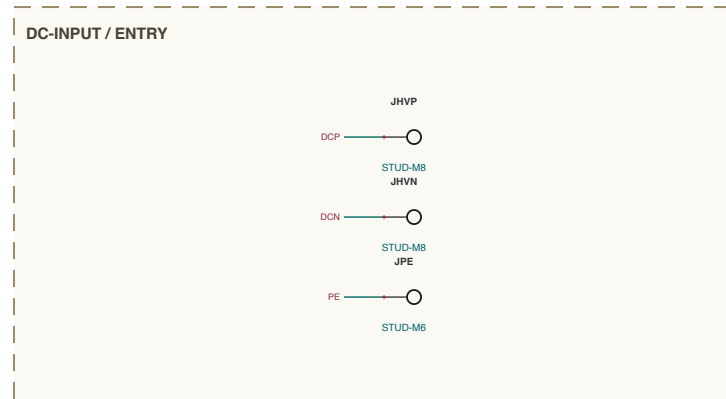
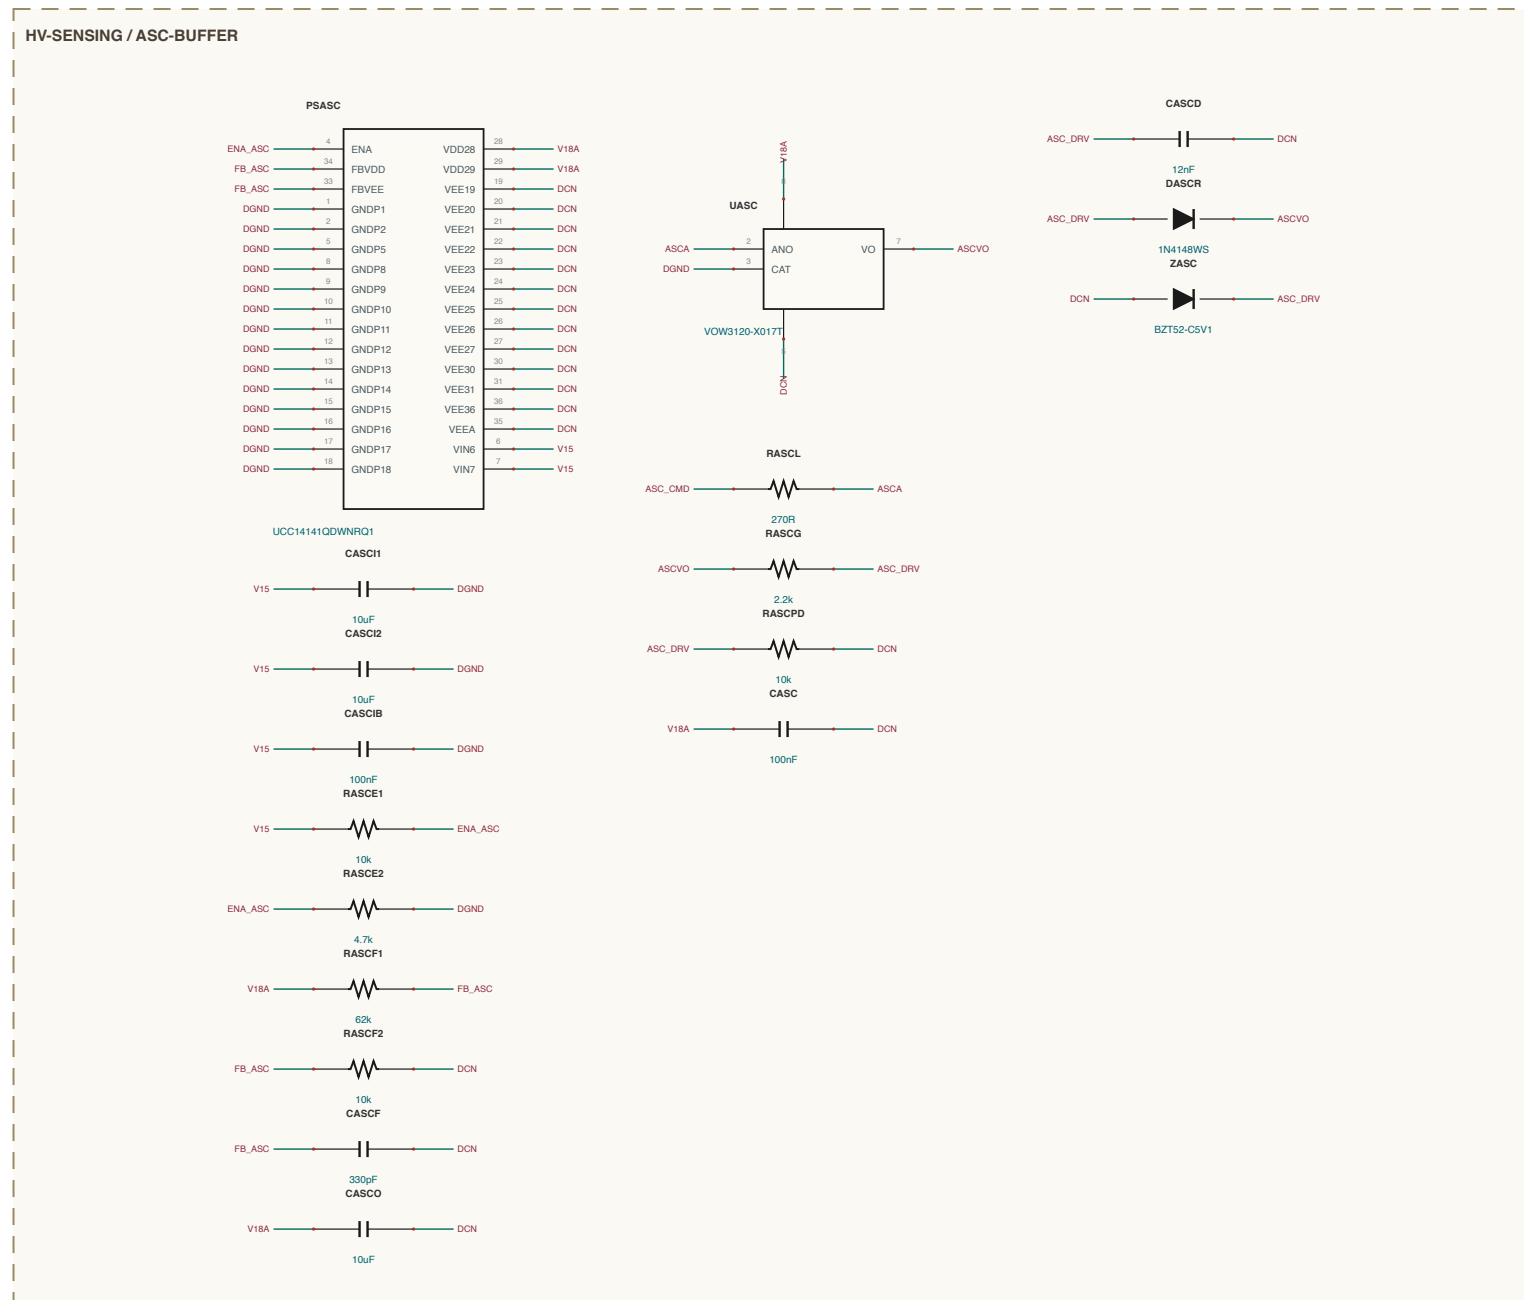
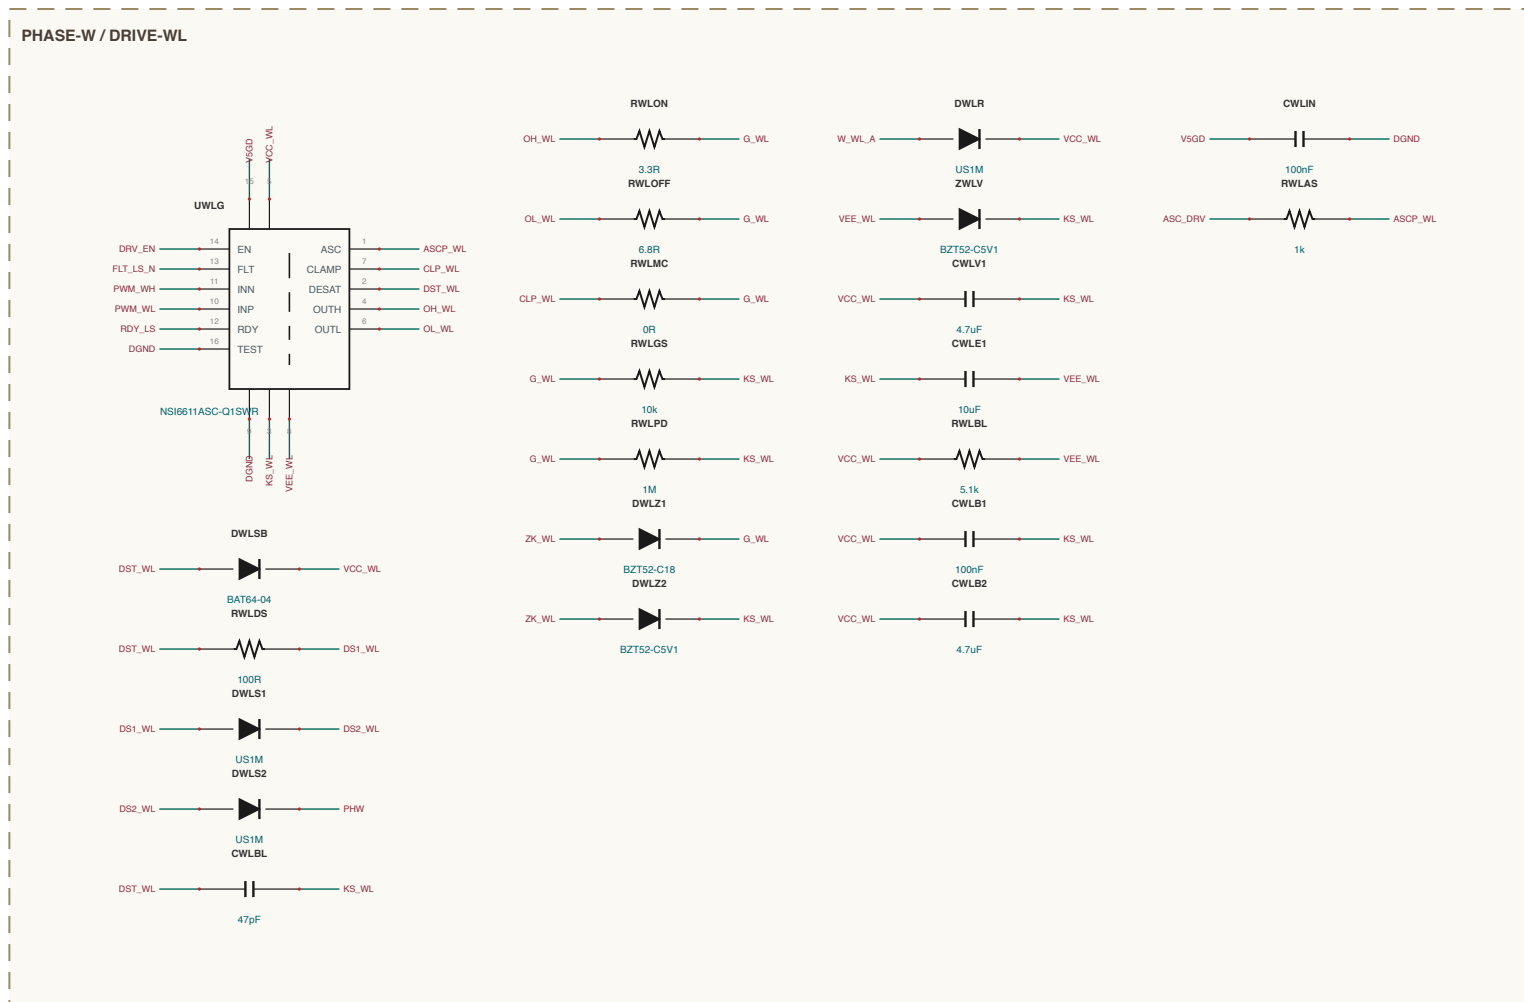
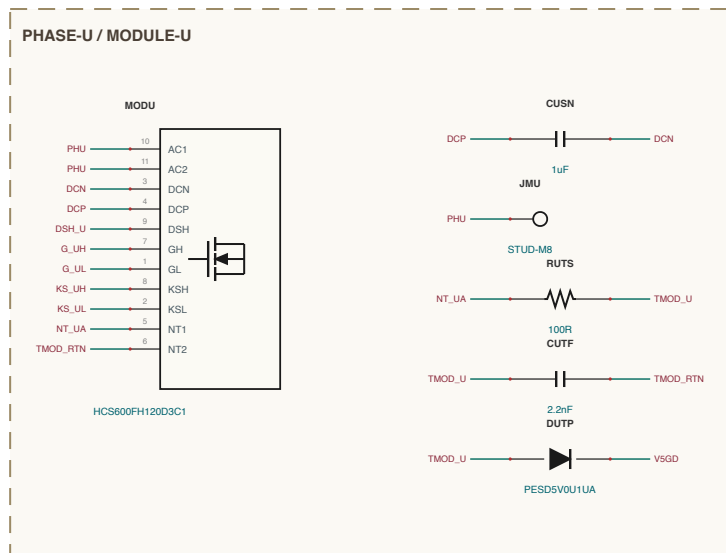
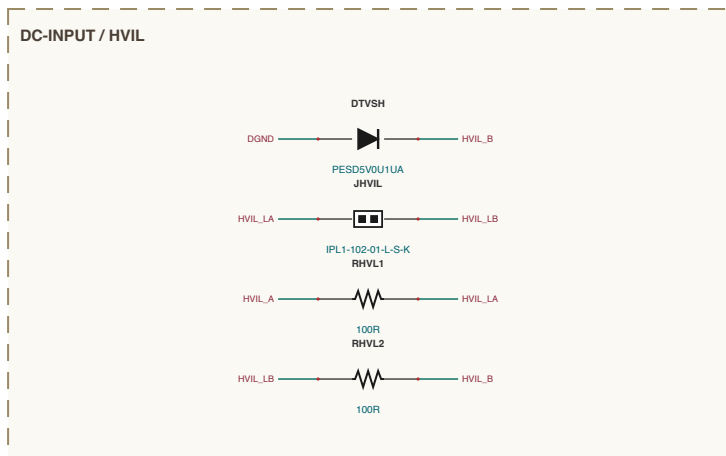


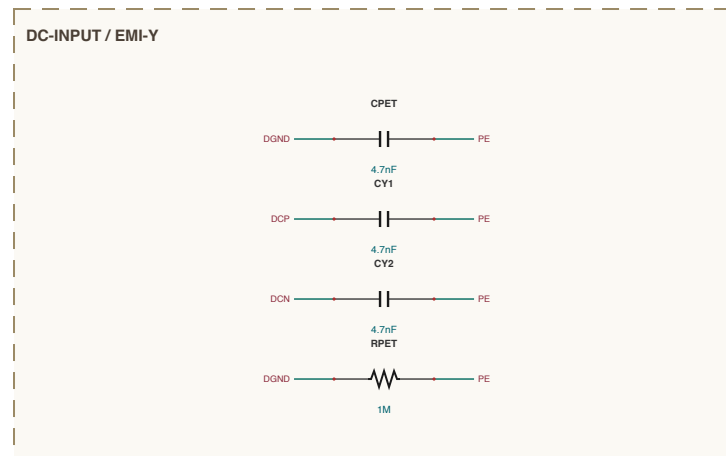

NET NAMING

Internal junctions are named for what they join

Use the `<PIN>` node at that IC pin e.g. `UNDC_VBP`

Residence_III subpoint of a series pair e.g. PIR.A_M

Residues: cross lag between Residues-*vars* e.g. ITD

all others are explicit design not.

same name on another sheet = same net, joined ONLY at the

named connector/slug/slab (see [INTERFIBO4/FIO LINKS](#), design basis).

Traction Inverter 220 kW — Power board (3x EconoDUAL 3 SiC)

Traction Inverter 220 kW pk - Power (HV), sheet 1 of 4

2026-09-23 · rev A.19