
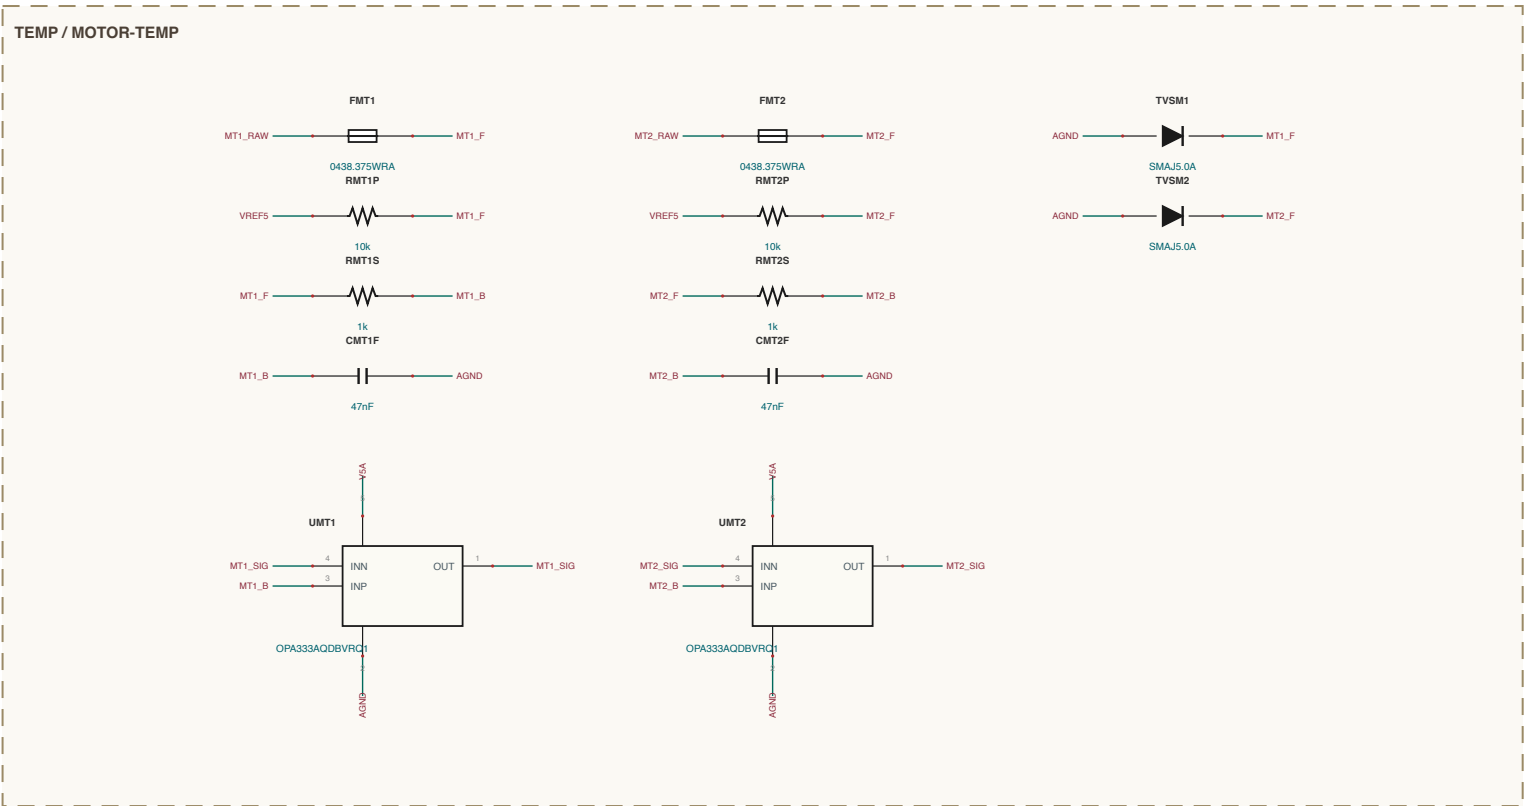
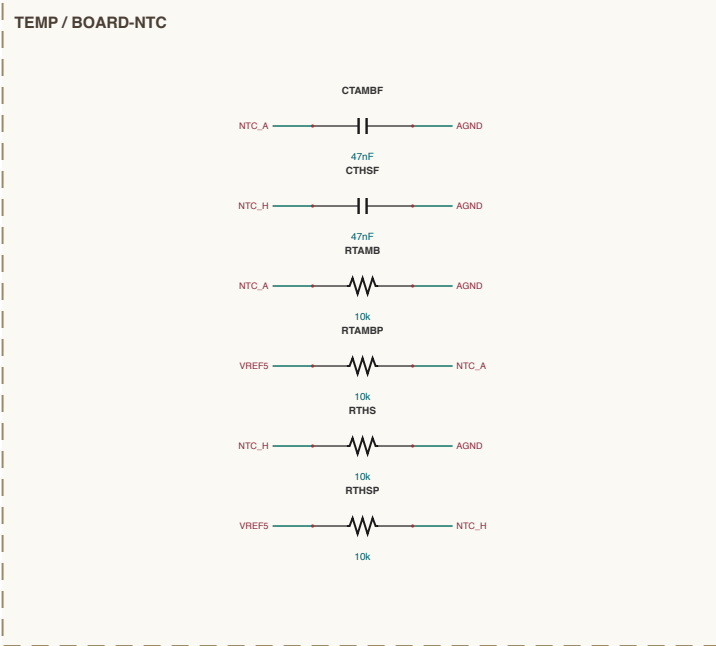
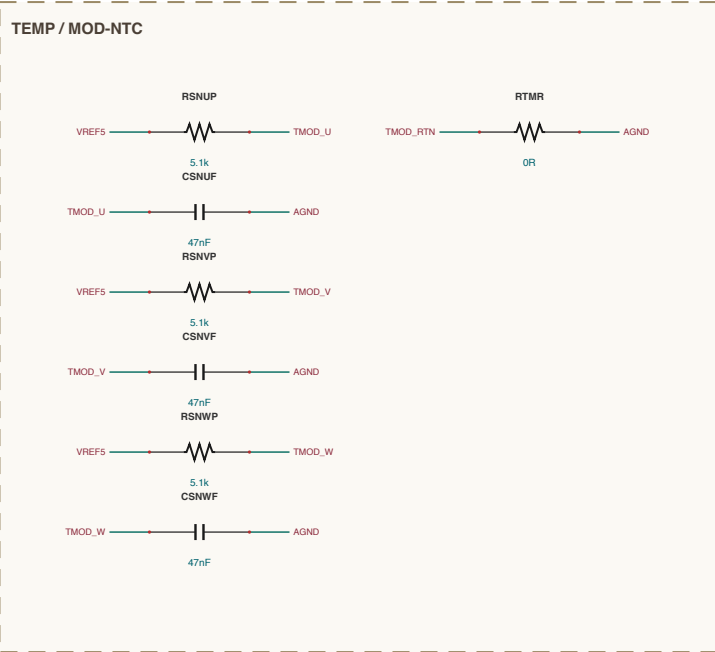
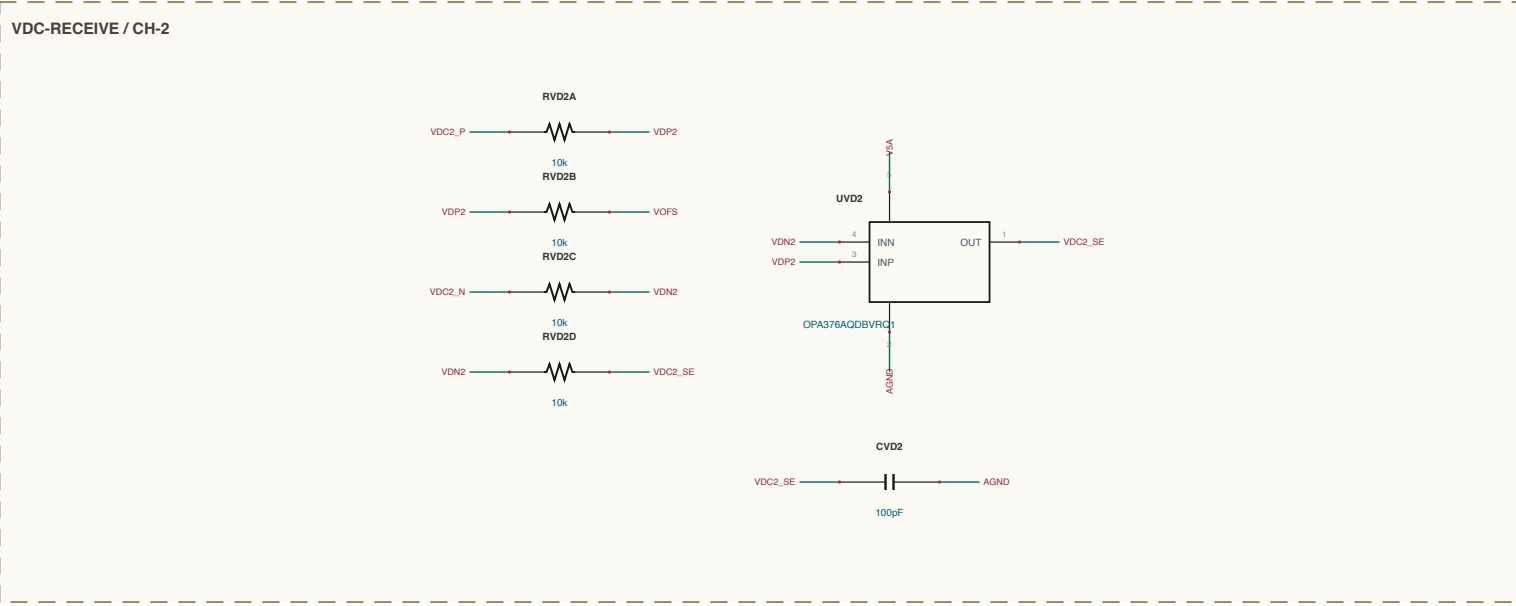
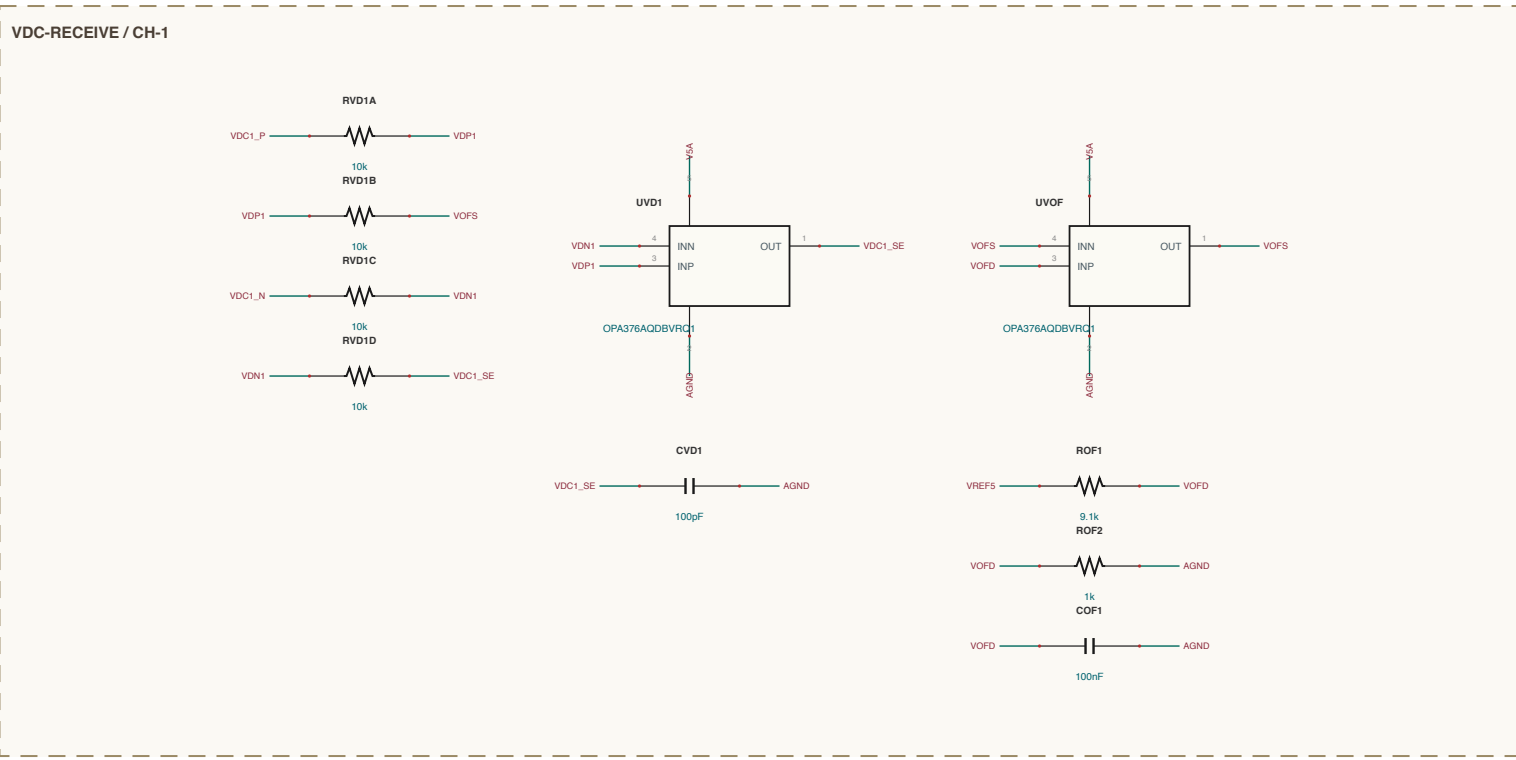
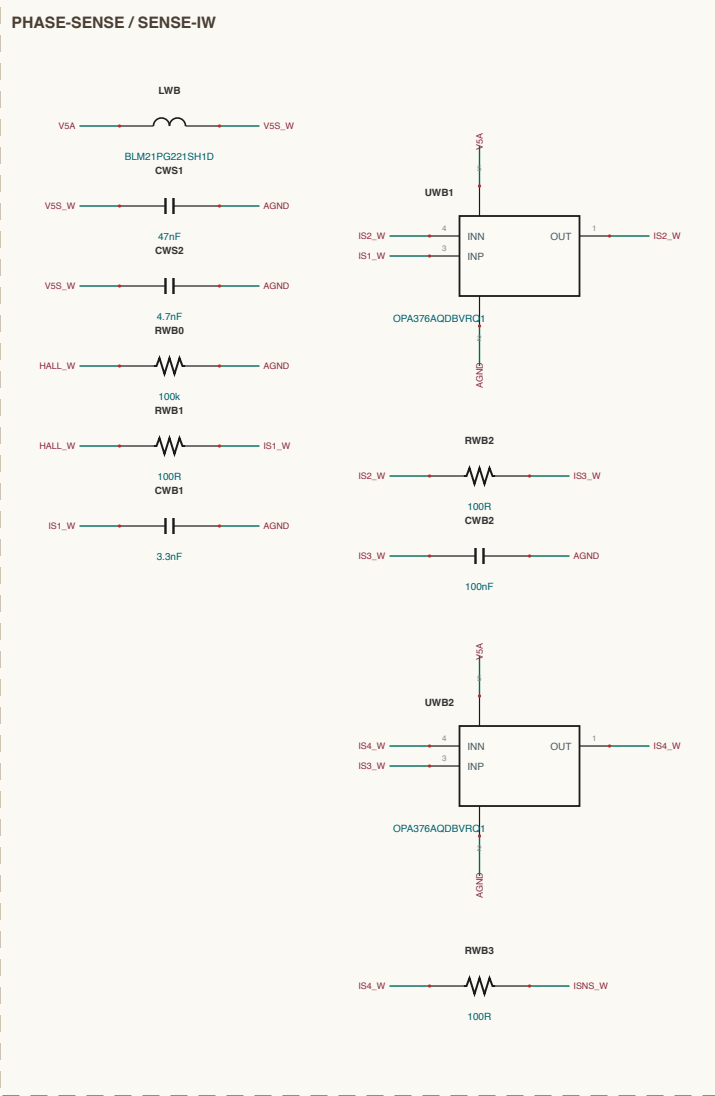
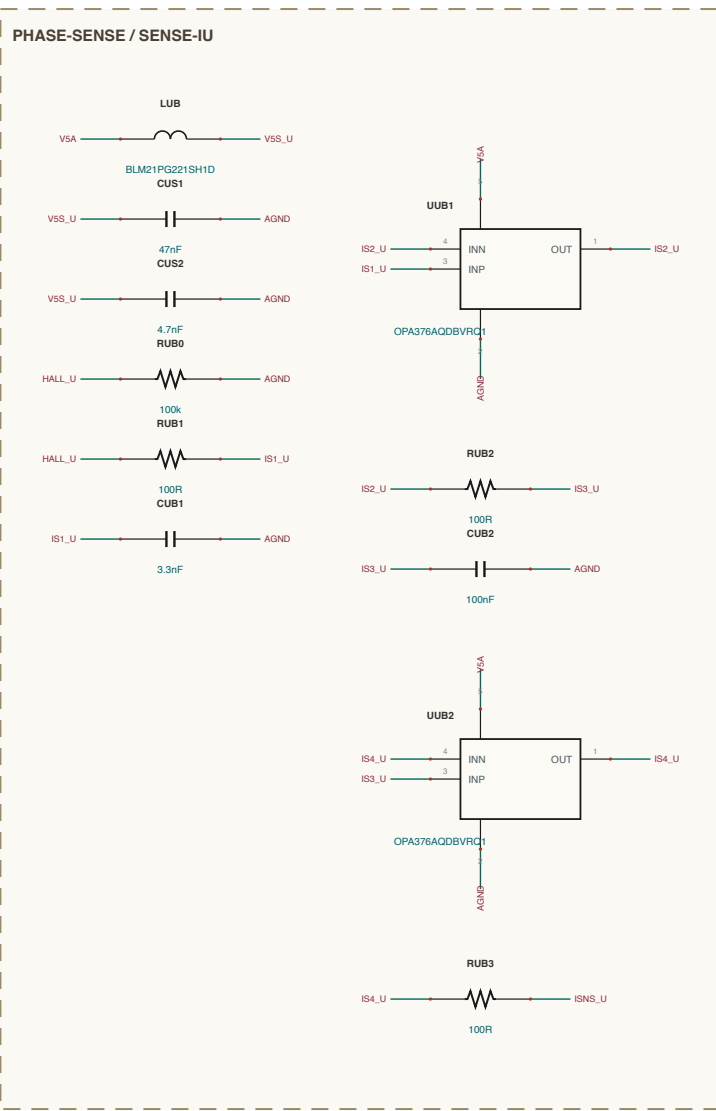
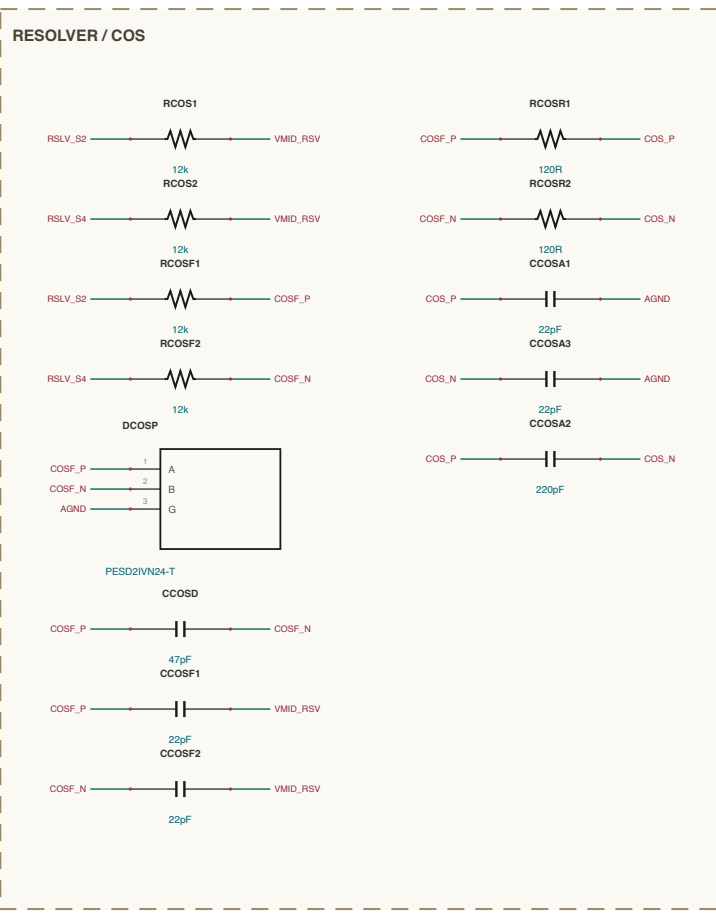
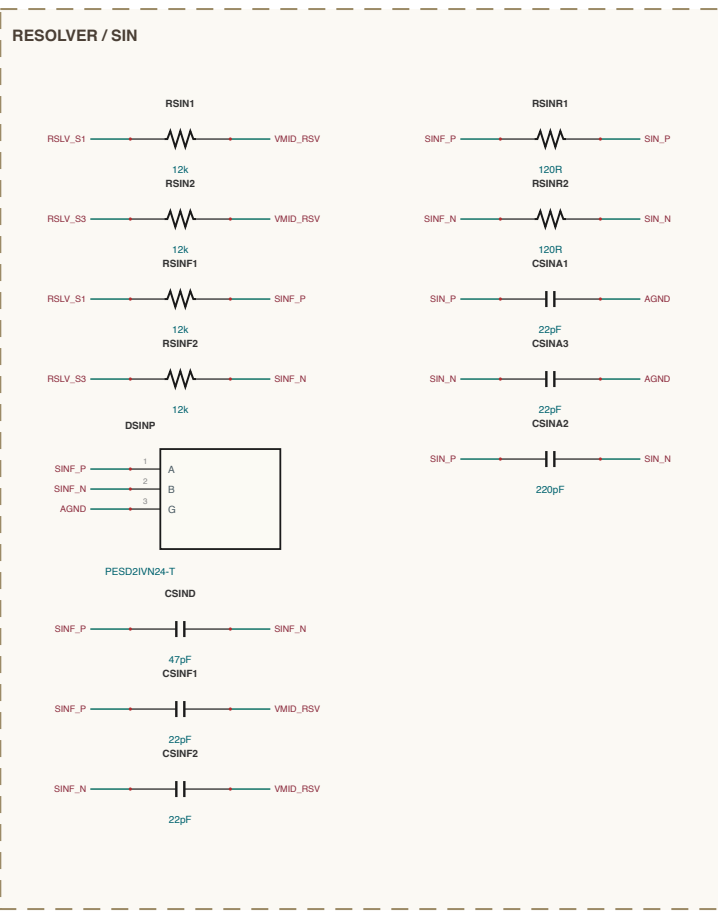
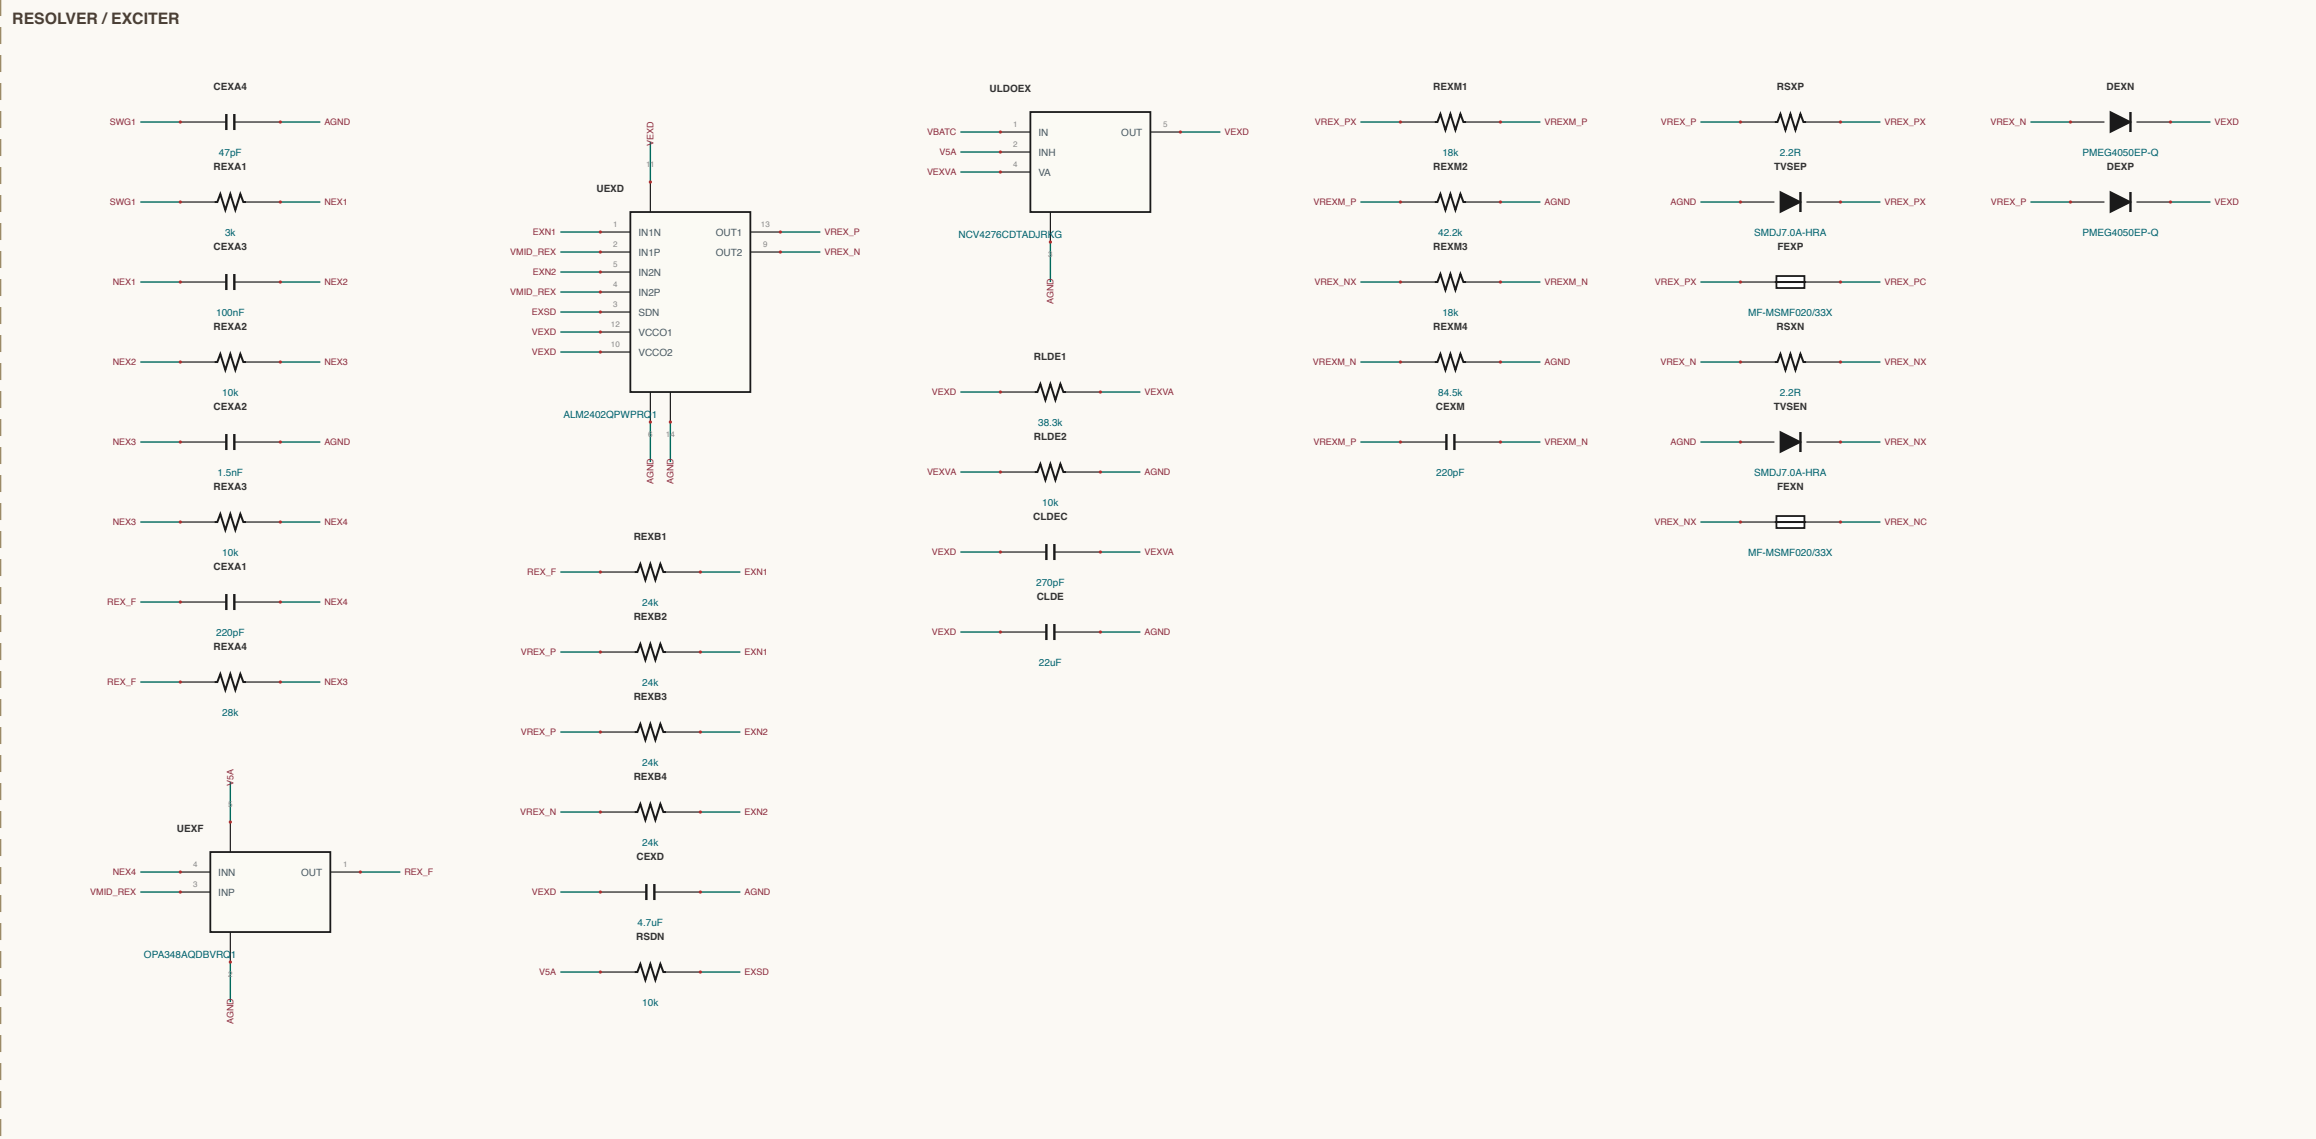
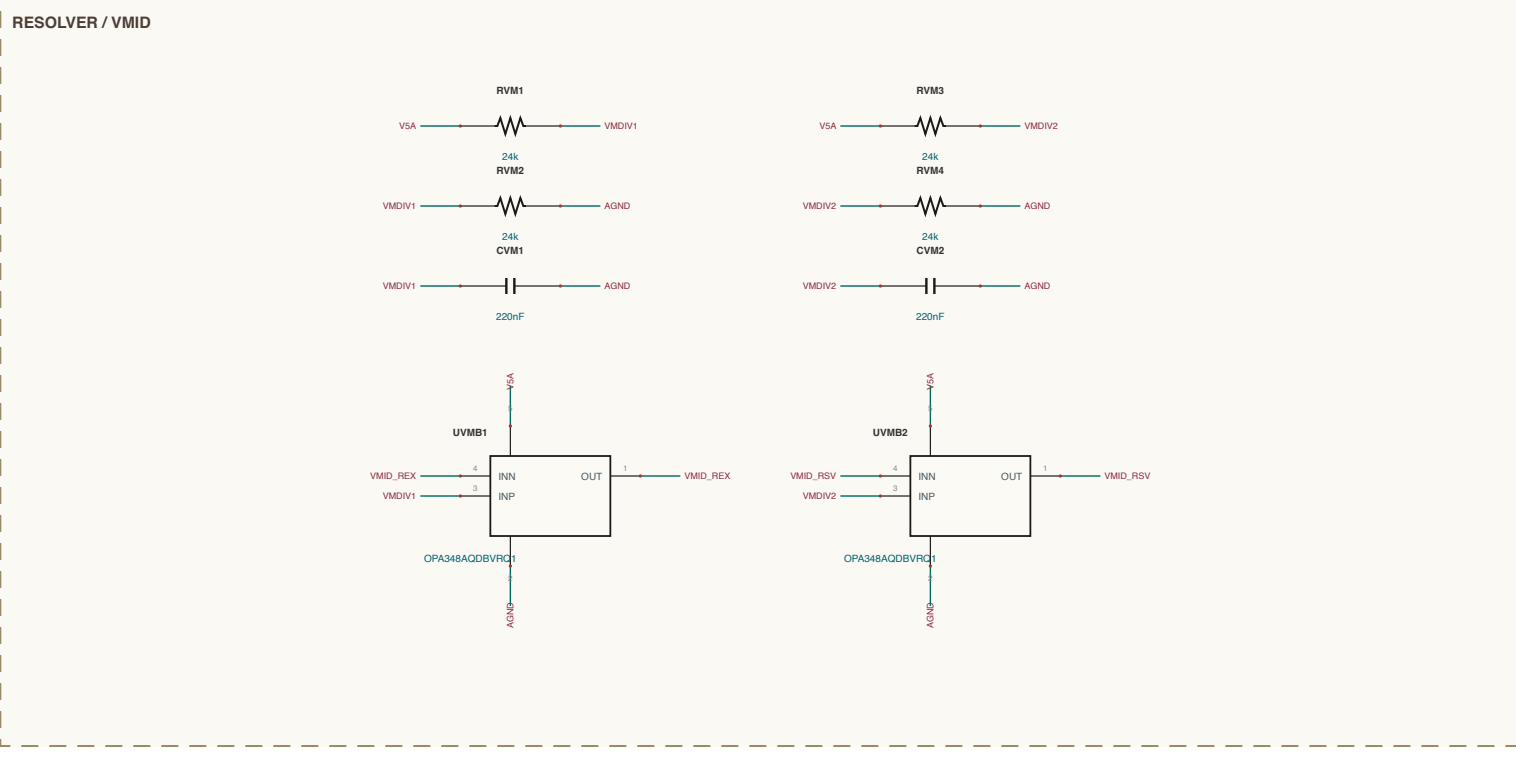
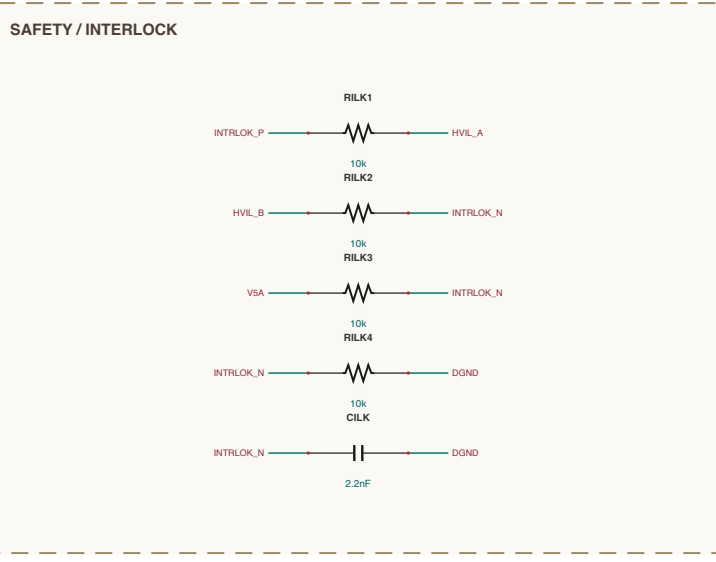
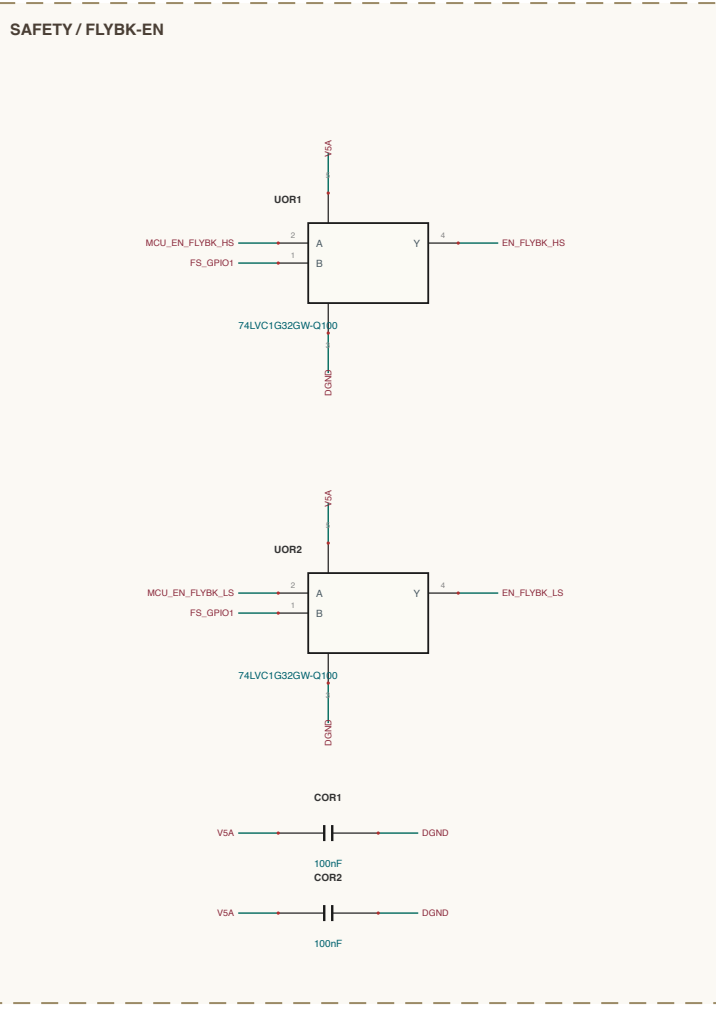
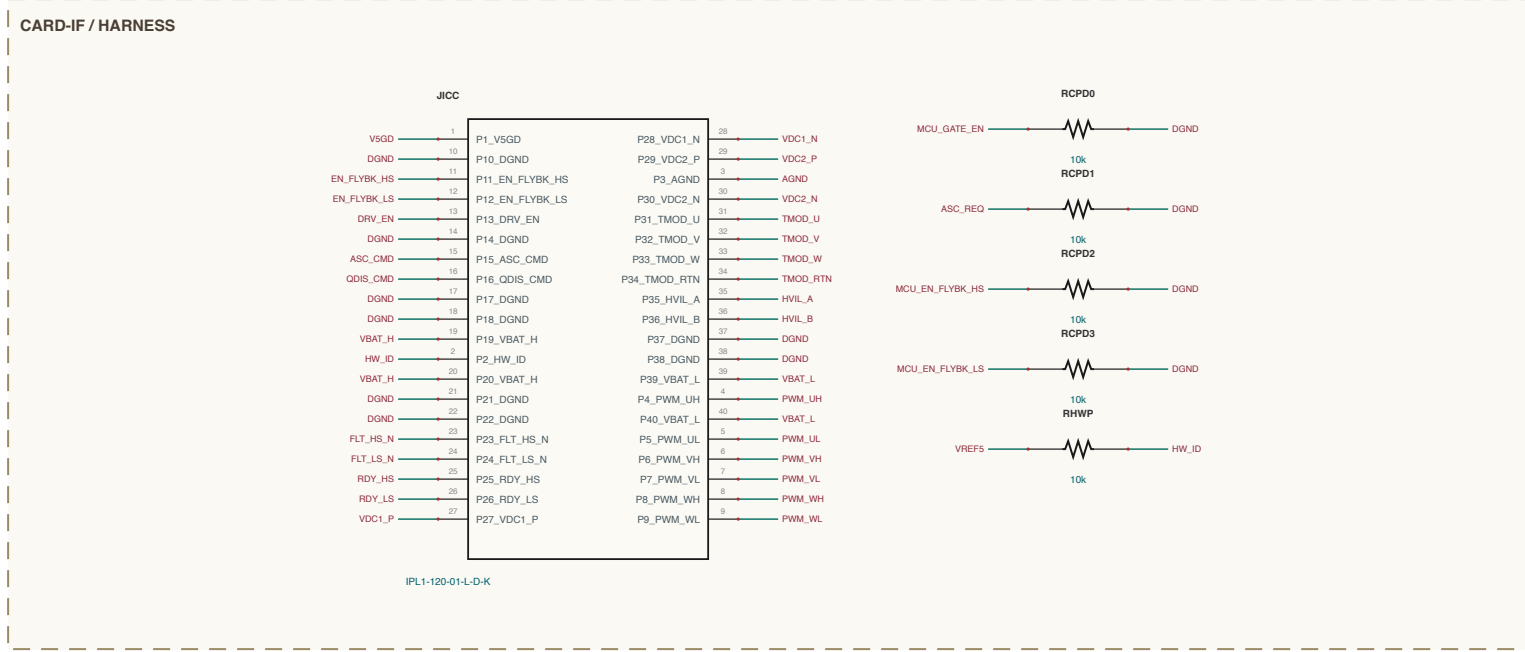
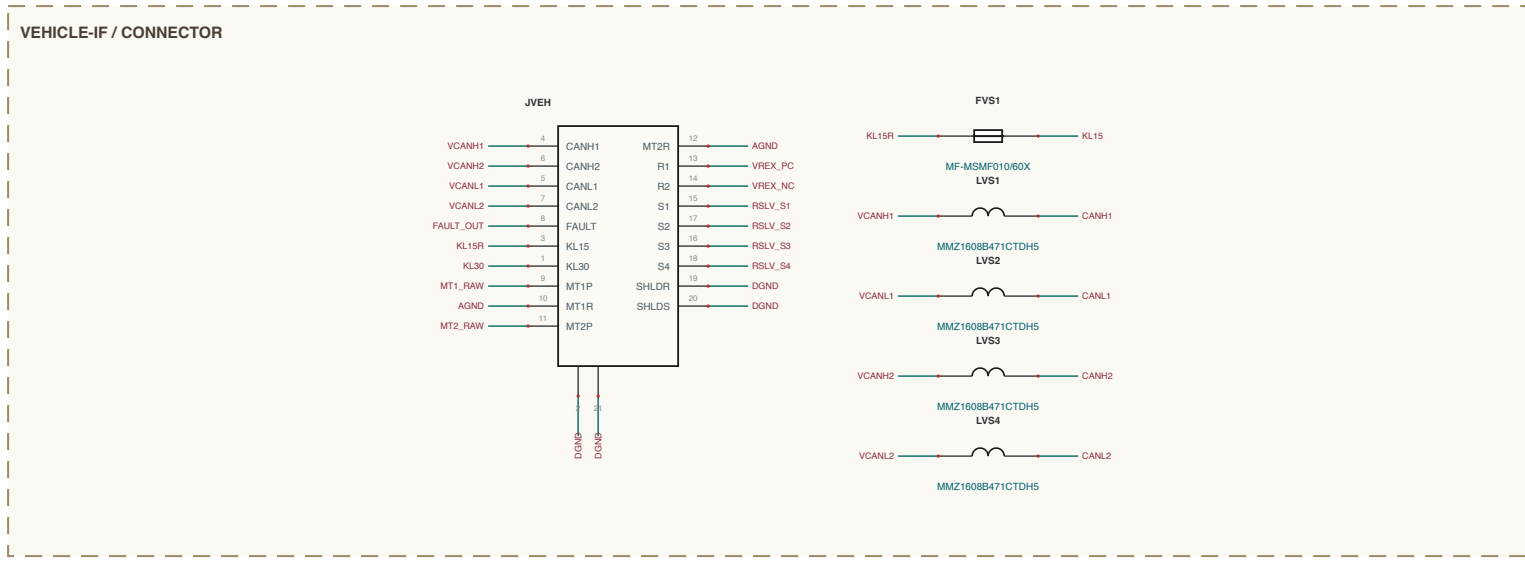
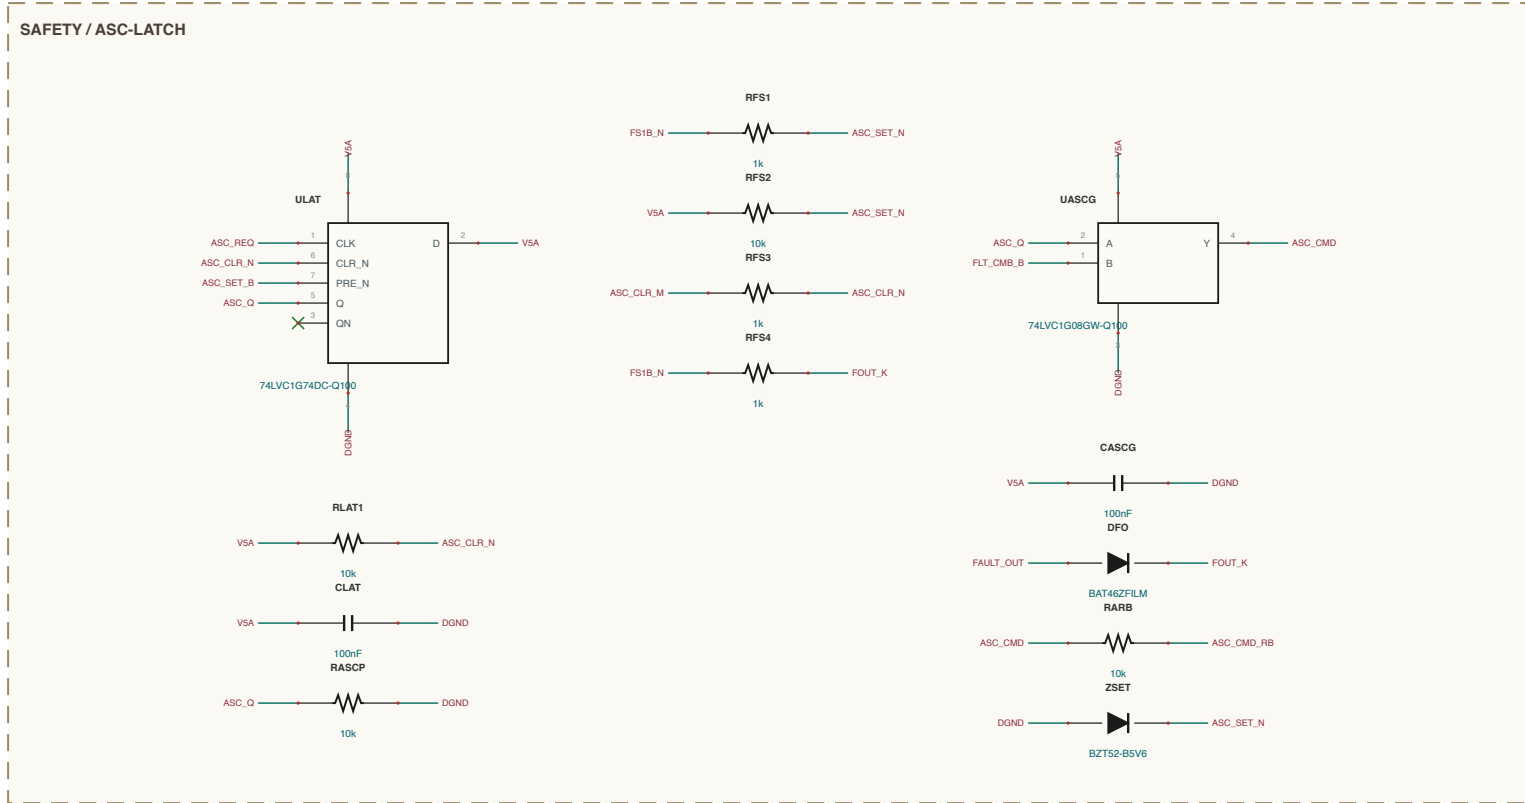
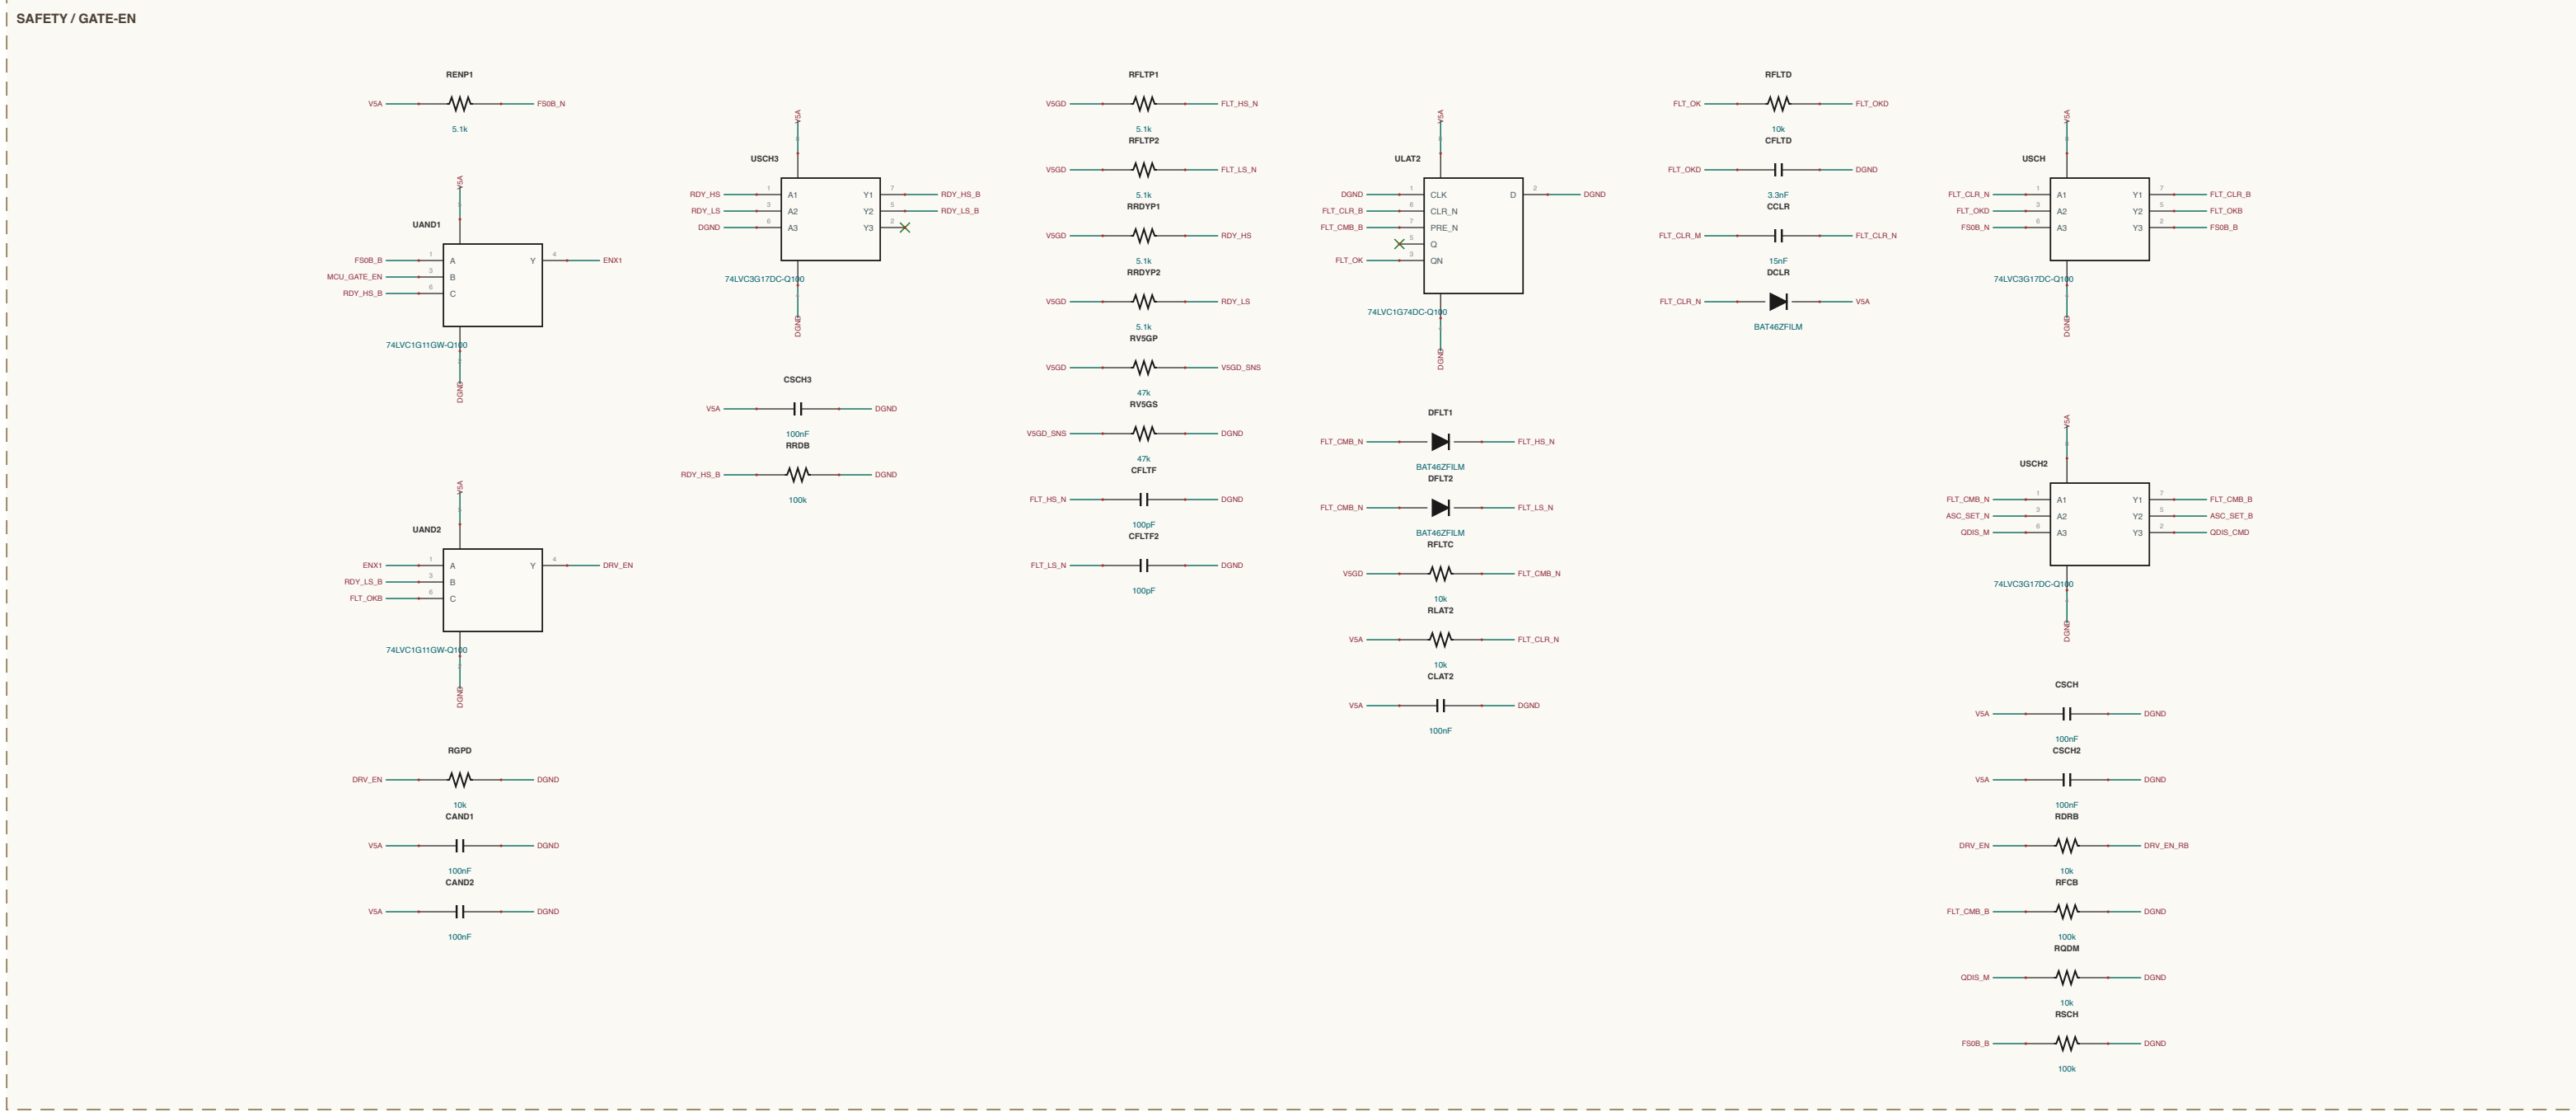
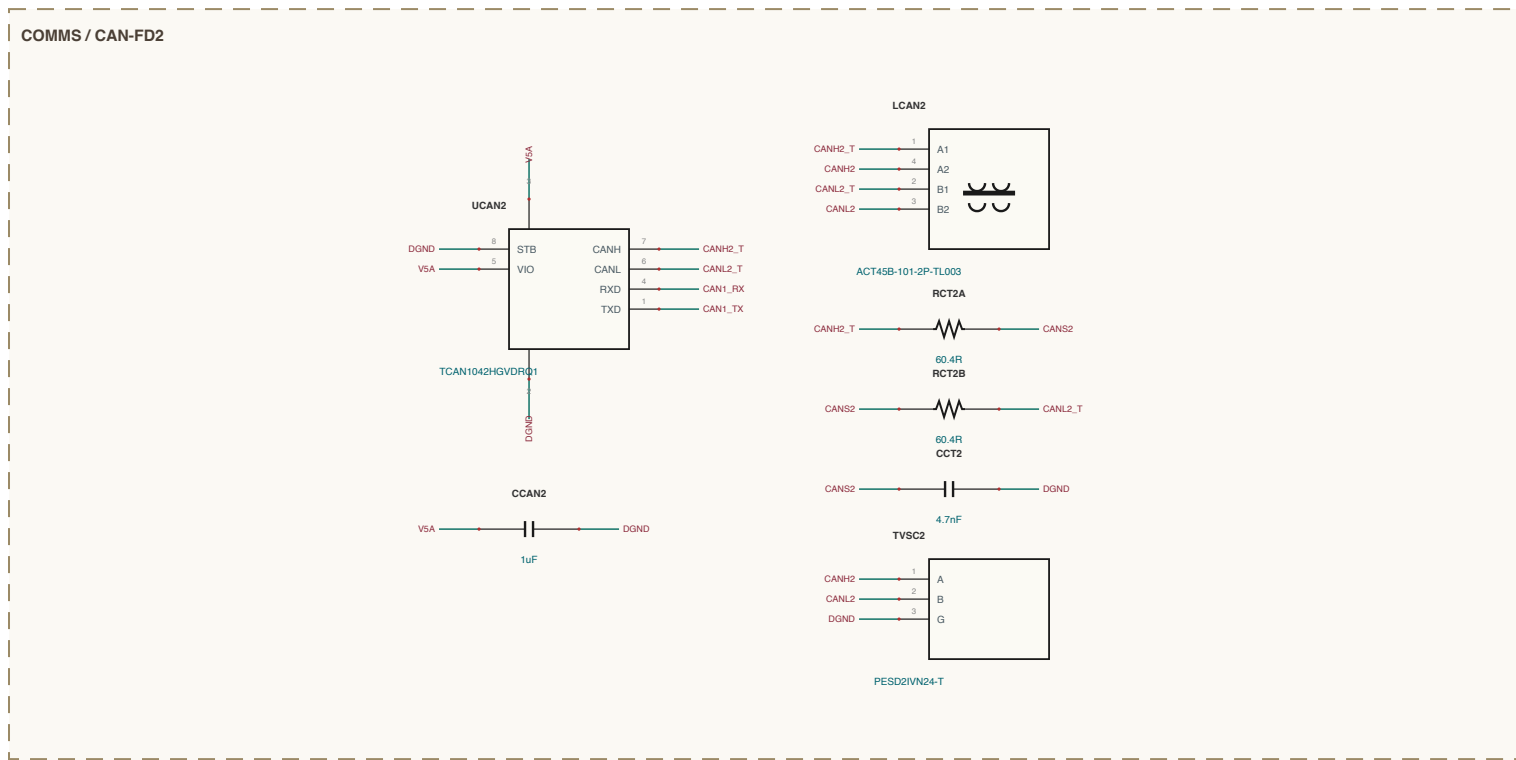
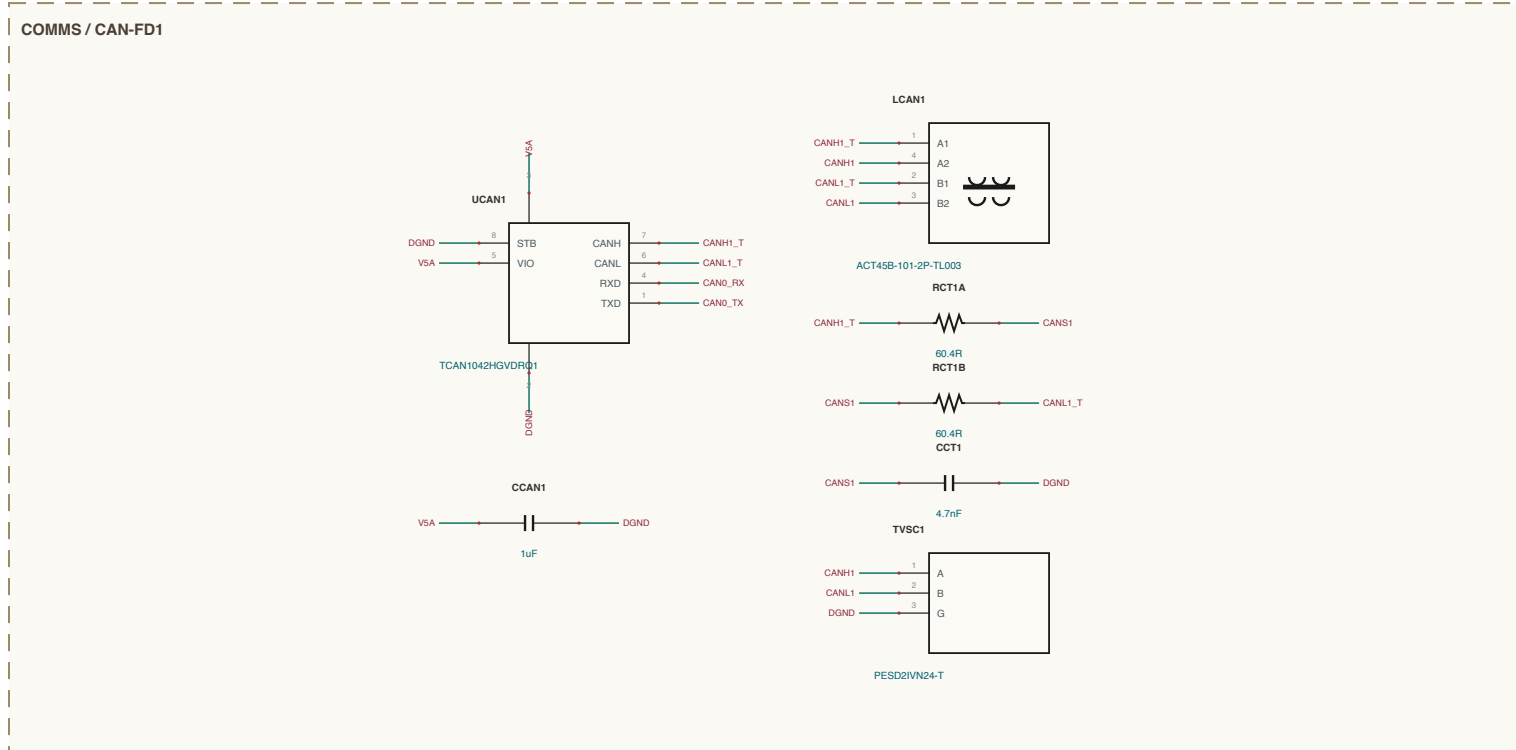
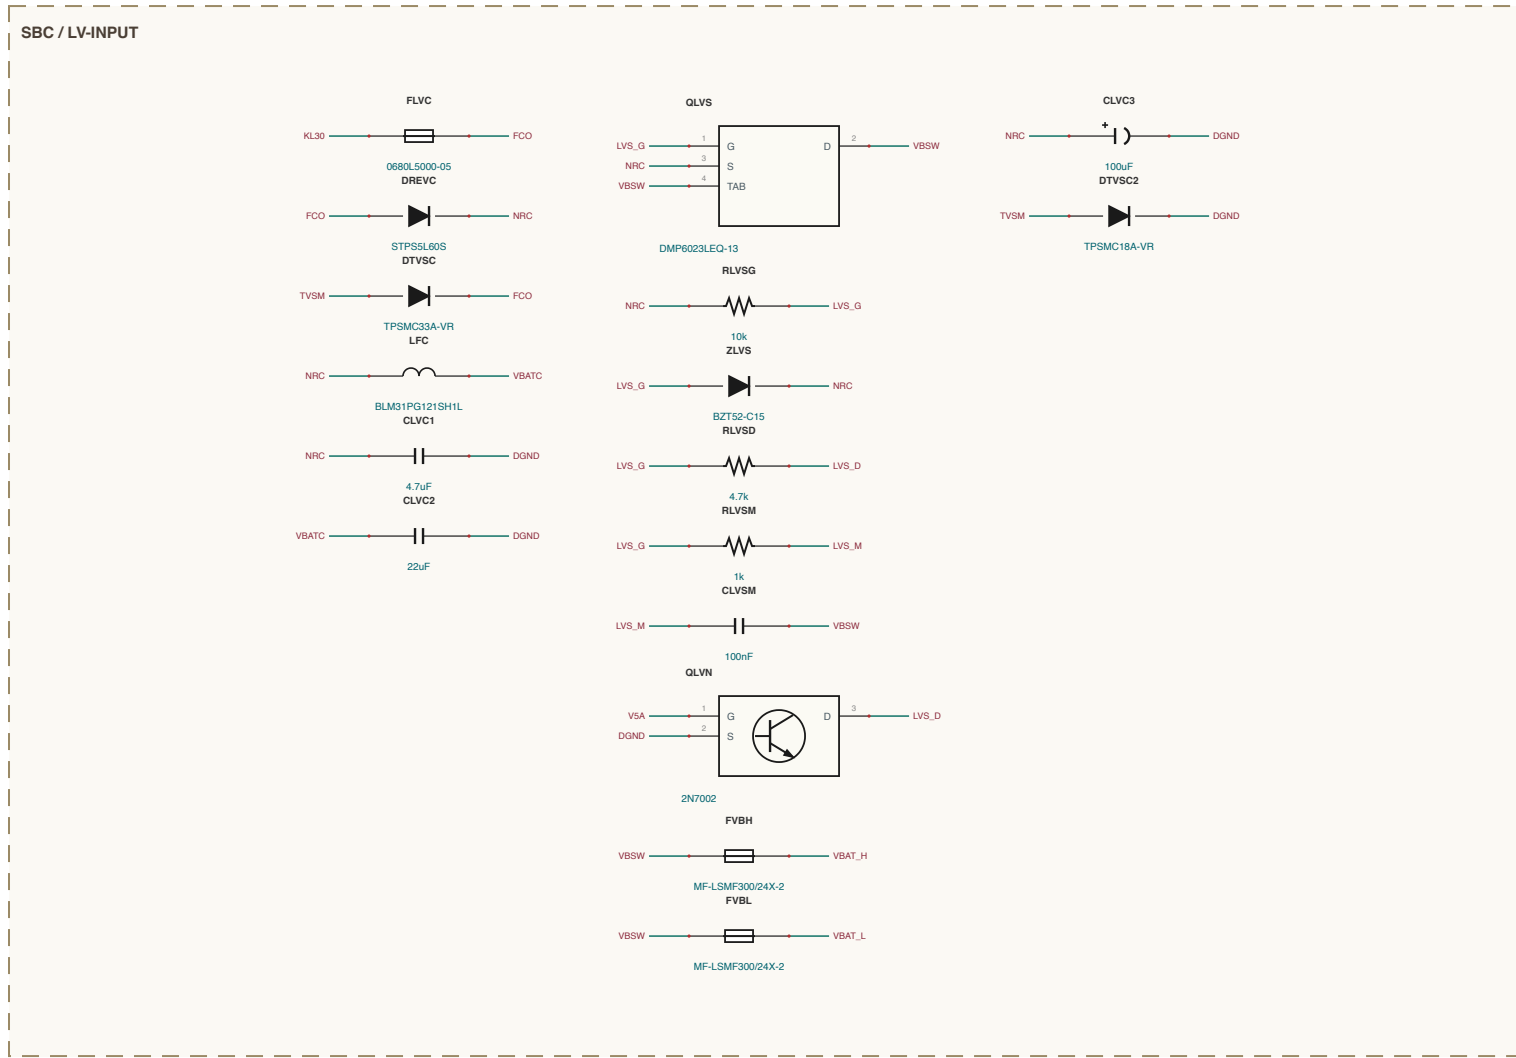
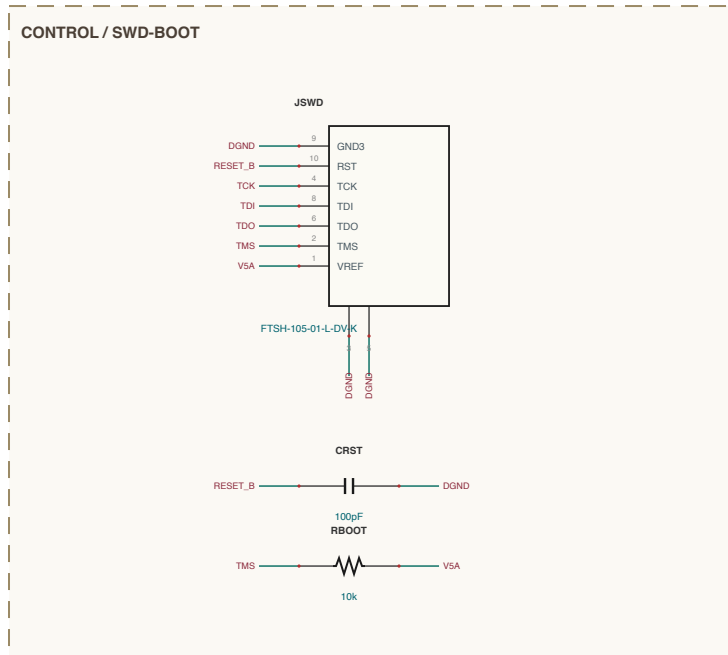
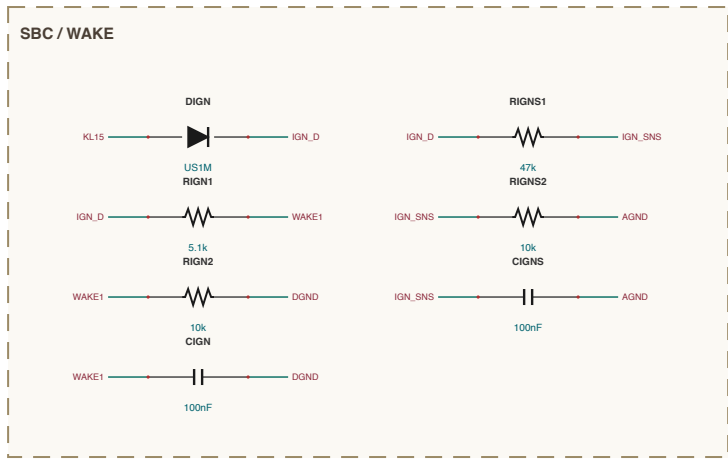
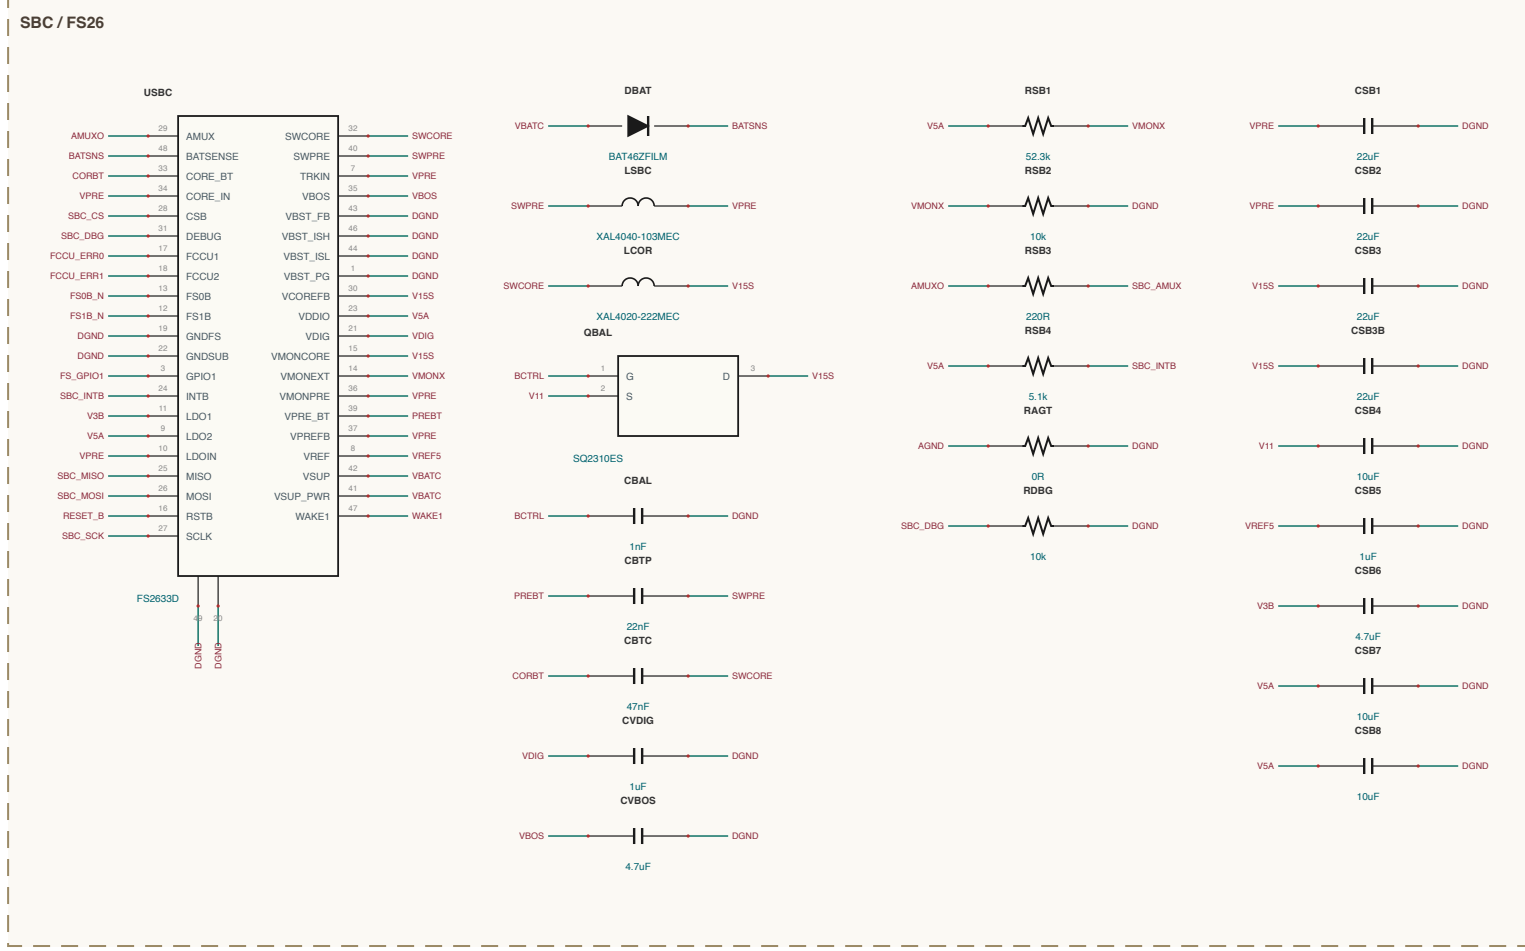


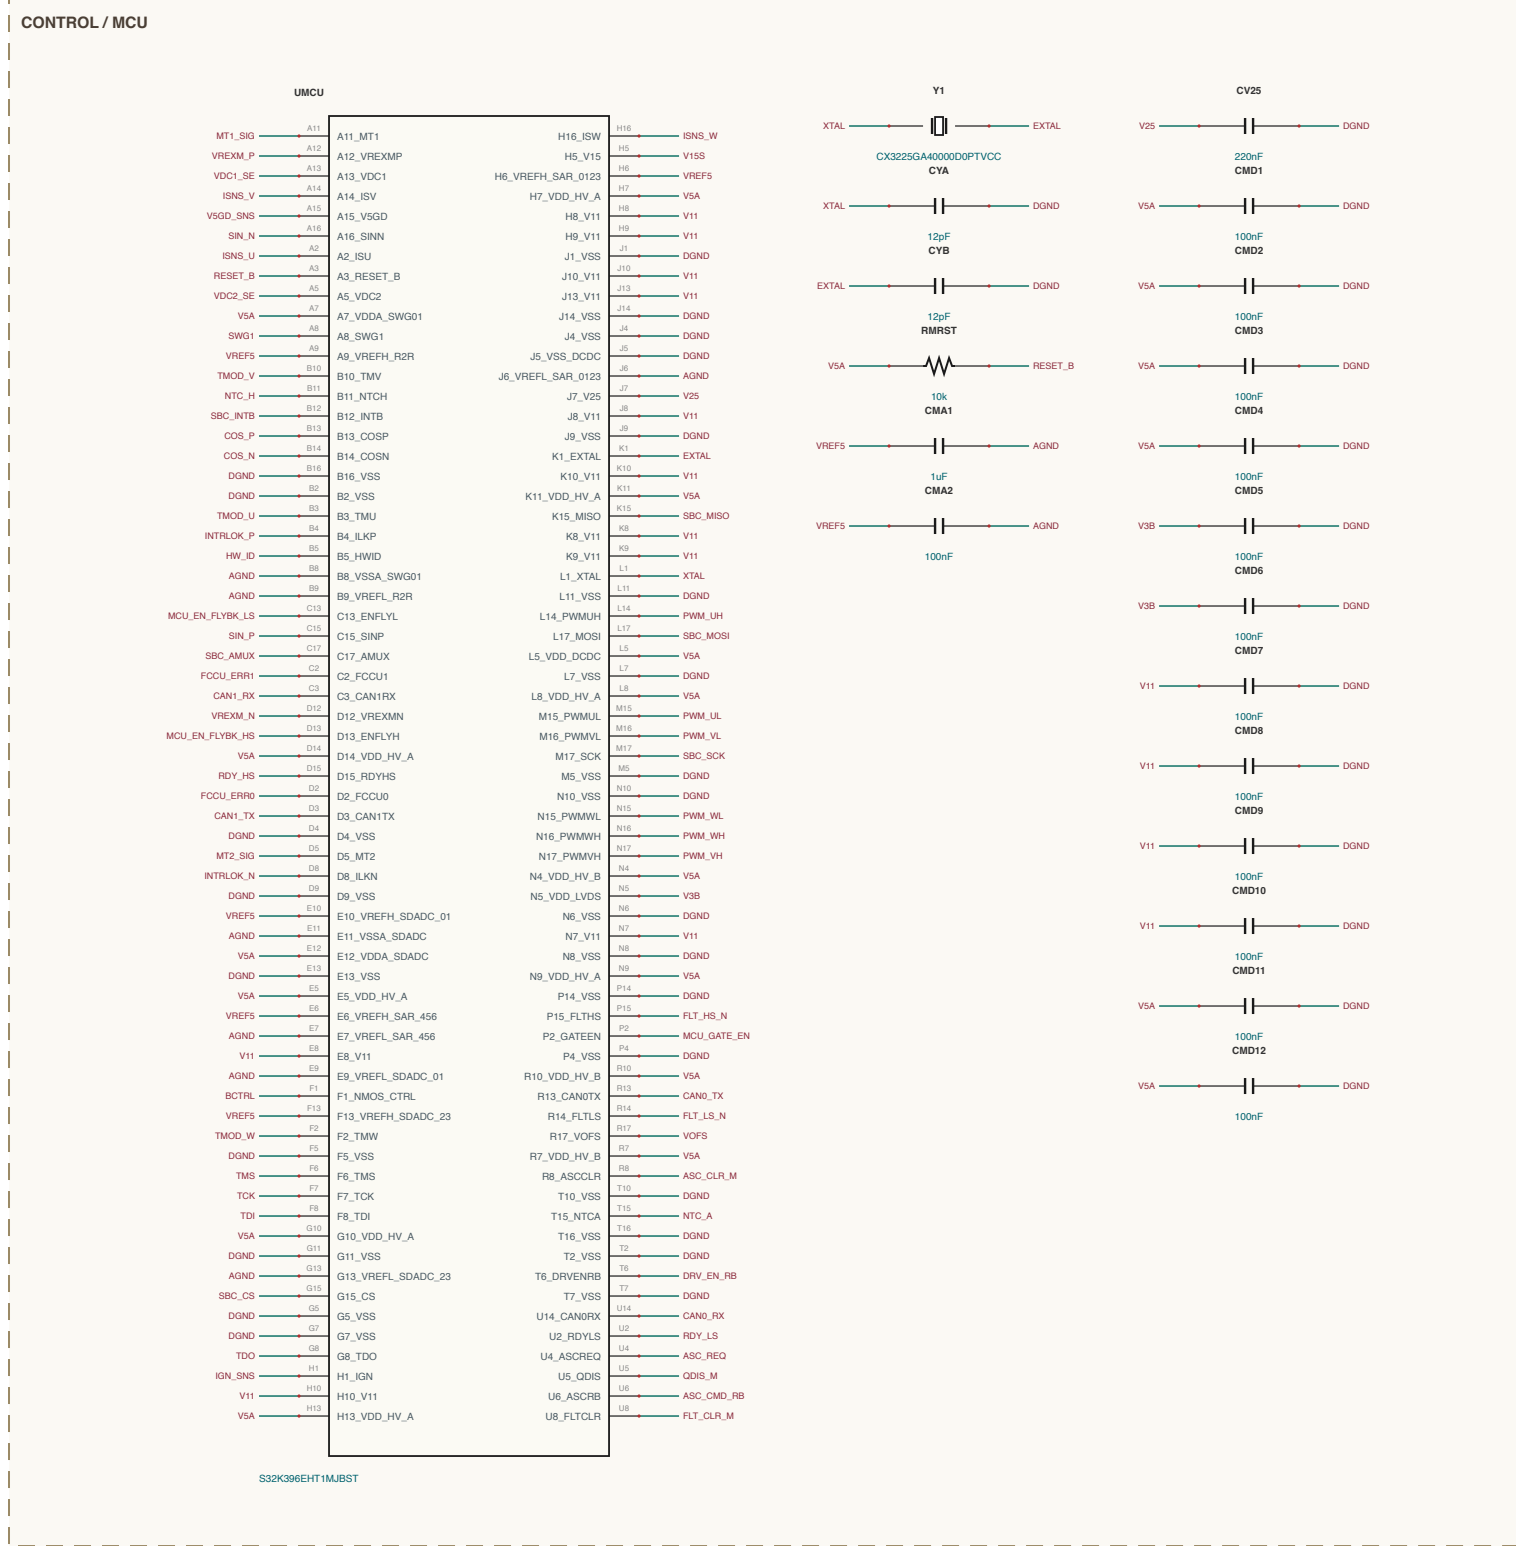

SHEET INDEX

100 VV pk Control Card (LV) - 4 of 4
PHASE SENSE - 4 sections
RESOLVER - 4 sections
SAFETY - 4 sections
SBC - 3 sections
TEMP - 3 sections
COMMS - 2 sections
CONTROL - 2 sections
VOC-RECEIVE - 2 sections
CAN/FS - 1 section
VEHICLE/F - 1 section
4 of 4 - 28 sections - 381 components

NET NAMING

Internal positions are named for what they are.

Location: 0000-0000 of what is pin 1, e.g. VDD, VDD, VDD.

Position: 0000-0000 of what is pin 1, e.g. VDD, VDD, VDD.

Position: 0000-0000 of what is pin 1, e.g. VDD, VDD, VDD.

all others are implied design rules.

all others are implied design rules.

all others are implied design rules.

all others are implied design rules.