
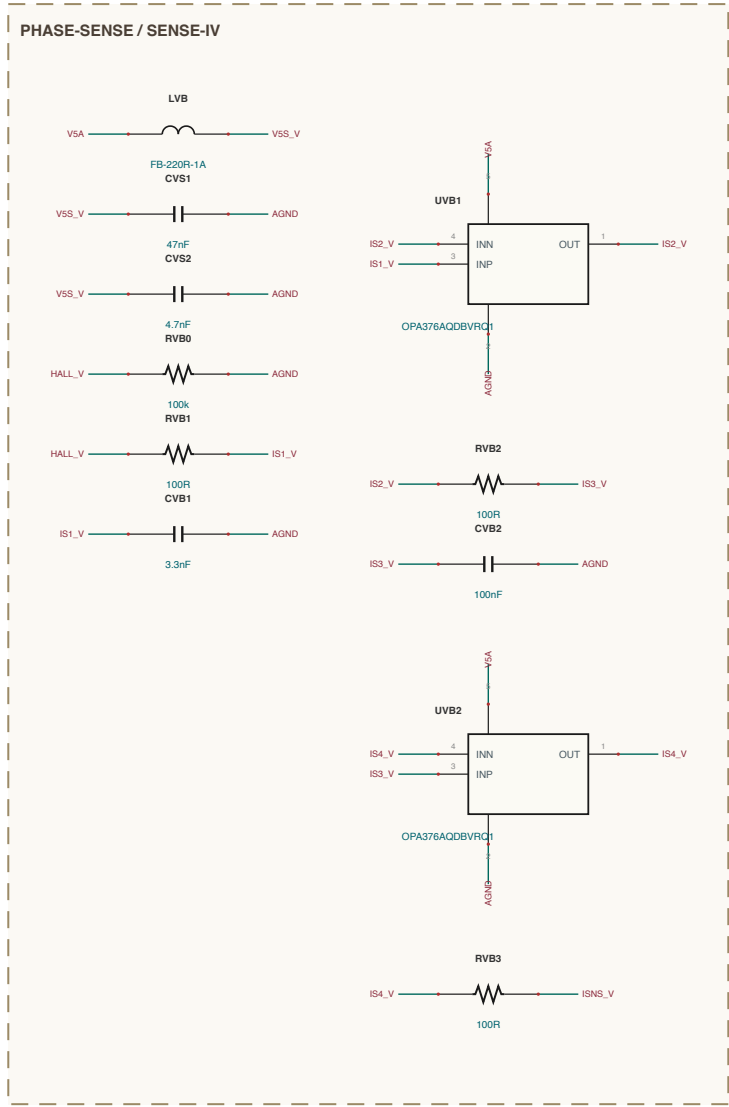
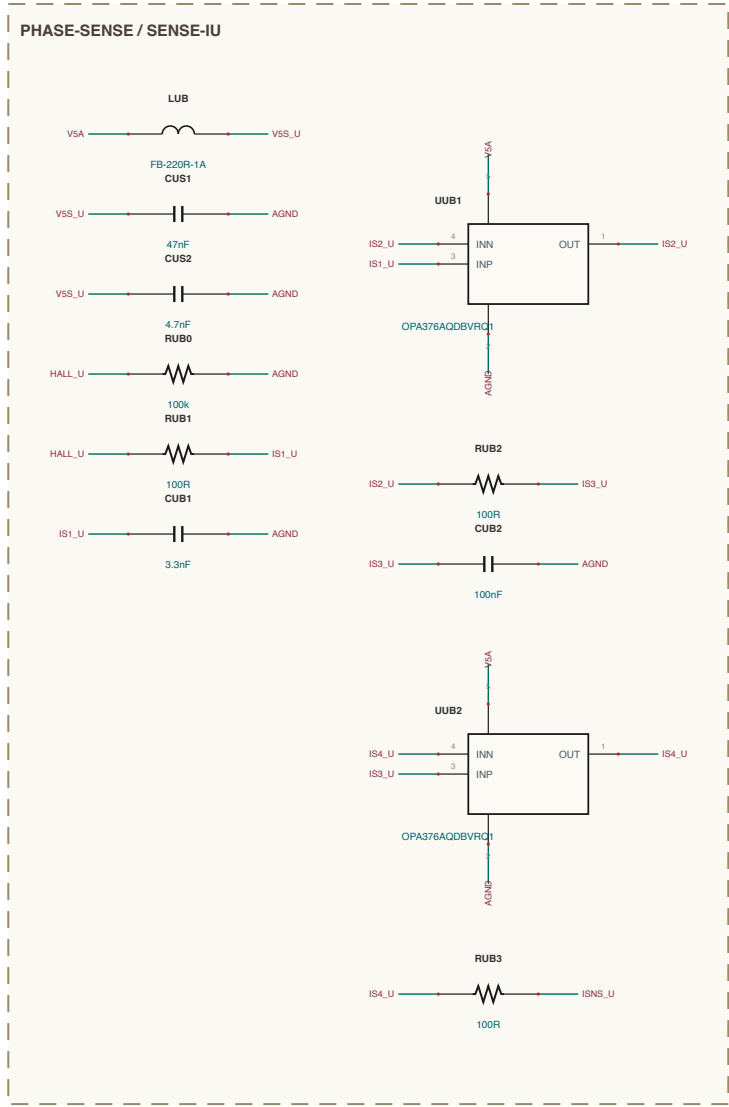
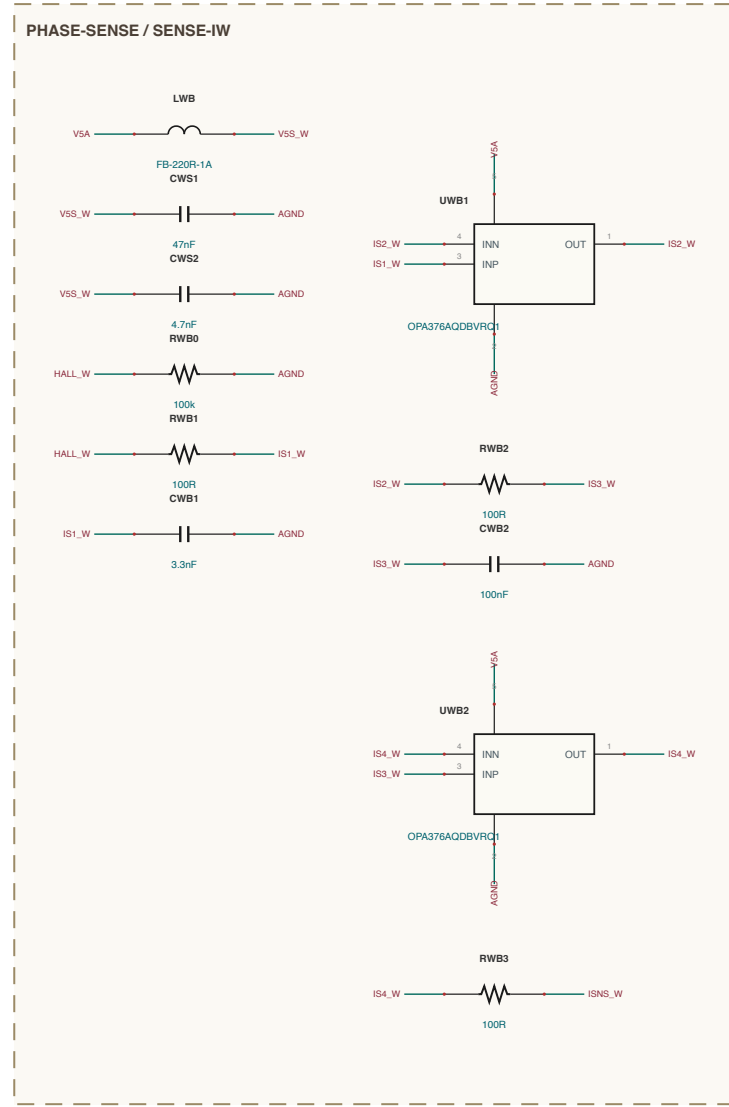
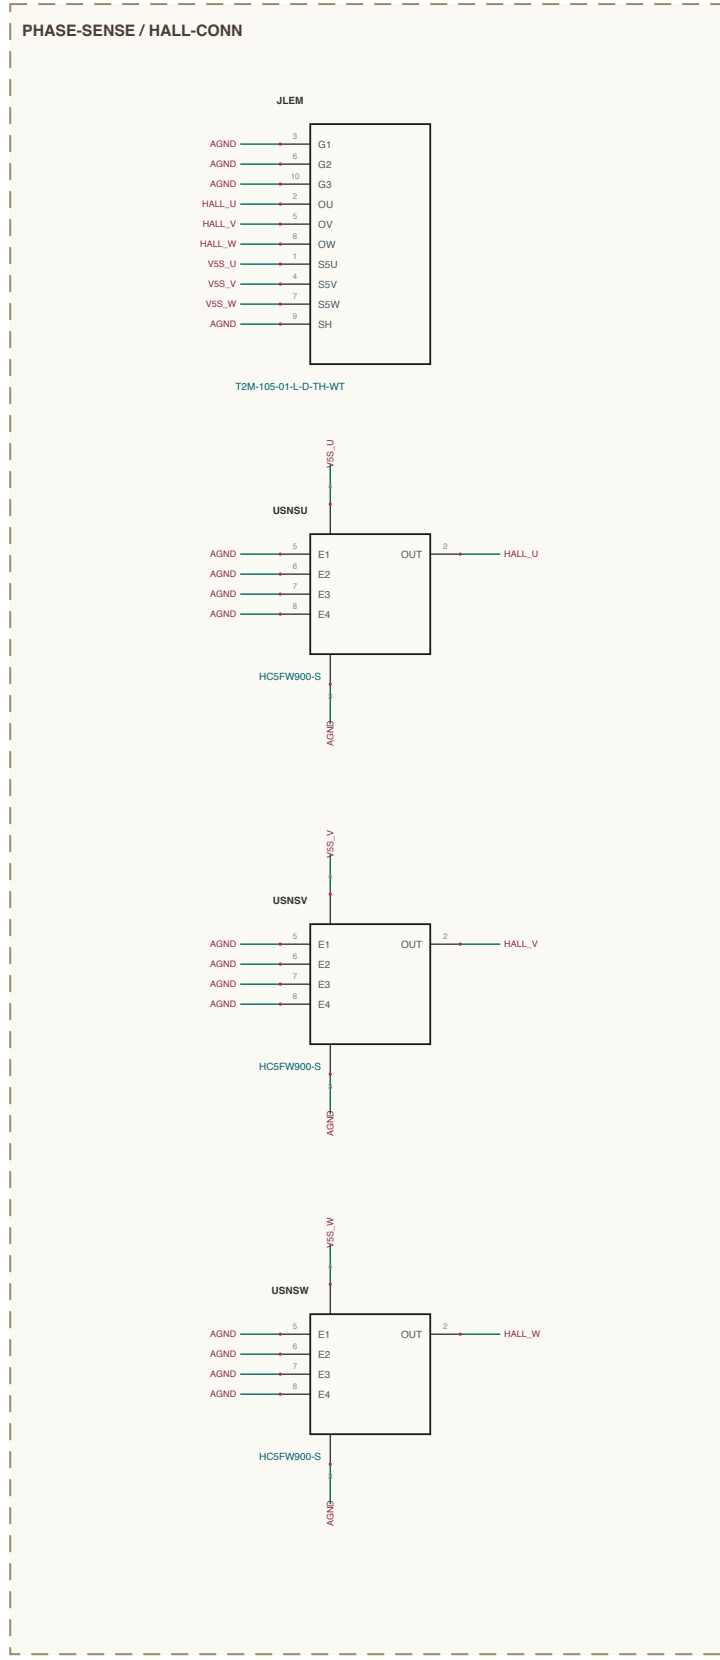
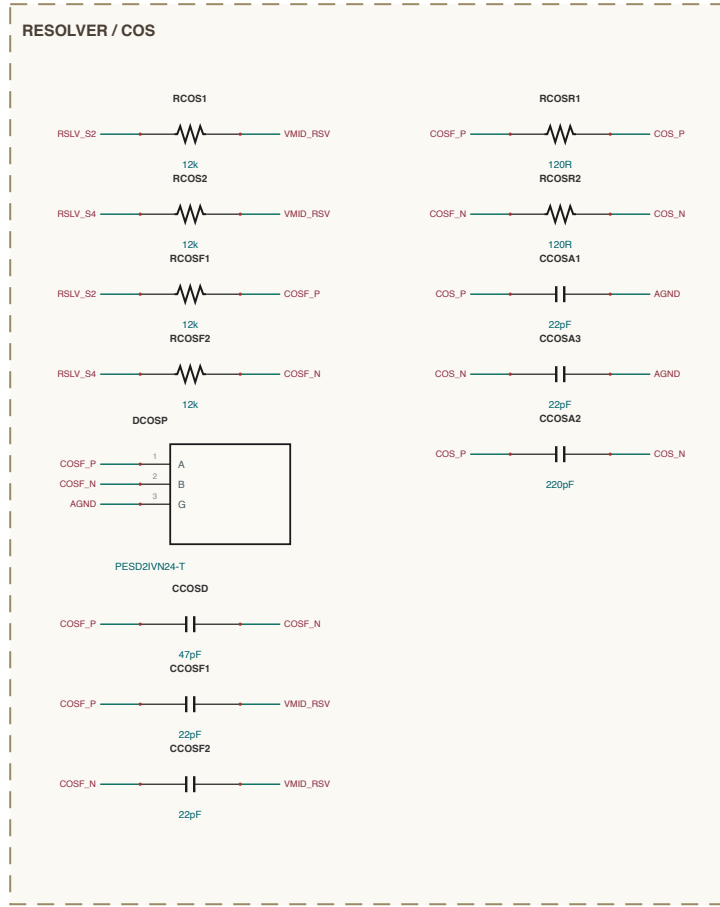
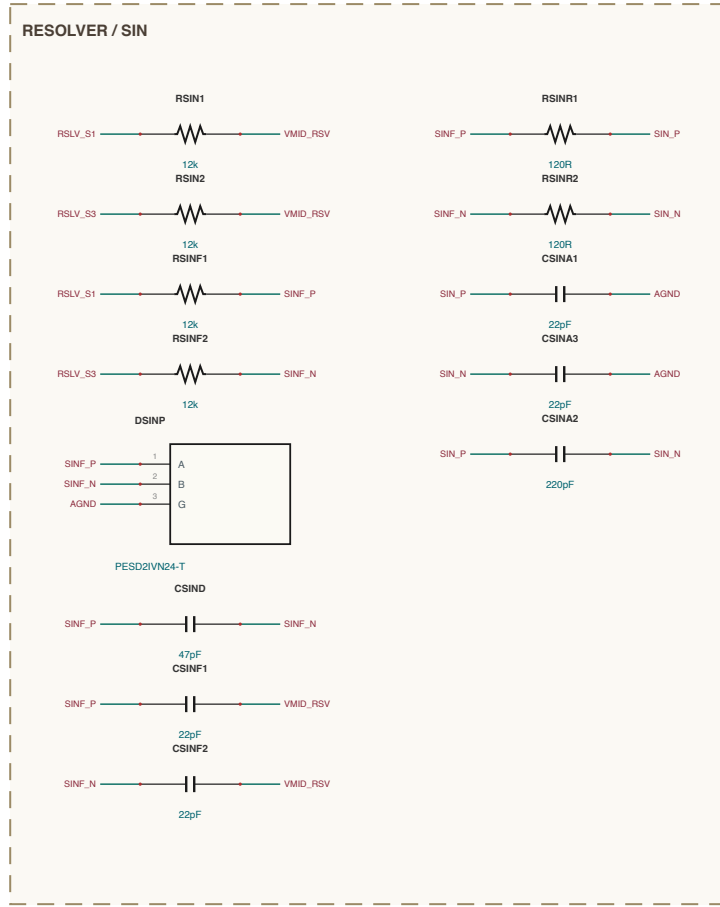
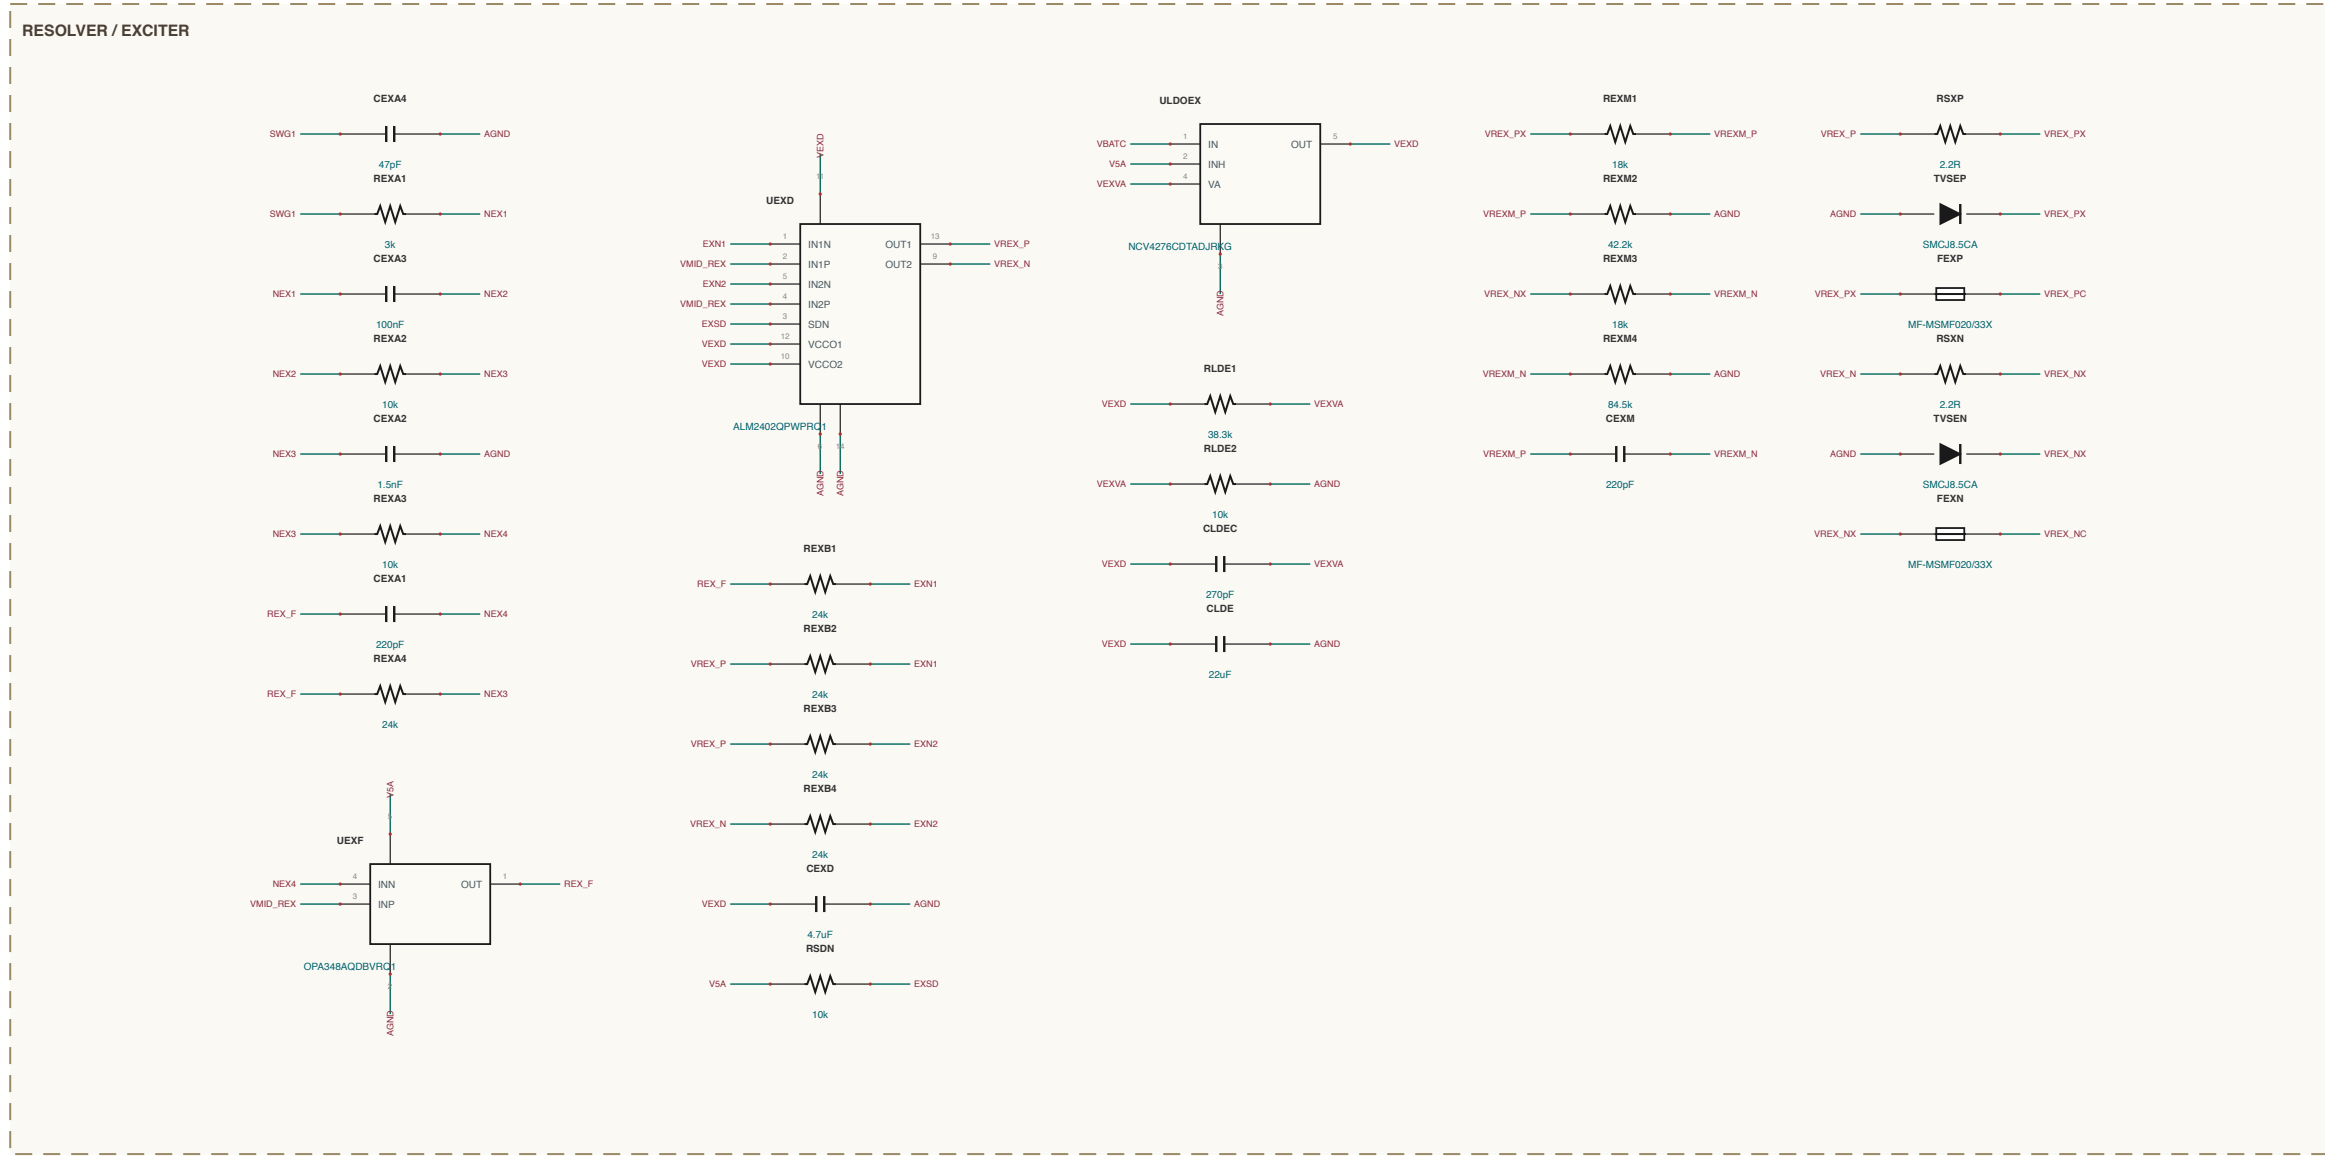
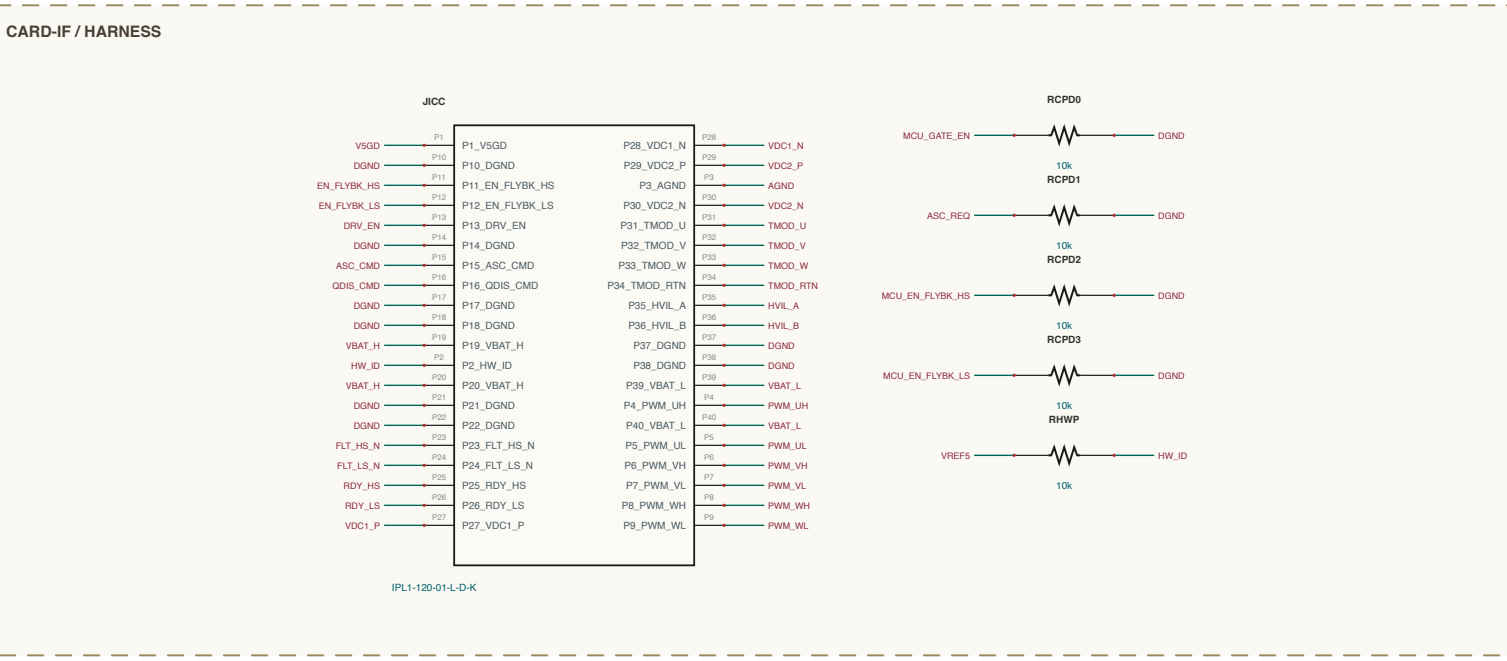
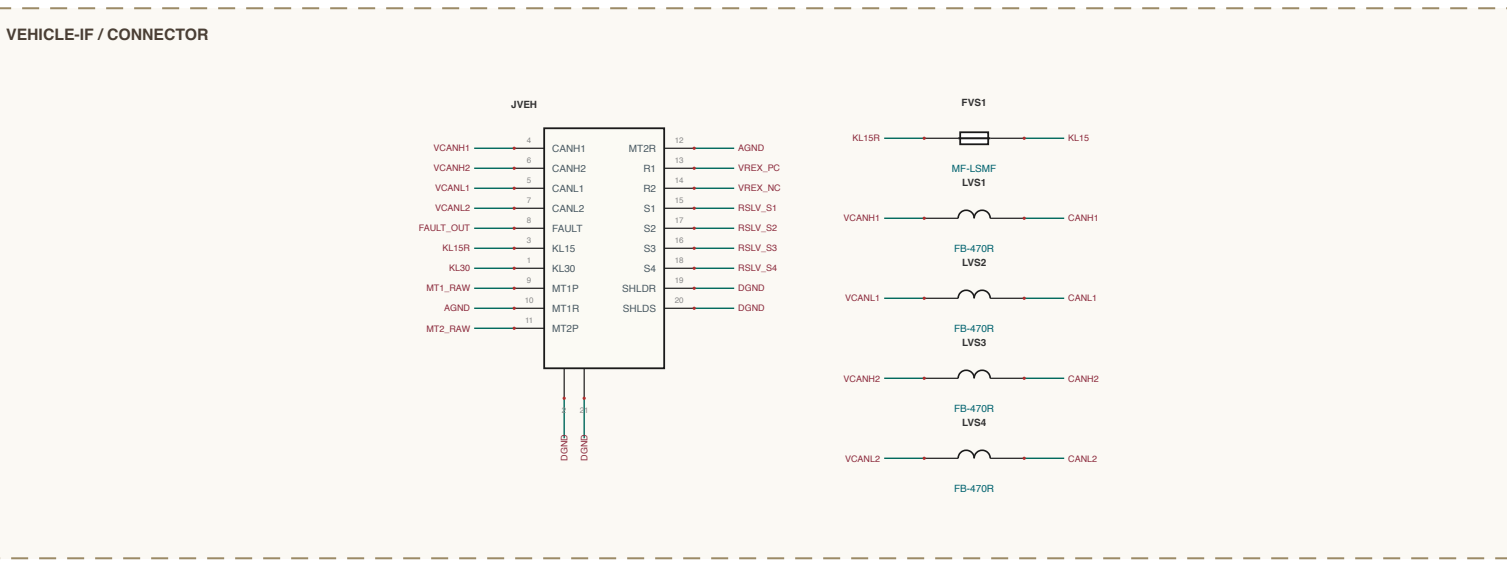
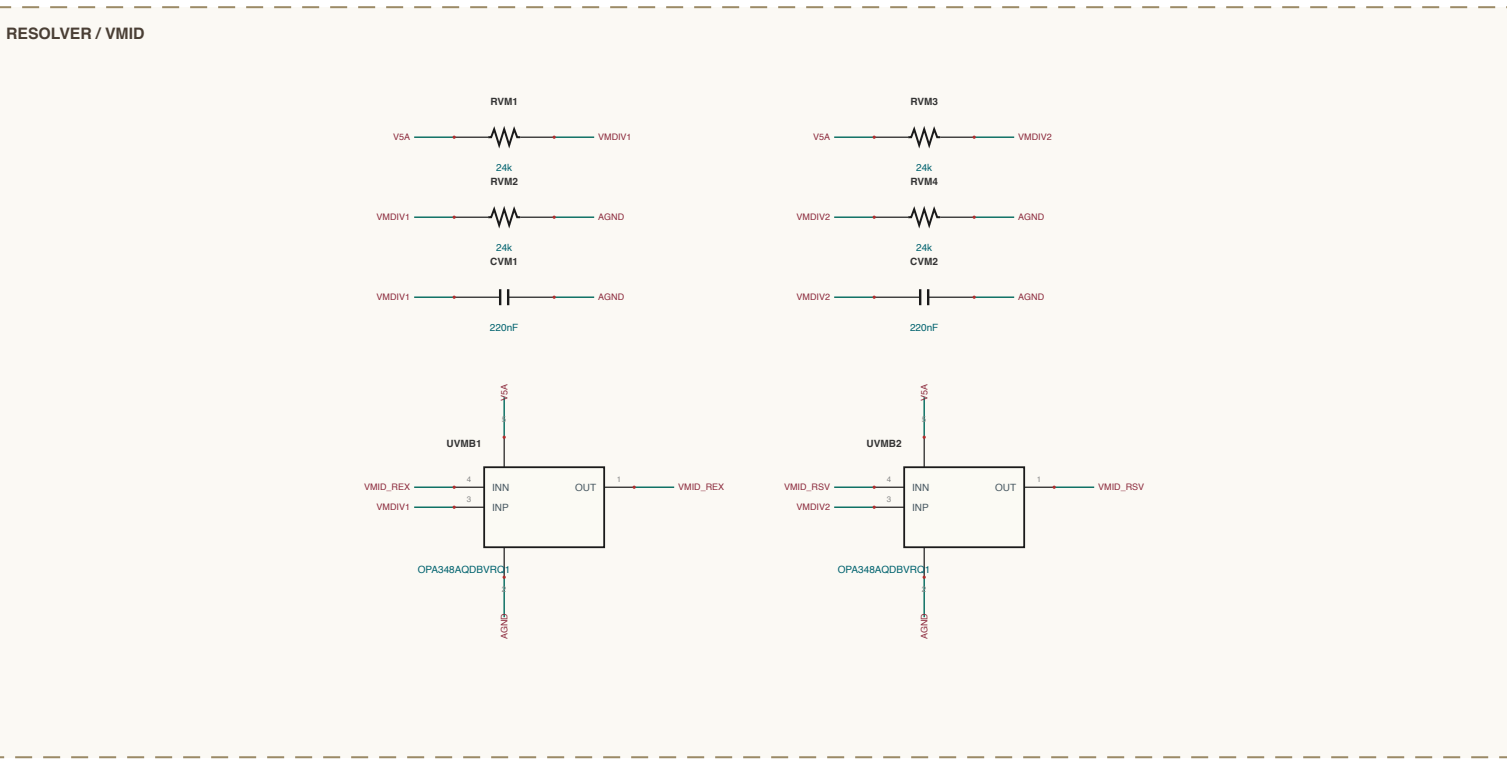
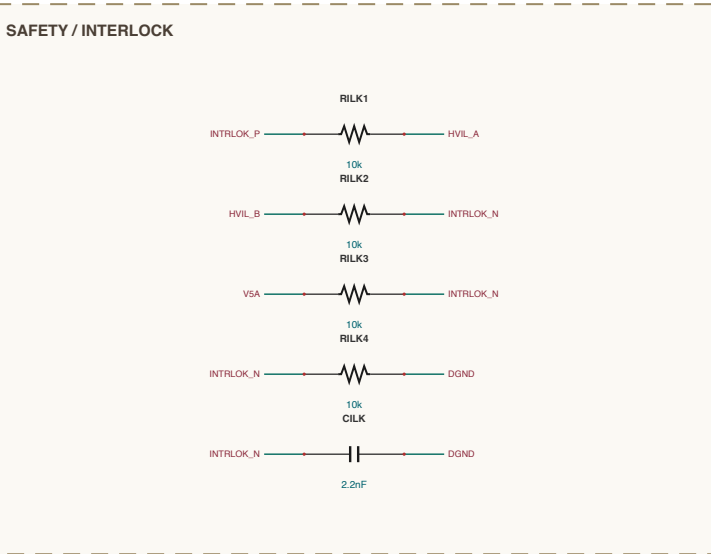
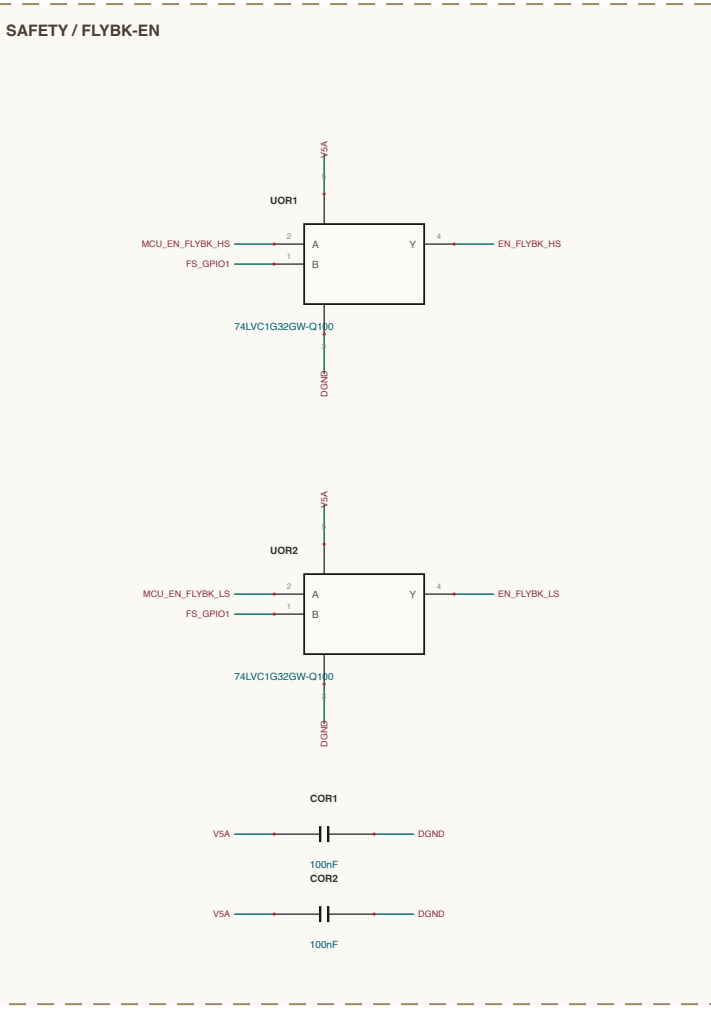
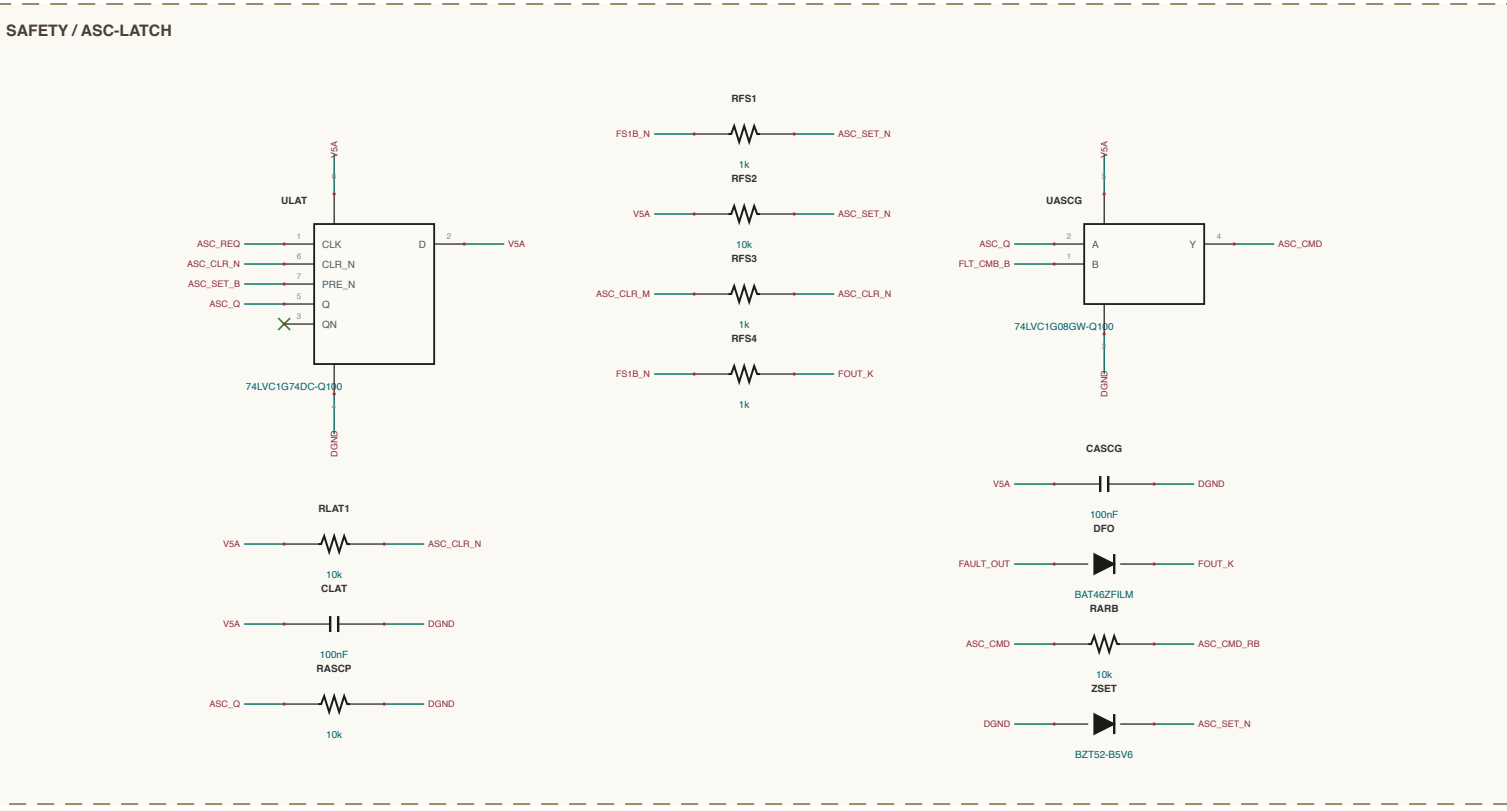
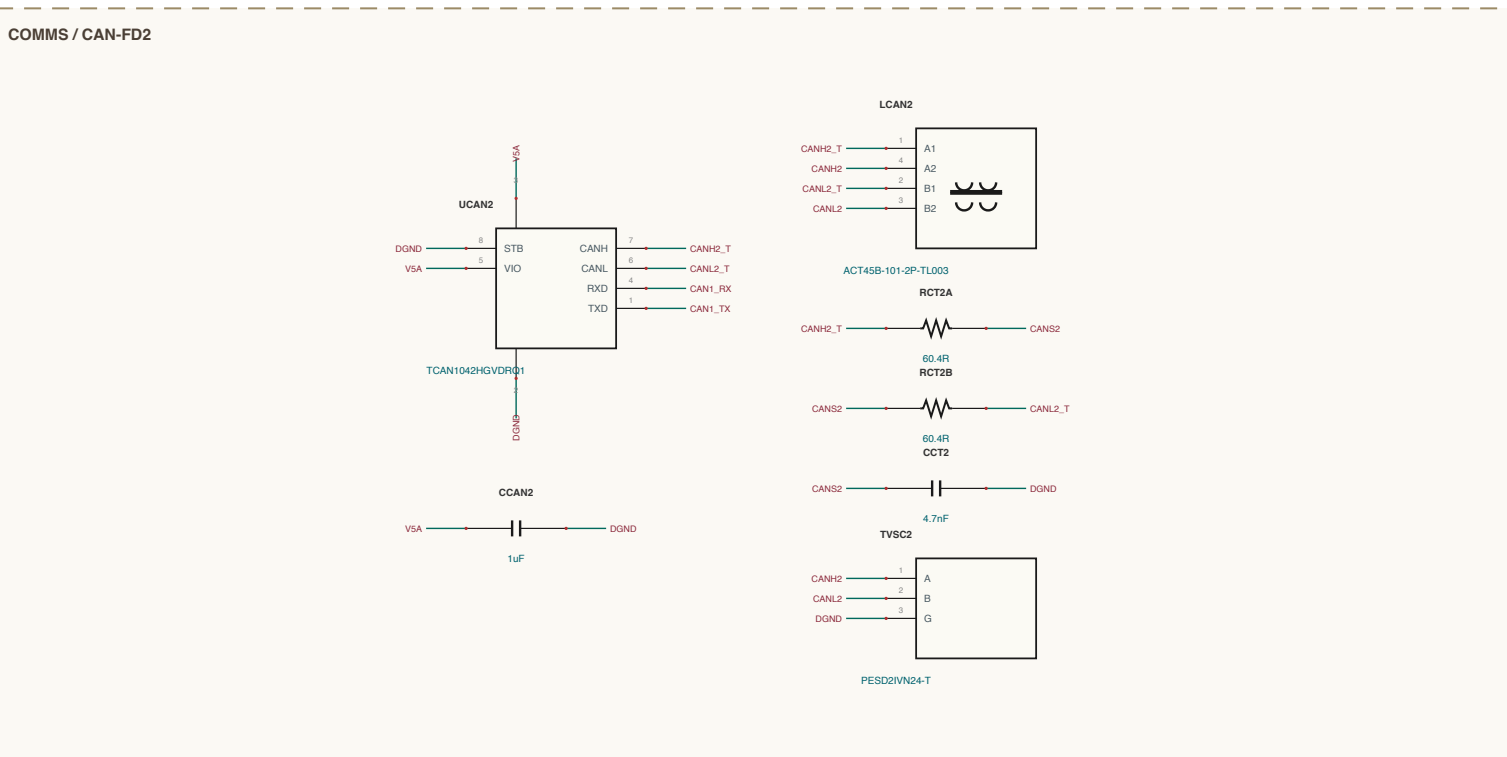
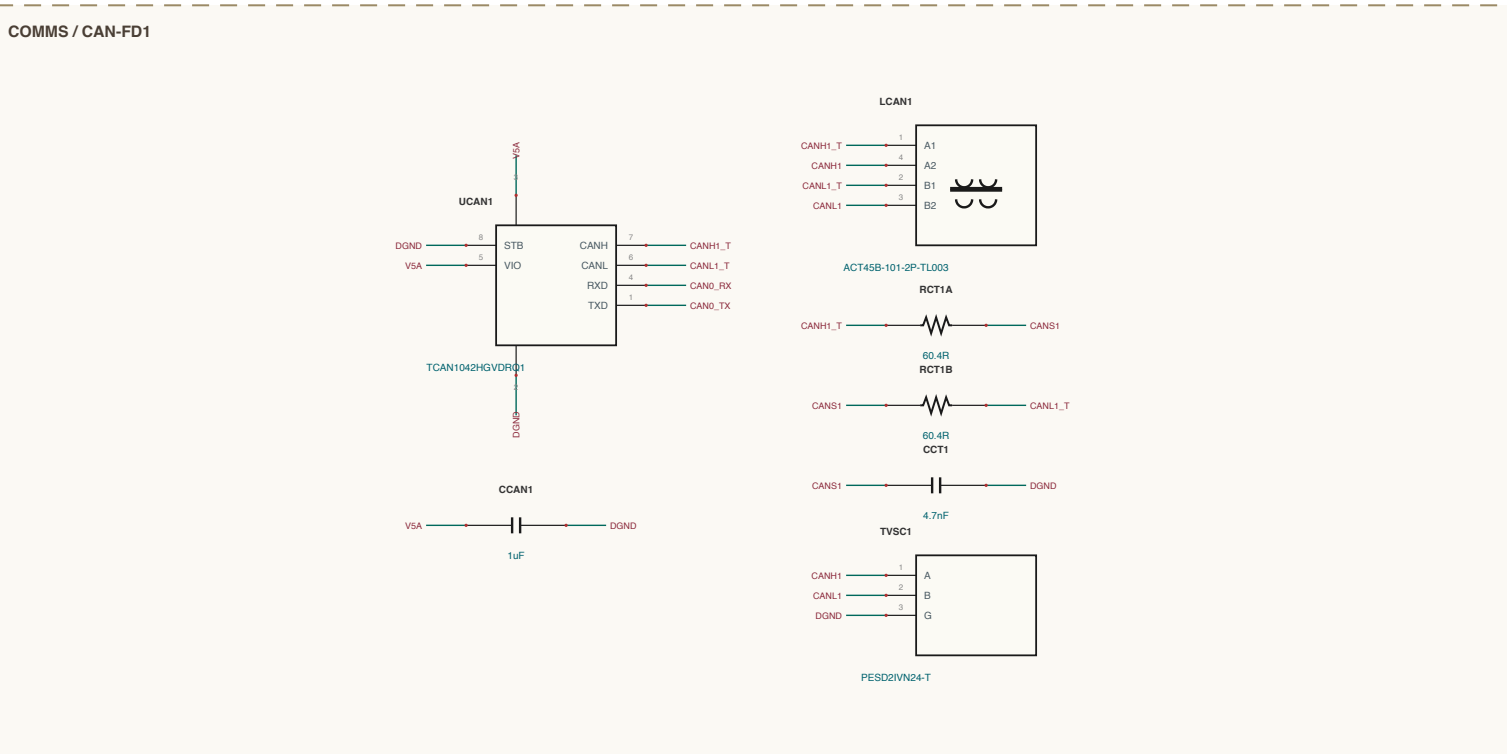
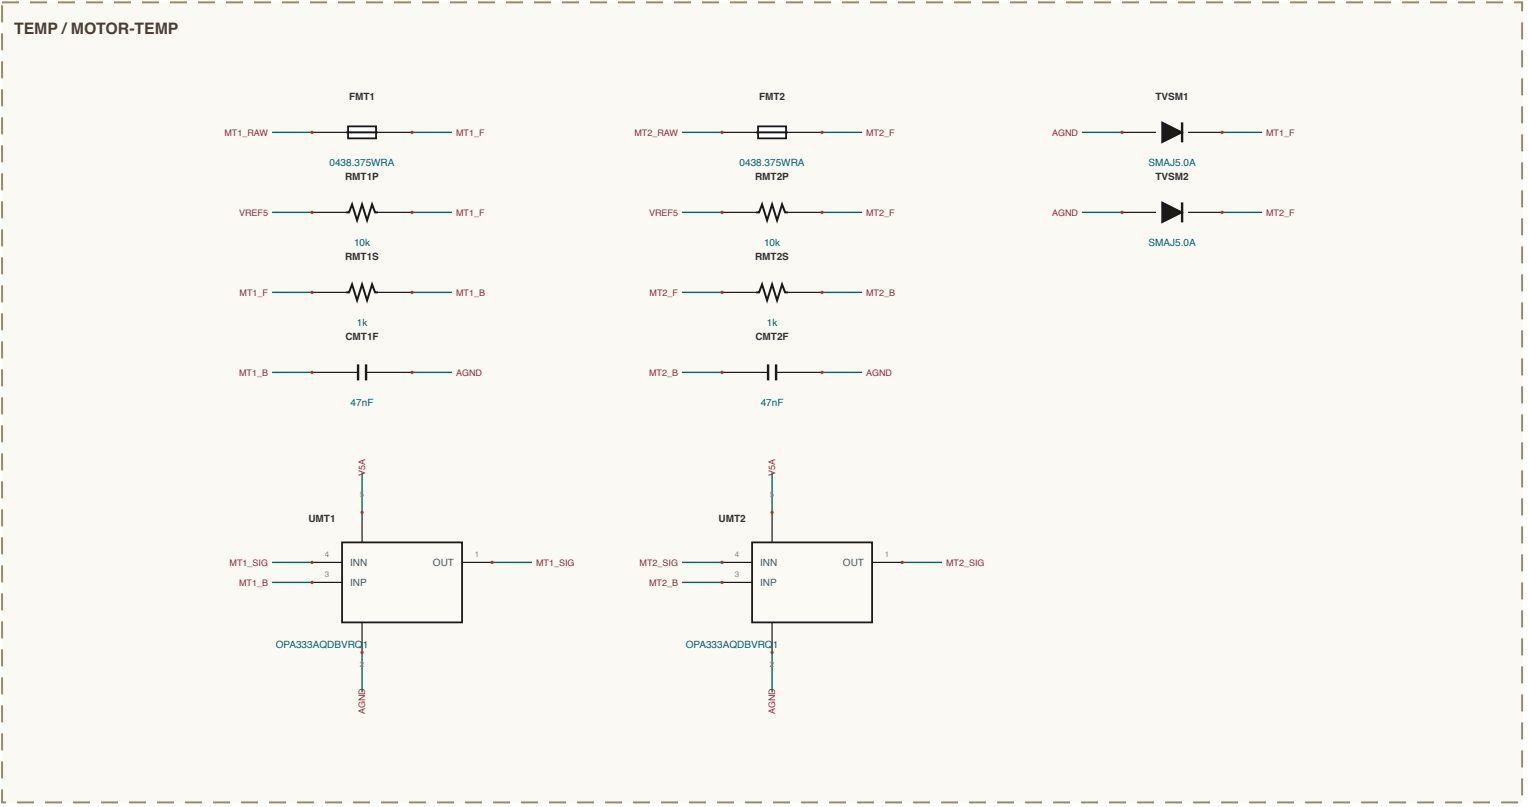
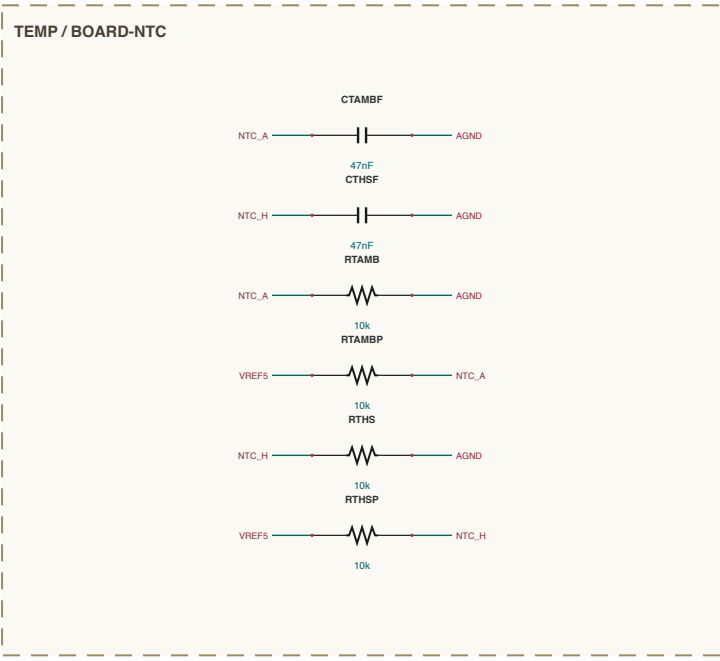
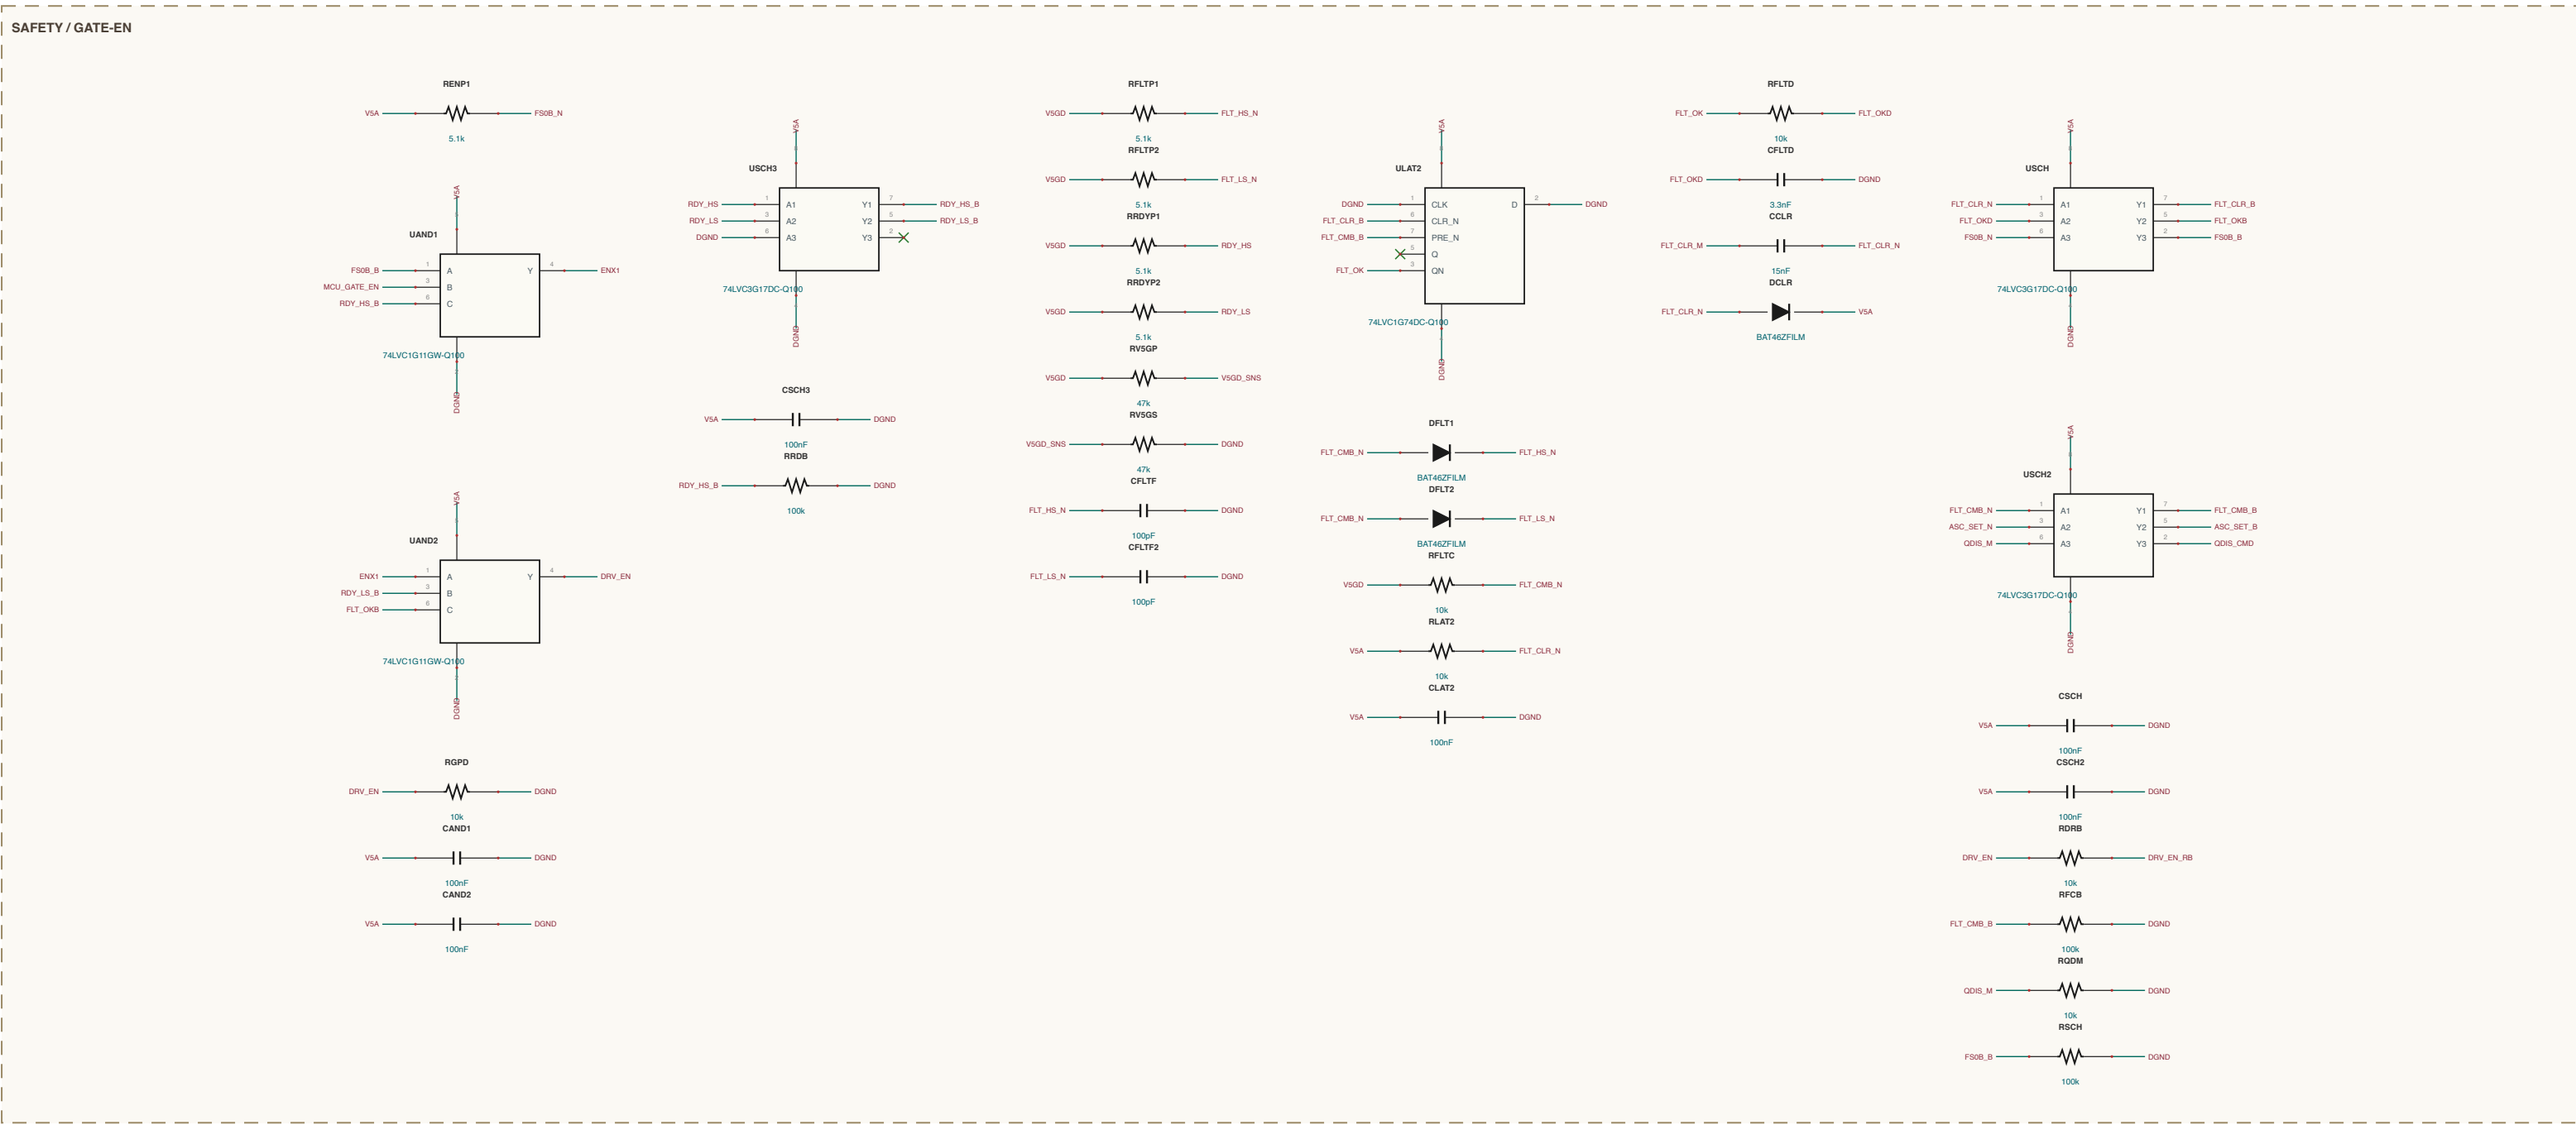
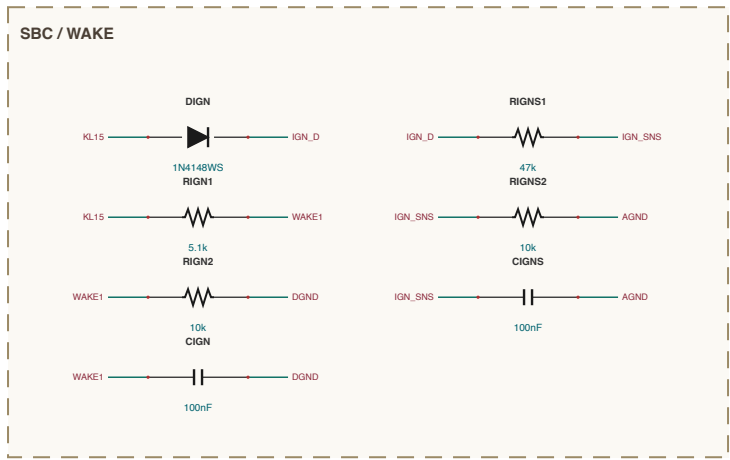
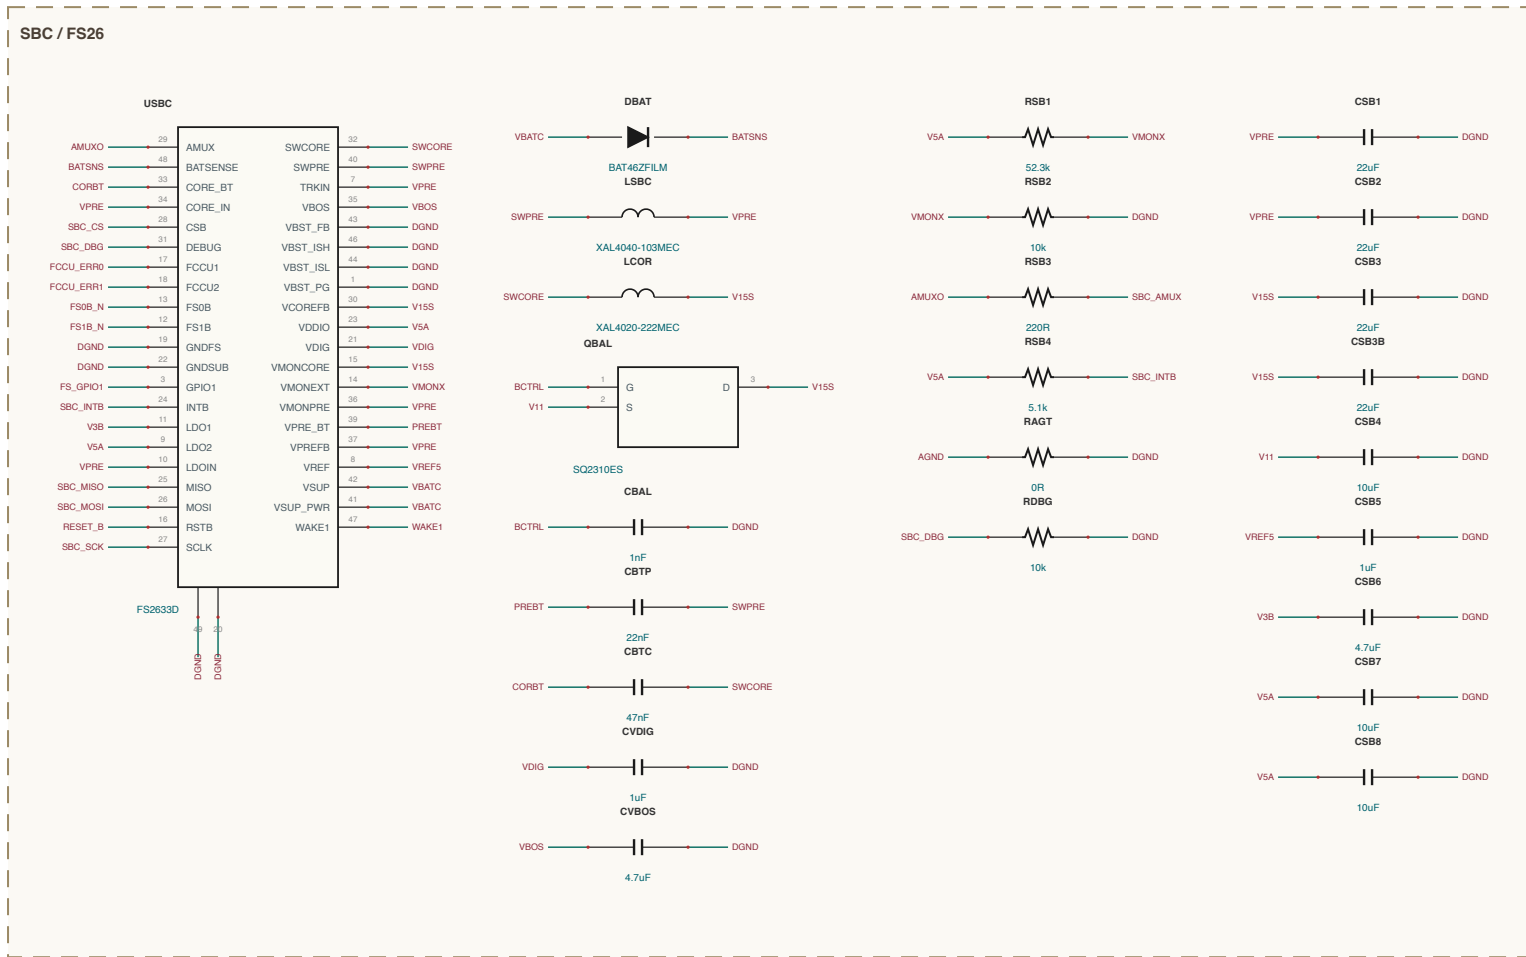
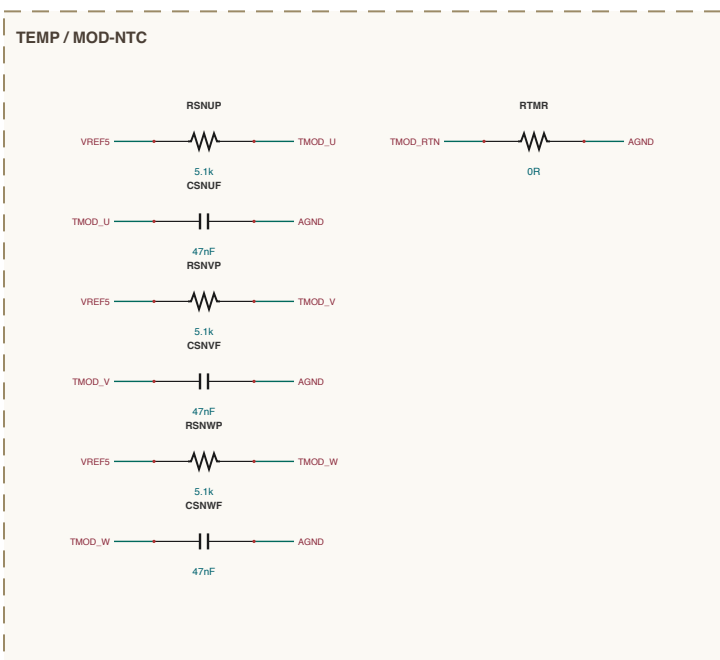
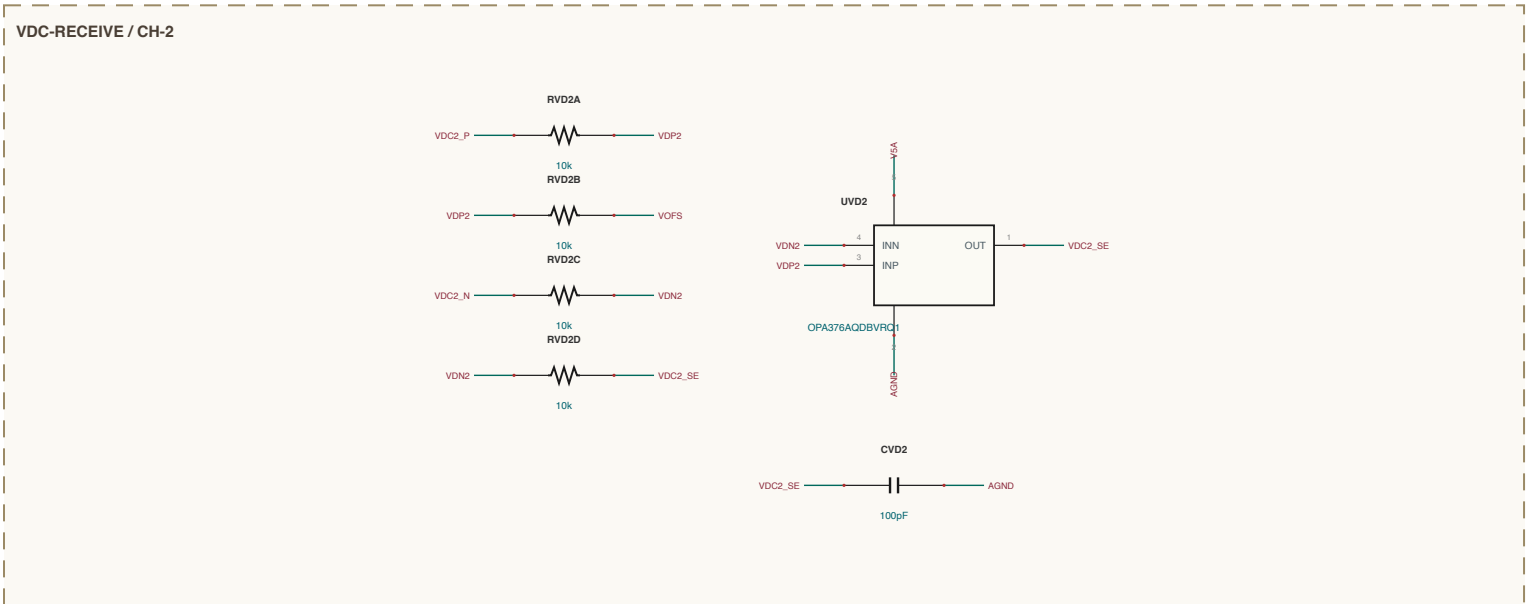
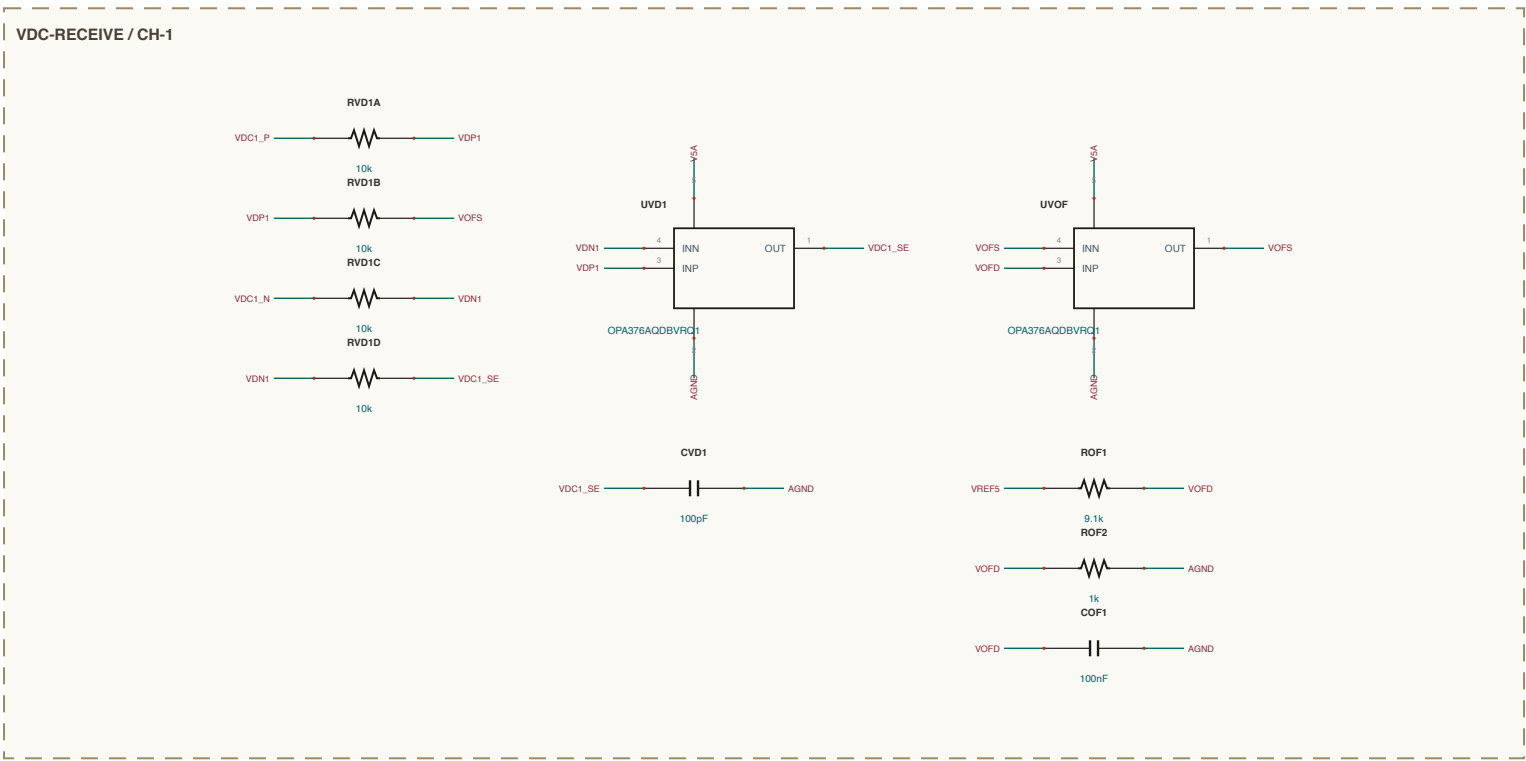
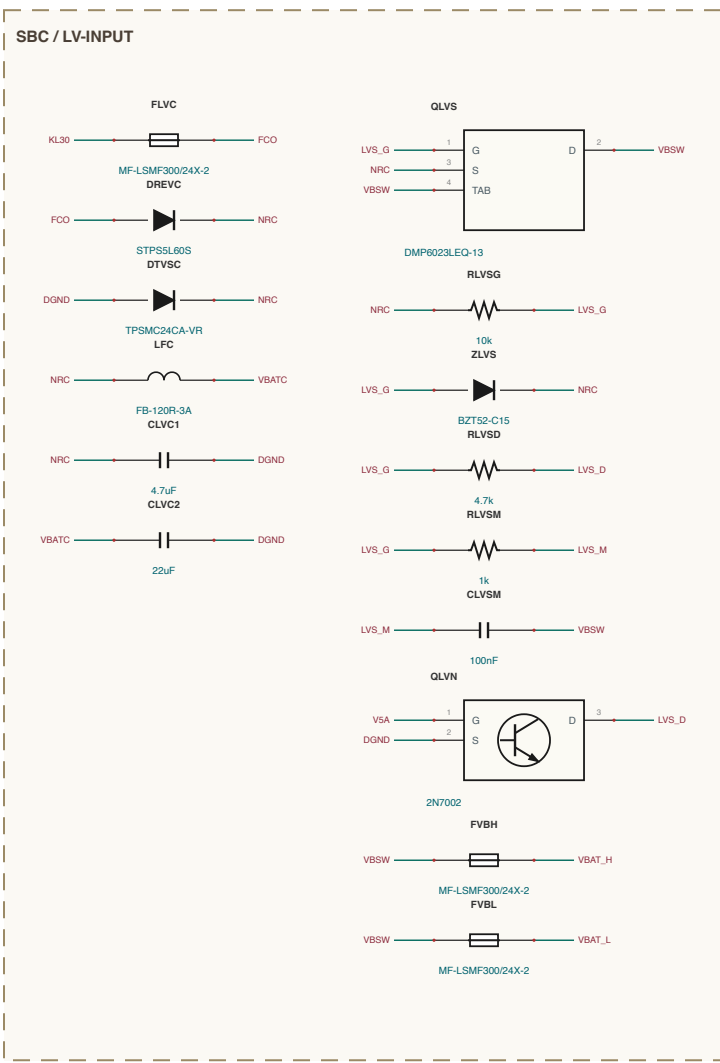
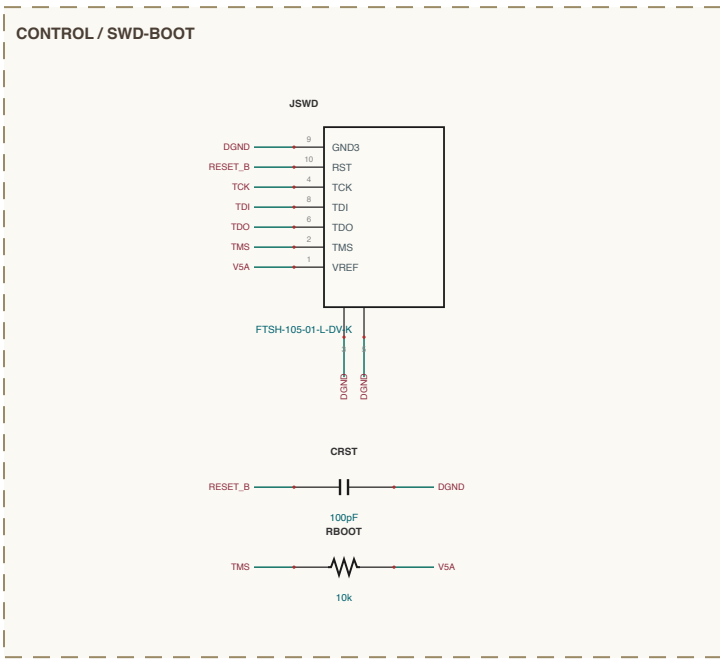


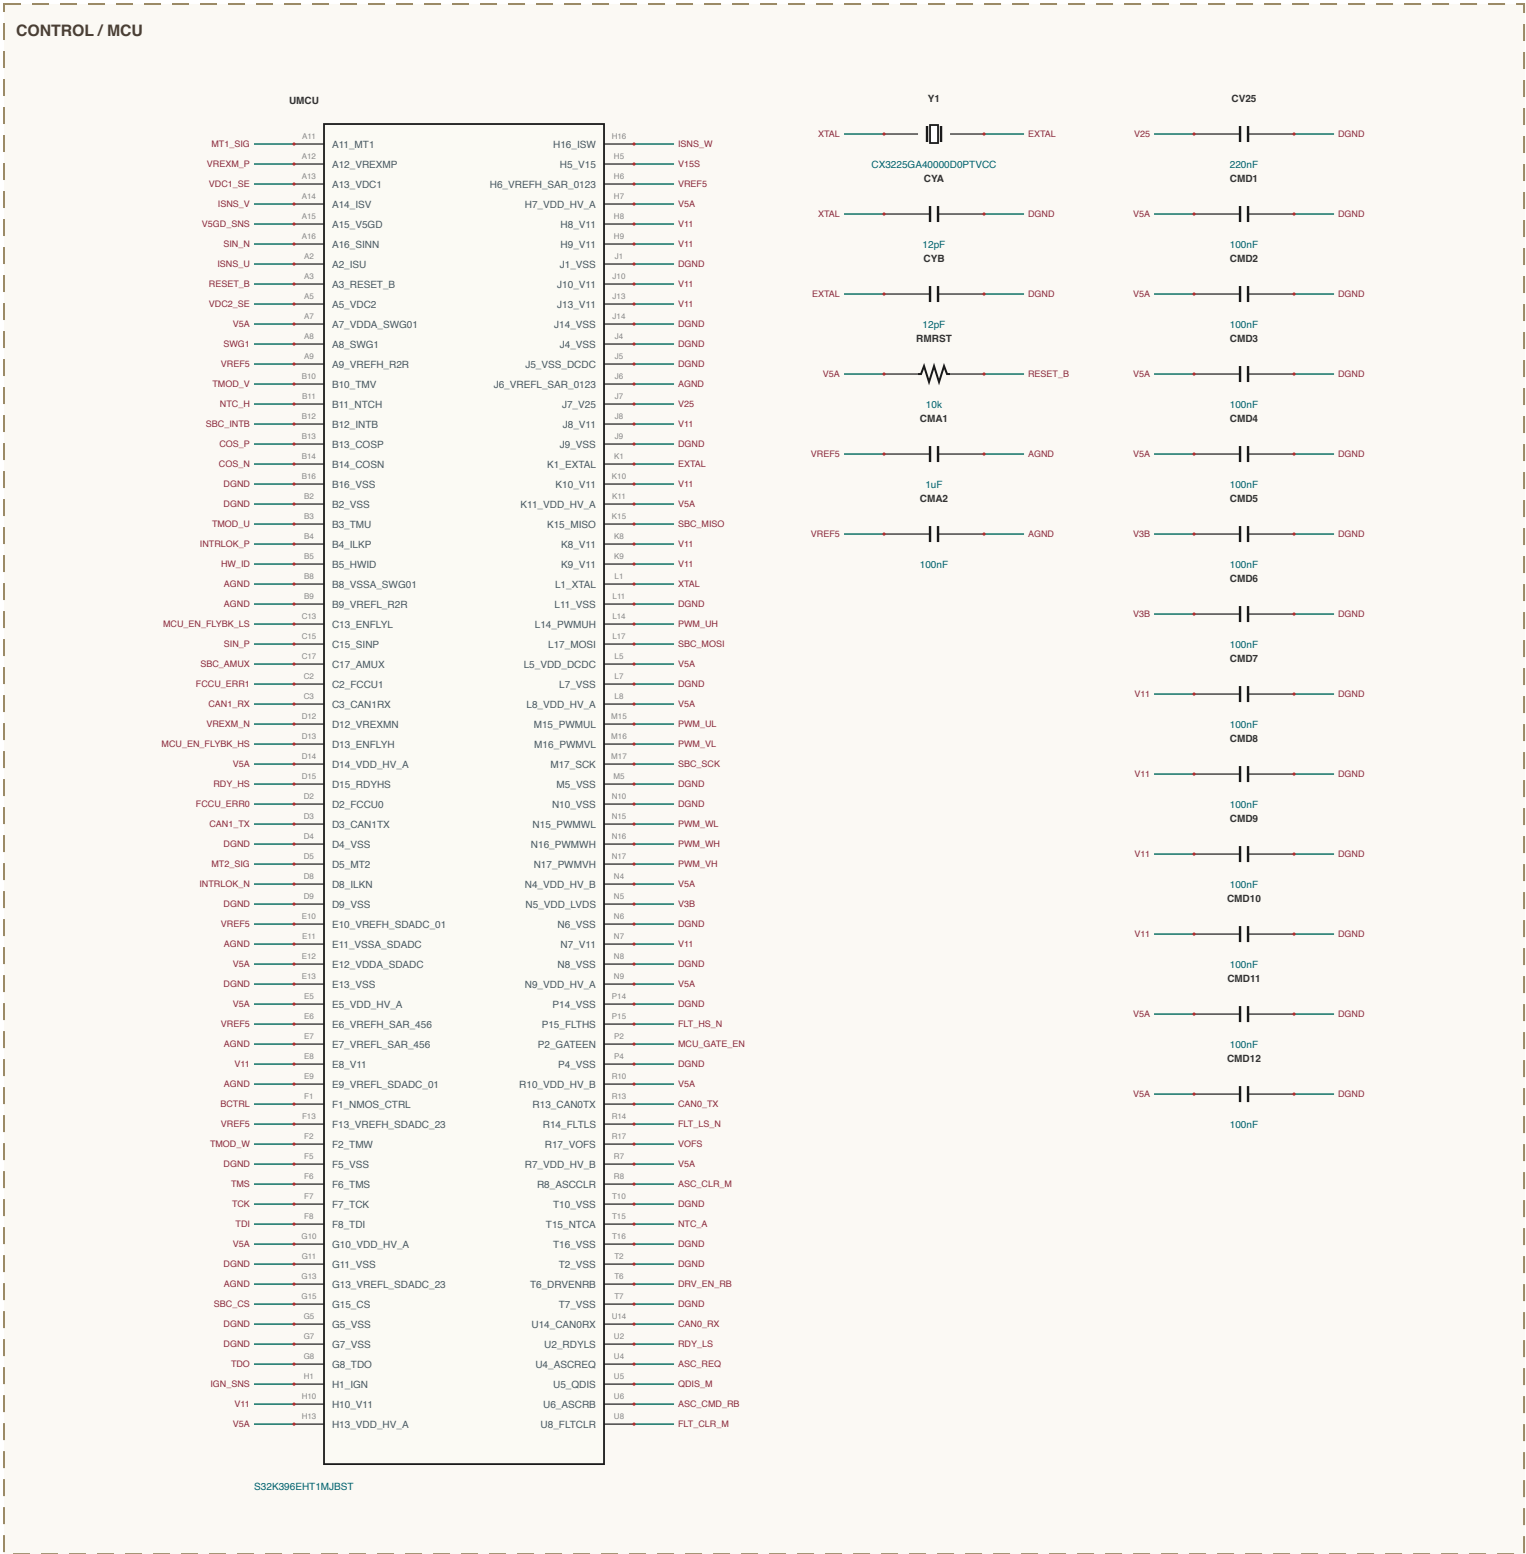

SHEET INDEX

200 kW pk Control card (LV) - 4 of 4
PHASE-SENSE - 4 sections
RESOLVER - 4 sections
SAFETY - 4 sections
SBC - 3 sections
TEMP - 3 sections
COMMS - 3 sections
CONTROL - 3 sections
VDC-RESERVE - 2 sections
CARDIF - 1 section
VEHICLE-IF - 1 section
See A.1.1 - 20 sections - 287 components

NET NAMING

Internal functions are colour-coded by sheet pin.
Green: 4-pin mode at that IC pin e.g. SWD, VDDP
Red: 5-pin mode at that IC pin e.g. SWD, VDDP
Blue: 6-pin mode at that IC pin e.g. SWD, VDDP
Yellow: 7-pin mode at that IC pin e.g. SWD, VDDP
Orange: 8-pin mode at that IC pin e.g. SWD, VDDP
Grey: 9-pin mode at that IC pin e.g. SWD, VDDP
White: 10-pin mode at that IC pin e.g. SWD, VDDP
Black: 11-pin mode at that IC pin e.g. SWD, VDDP
Light Blue: 12-pin mode at that IC pin e.g. SWD, VDDP
Light Green: 13-pin mode at that IC pin e.g. SWD, VDDP
Light Yellow: 14-pin mode at that IC pin e.g. SWD, VDDP
Light Orange: 15-pin mode at that IC pin e.g. SWD, VDDP
Light Red: 16-pin mode at that IC pin e.g. SWD, VDDP
Light Purple: 17-pin mode at that IC pin e.g. SWD, VDDP
Light Brown: 18-pin mode at that IC pin e.g. SWD, VDDP
Light Grey: 19-pin mode at that IC pin e.g. SWD, VDDP
Light Black: 20-pin mode at that IC pin e.g. SWD, VDDP