
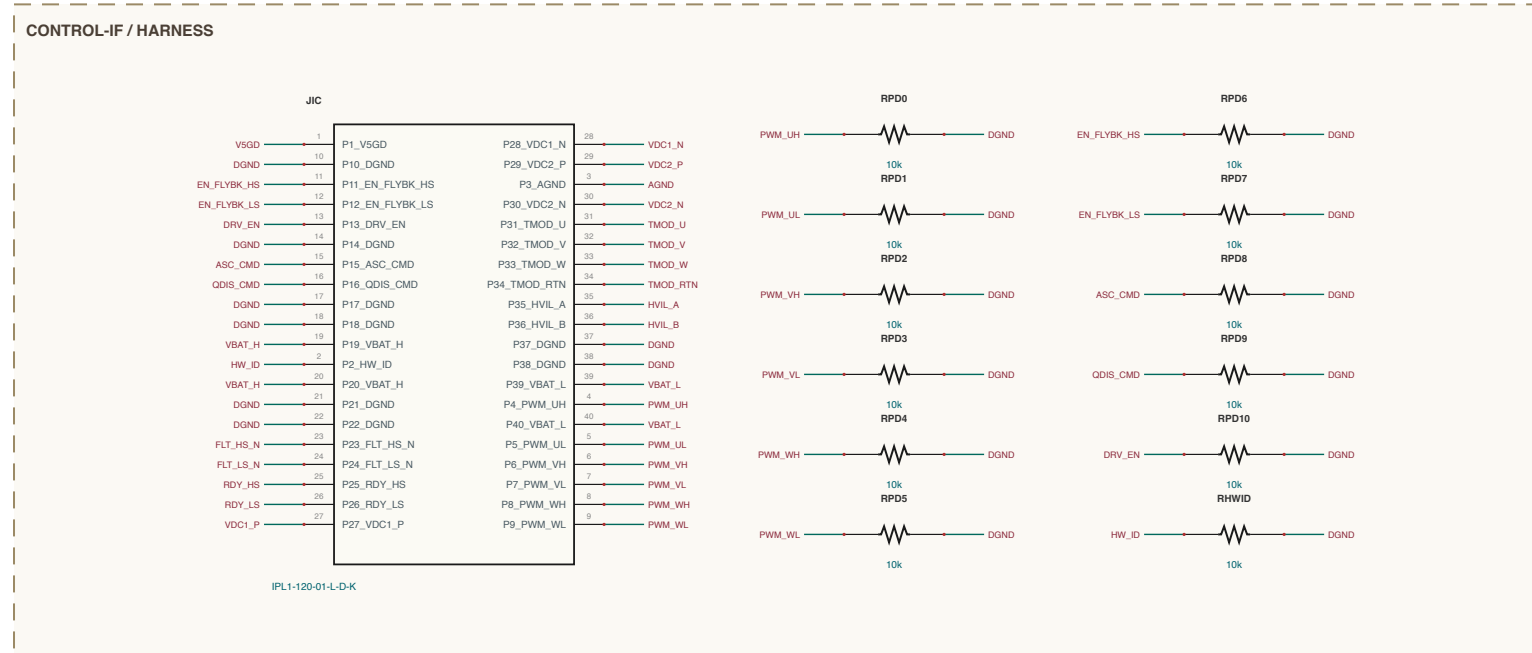
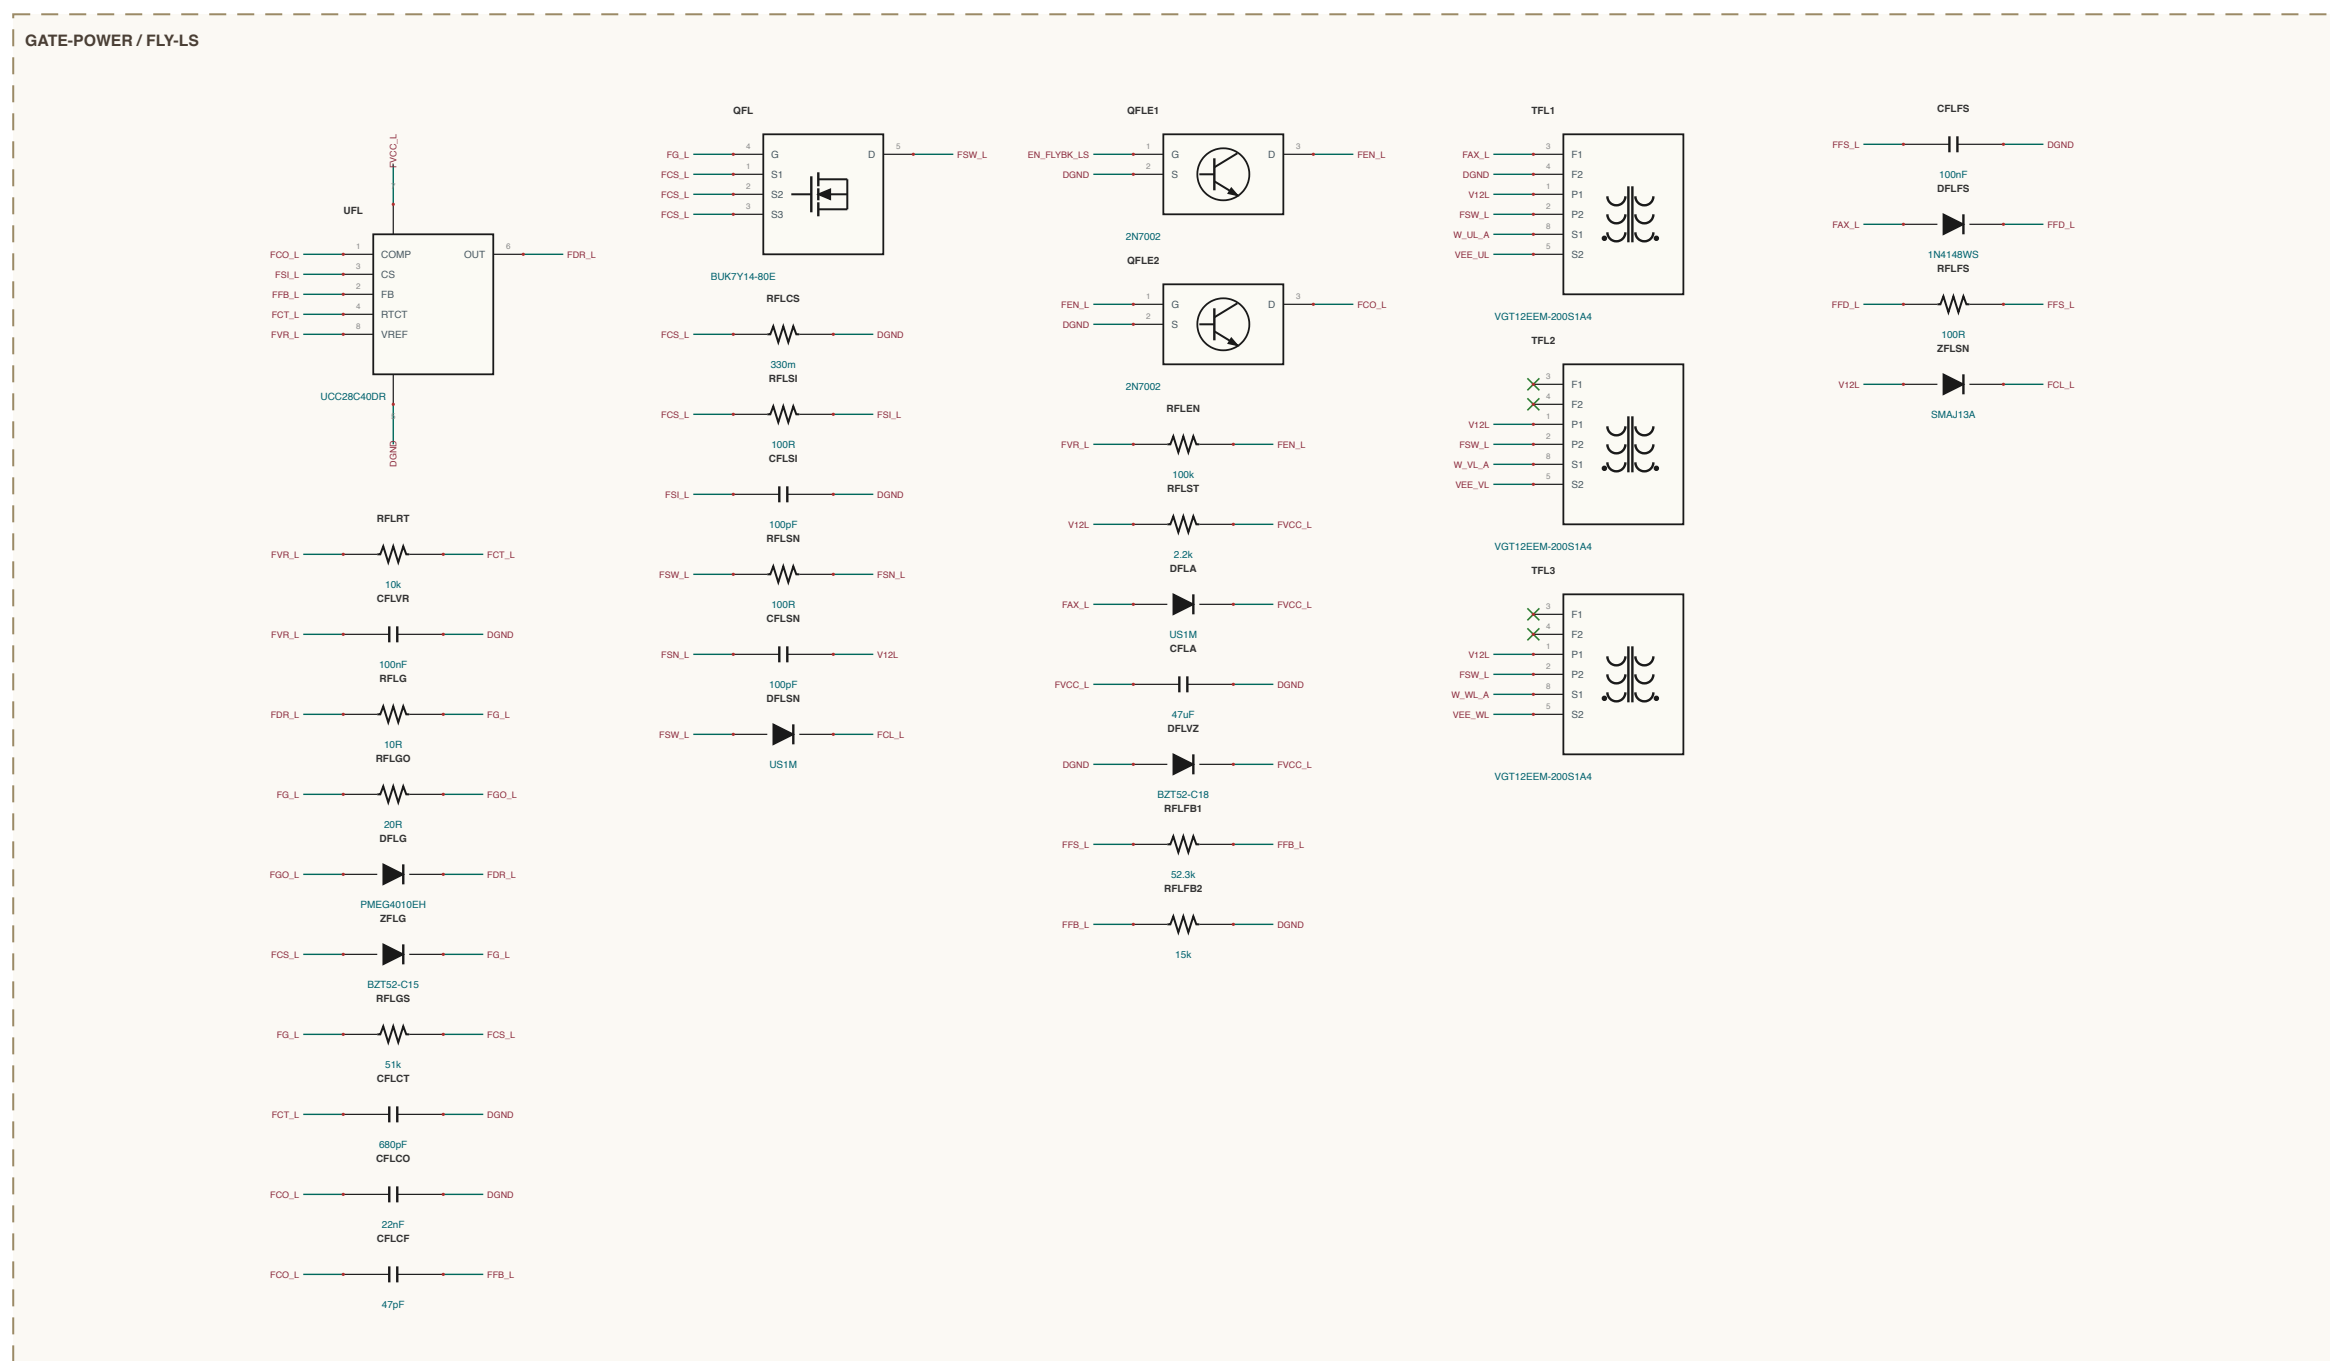
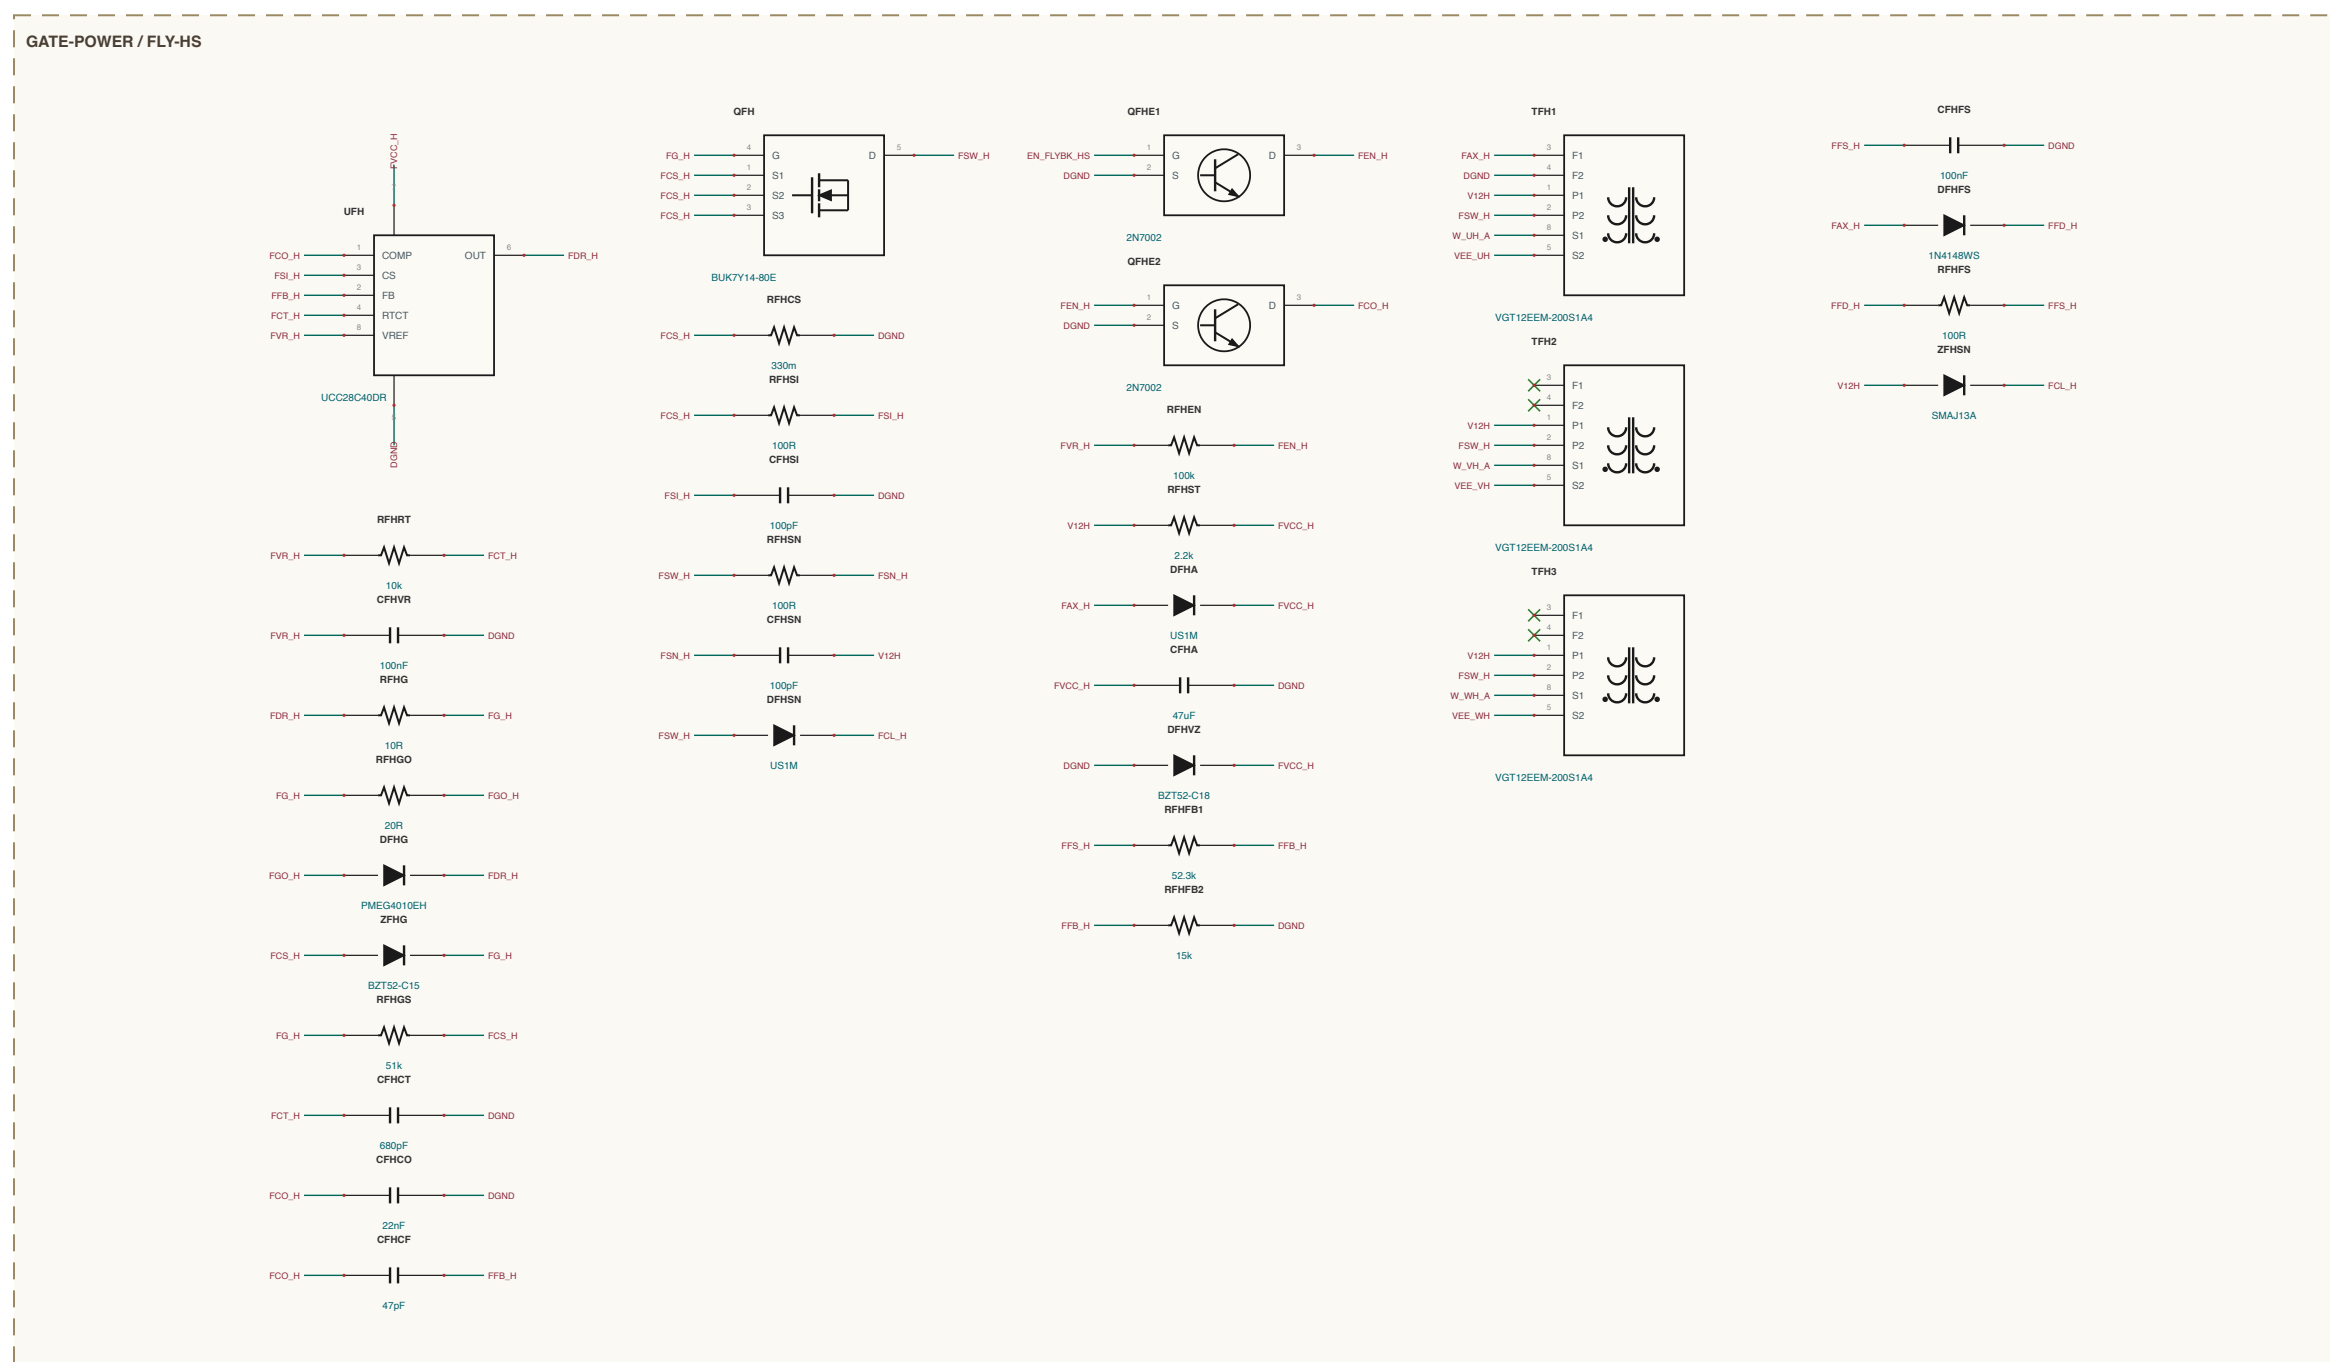
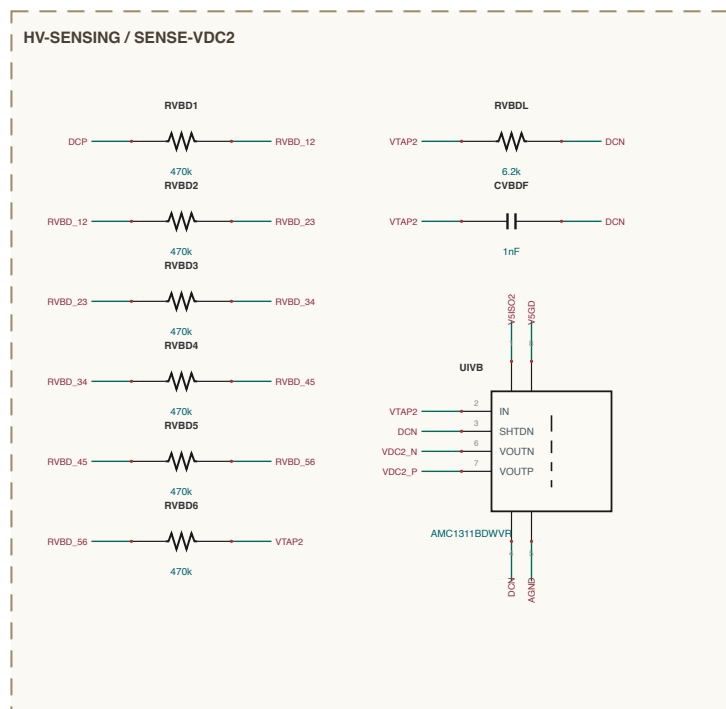
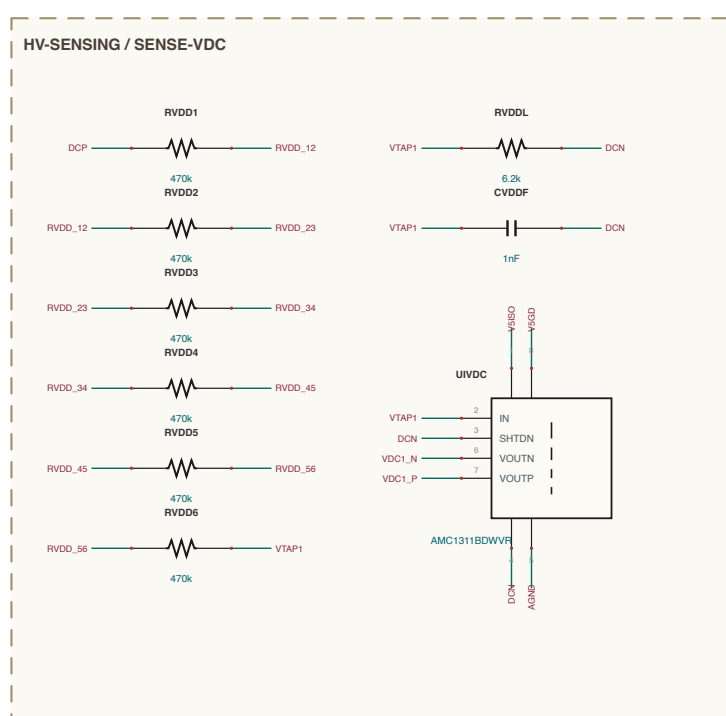
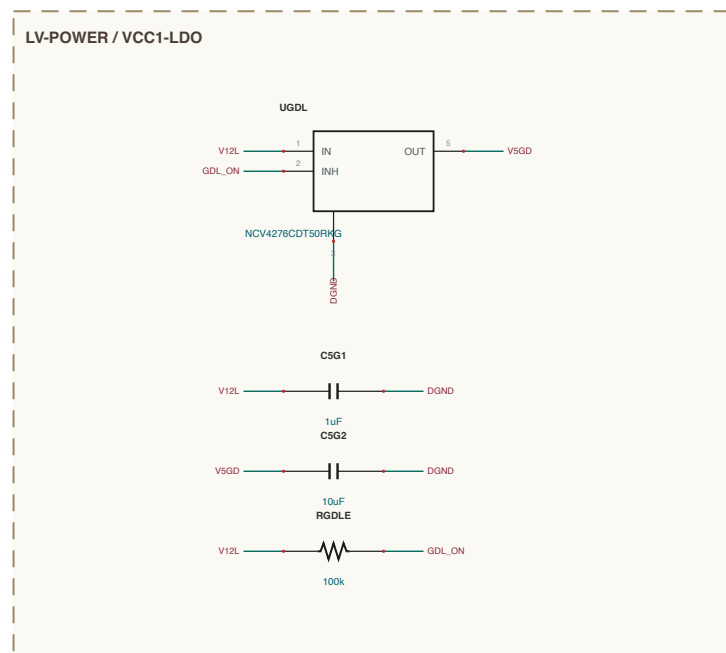
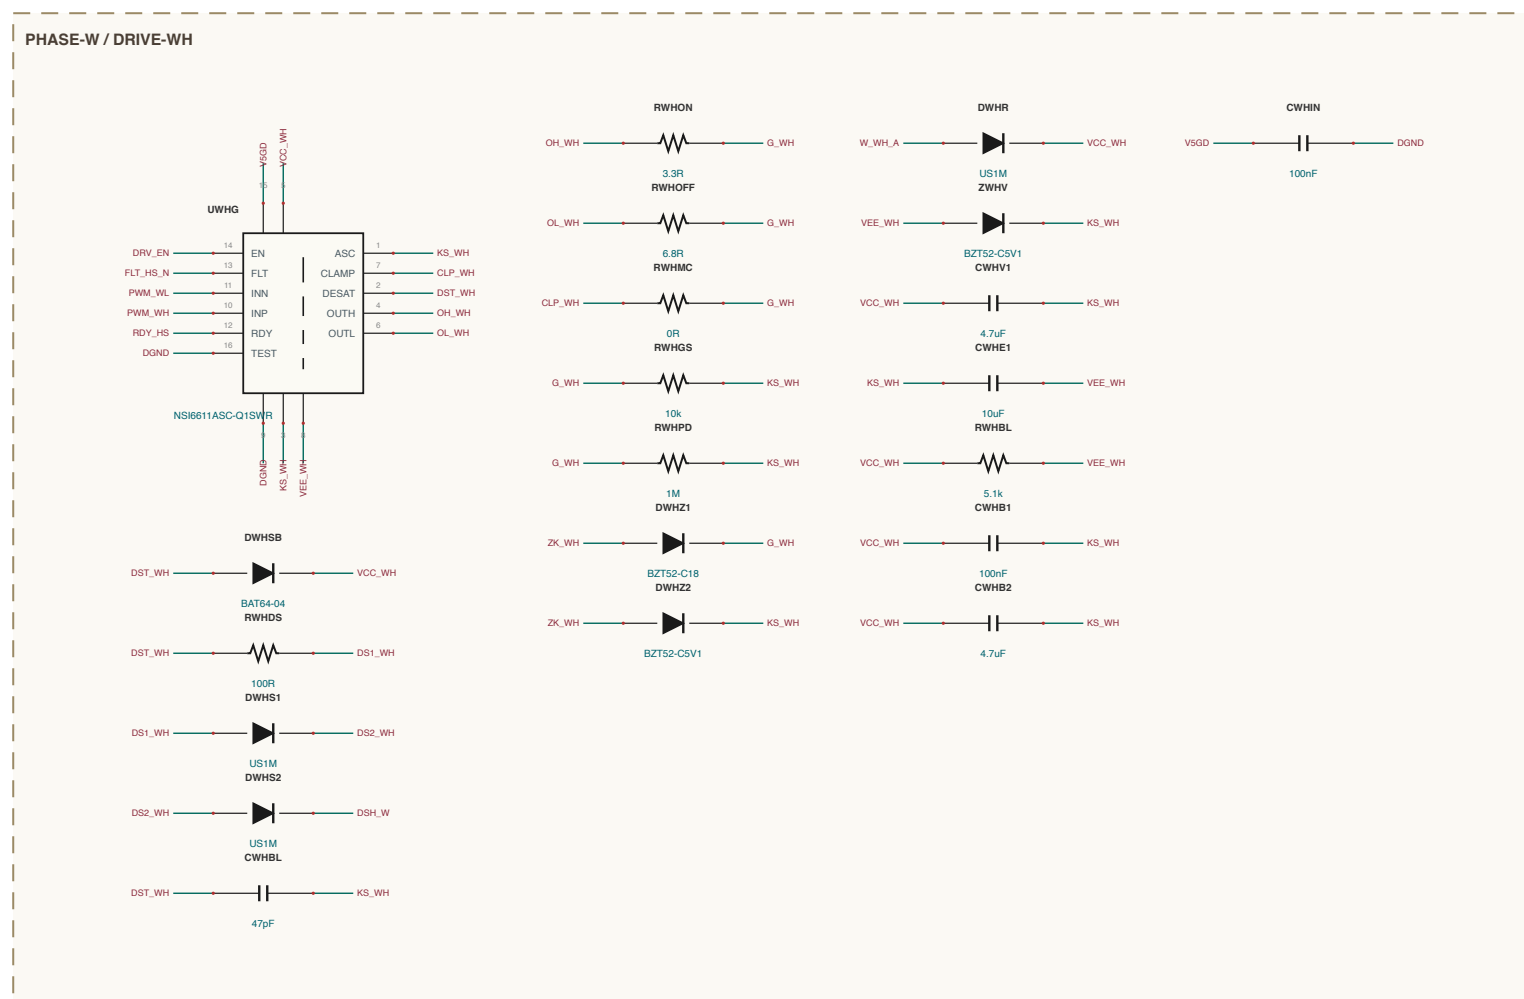
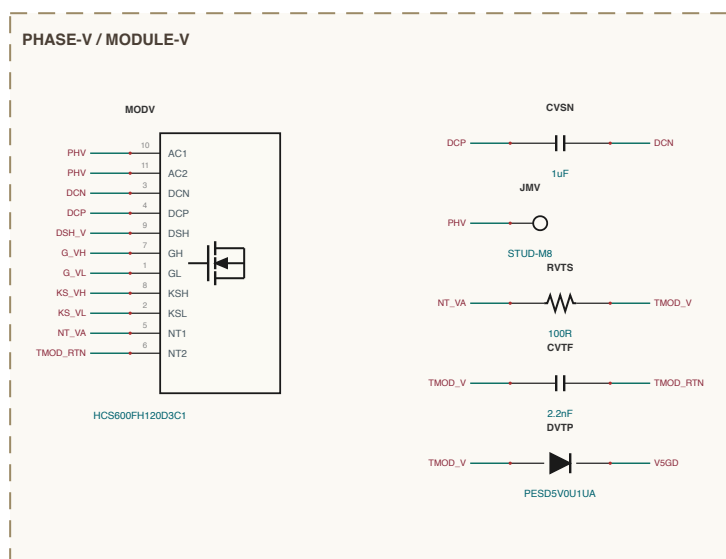
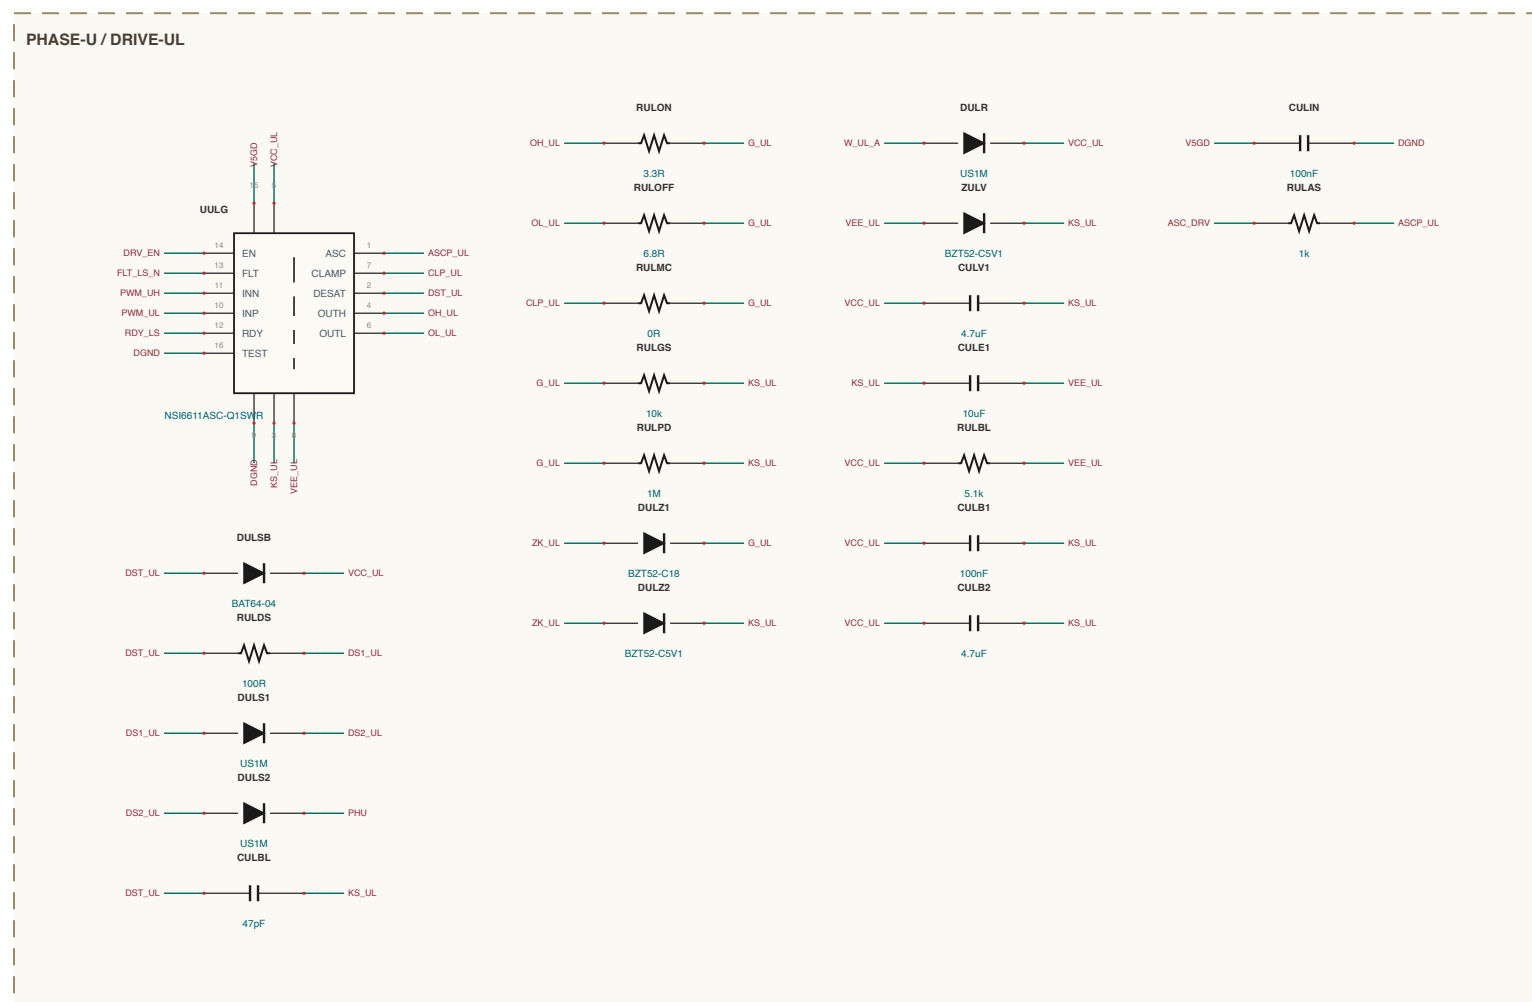
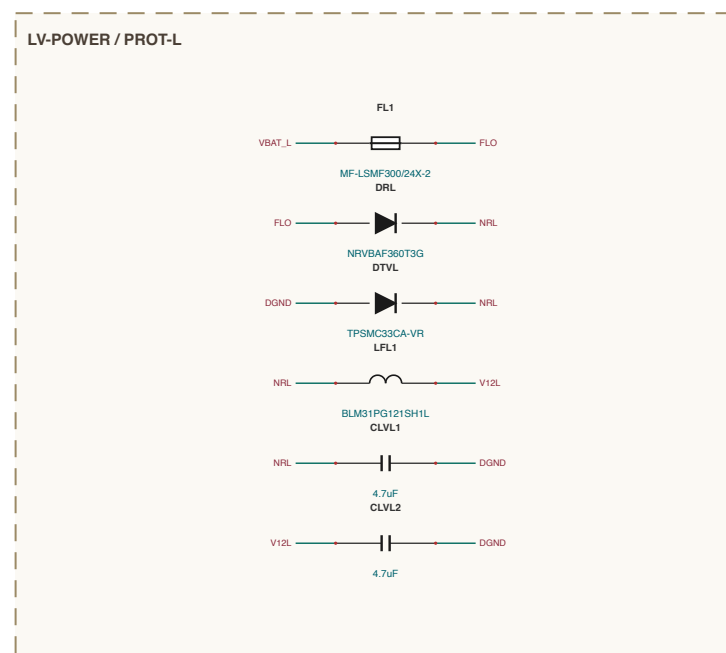
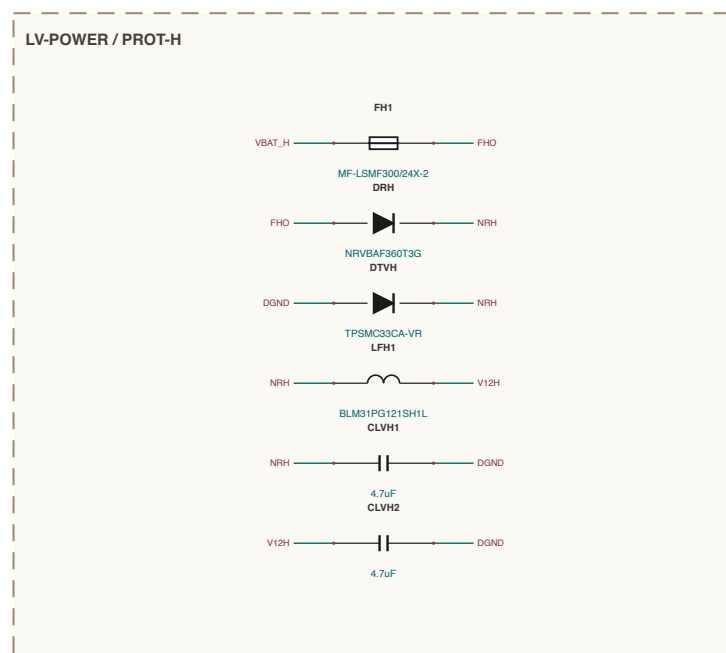
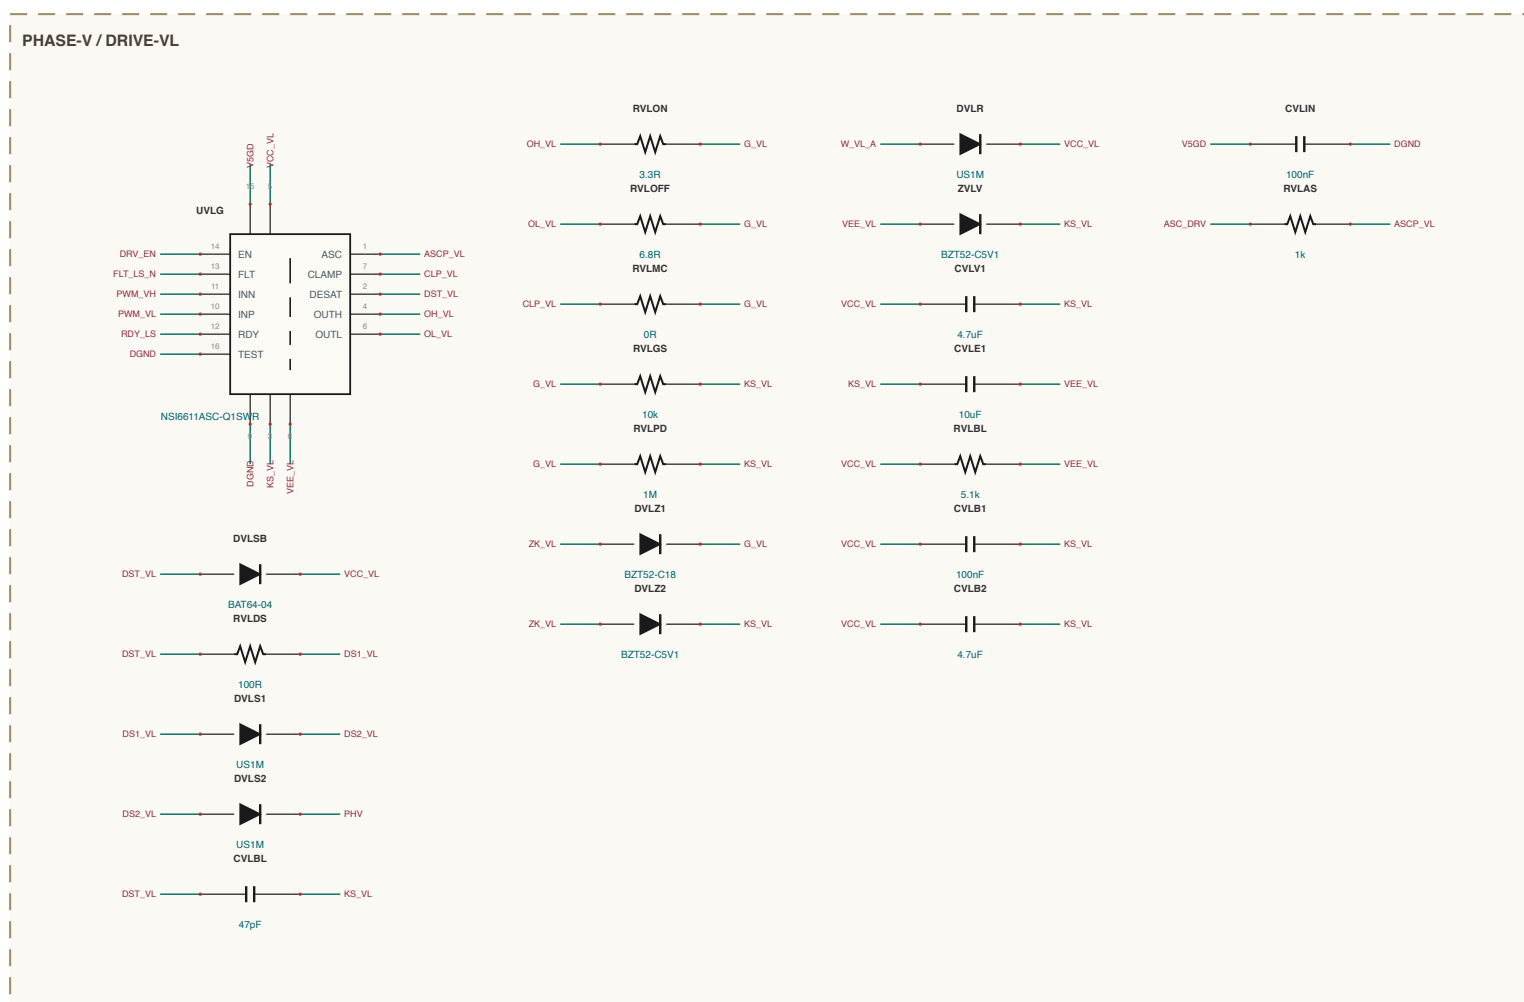
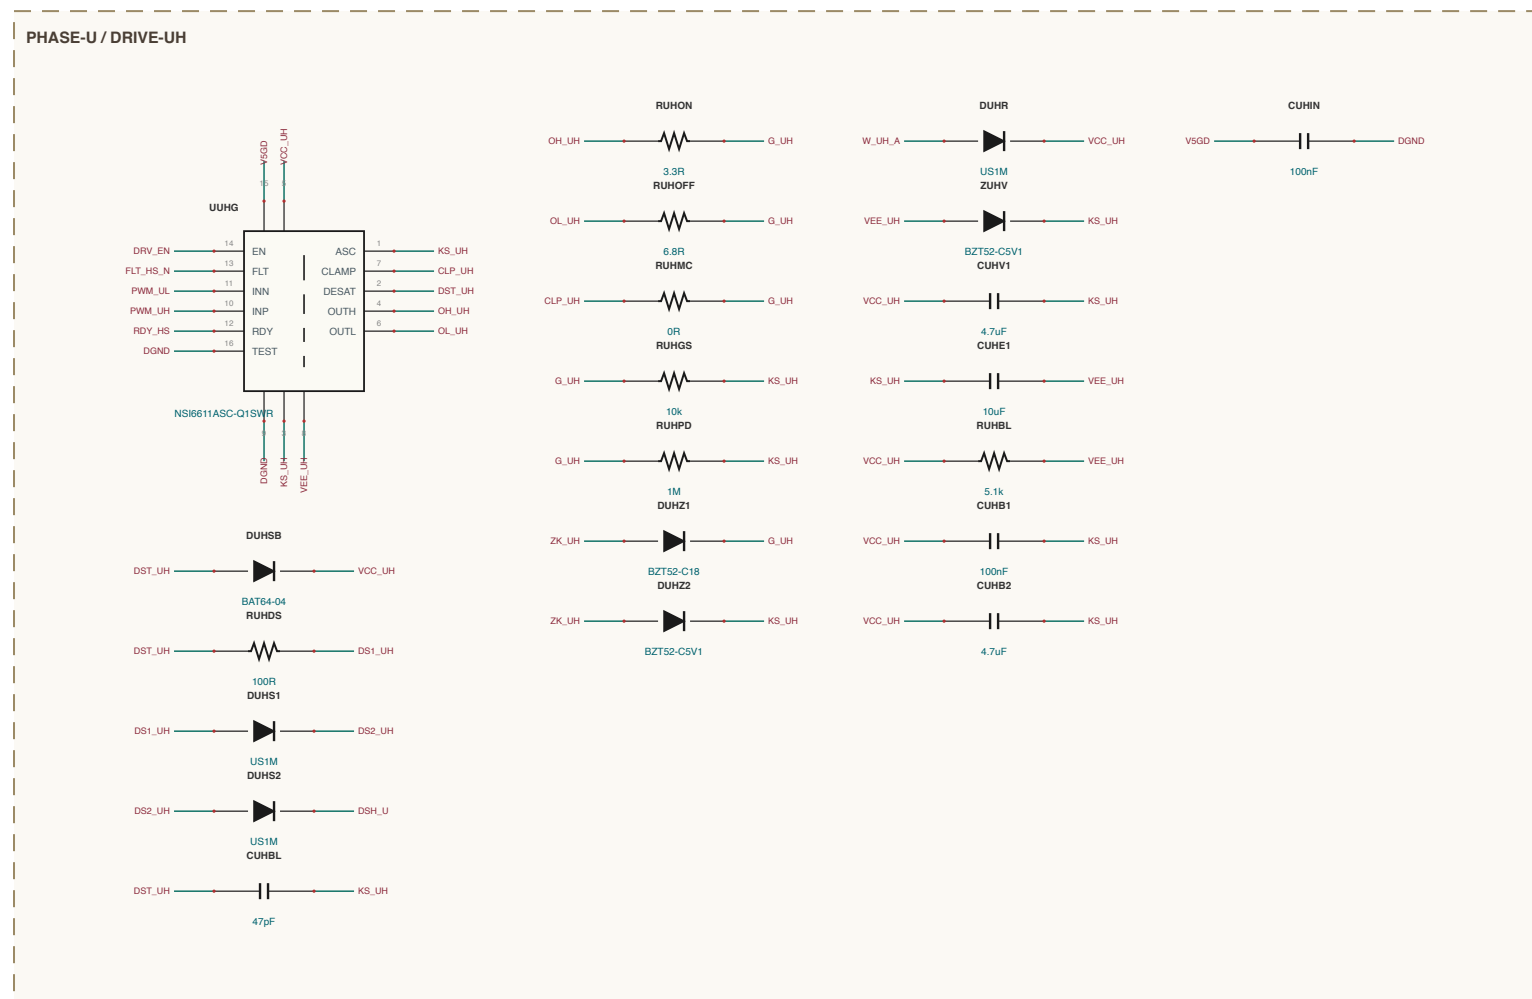
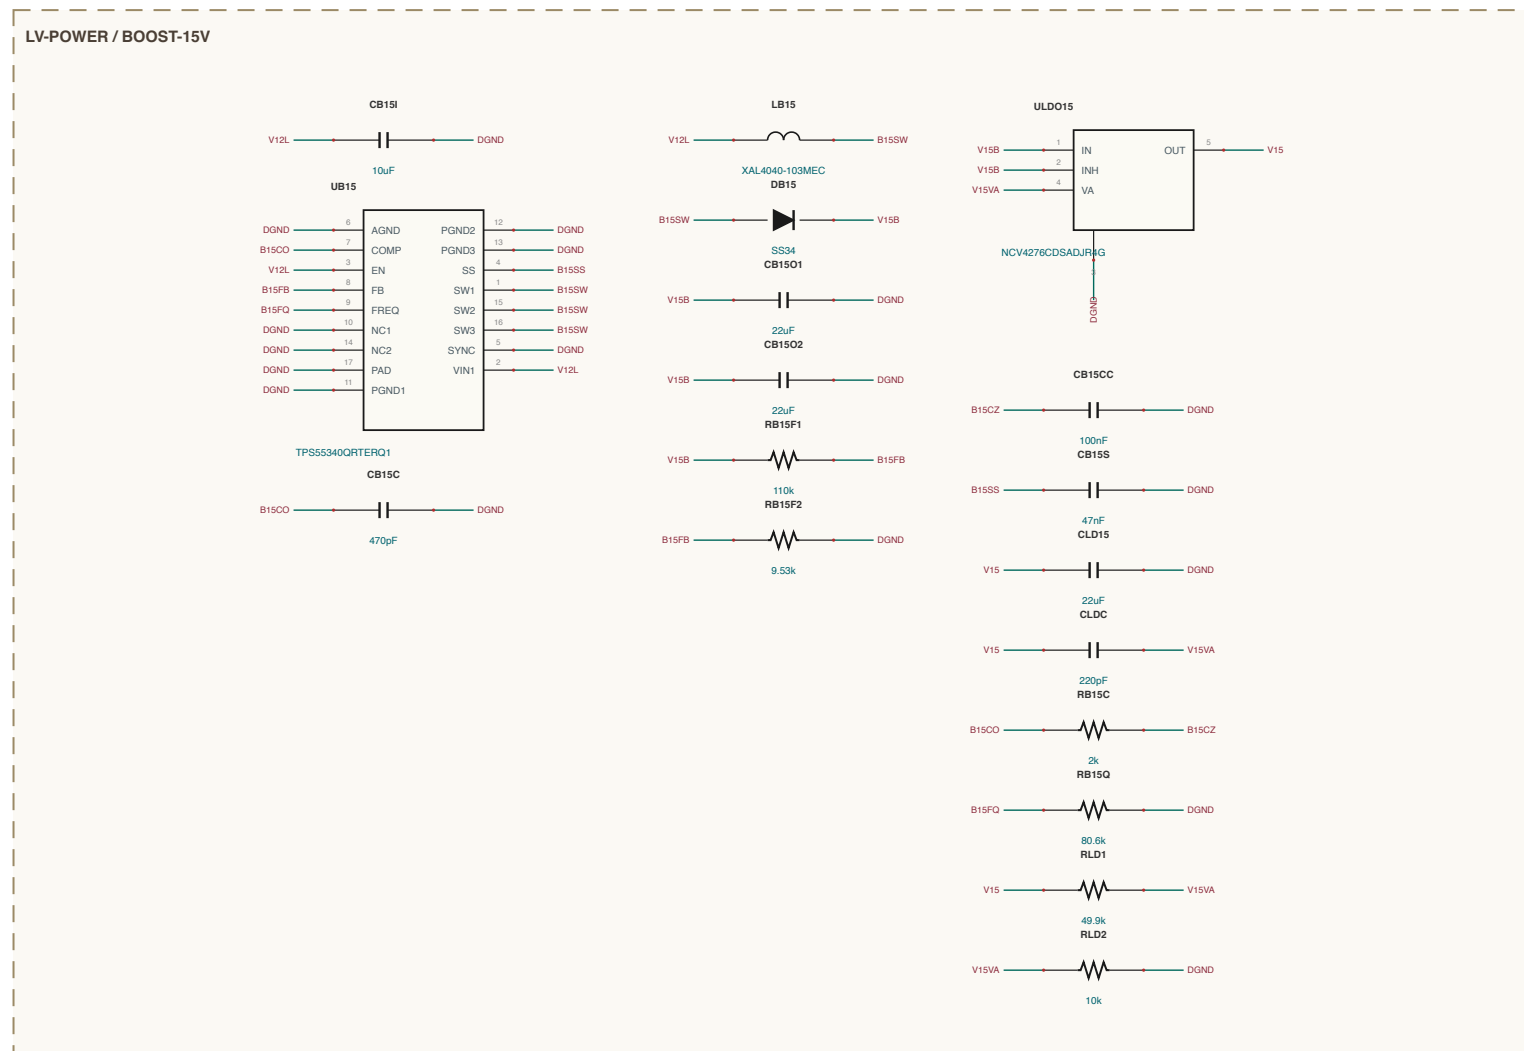
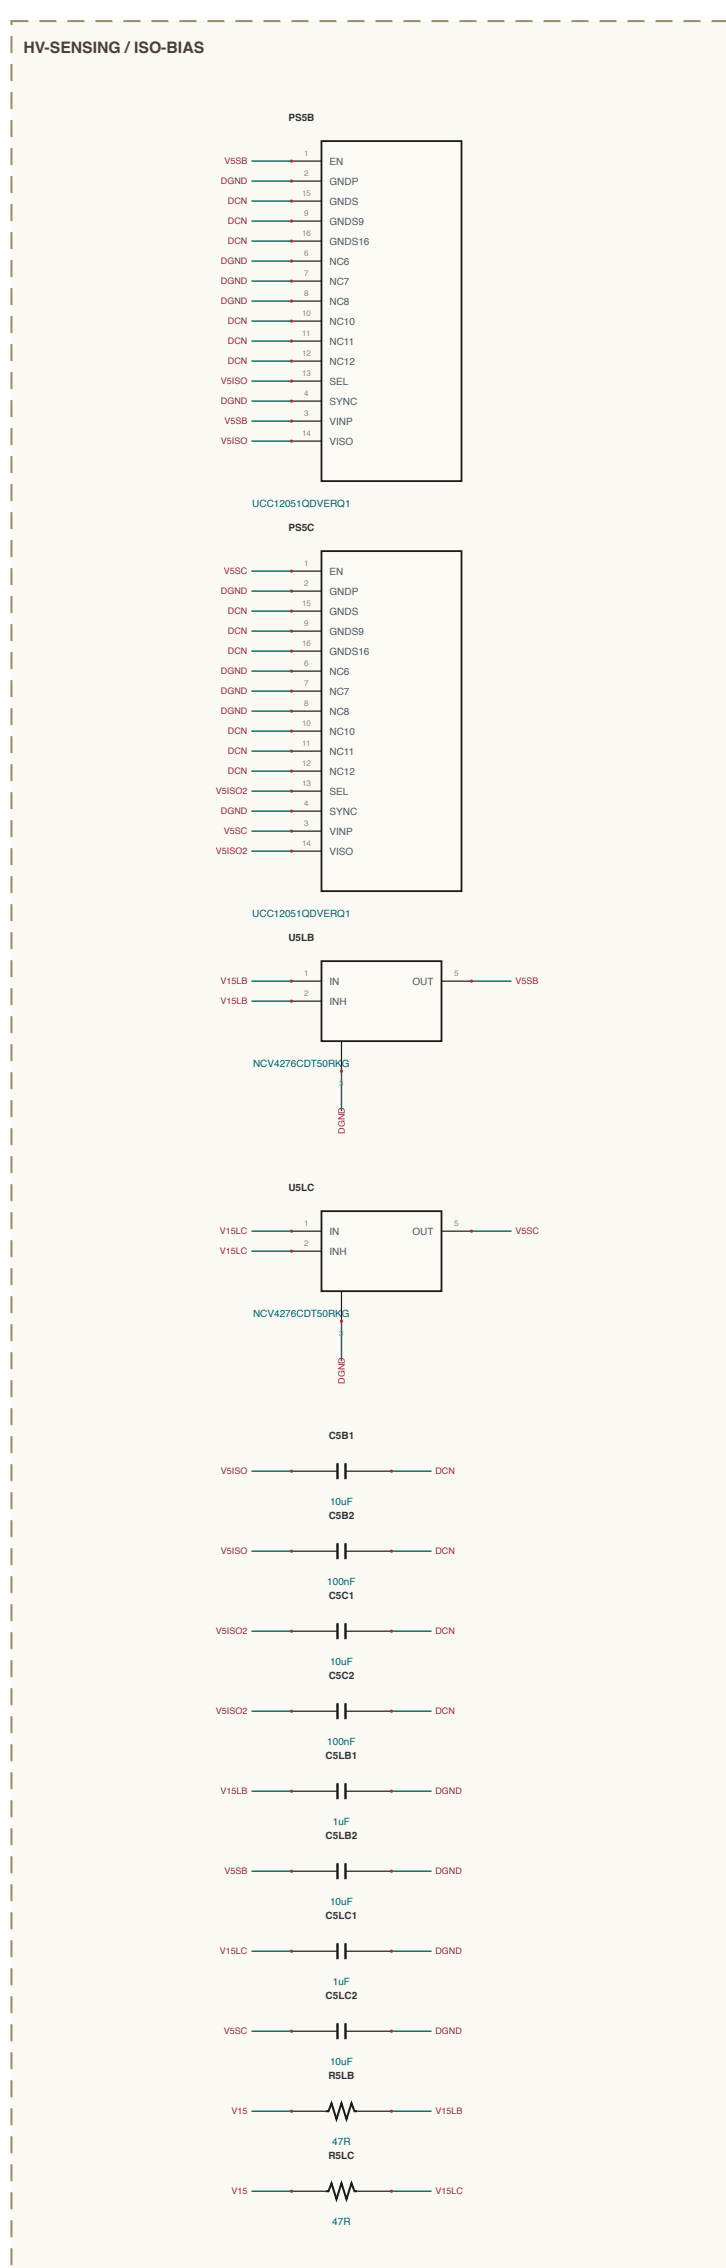
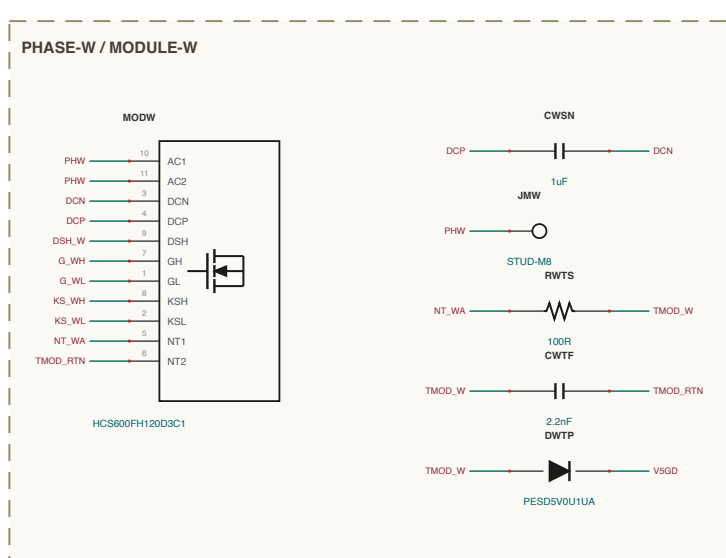
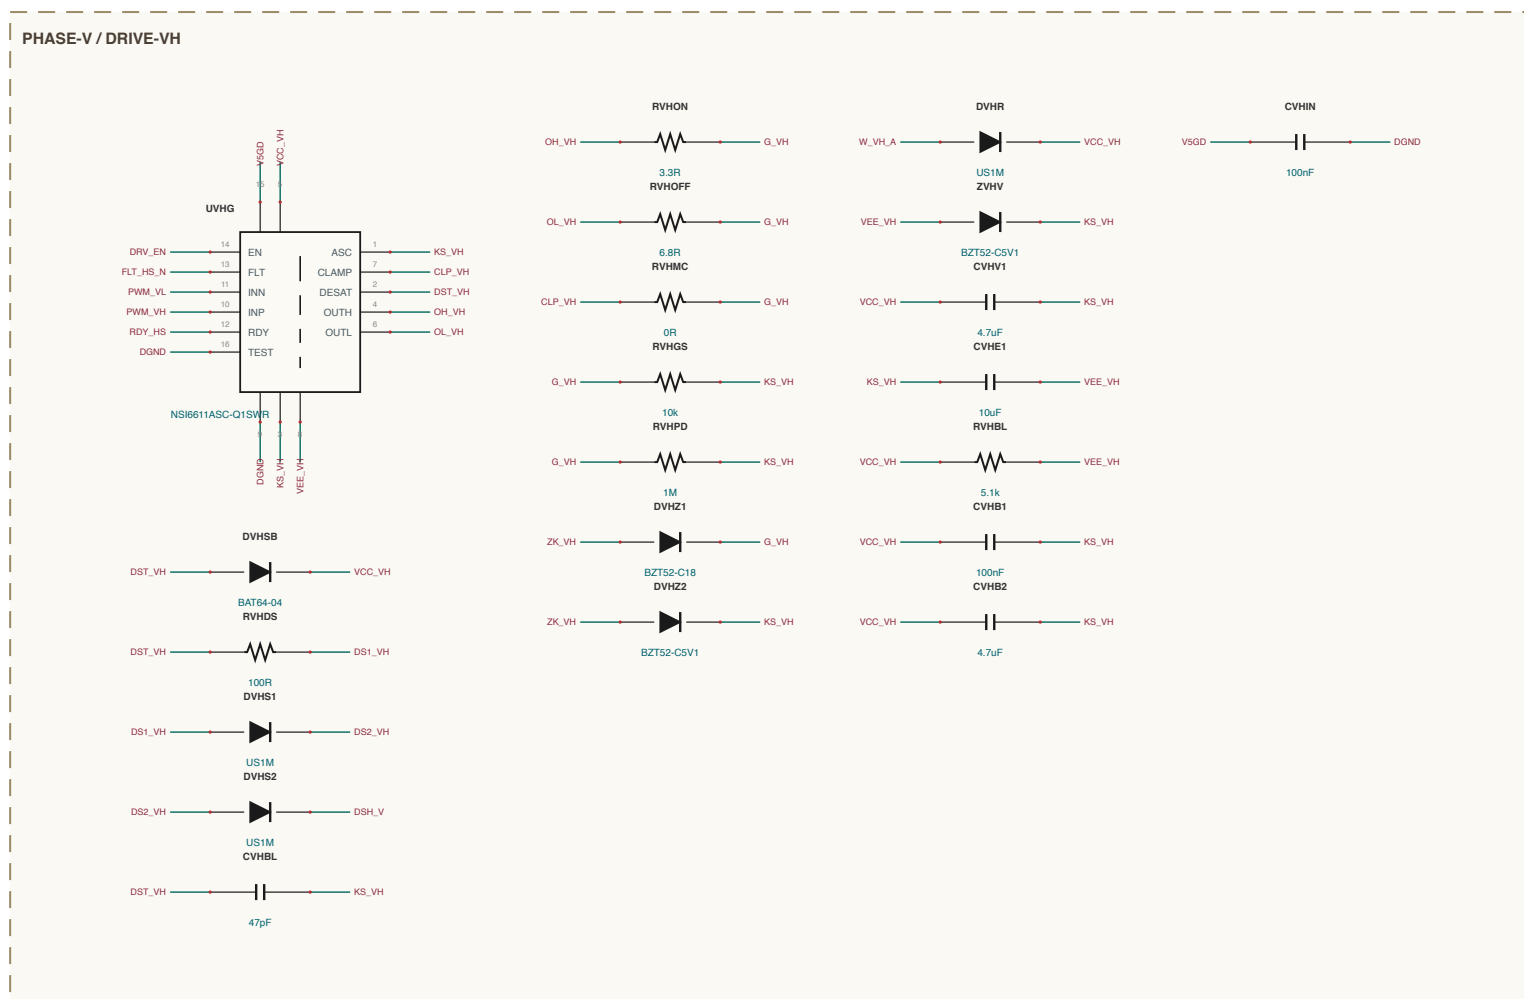
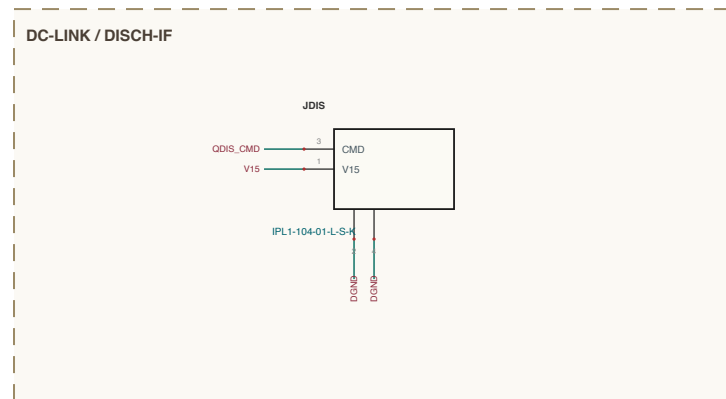
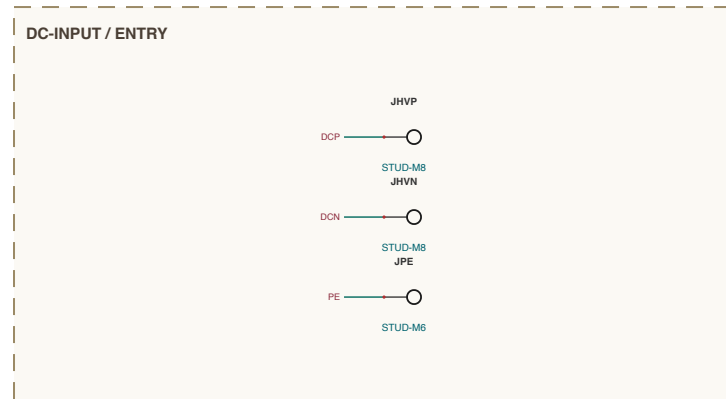
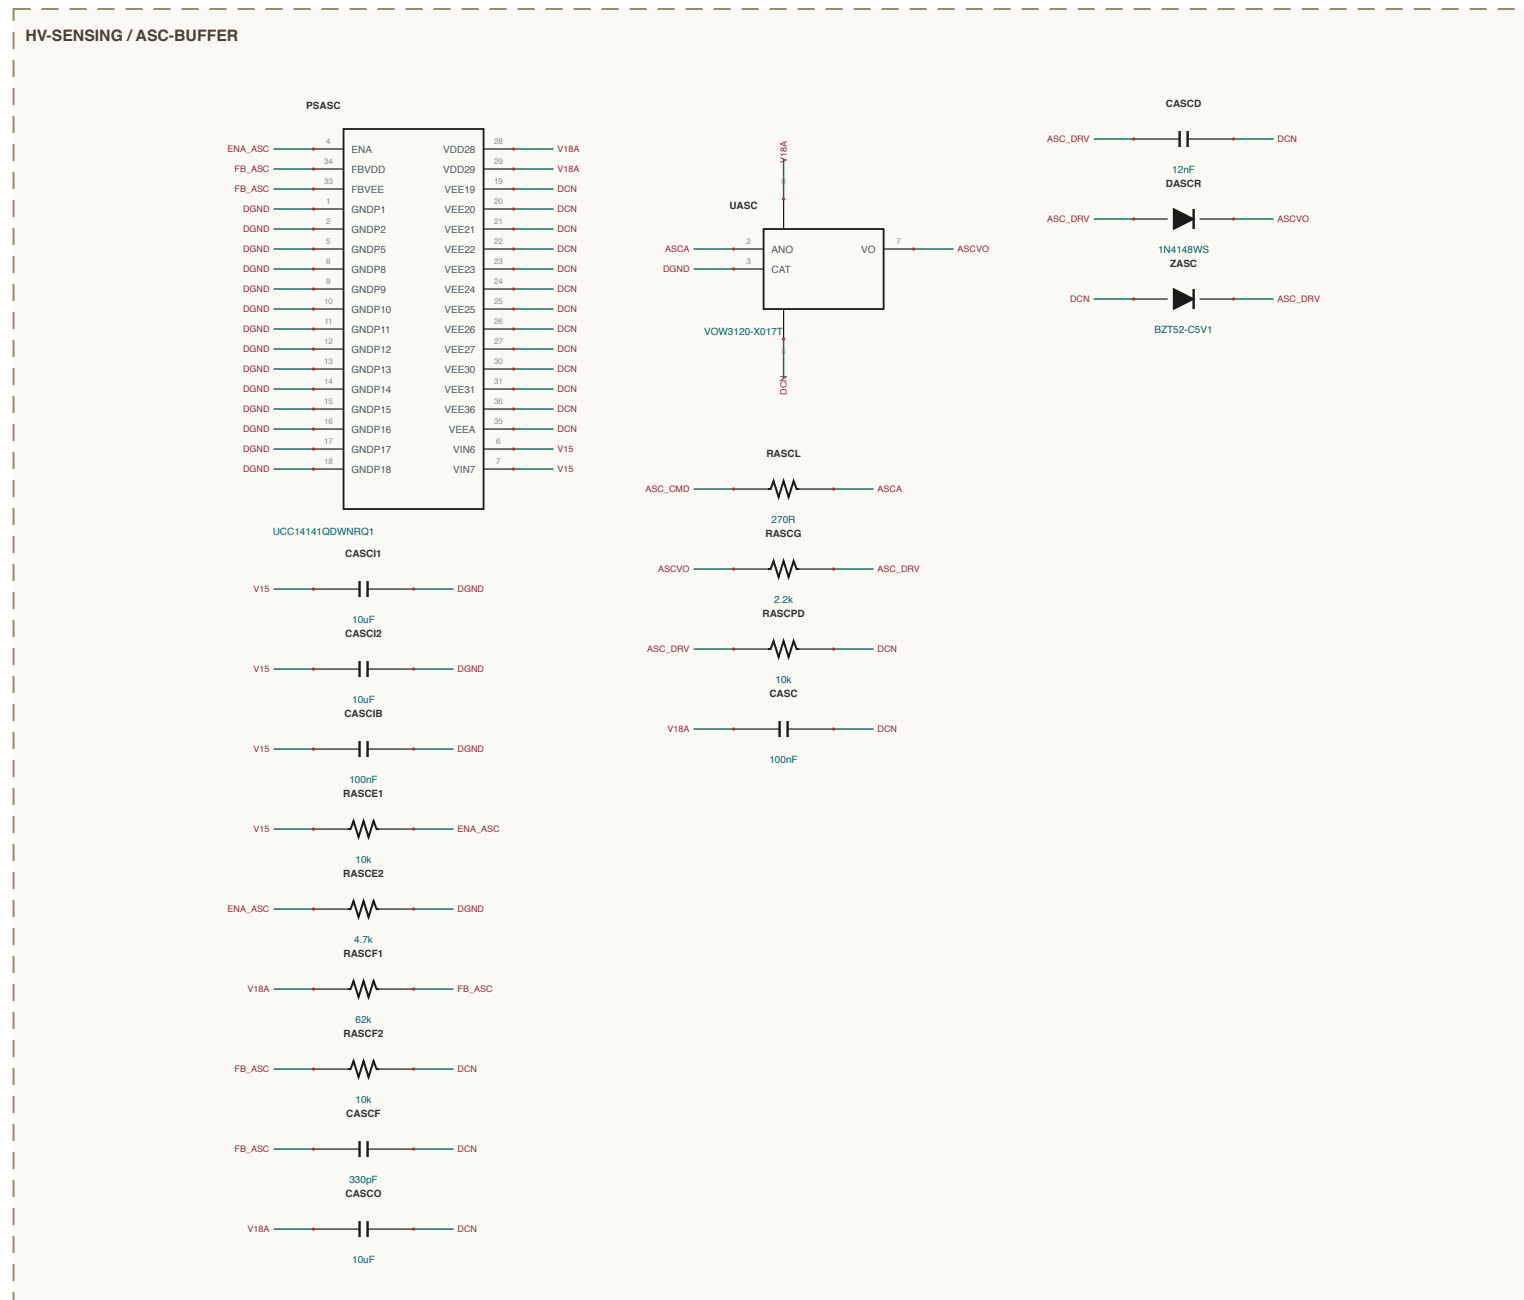
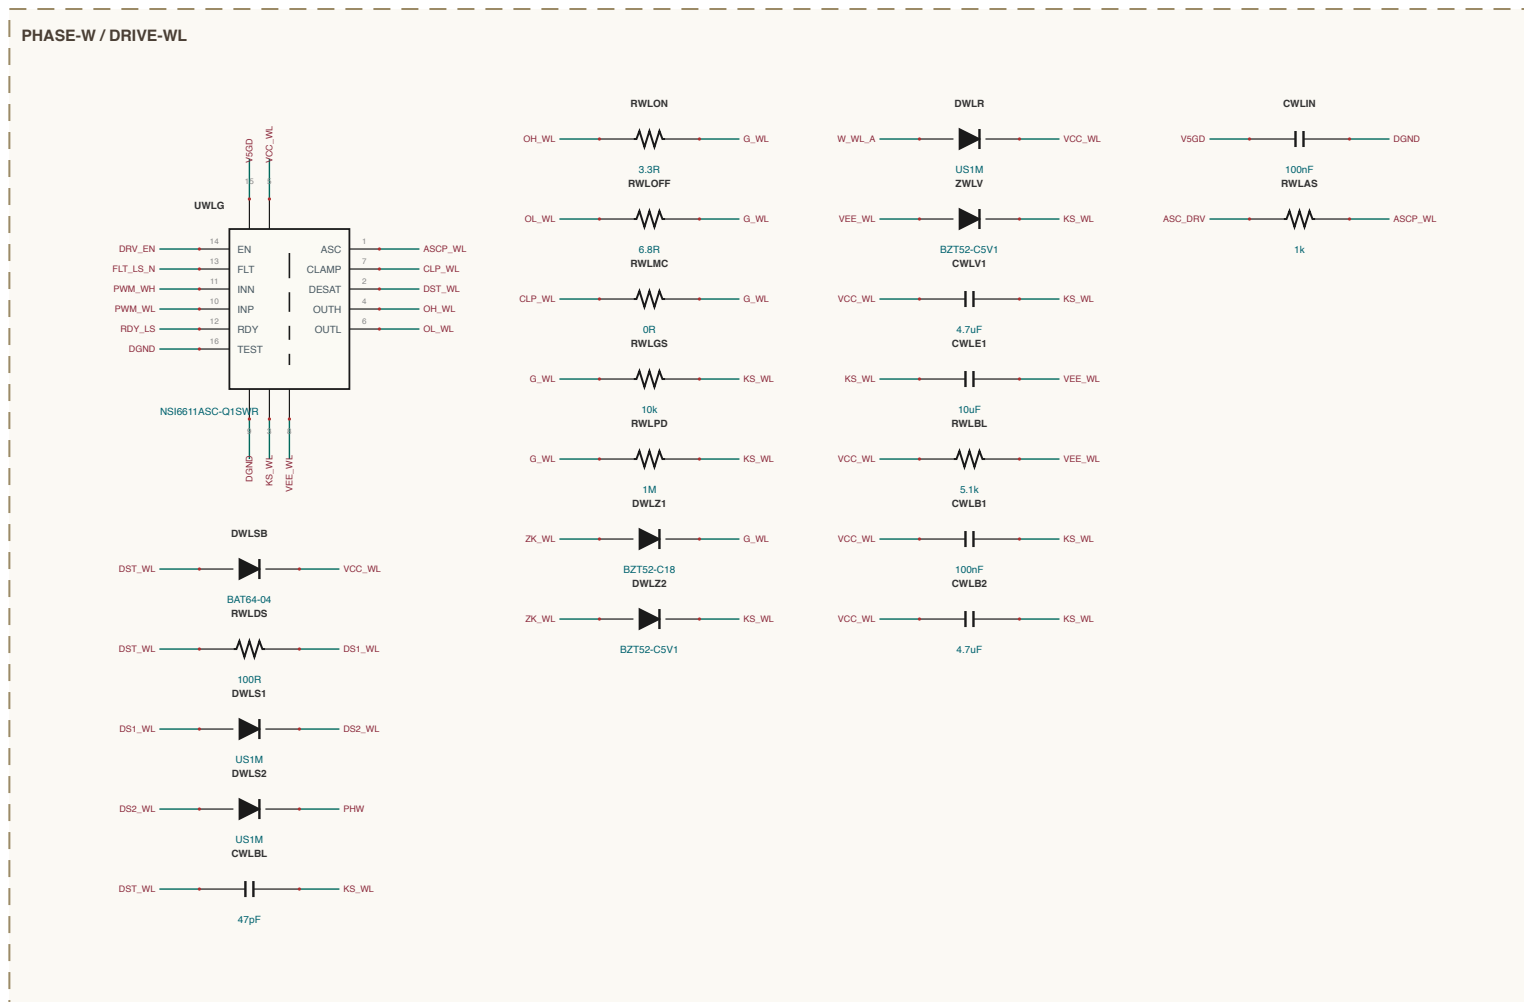
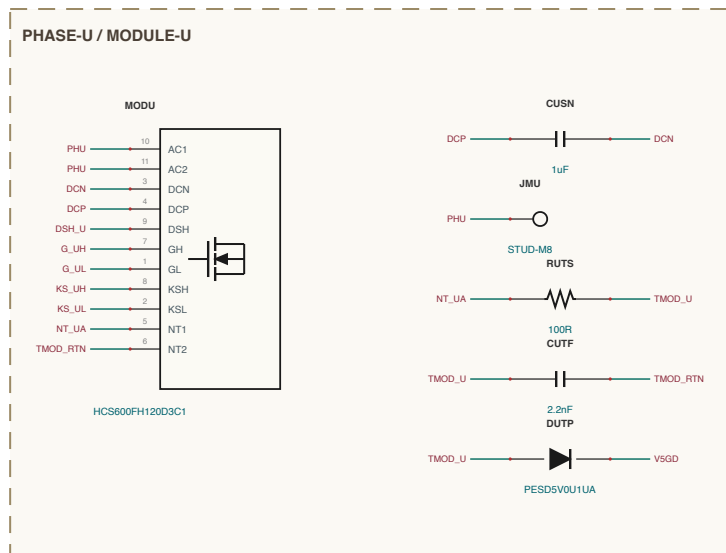
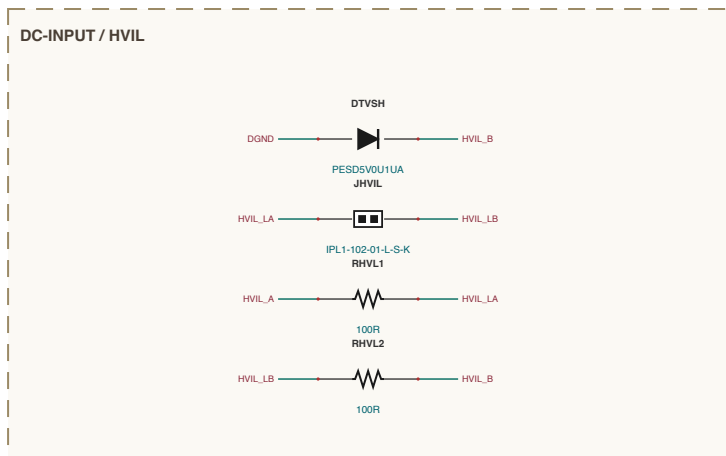


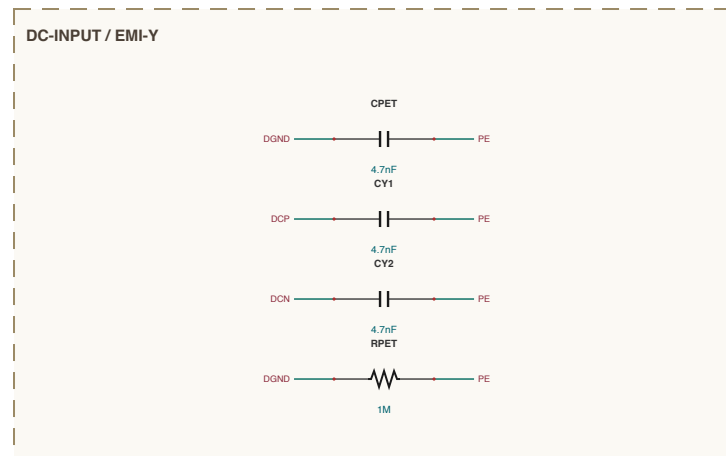

ASB-01 SAFETY CONCEPT + DC-LINK DISCHARGE VENTION	
add asbs_01 -> 3-phase open (3AC above connected), Discharge on E103 / E01 / E02 / E05	
1 looking 5230300 (ASB-01 cond) + one torque path	3 WIP, open + V202000 algorithm -> torque off (FIR)
2 FIRM GSA switching + monitoring -> FIRM (no SW)	--- DISCHARGE ---
3 FIRMARC2_DISM57500771=0 + DISM_004 = 3-ph open	REASON: 12s, 20s, 20s, 20s (3s + 2s + 2s) = 60s, 60s to 10s
4 FIRM stop -> 1.6 AEC limit (2H stopped GPM)	ACTIVE GDS + 3s FIRM 100 + 1.60s, 1.6s to 60s
5 FIRMEN EN + MCO (or FIRM-GPM) (ACD gate open)	E = 116 / 0000 V, 32 ohm event, GDS 320015s
6 3s fail + acryltyl + phaseability (torque path)	VERIFY MCO from GDS, switches 300s VDC channels
7 3s test VDC reverse 0% + fault, VDCs monitoring	RALE: reset margin with the DISCHARGE BOARD RESET
8 DISM2 gate switch (3AC not 3-ph closed), switching	