
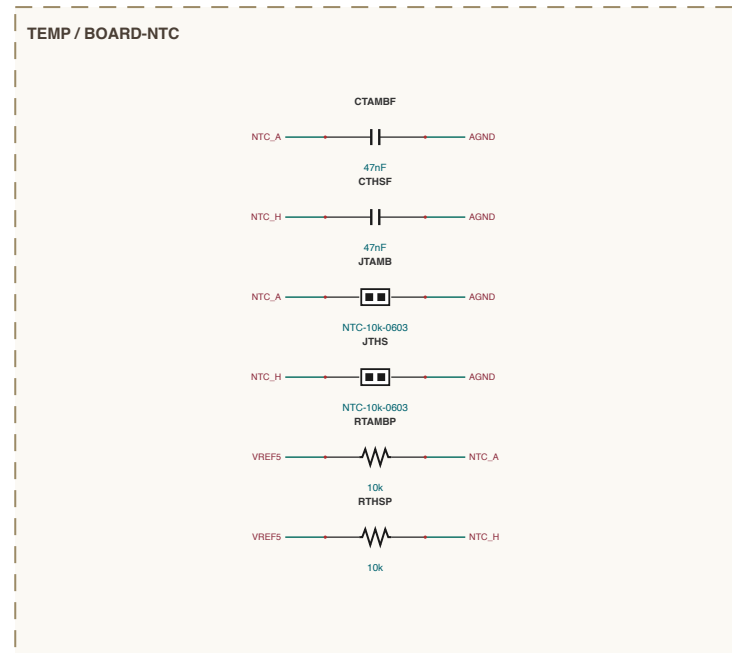
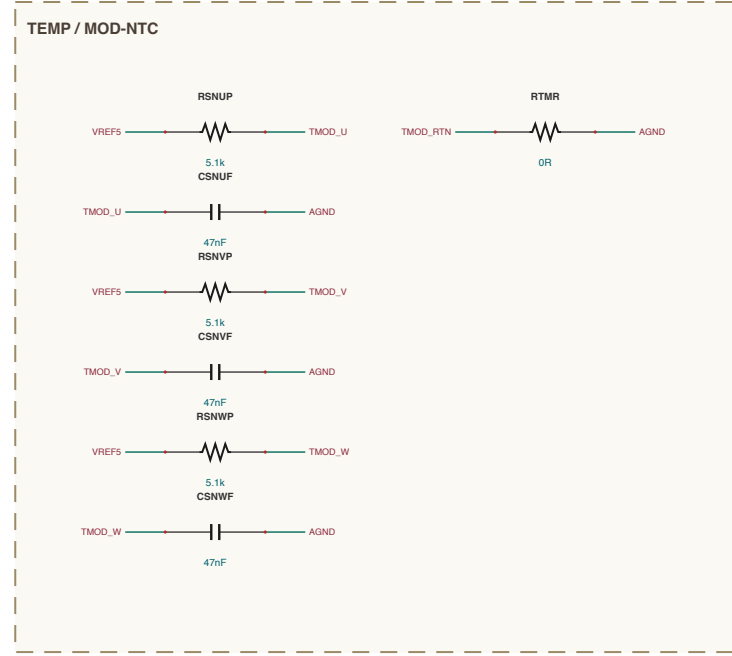
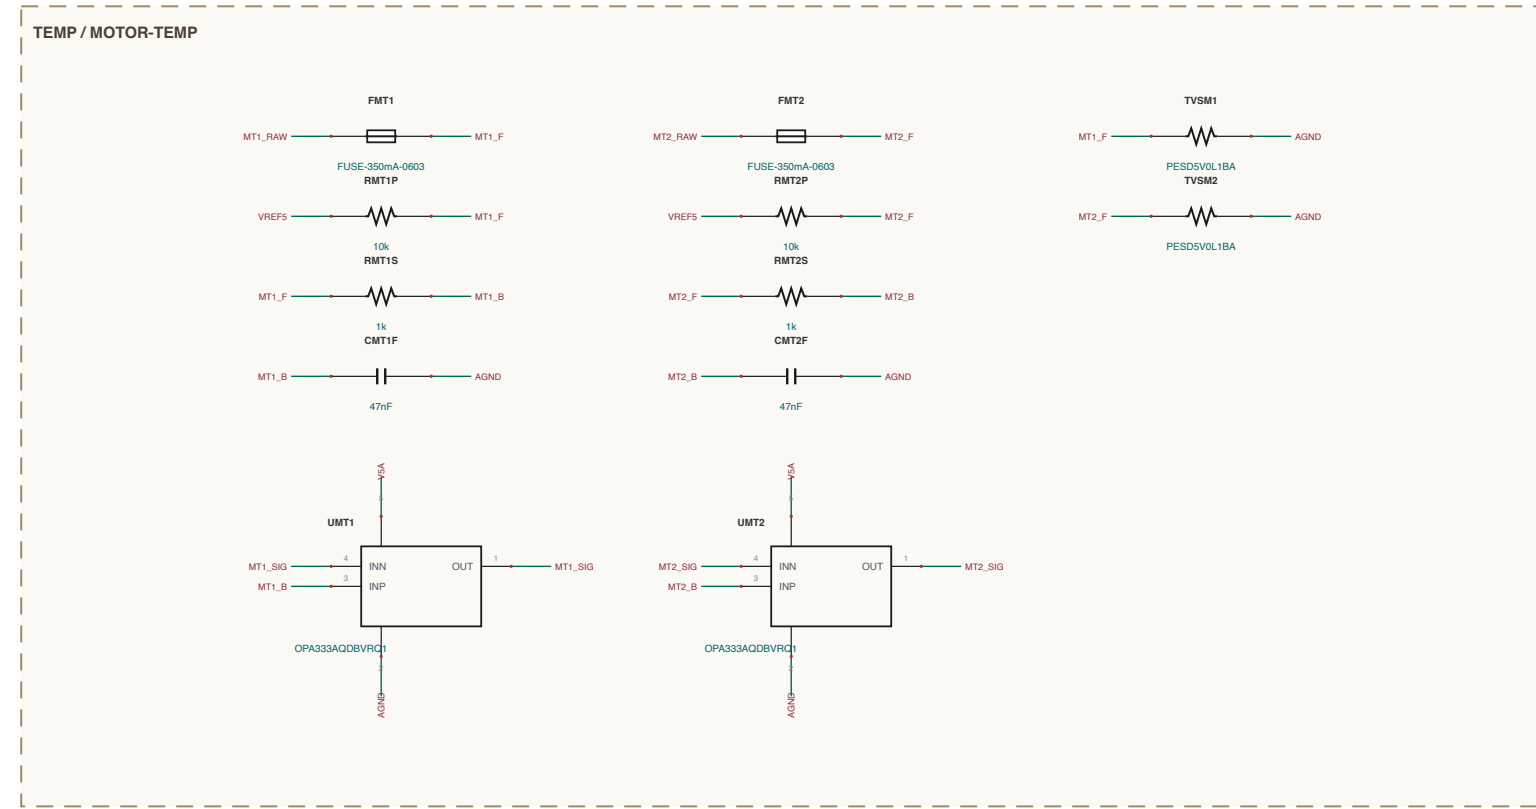
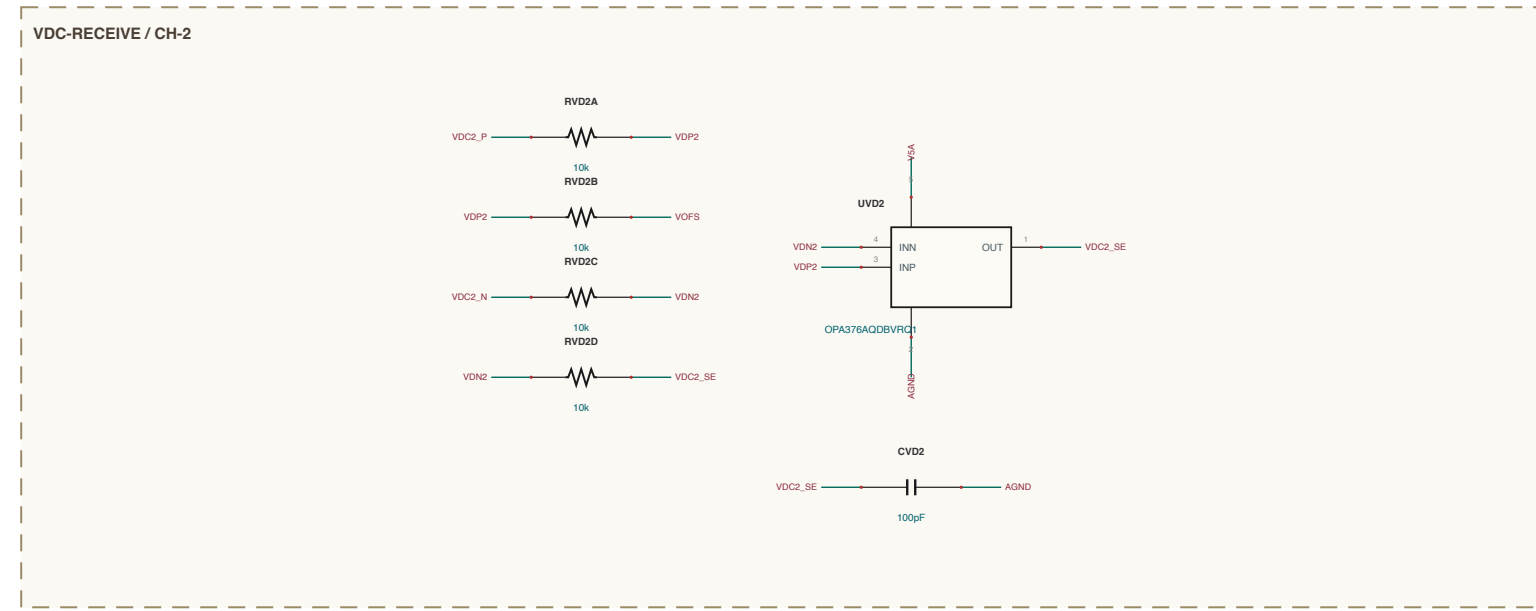
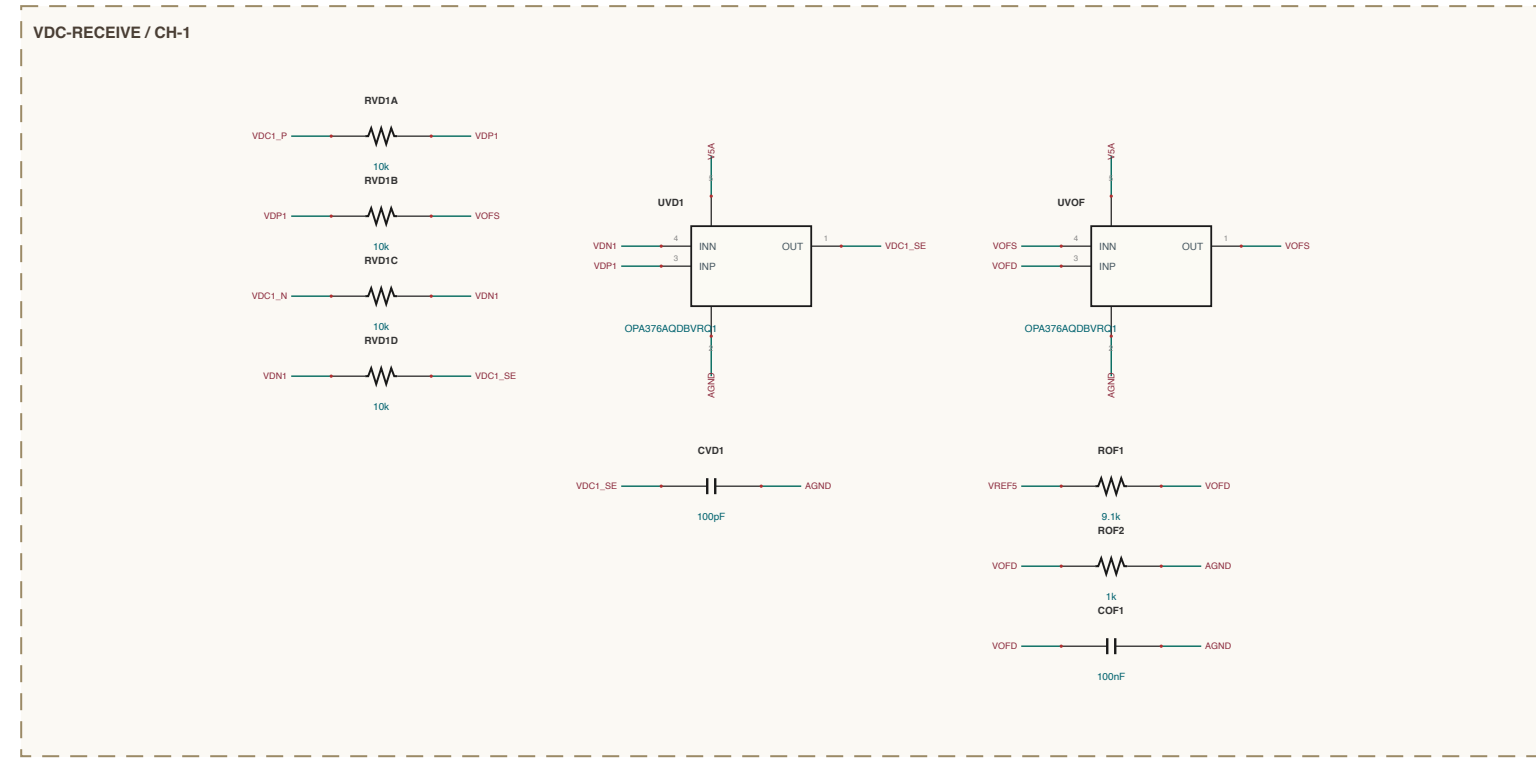
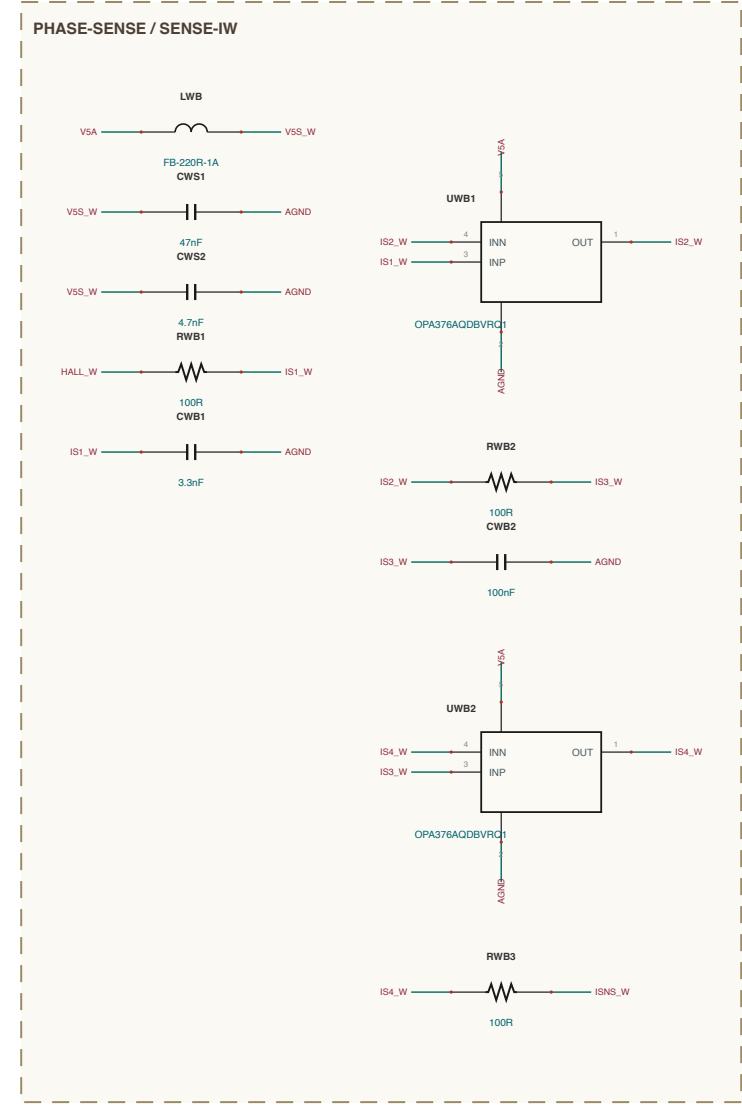
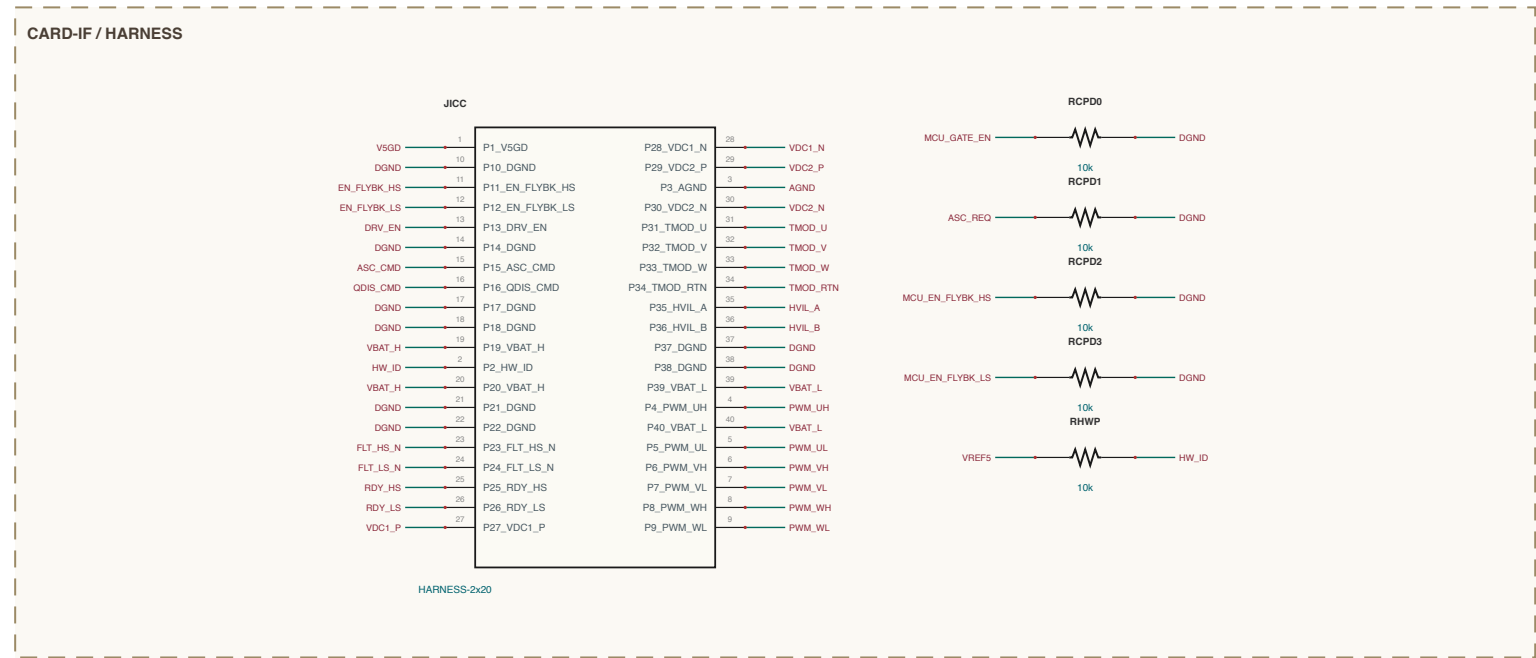
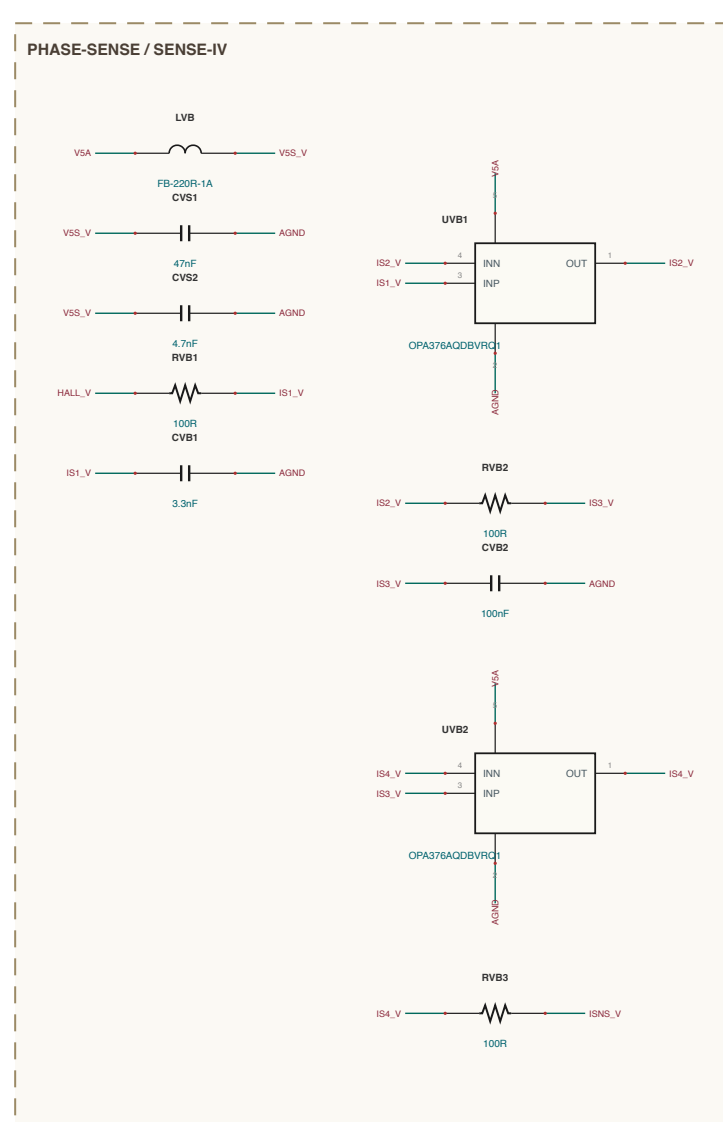
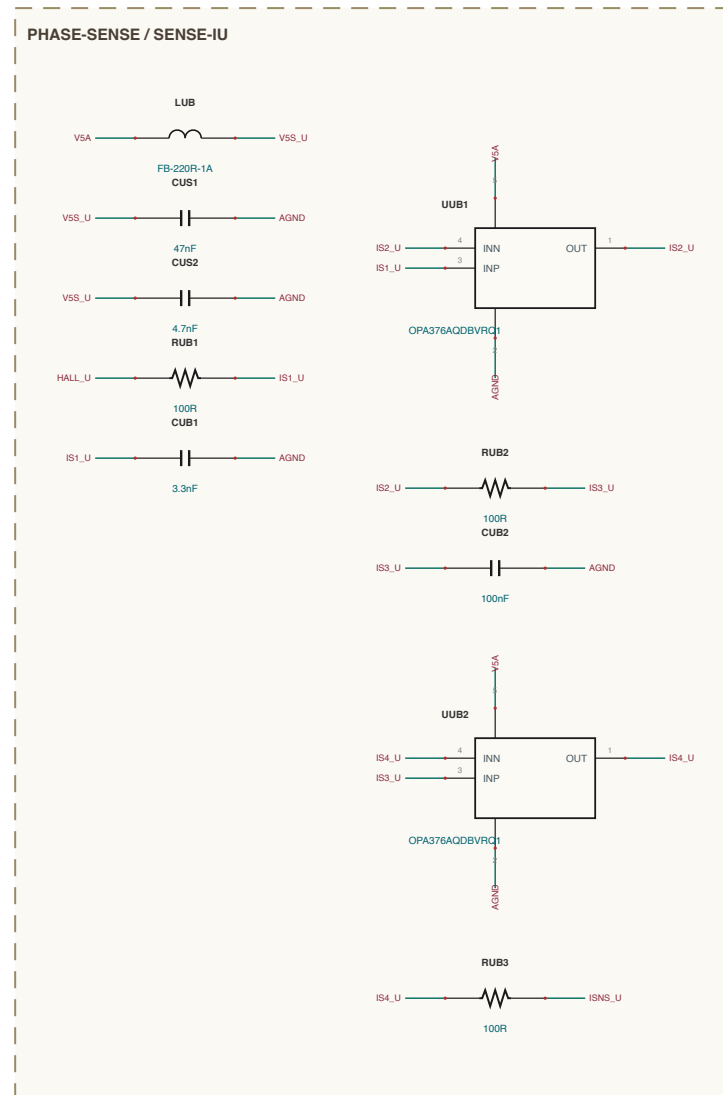
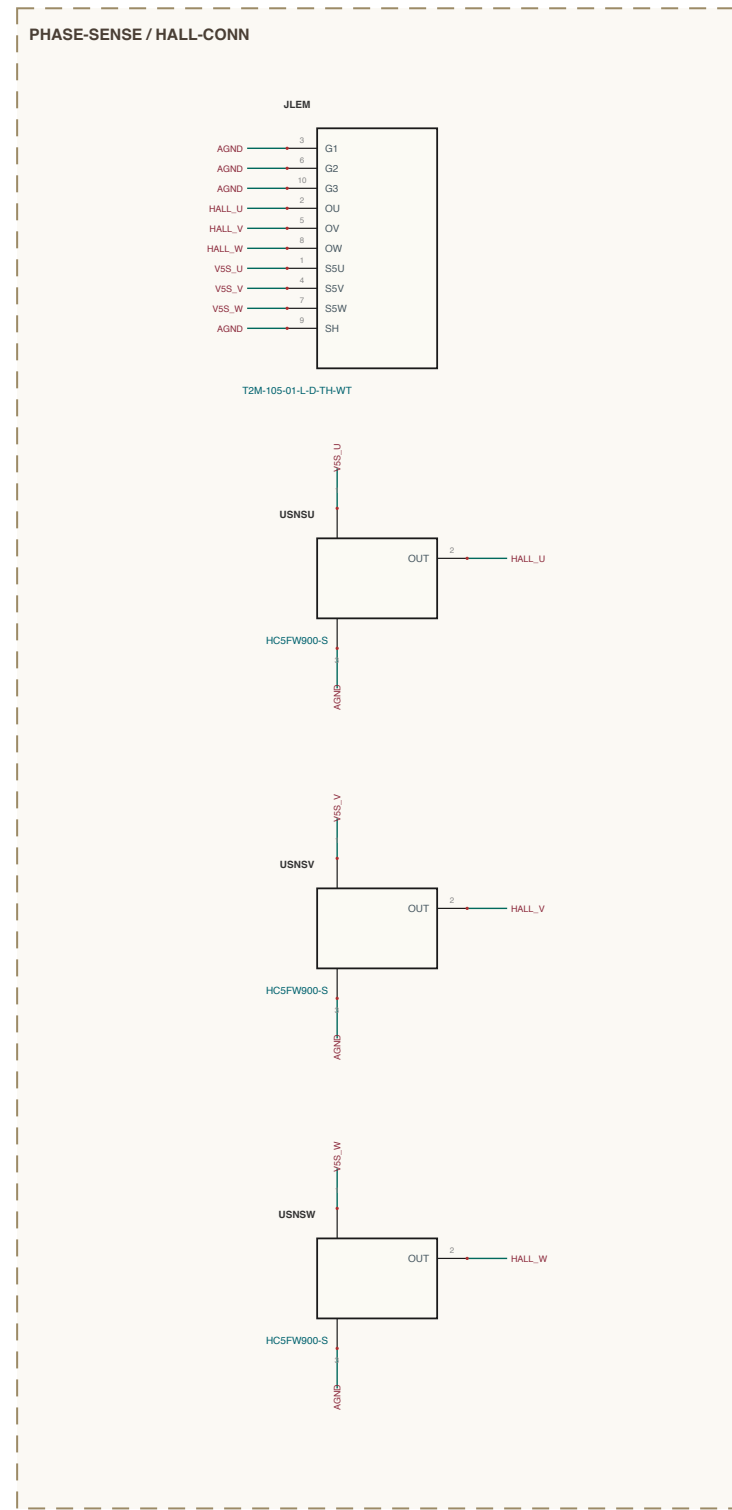
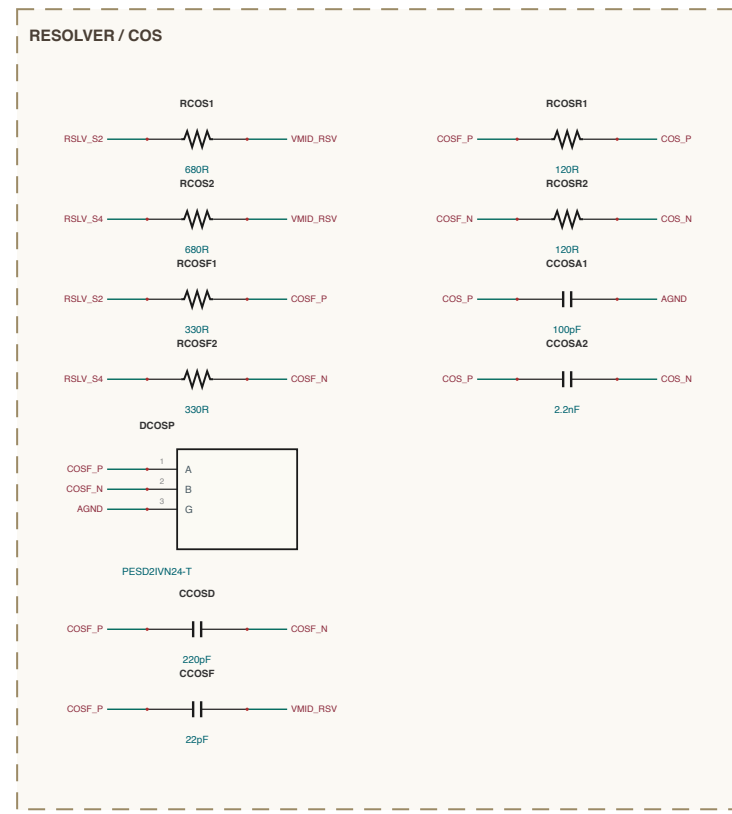
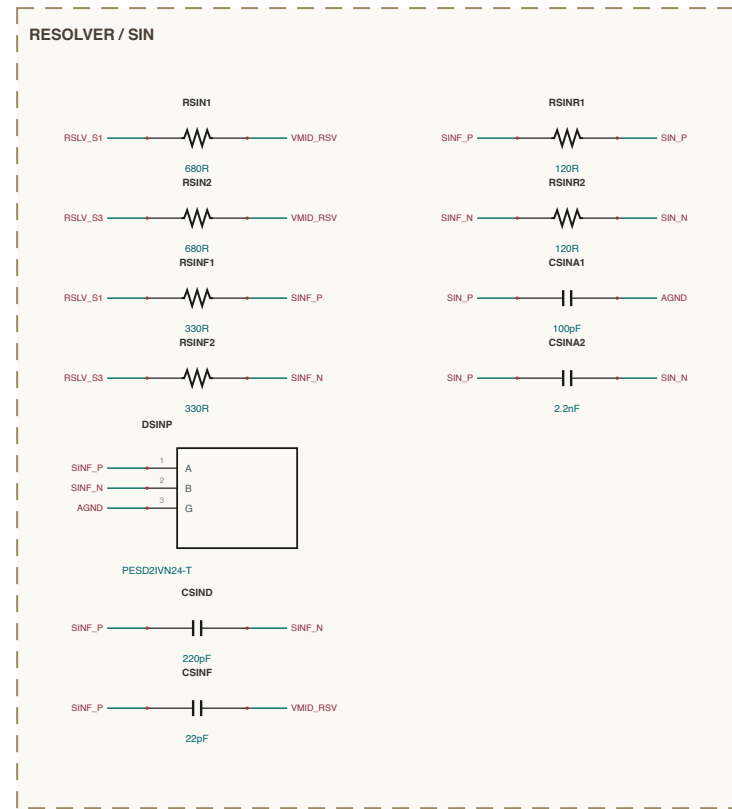
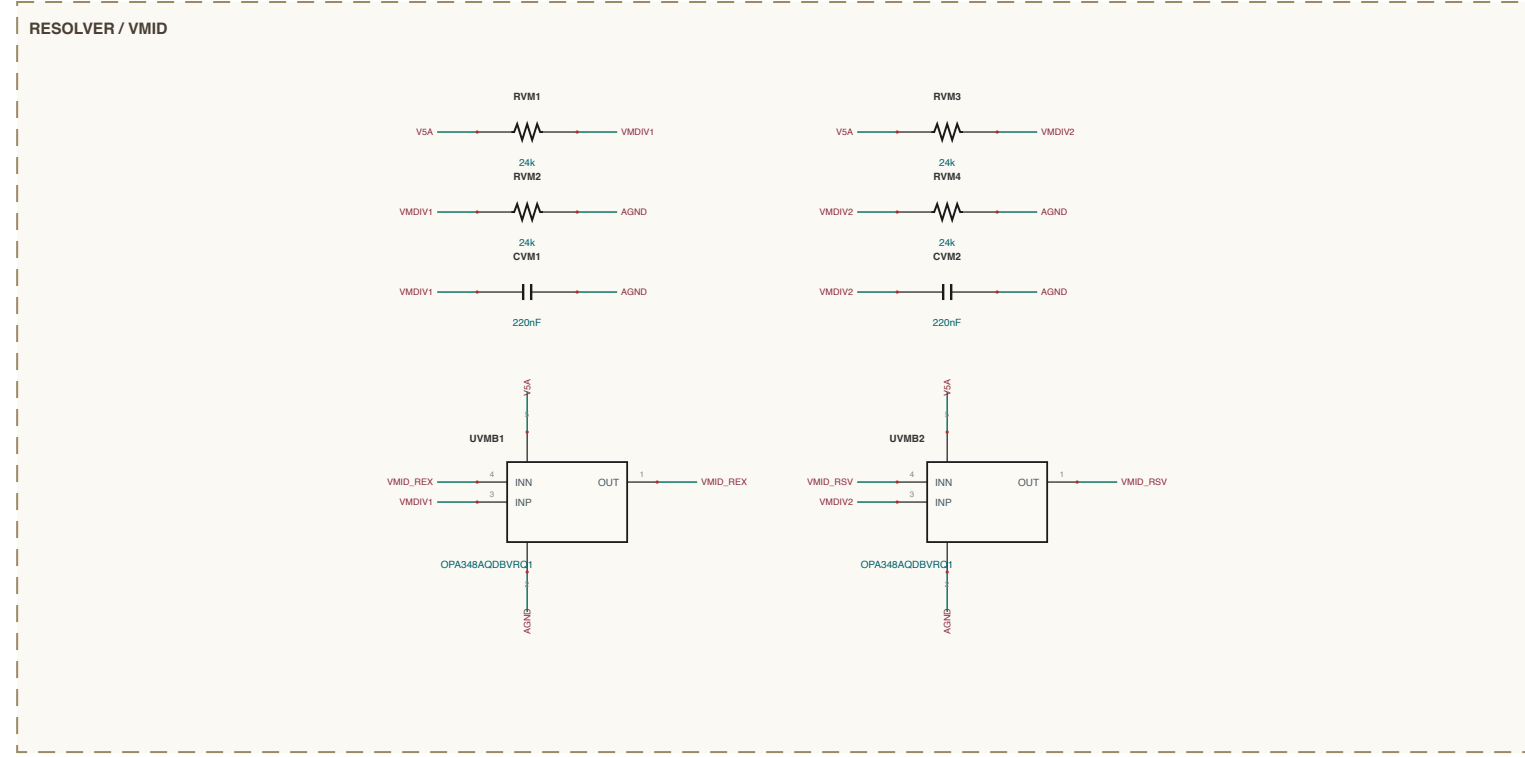
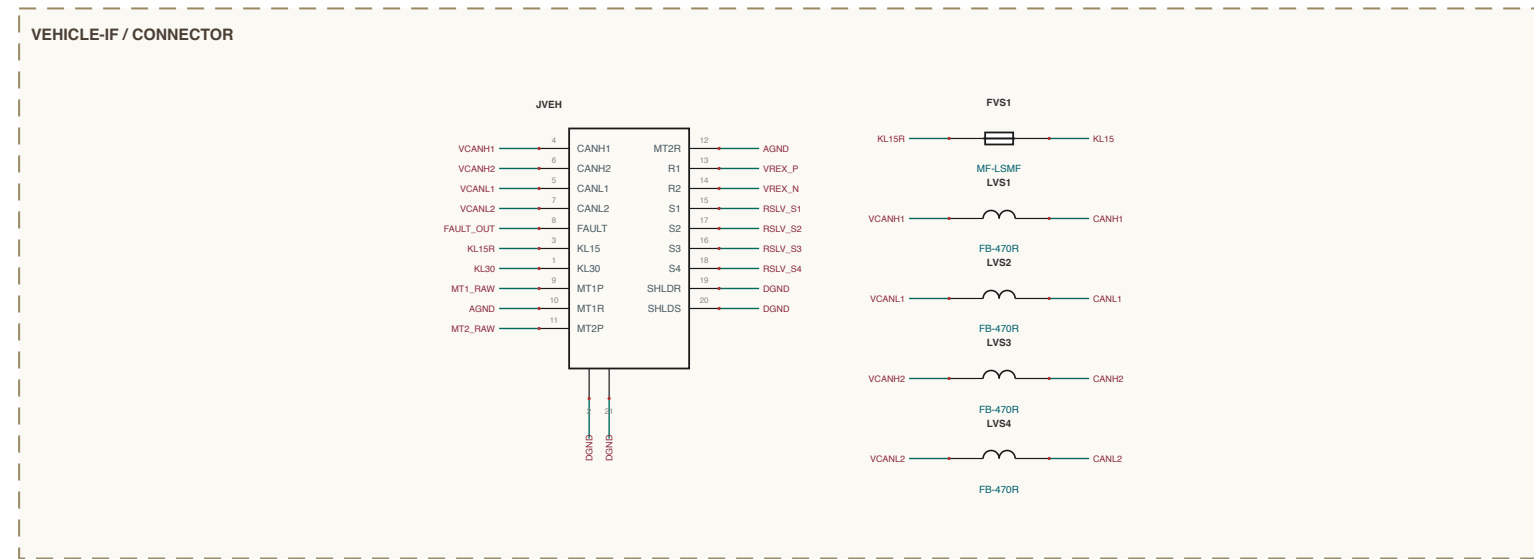
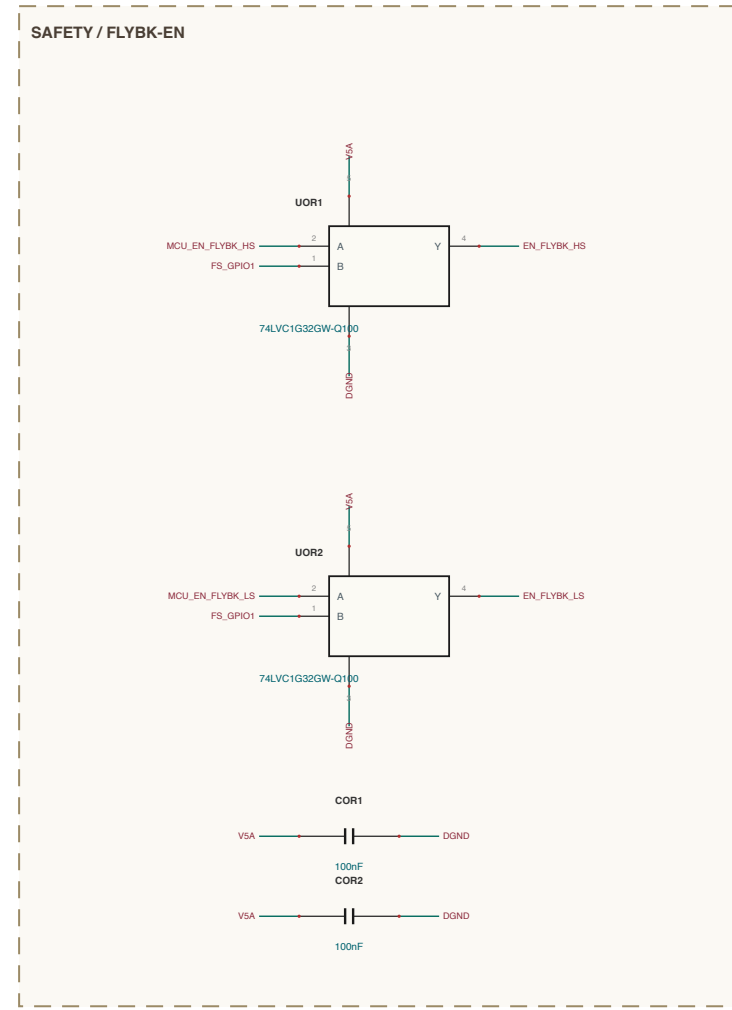
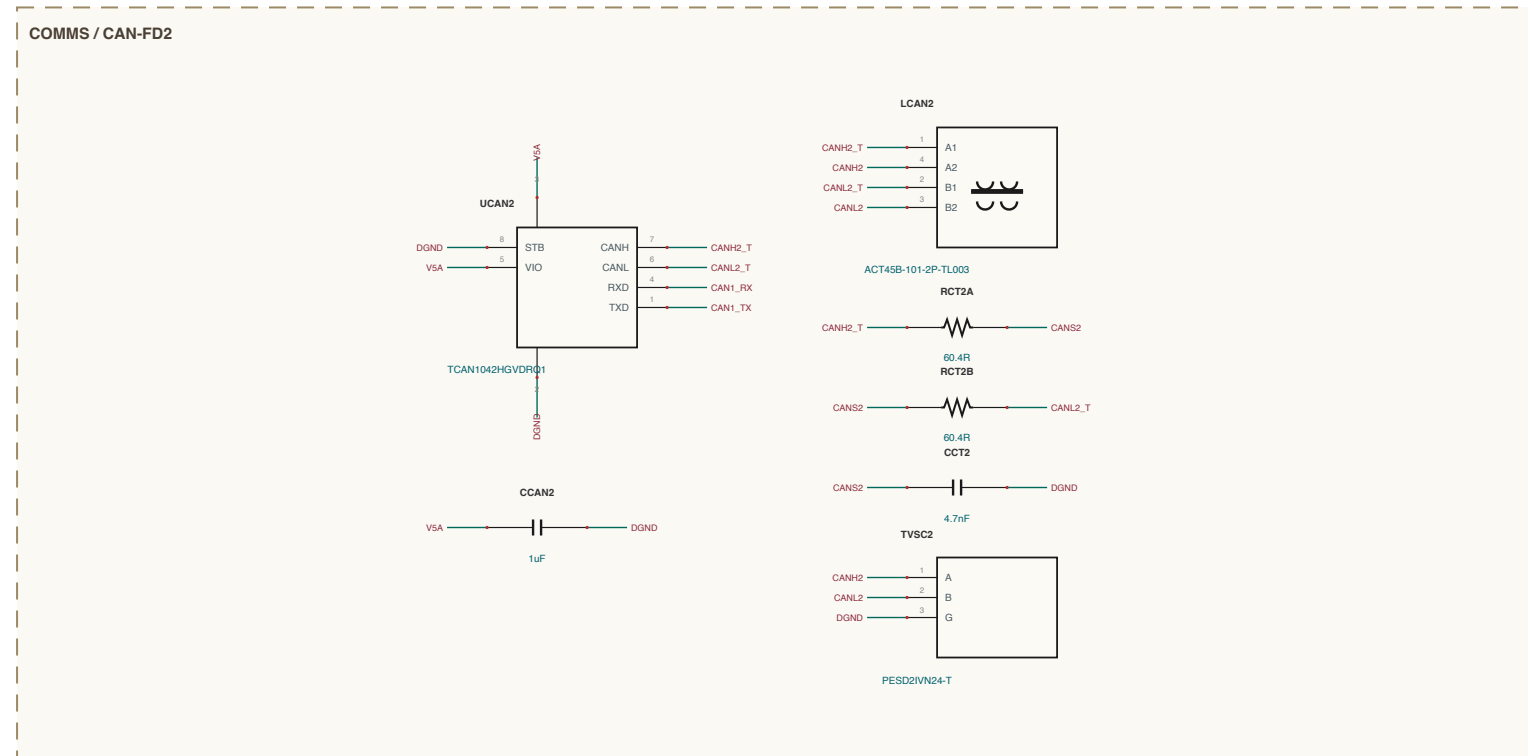
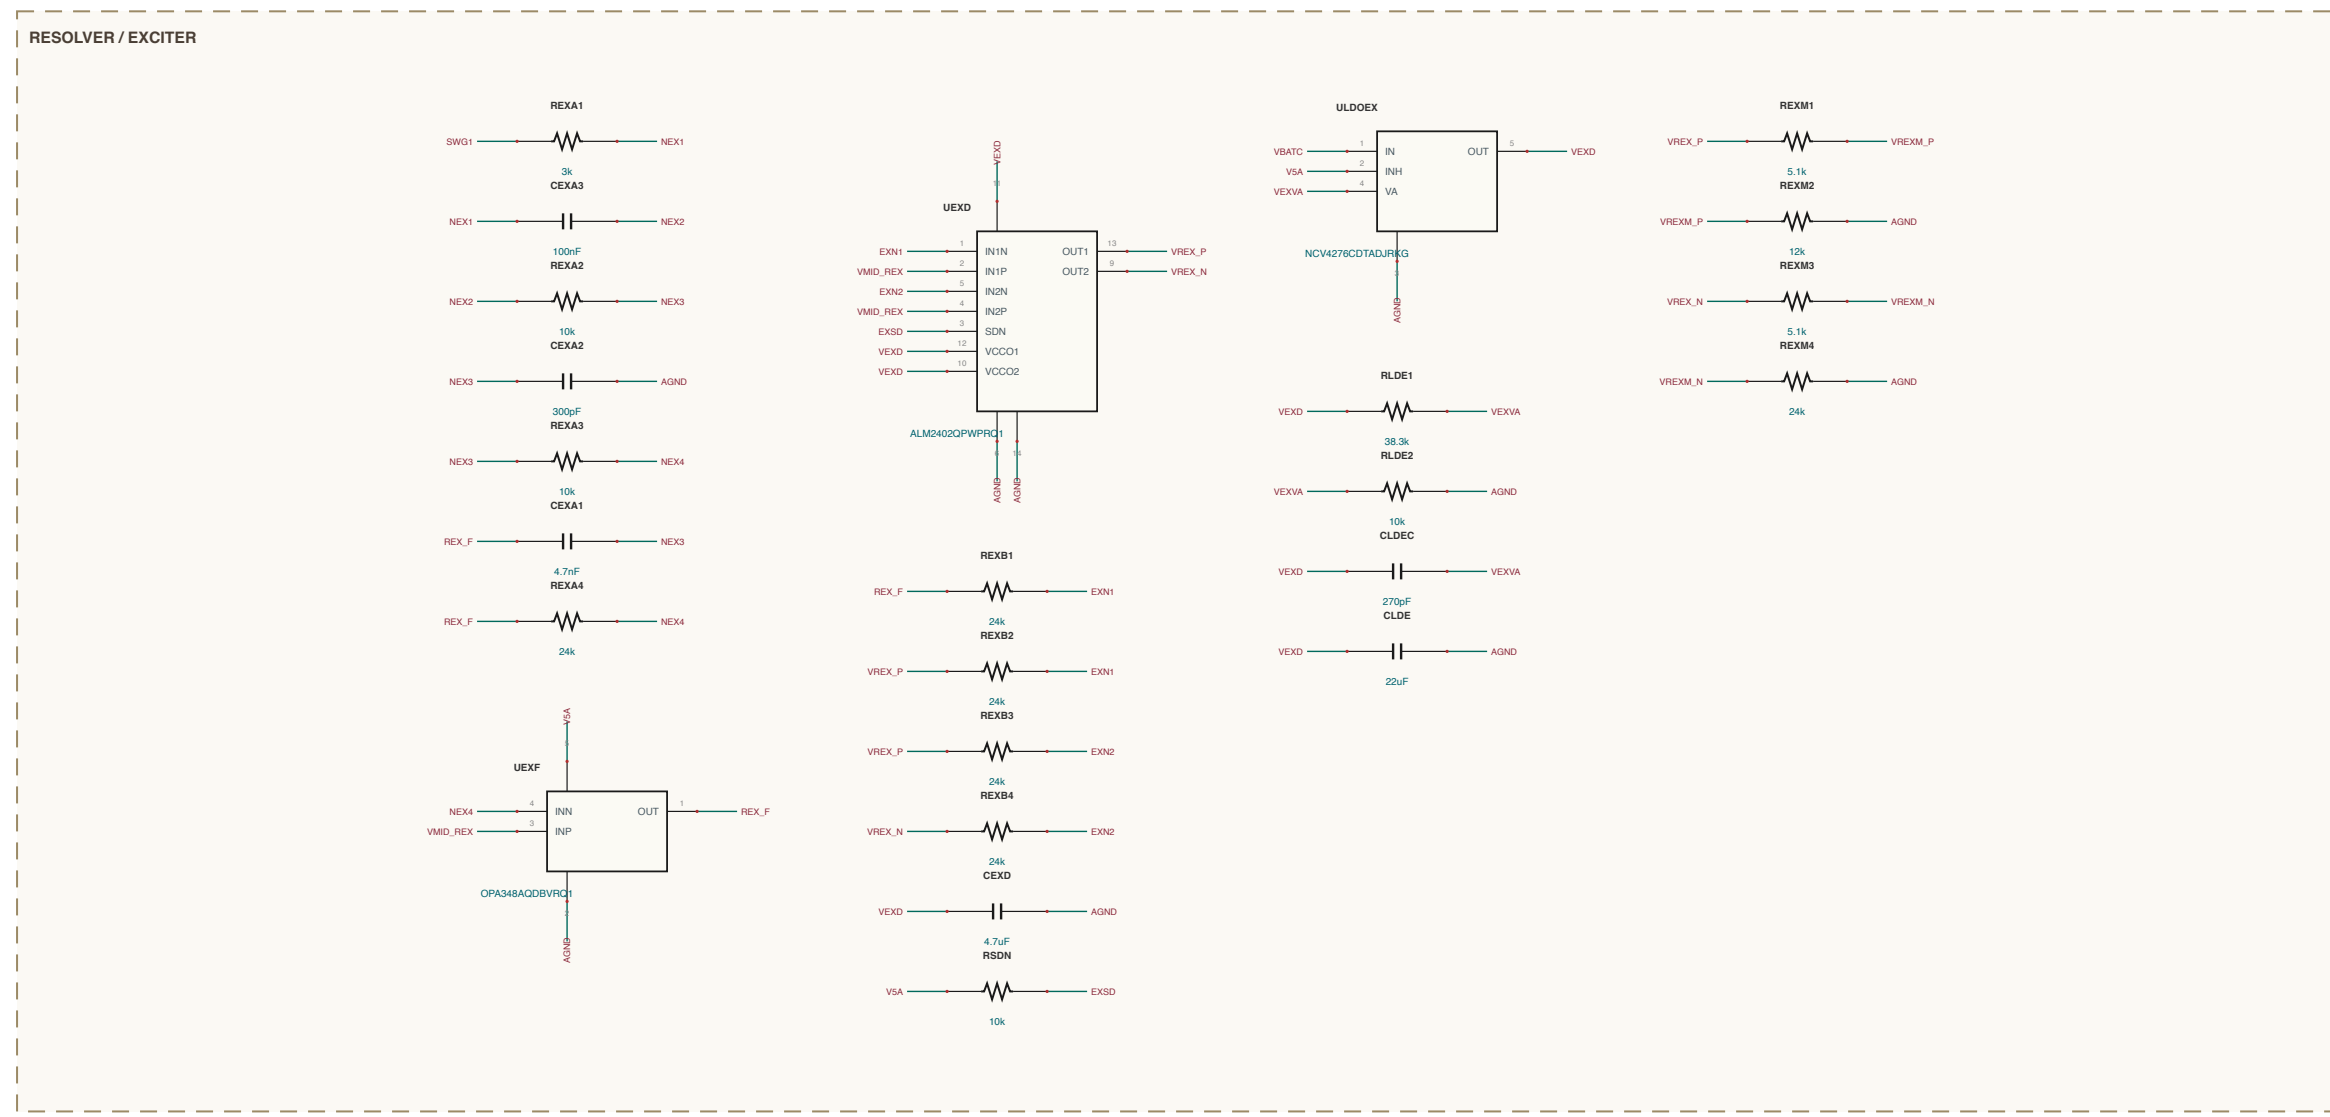
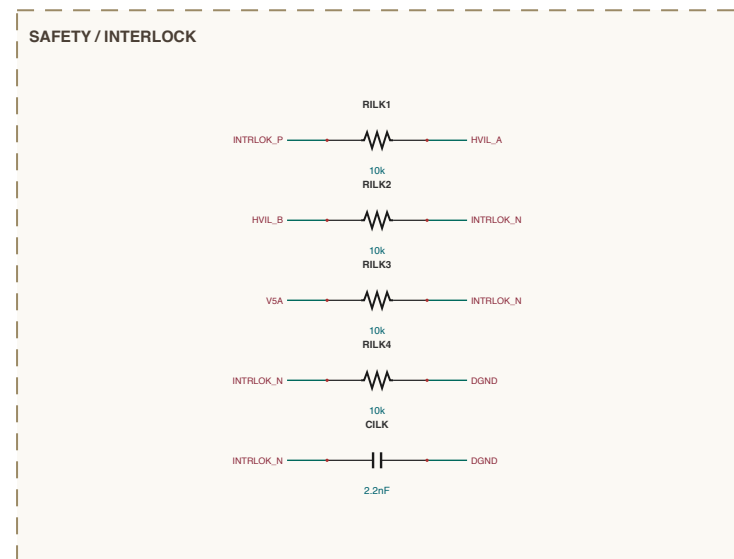
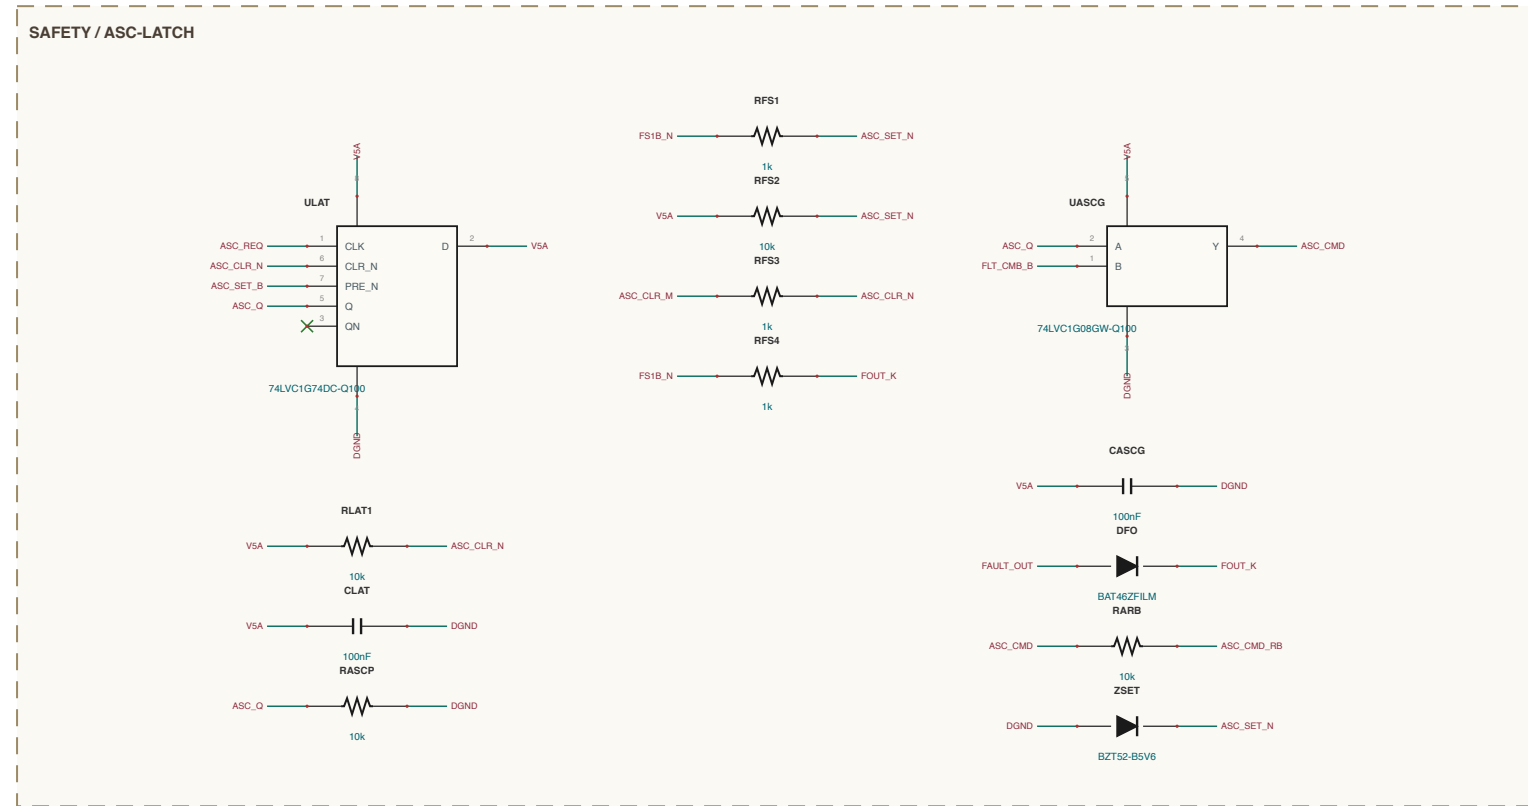
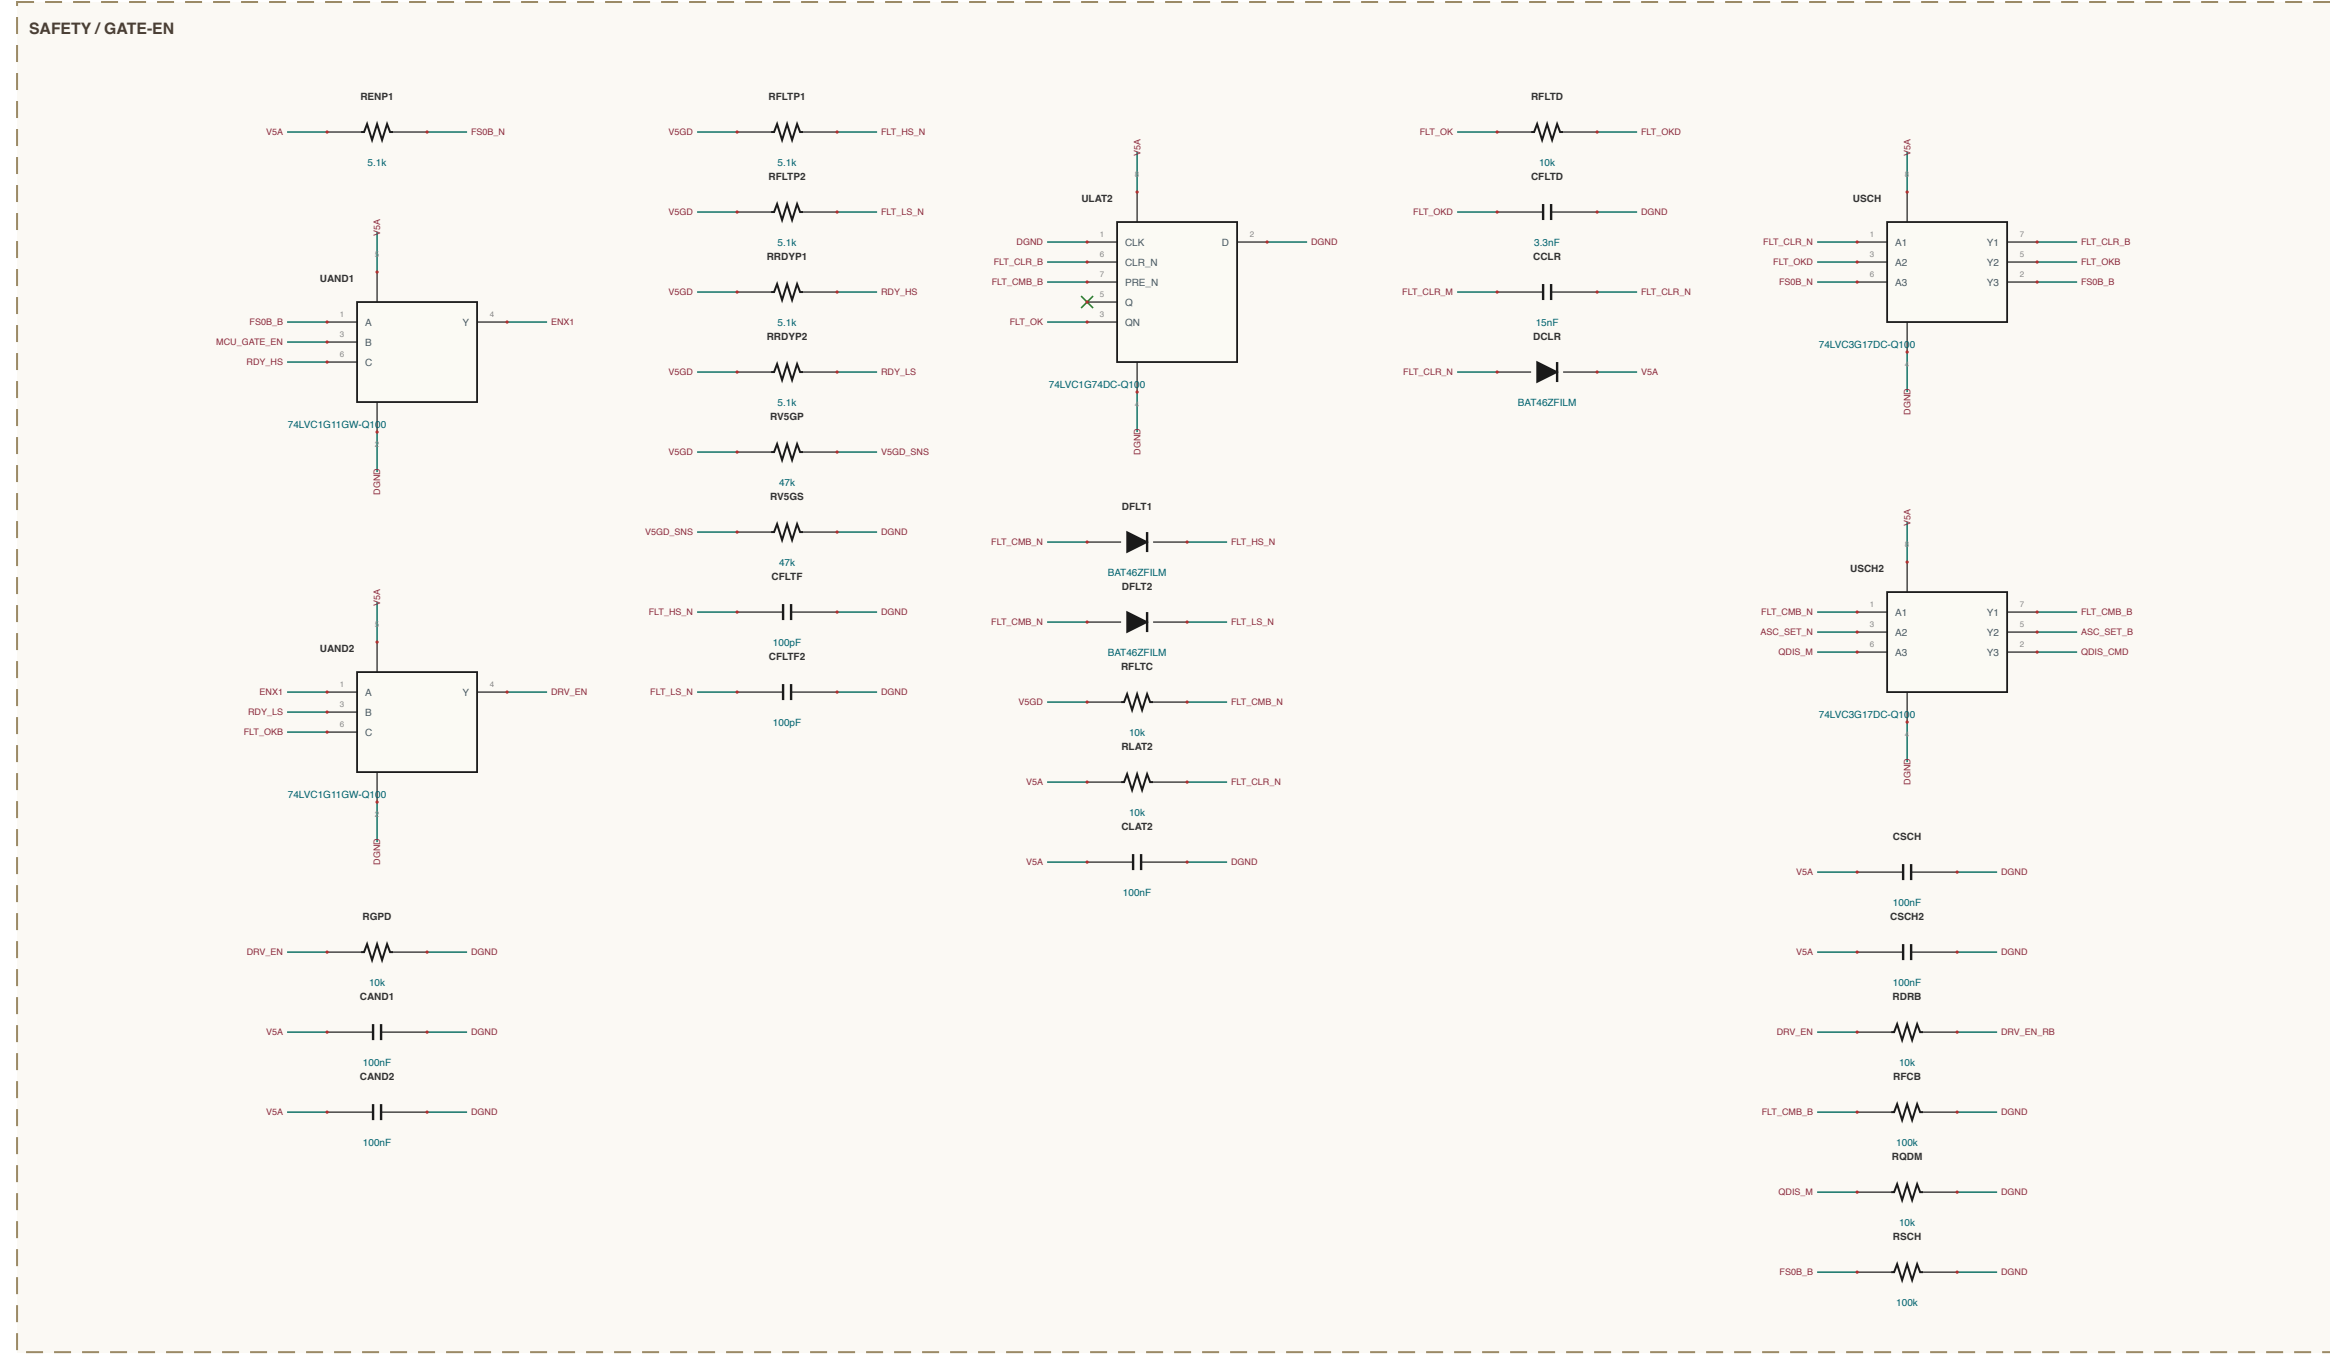
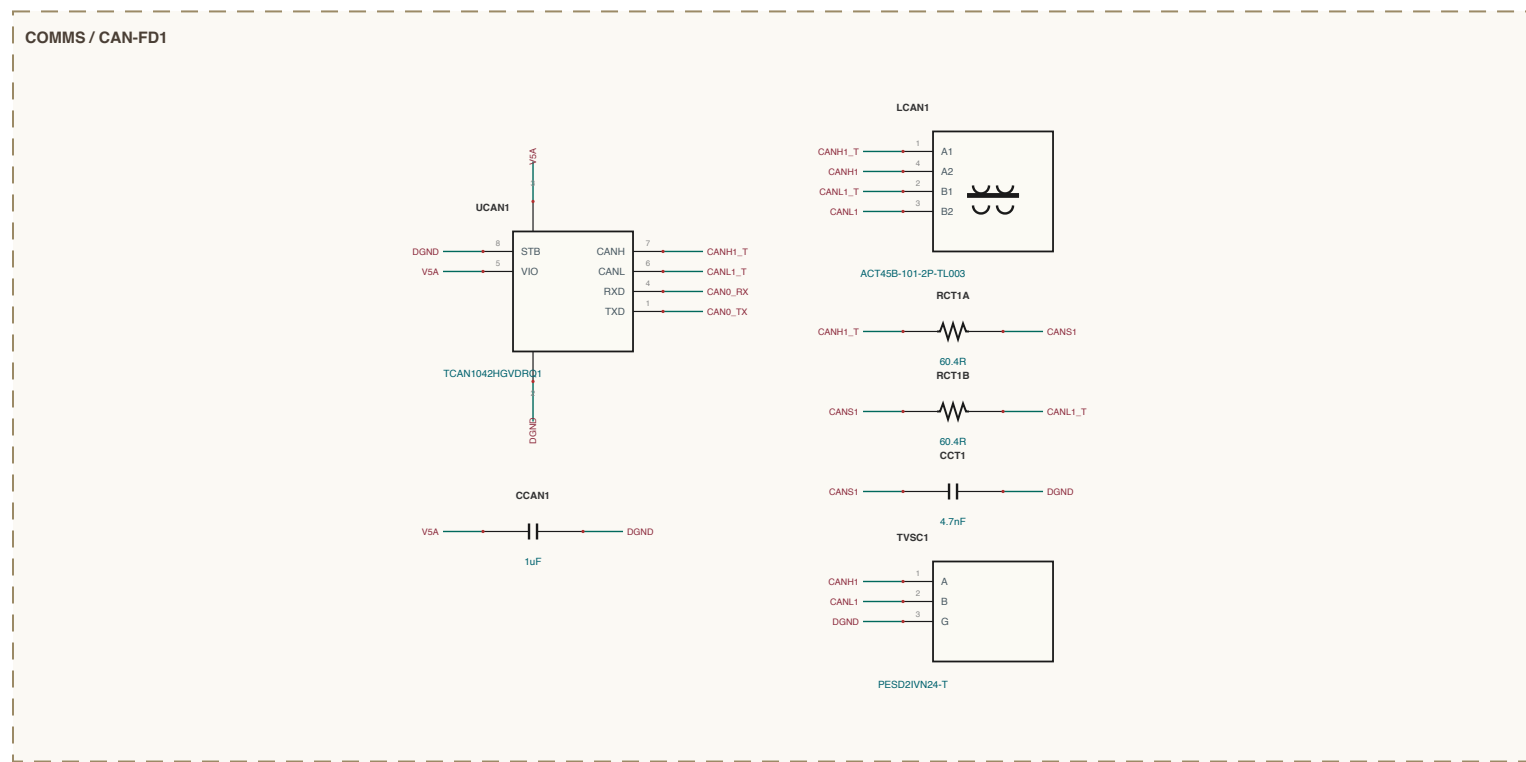
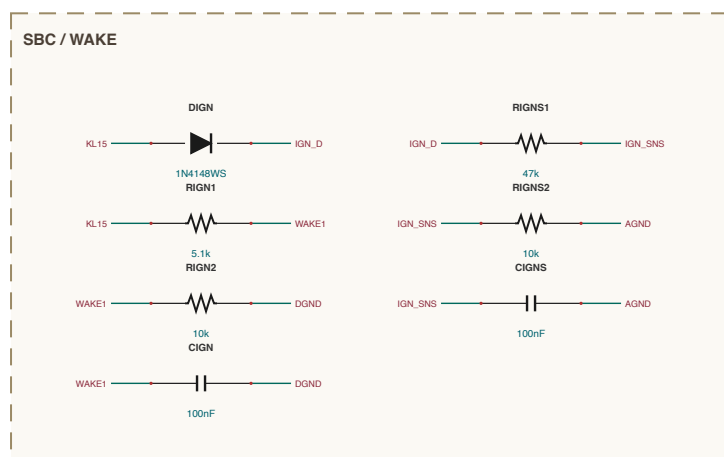
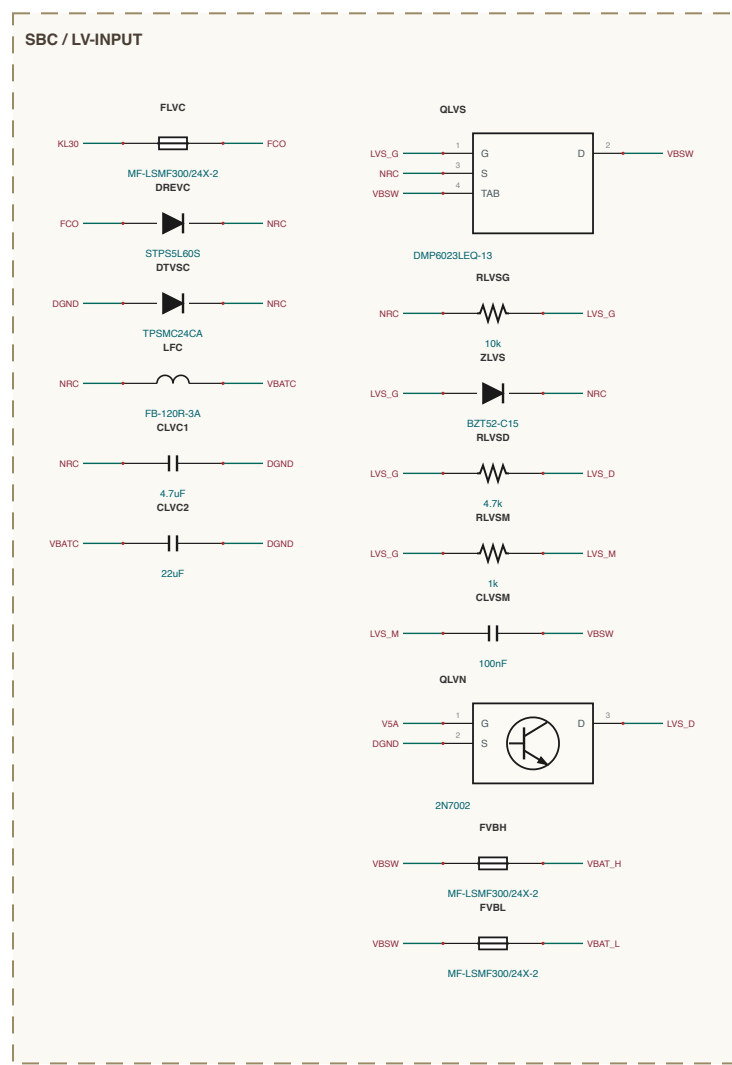
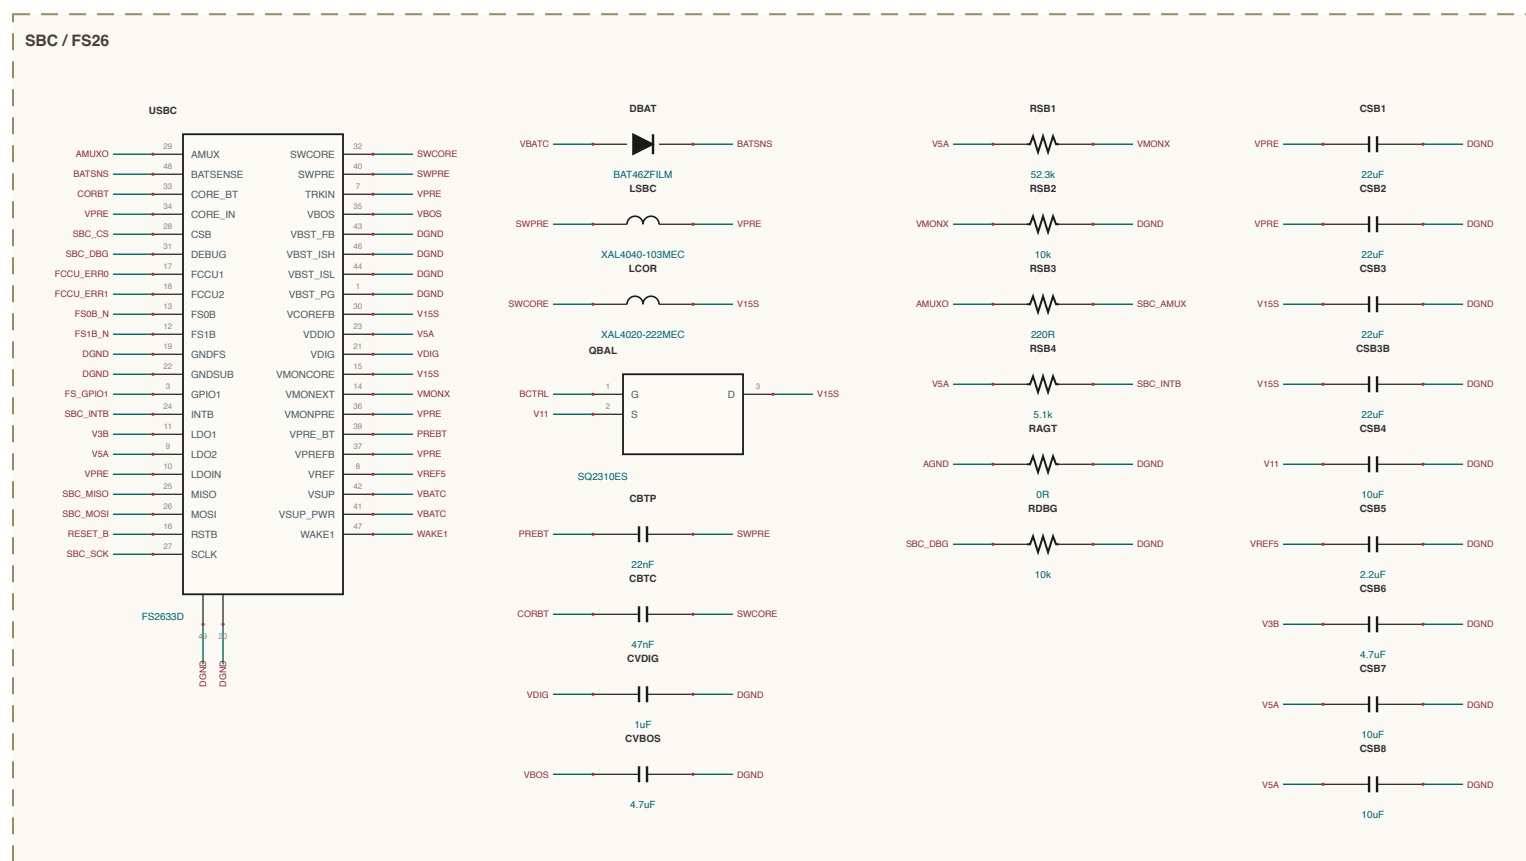
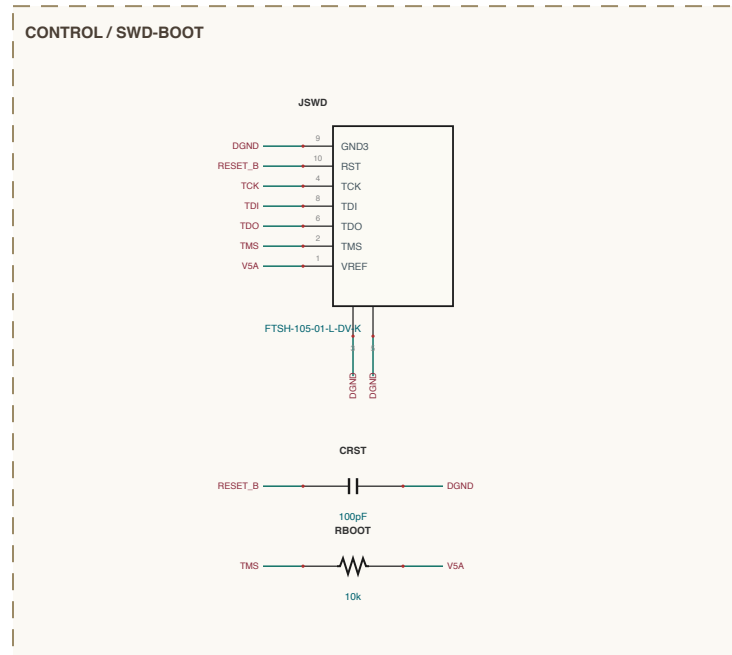


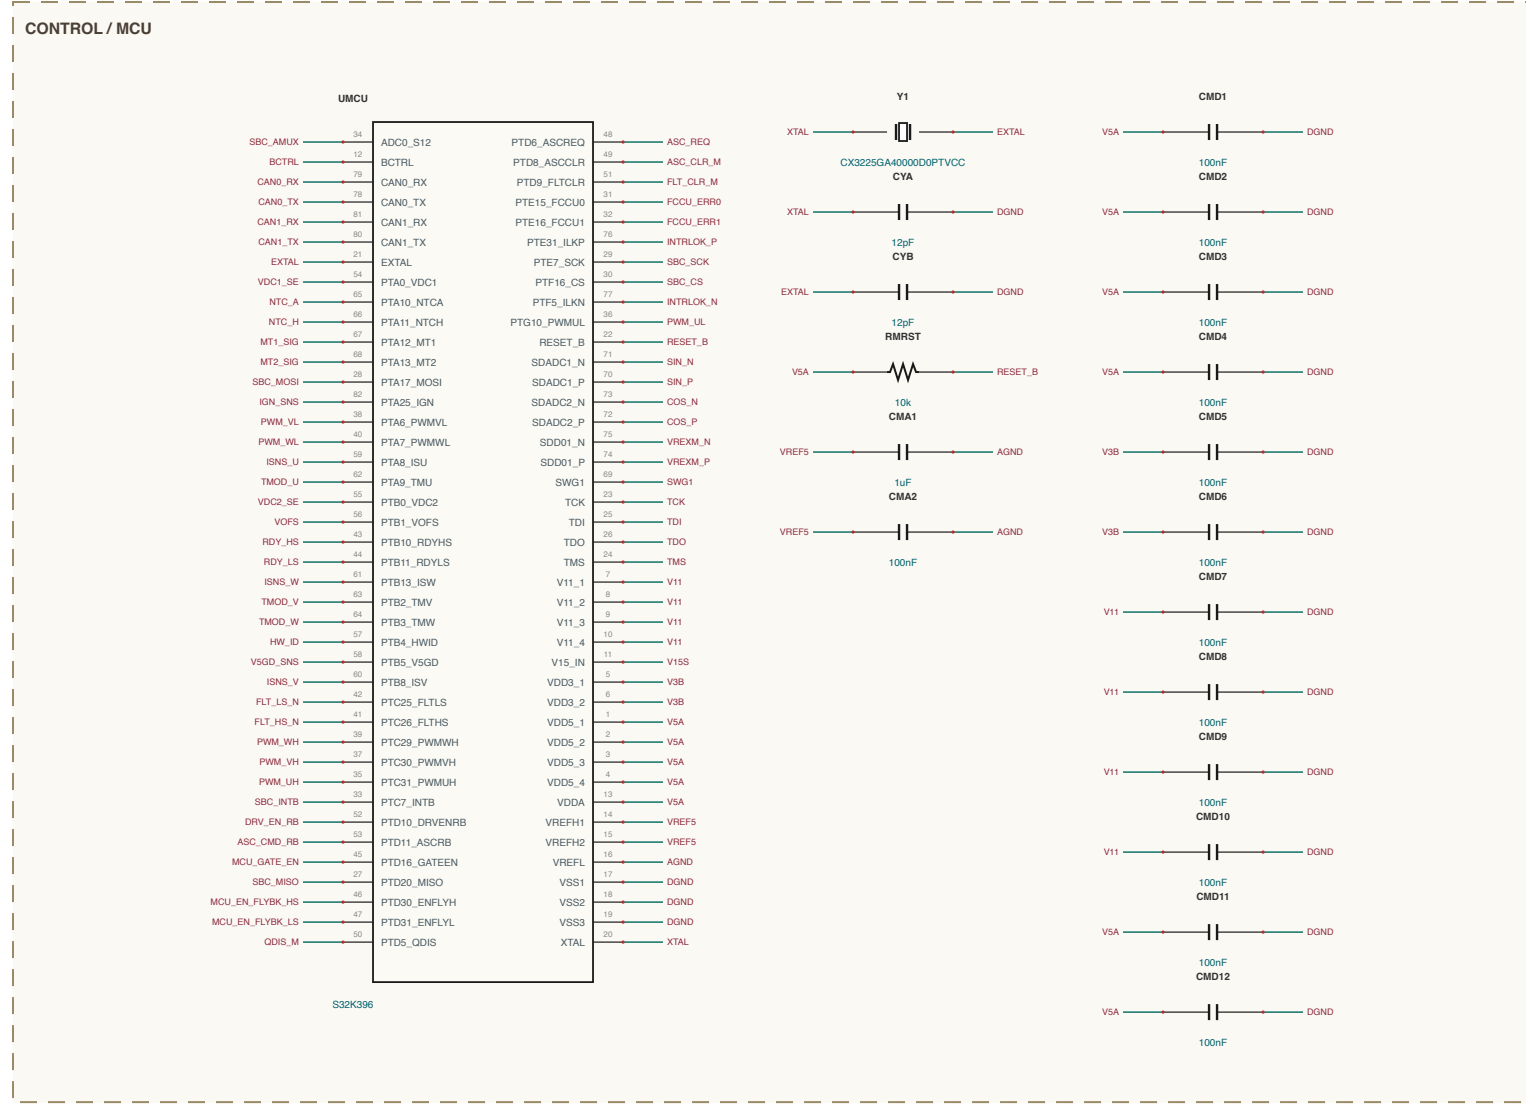

SHEET INDEX

220 kW ya Control card S32K396 - 4 of 4
PHASE-SENSE - 4 sections
RESOLVER - 4 sections
SAFETY - 3 sections
SBC - 3 sections
TEMP - 3 sections
COMMS - 2 sections
CONTROL - 1 sections
VDC-RECEIVE - 2 sections
CARD-IF - 1 sections
VEHICLE-IF - 1 sections

see 4.4 - 18 sections - EIT components

NET NAMING

Internal junctions are named for what they join
Location - JPin node at that IC pin e.g. S32K396_1234
Resistance - At endpoint of a wireline part e.g. RBL_1_M
Resistance - wireline tag between Resistance e.g. RBL_1_12
All others are explicit design rules
same name on another sheet = same net, joined ONLY if the
named connections/labels use INTERBOARD LABEL design base