


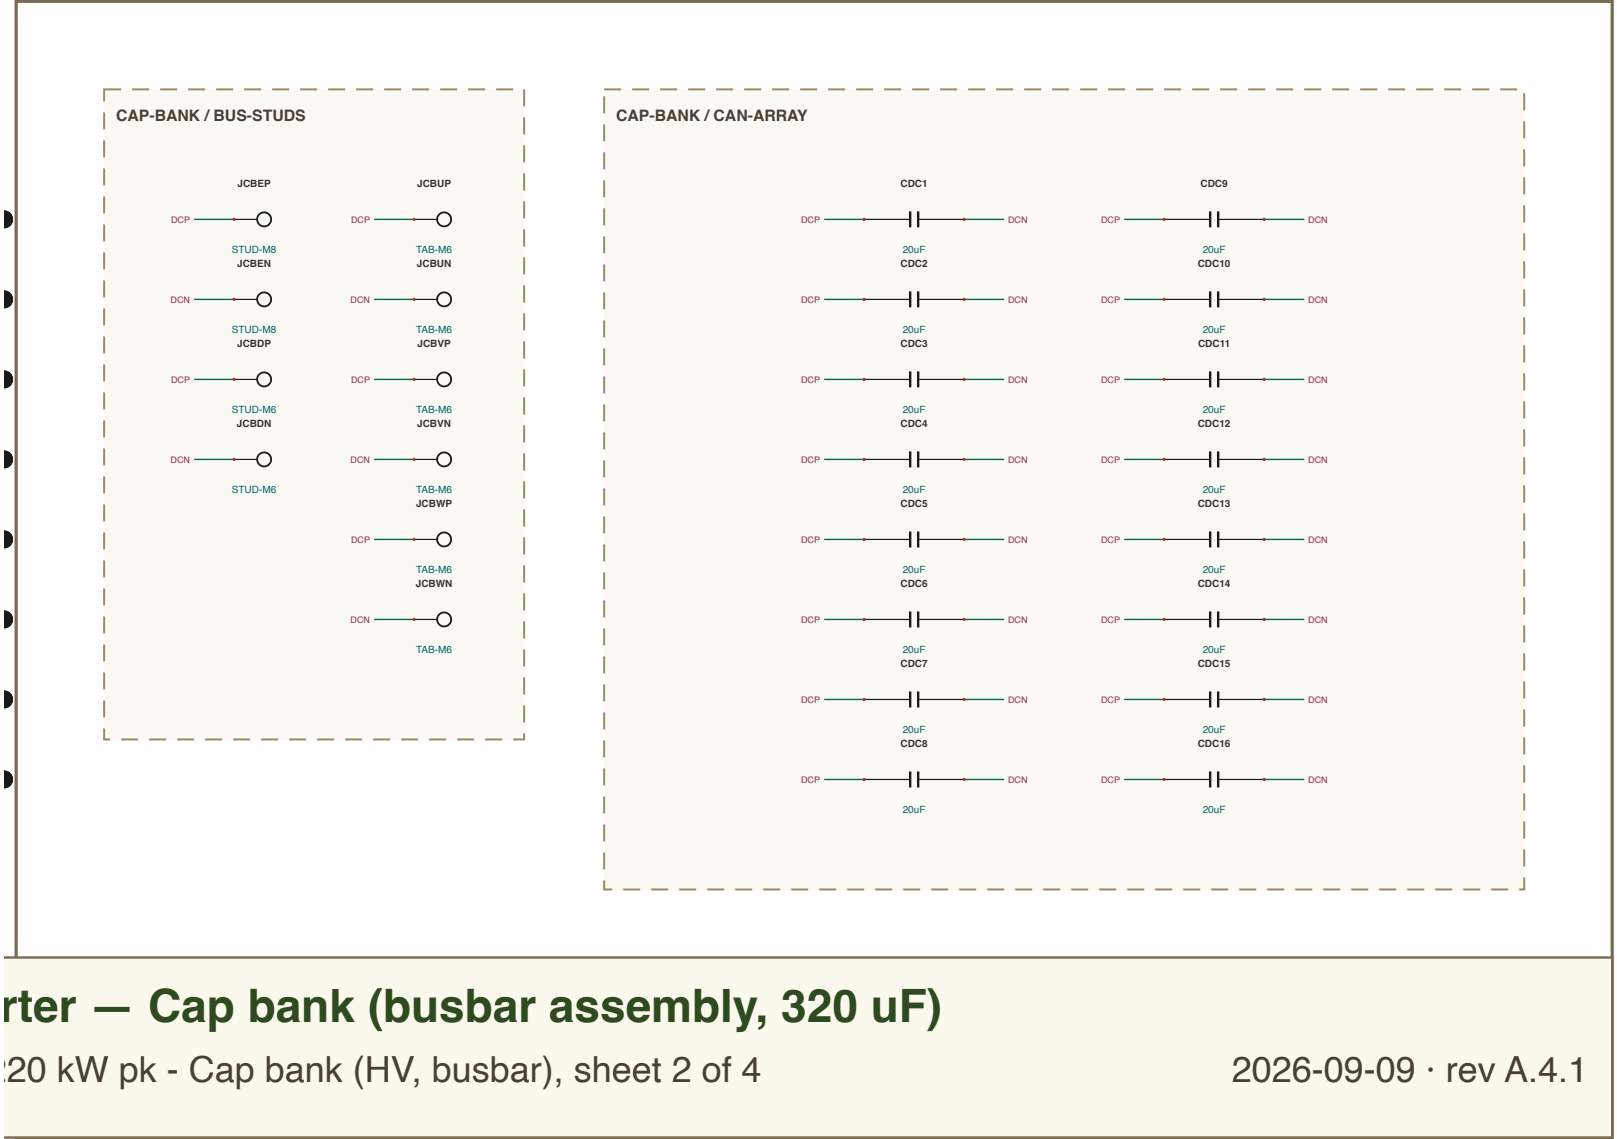
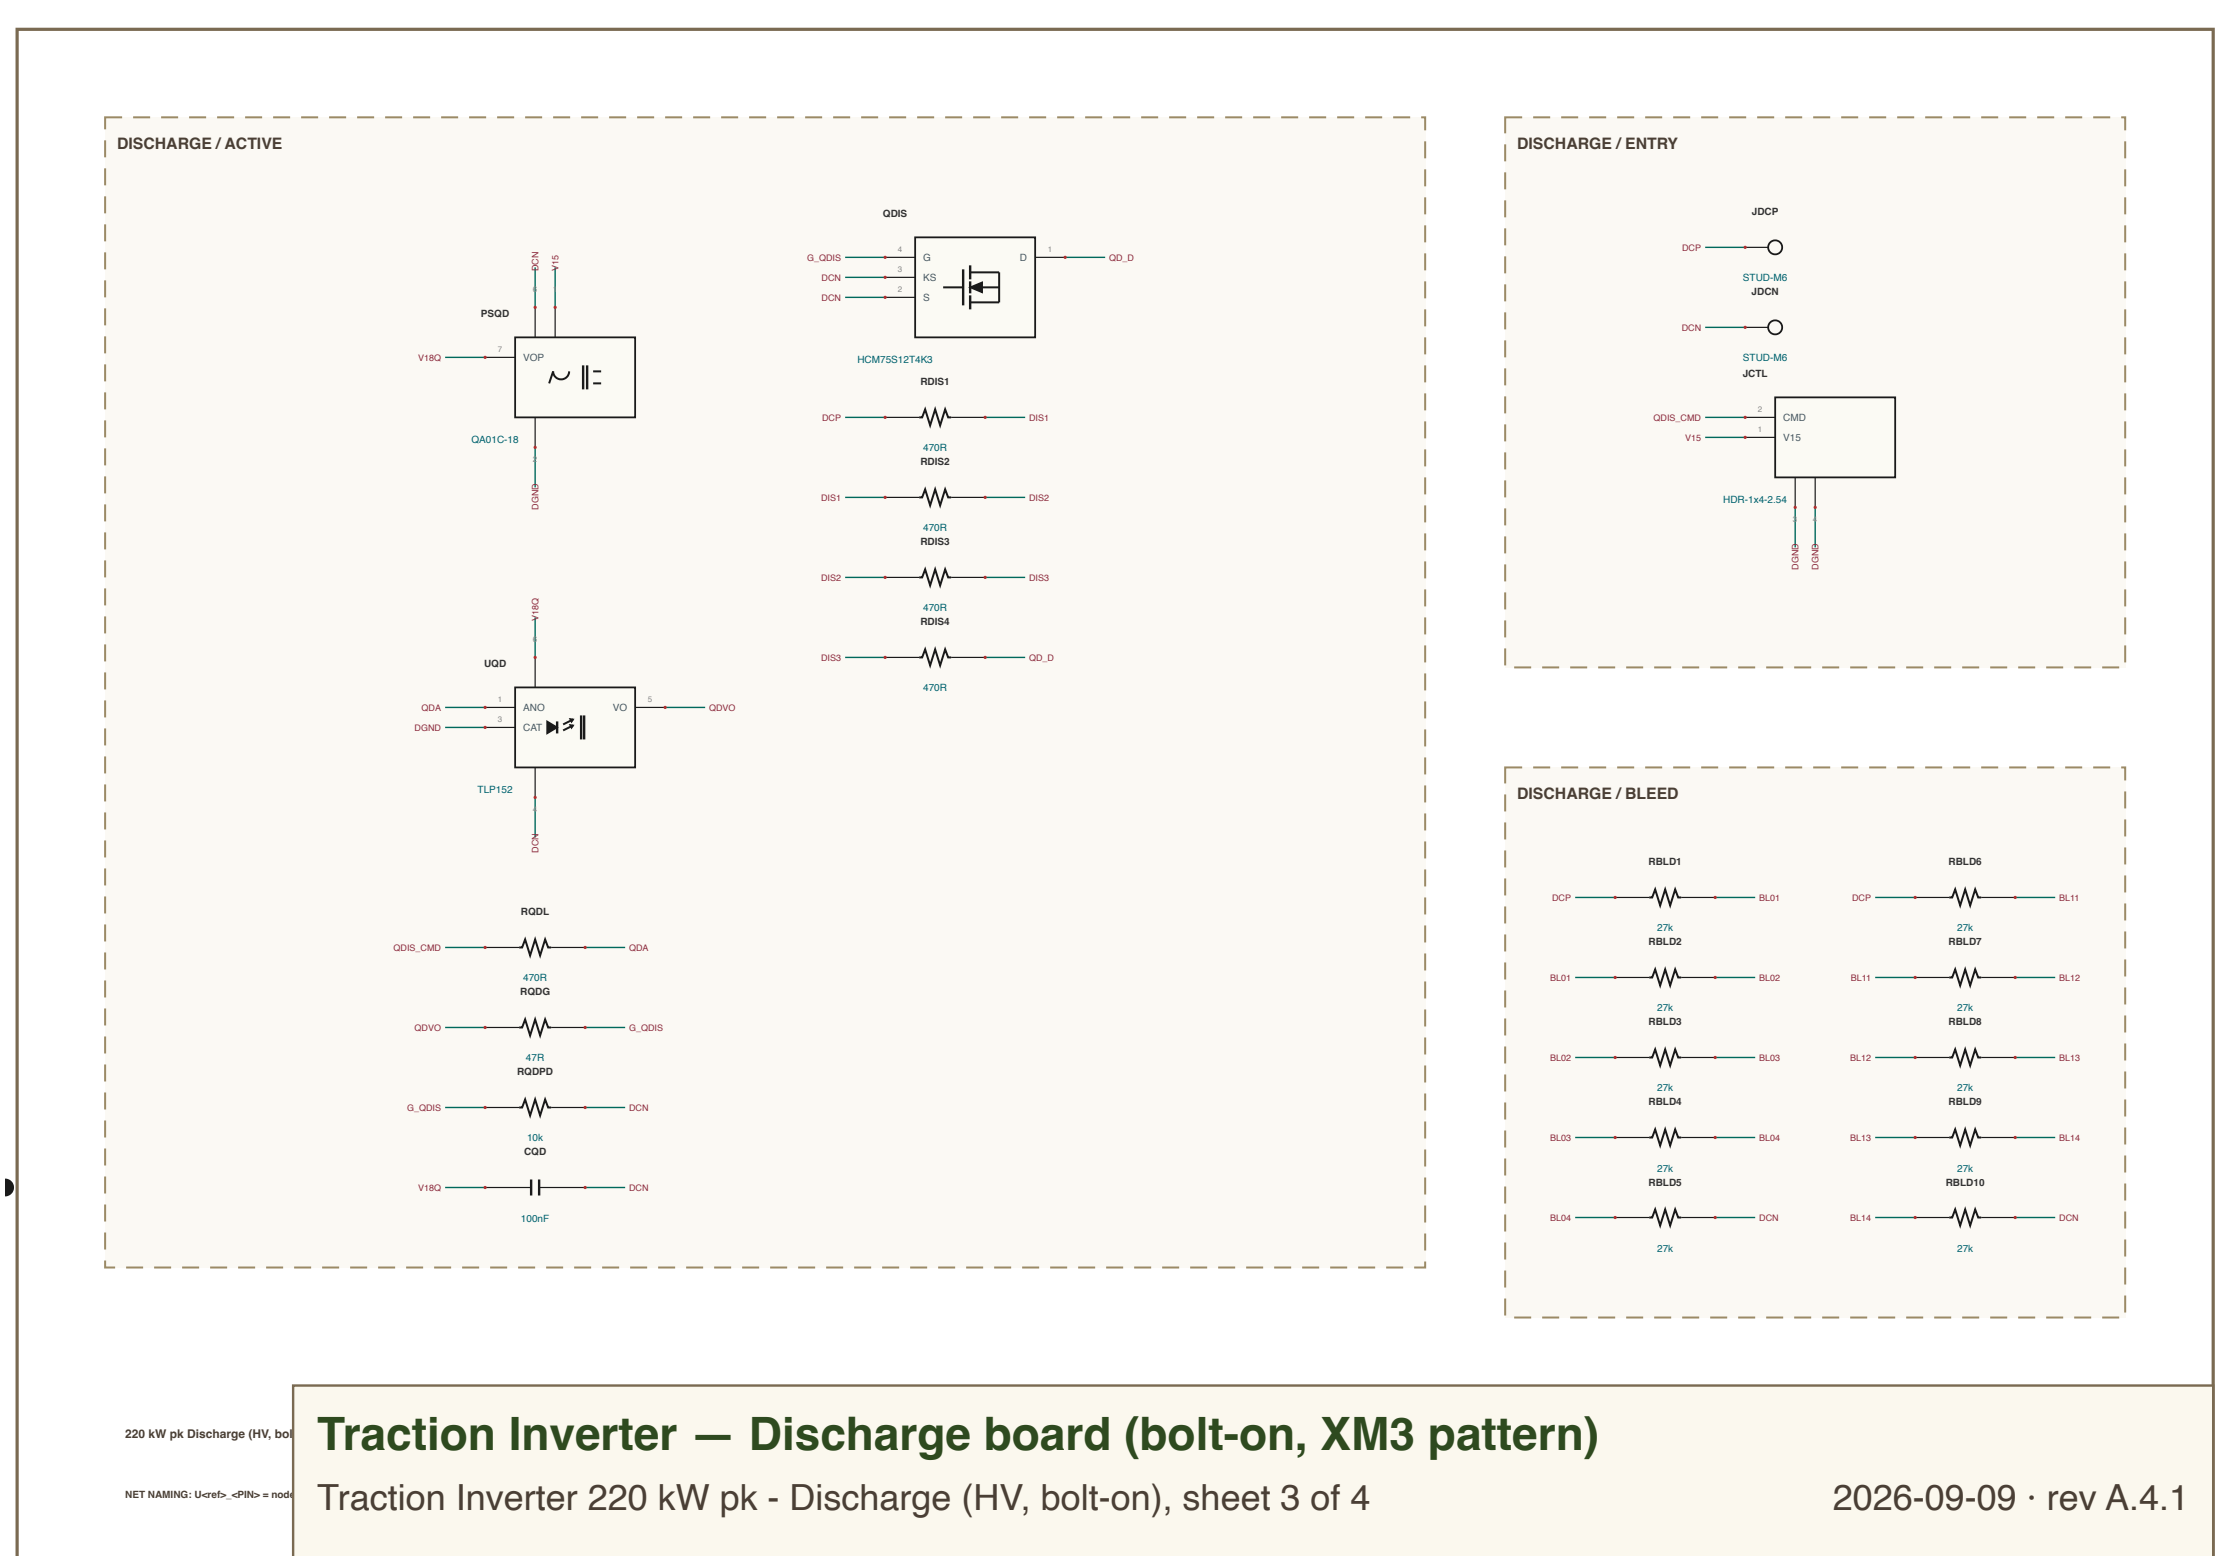
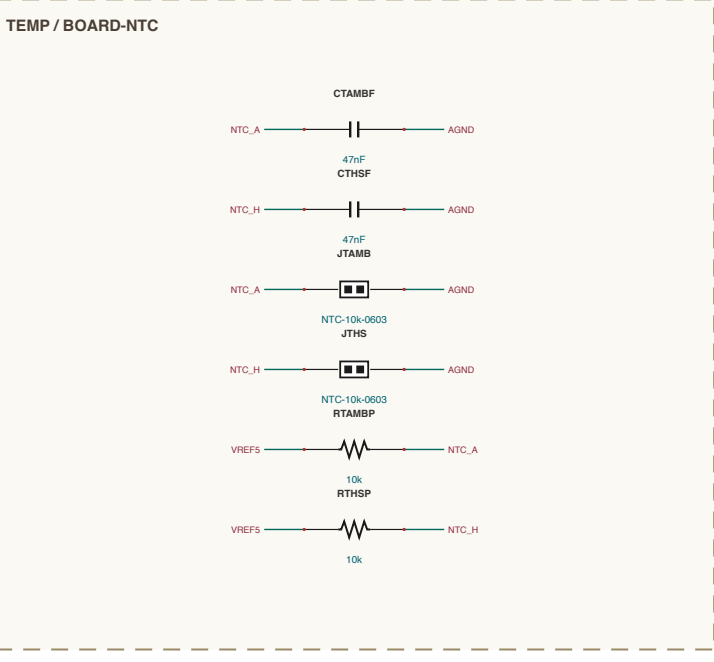
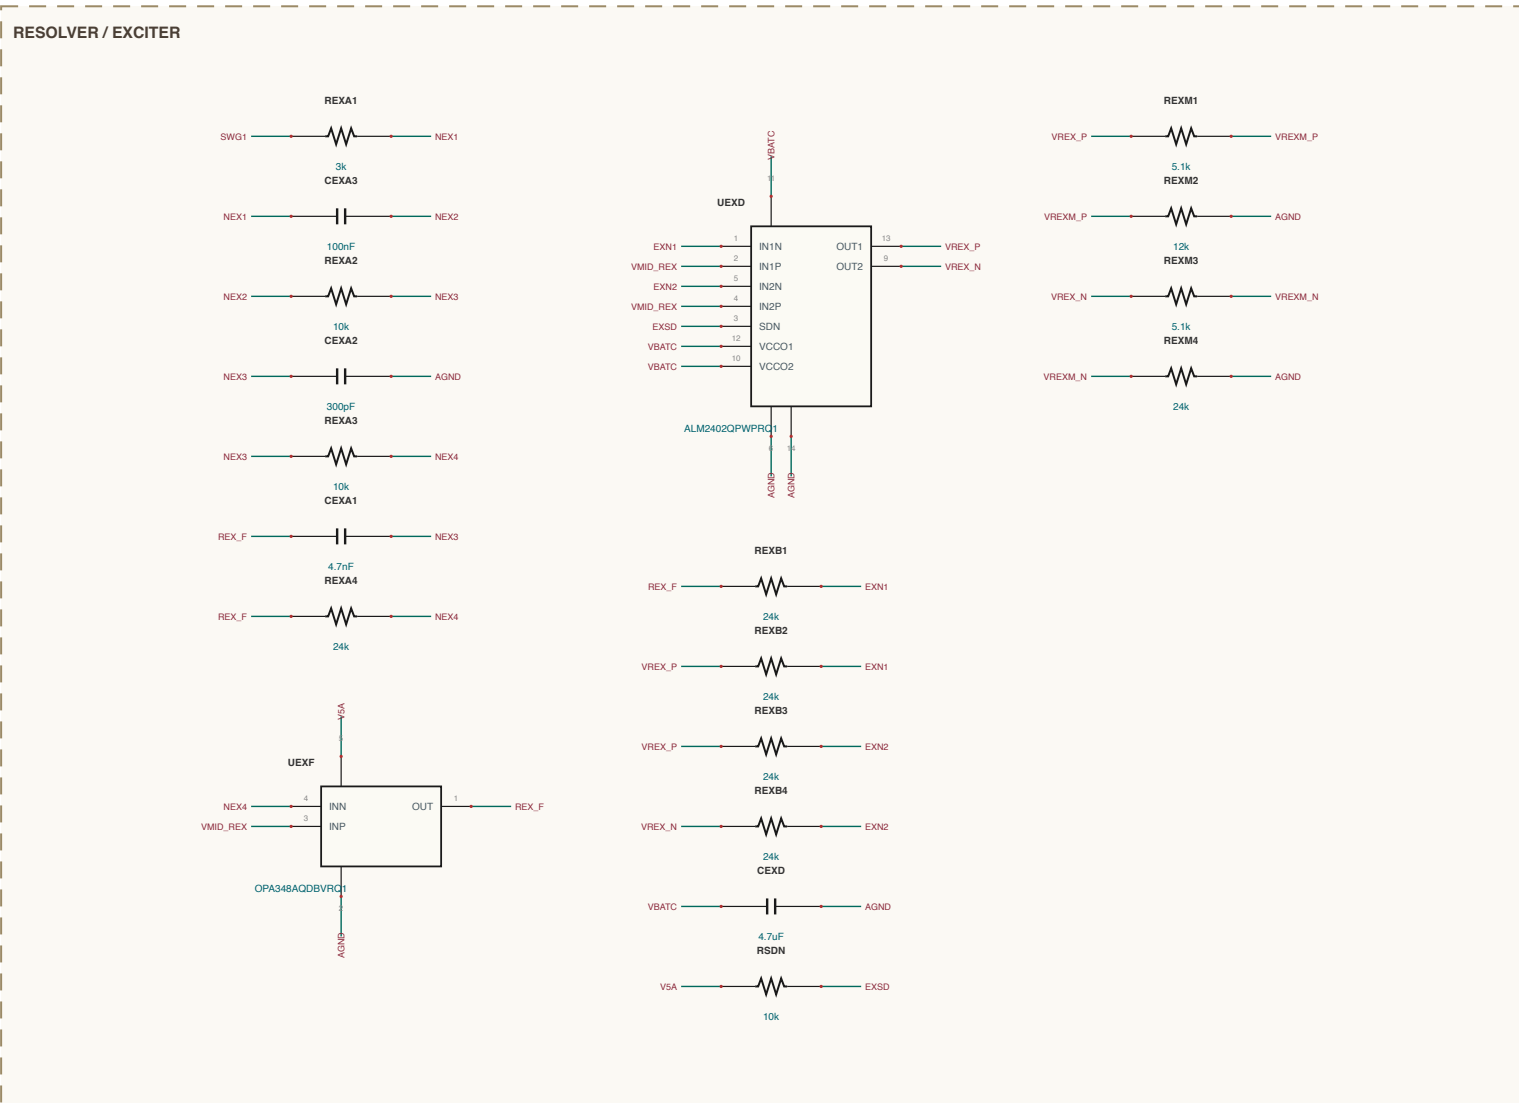
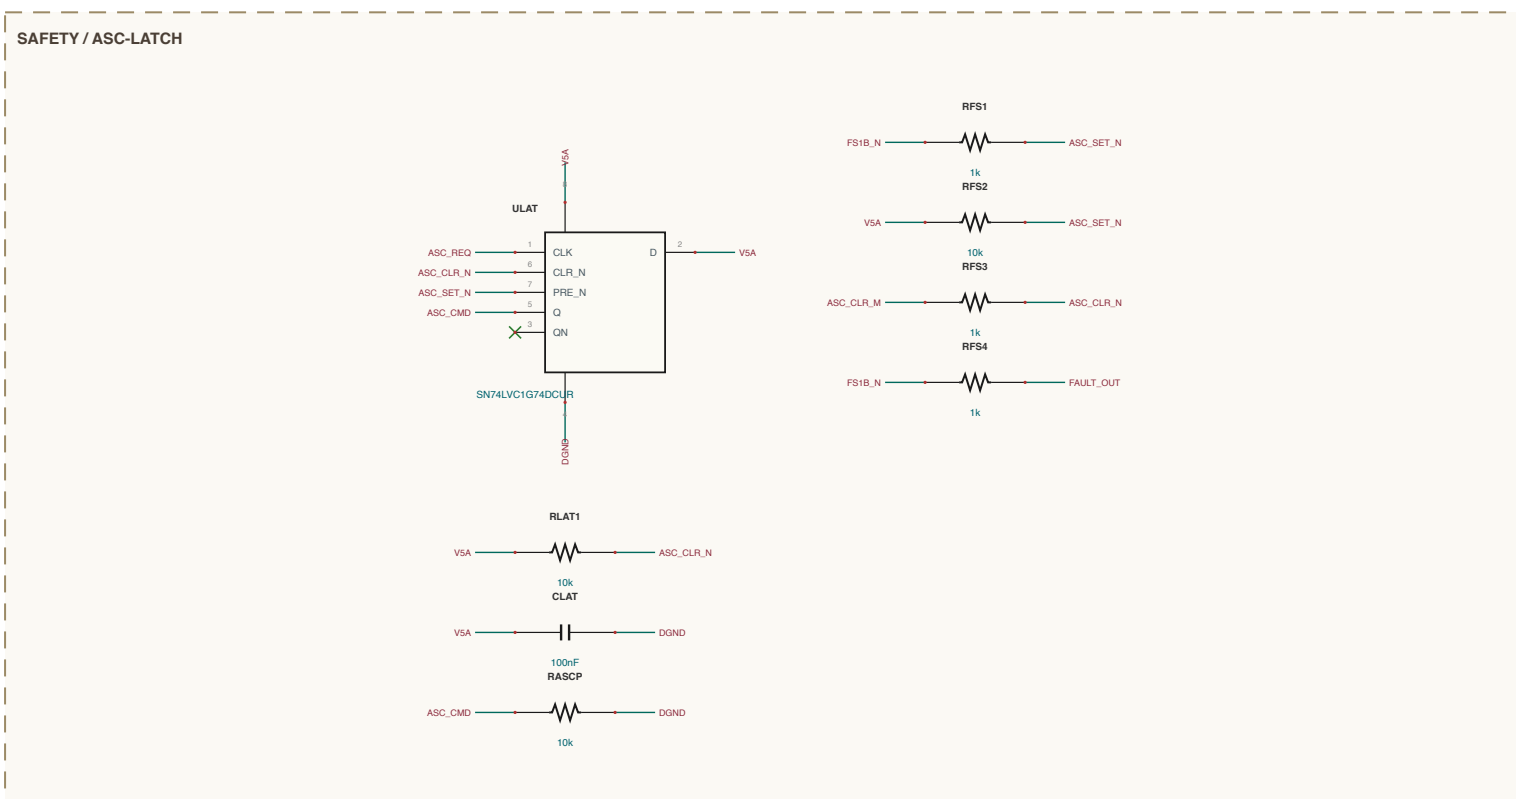
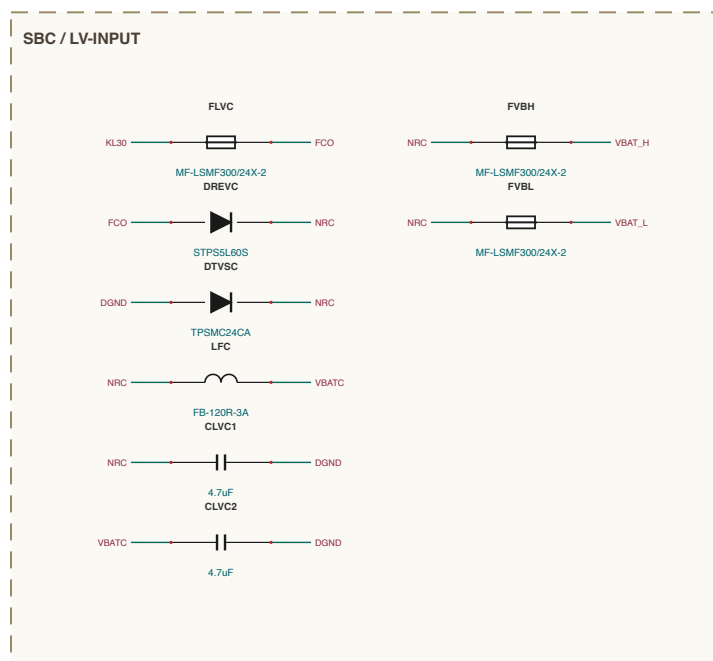
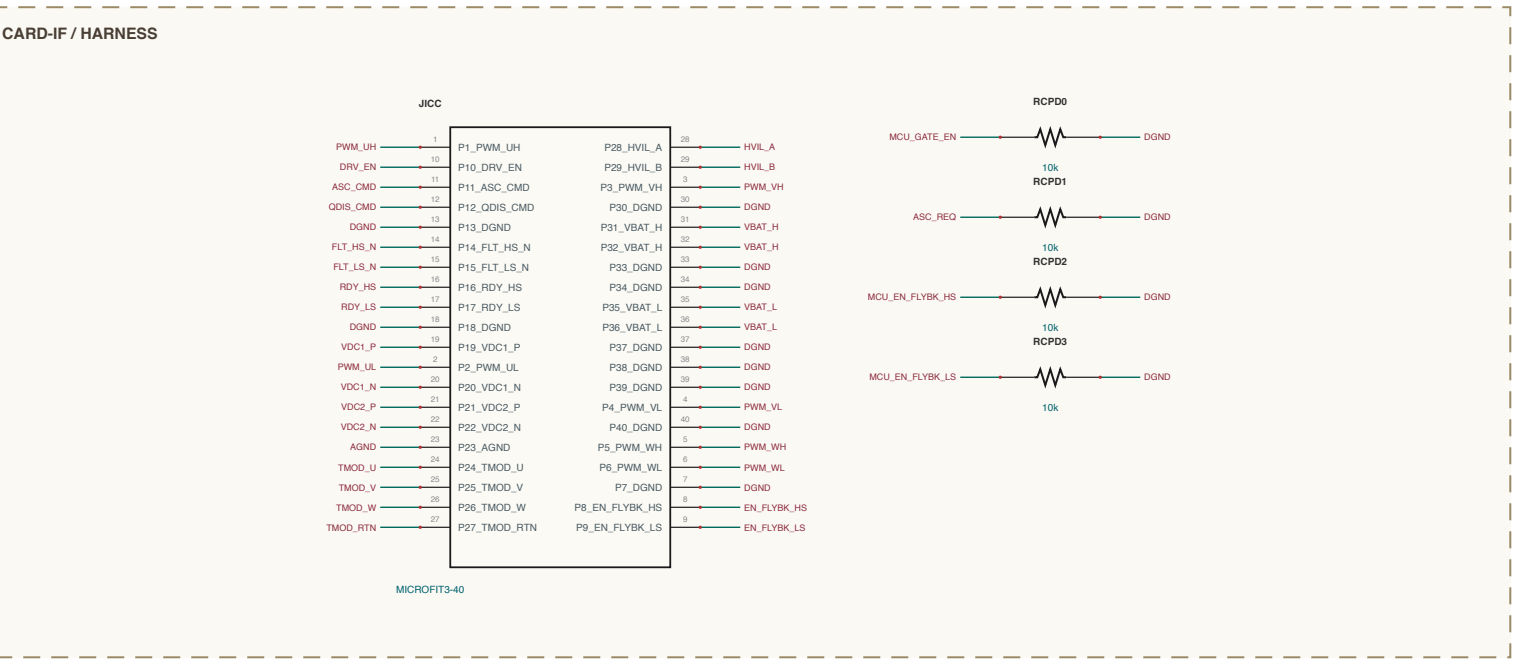
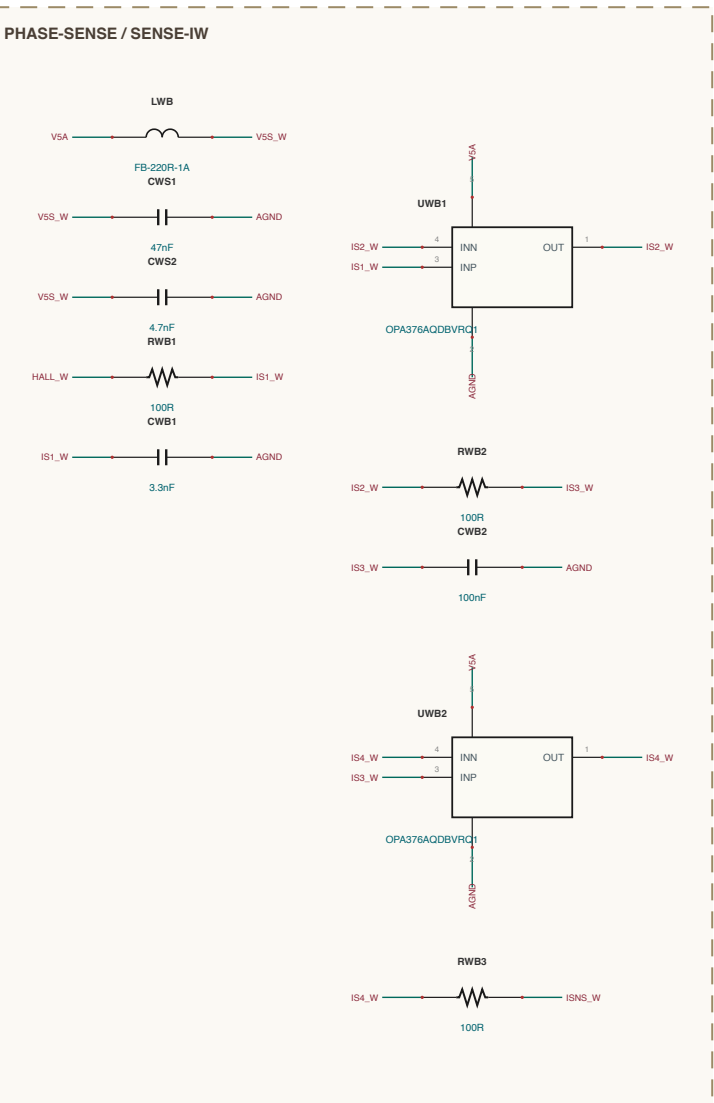
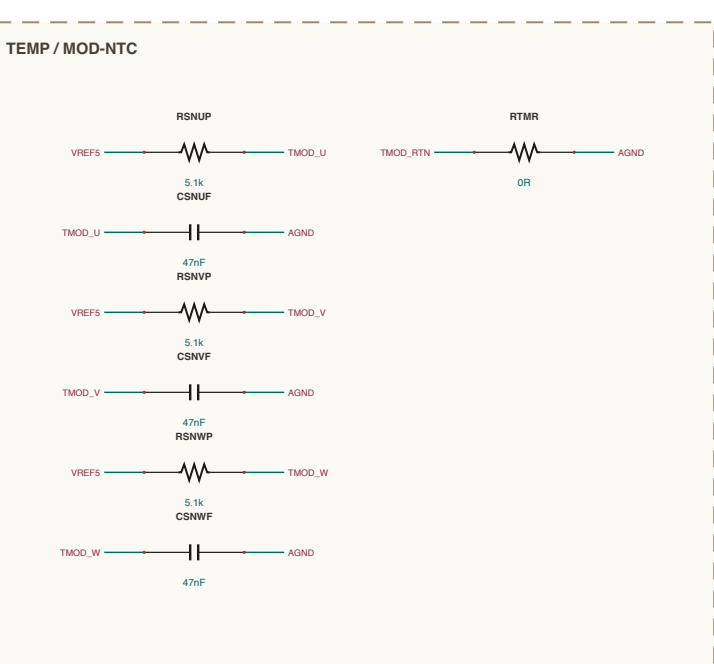
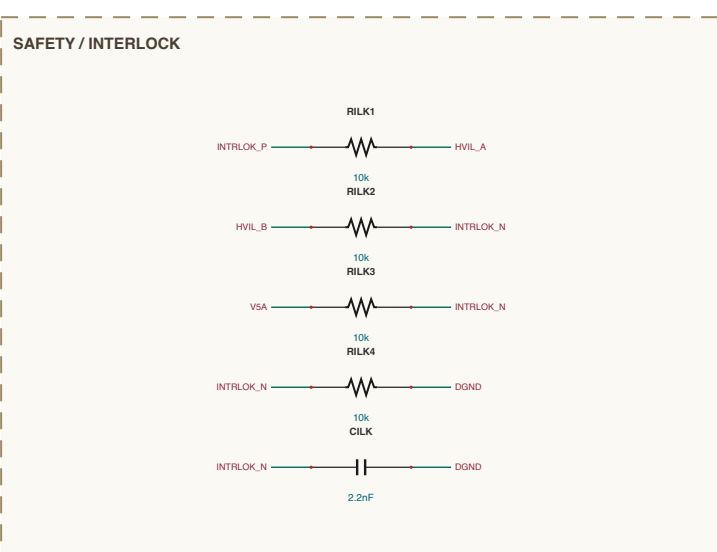
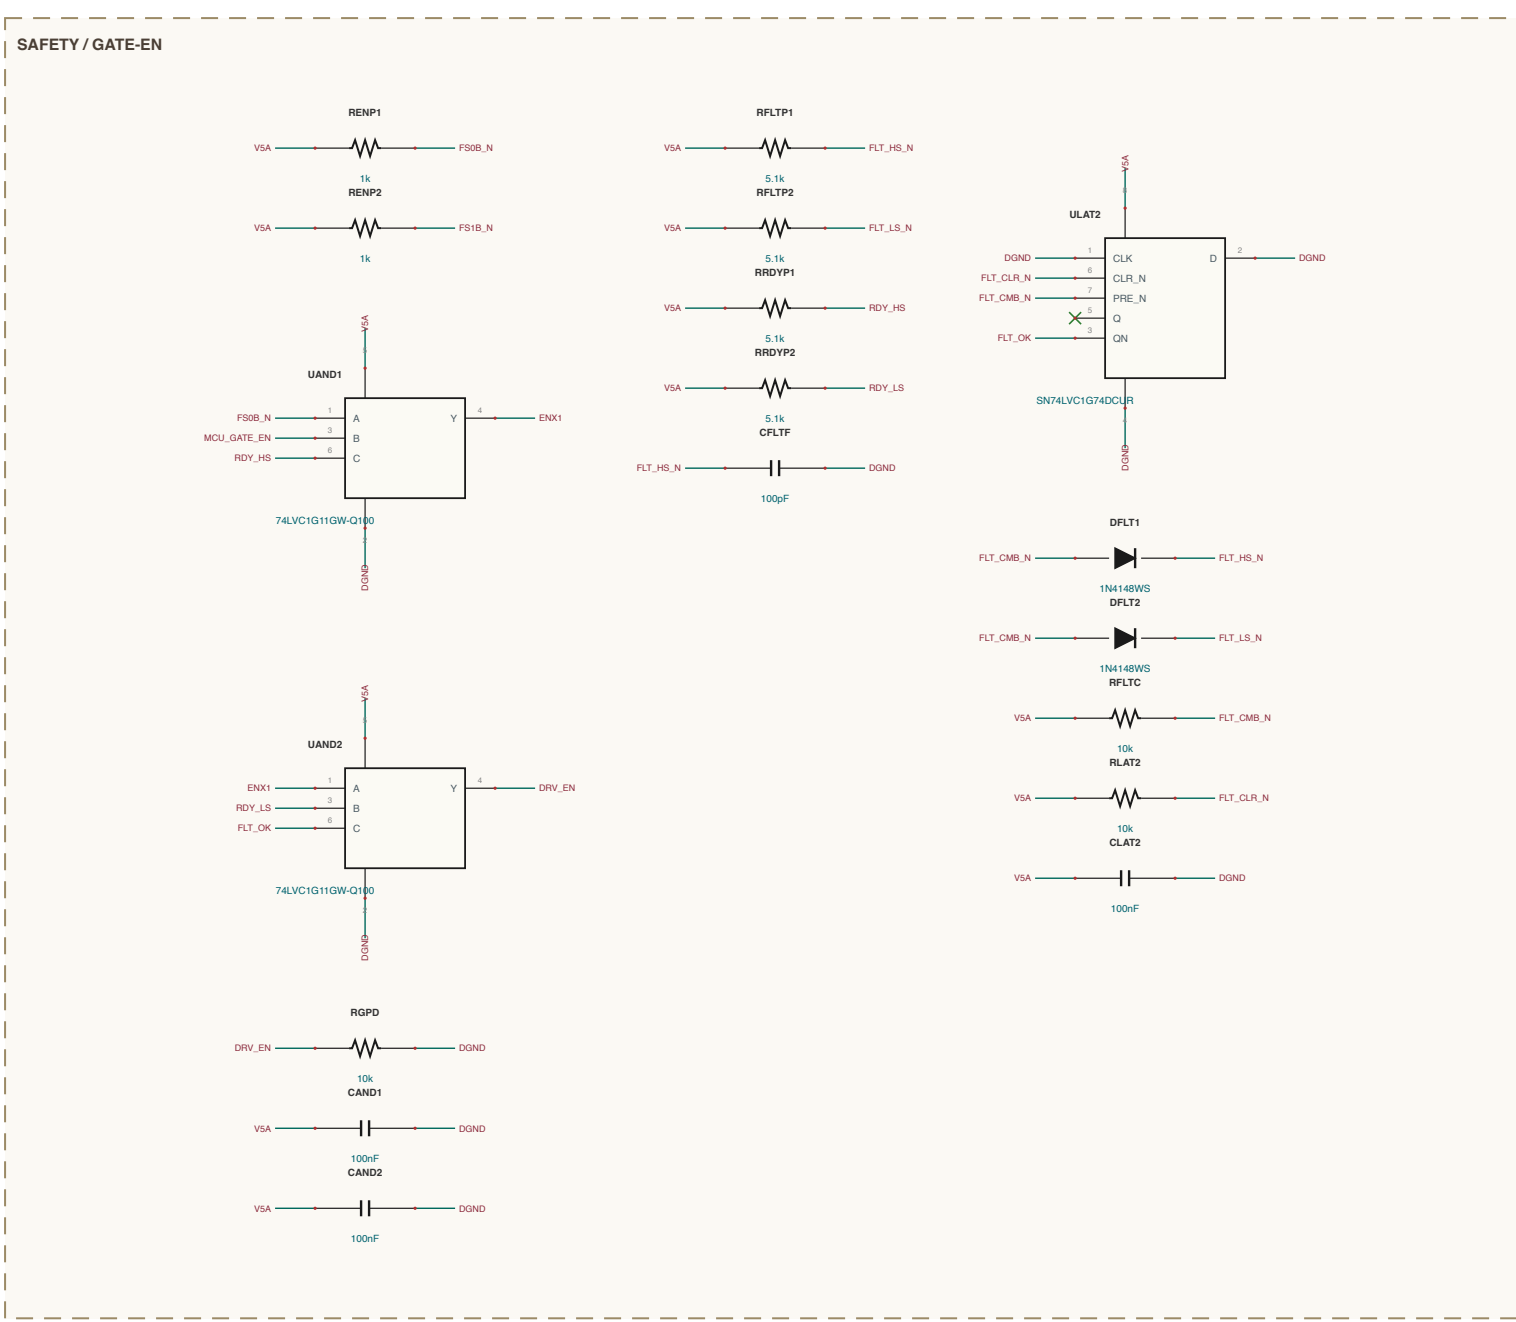
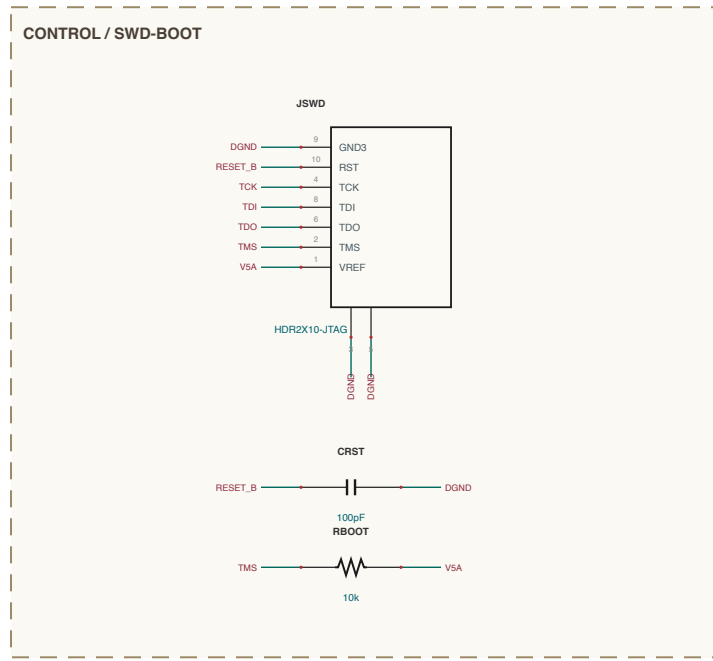
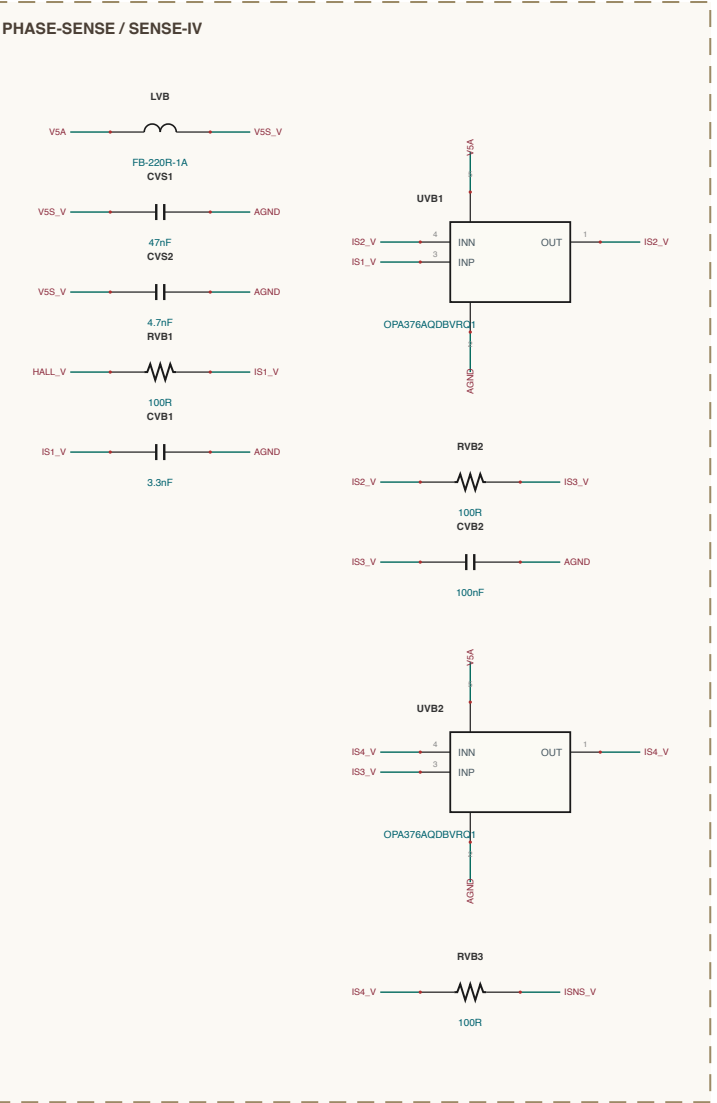
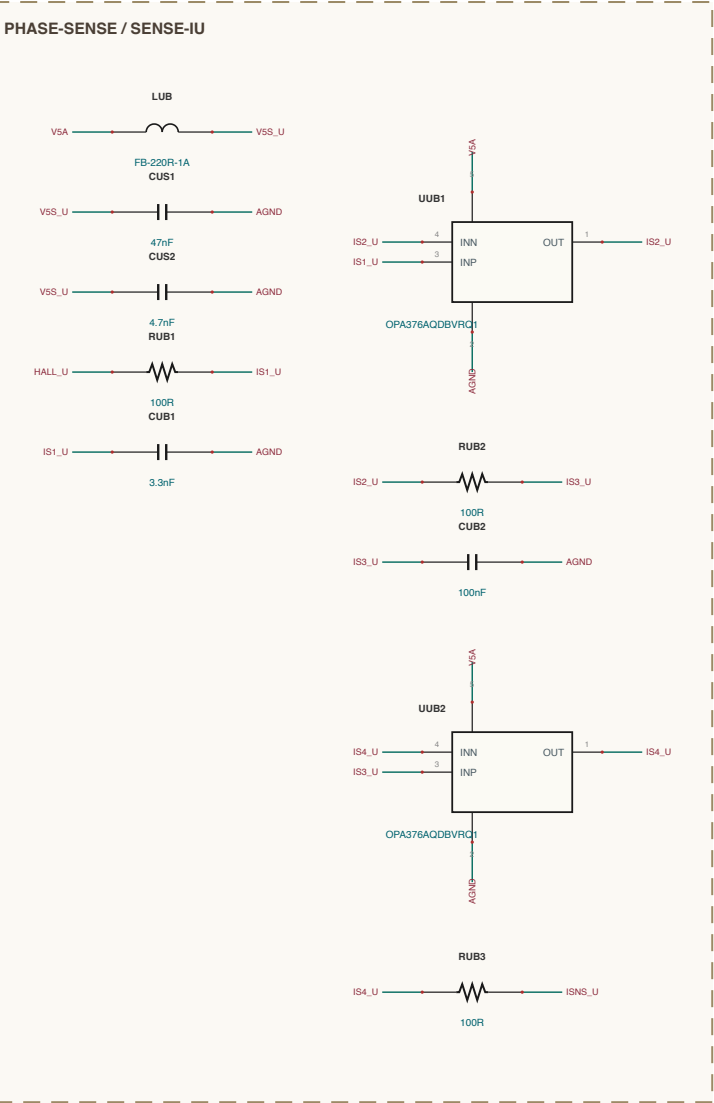
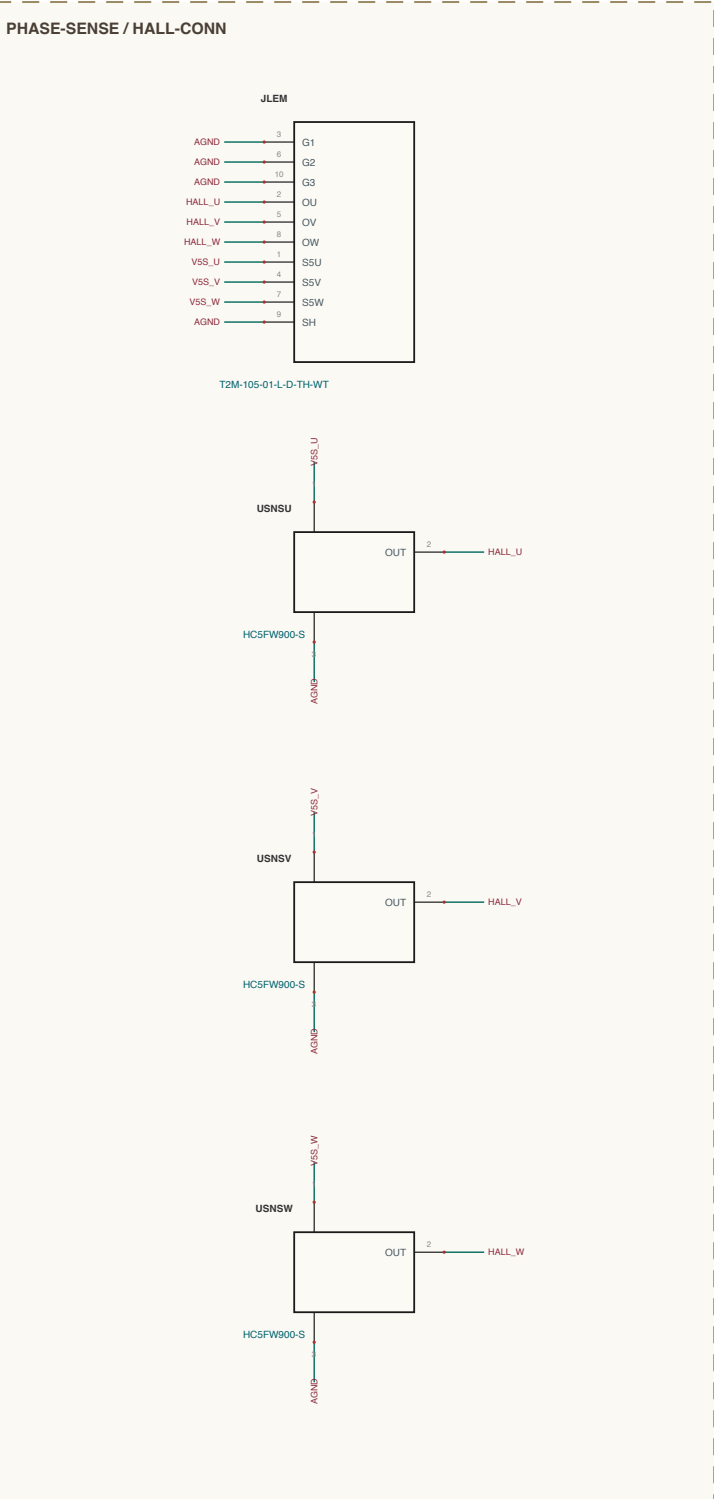


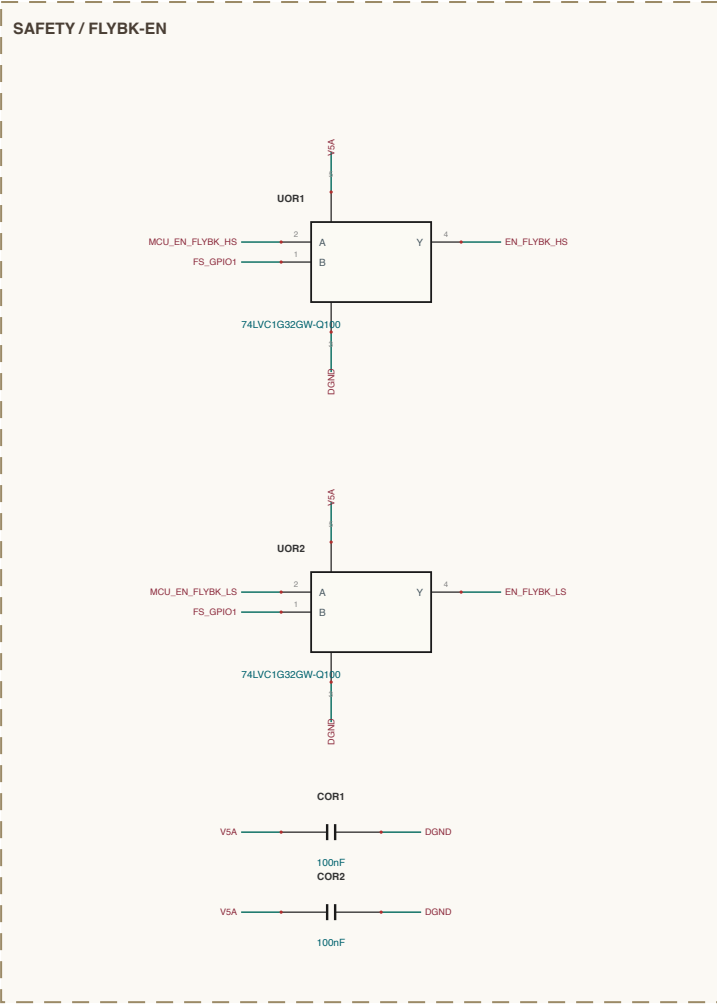

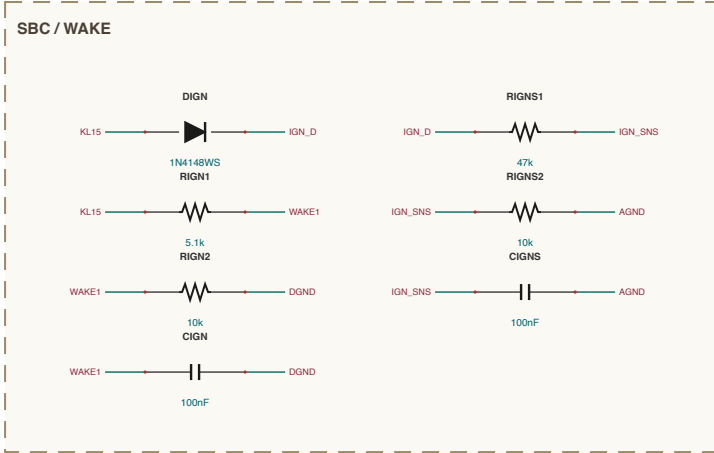





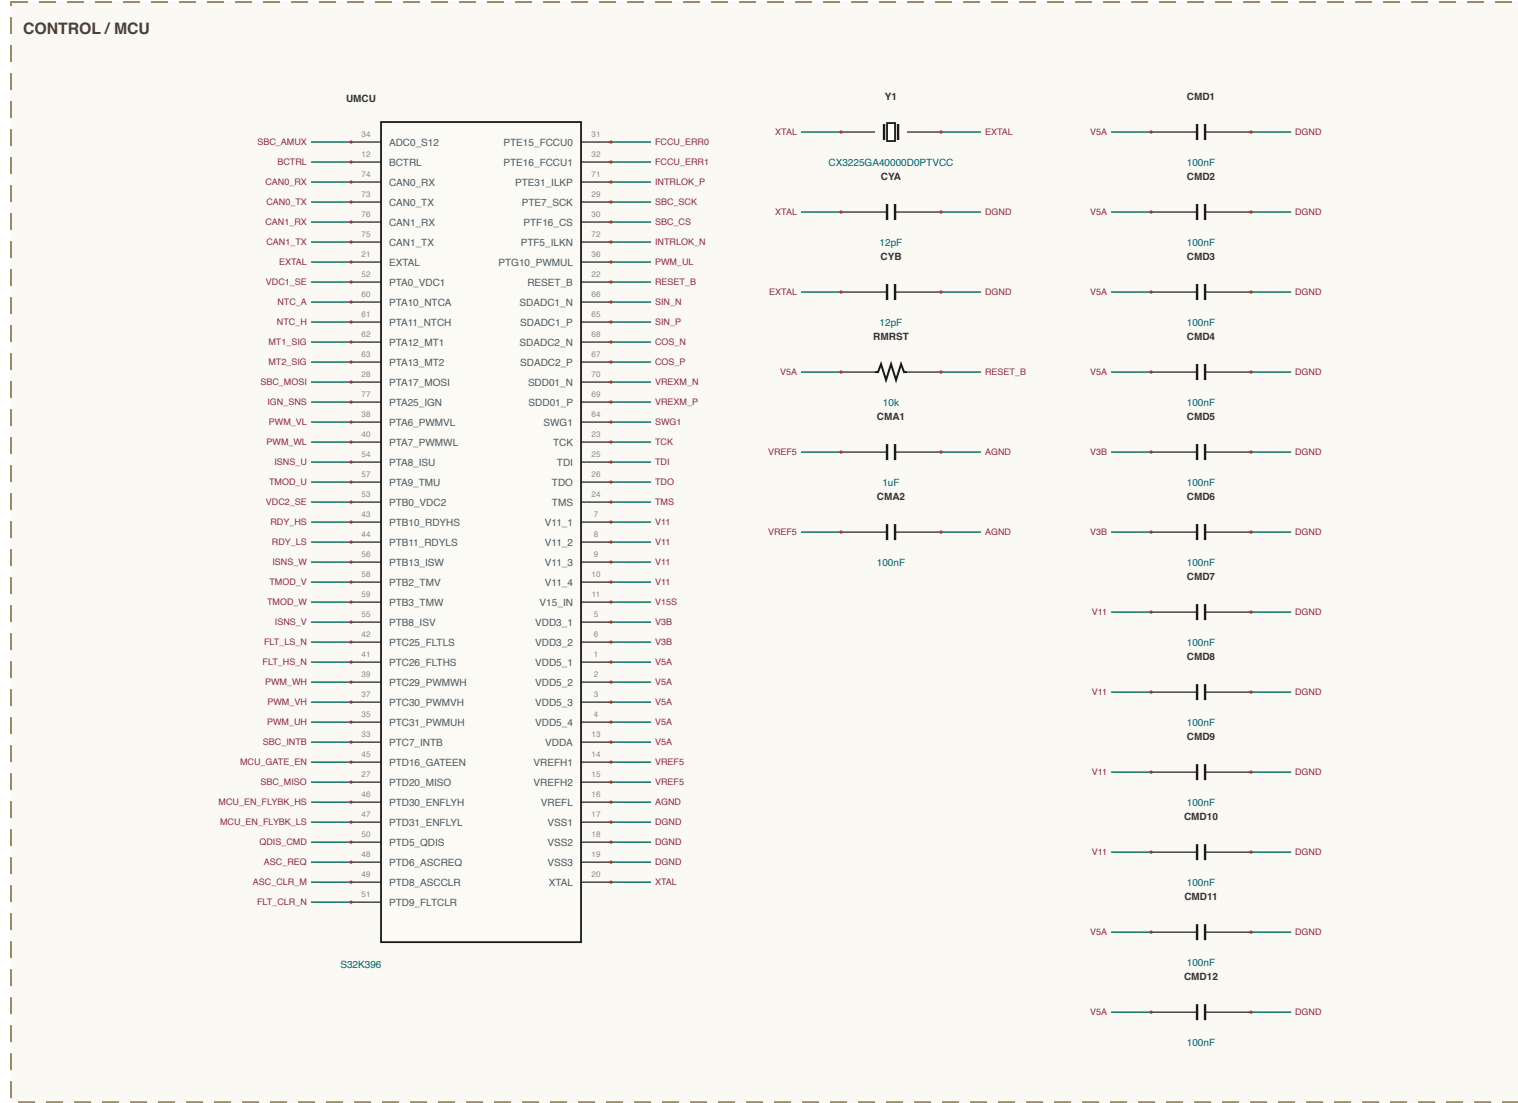


SHEET INDEX

220 kW pk Control Card S32K396 - A.4.1

Section	Count
PHASE-SENSE - 4 sections	4
RESOLVER - 4 sections	4
SAFETY - 4 sections	4
SBC - 3 sections	3
TEMP - 3 sections	3
COMMS - 3 sections	3
CONTROL - 2 sections	2
VOC-RECEIVE - 2 sections	2
CARD-IF - 1 section	1
VEHICLE-IF - 1 section	1

10 A.4.1 - 10 sections - 100 components

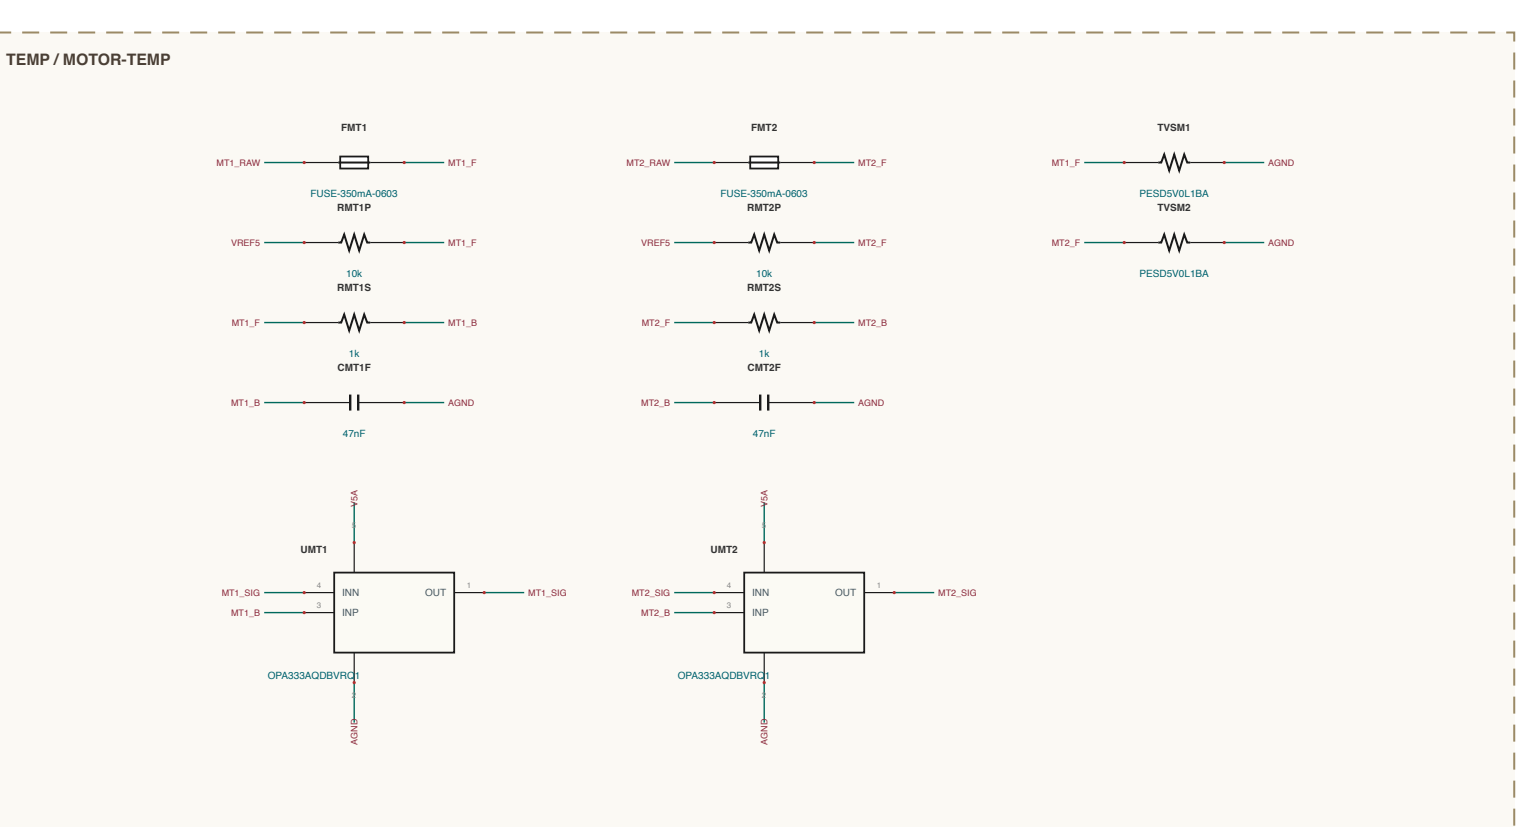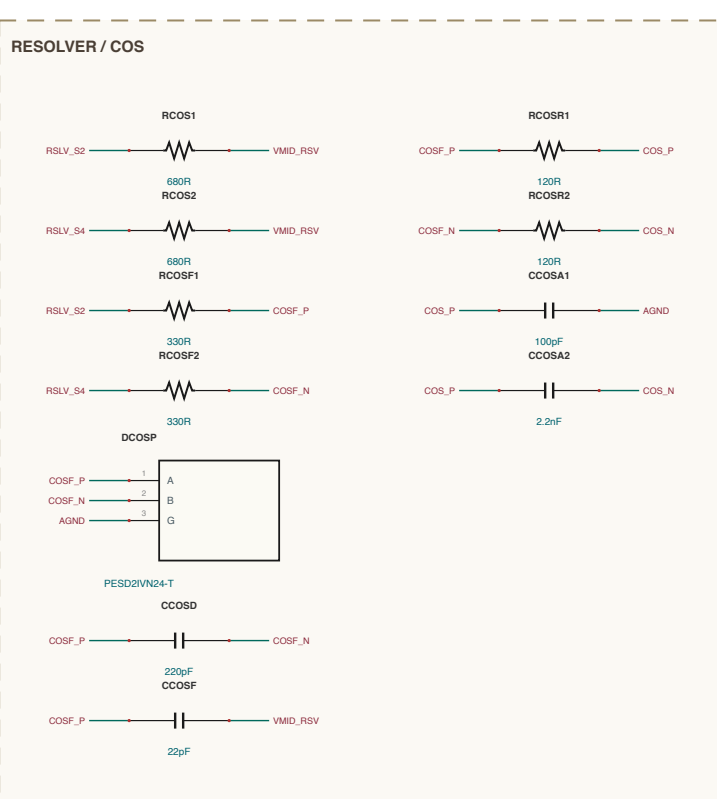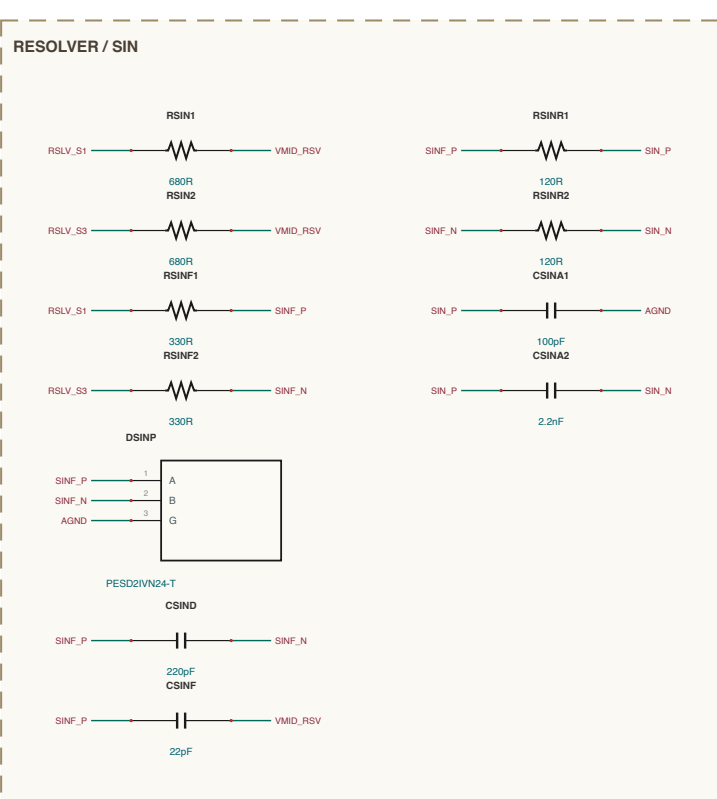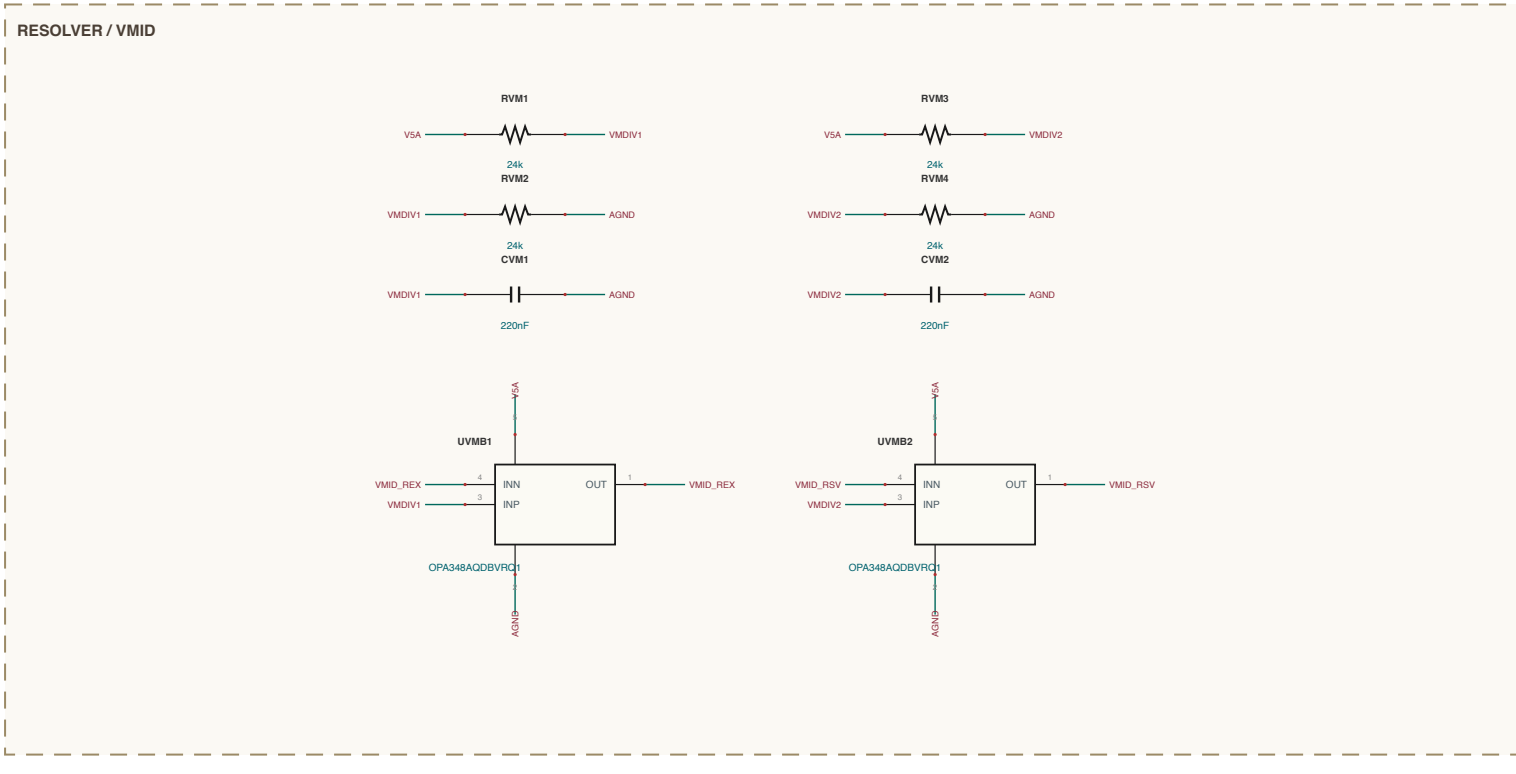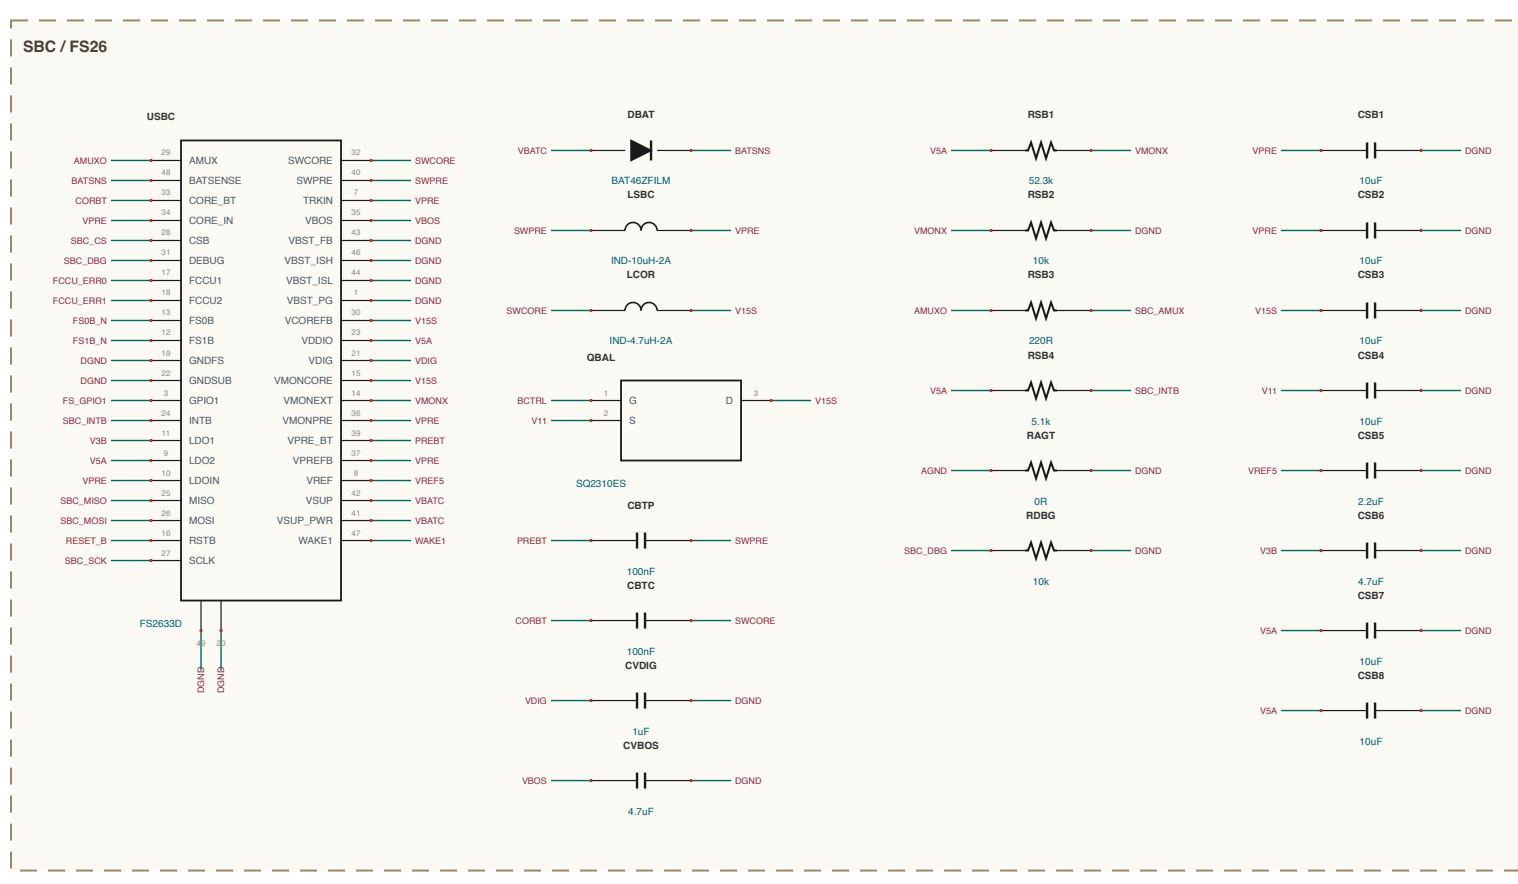

NET NAMING

Internal positions are named for what they join

Connectors, while made at that IC pin e.g. VDD36, VDD36

Resistor, M, midpoint of a variable pot e.g. VDD36, M

Resistor, - when top between Resistor and e.g. VDD36, 15

If others are explicit design note

same name on another sheet = same net, joined ONLY at the

joined connections/variables from INTERCONNECTED, design team

