
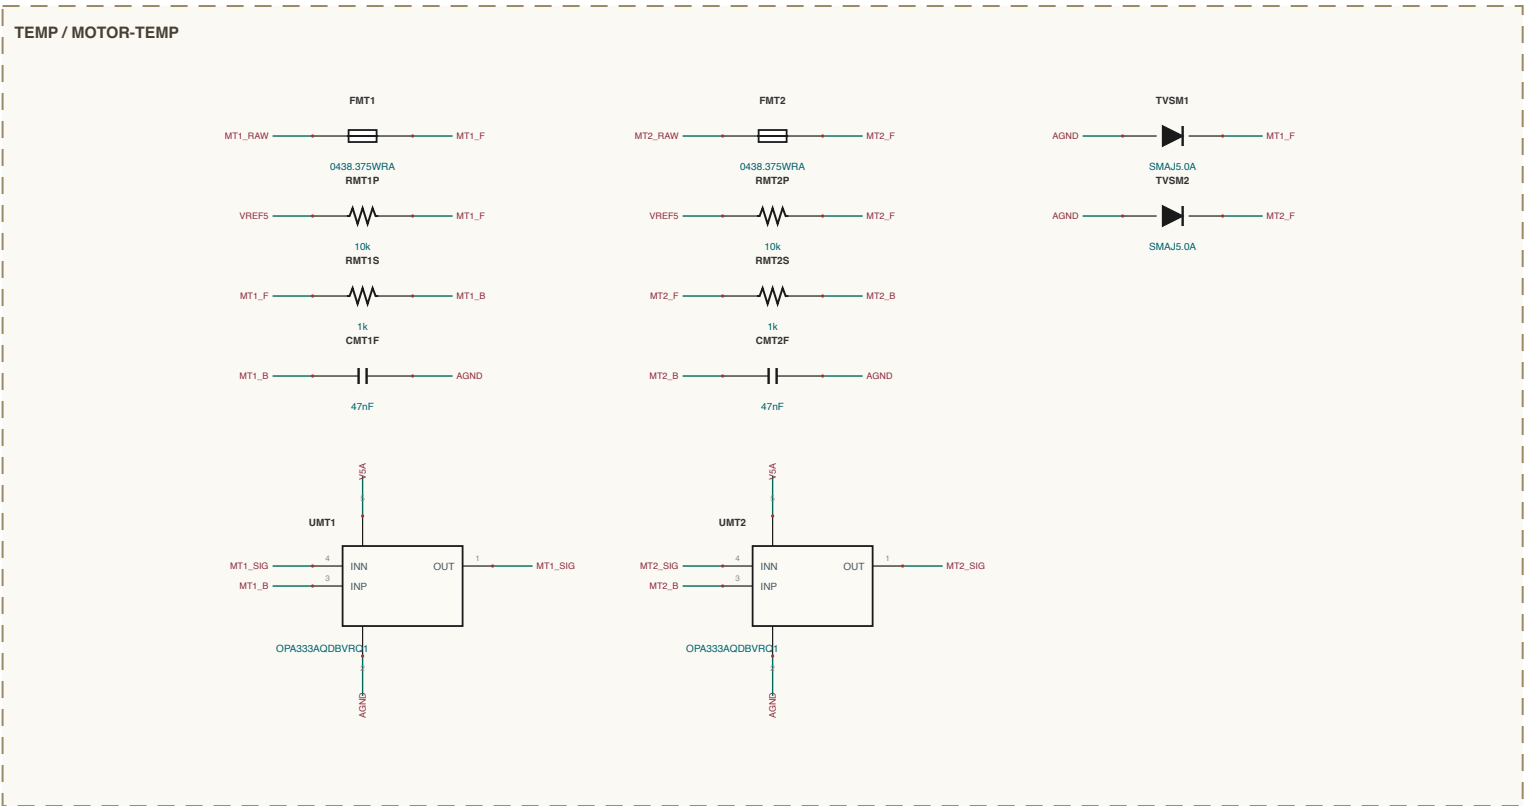
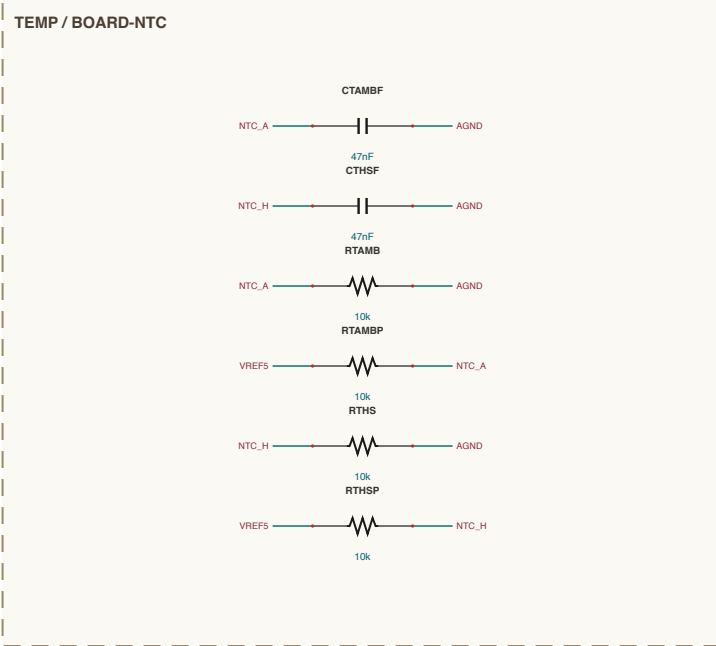
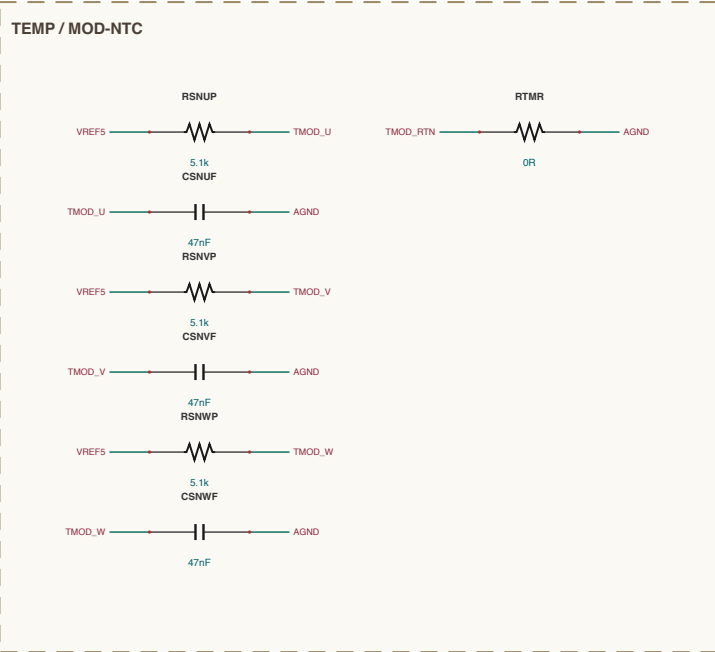
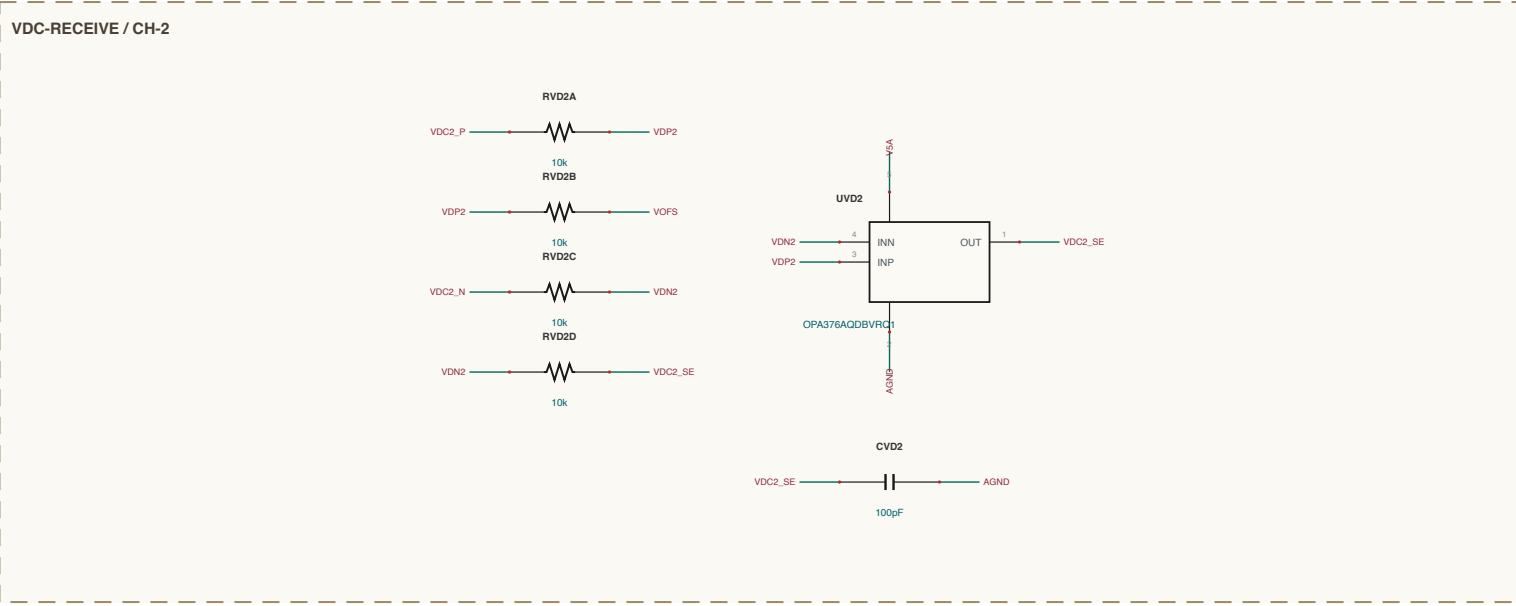
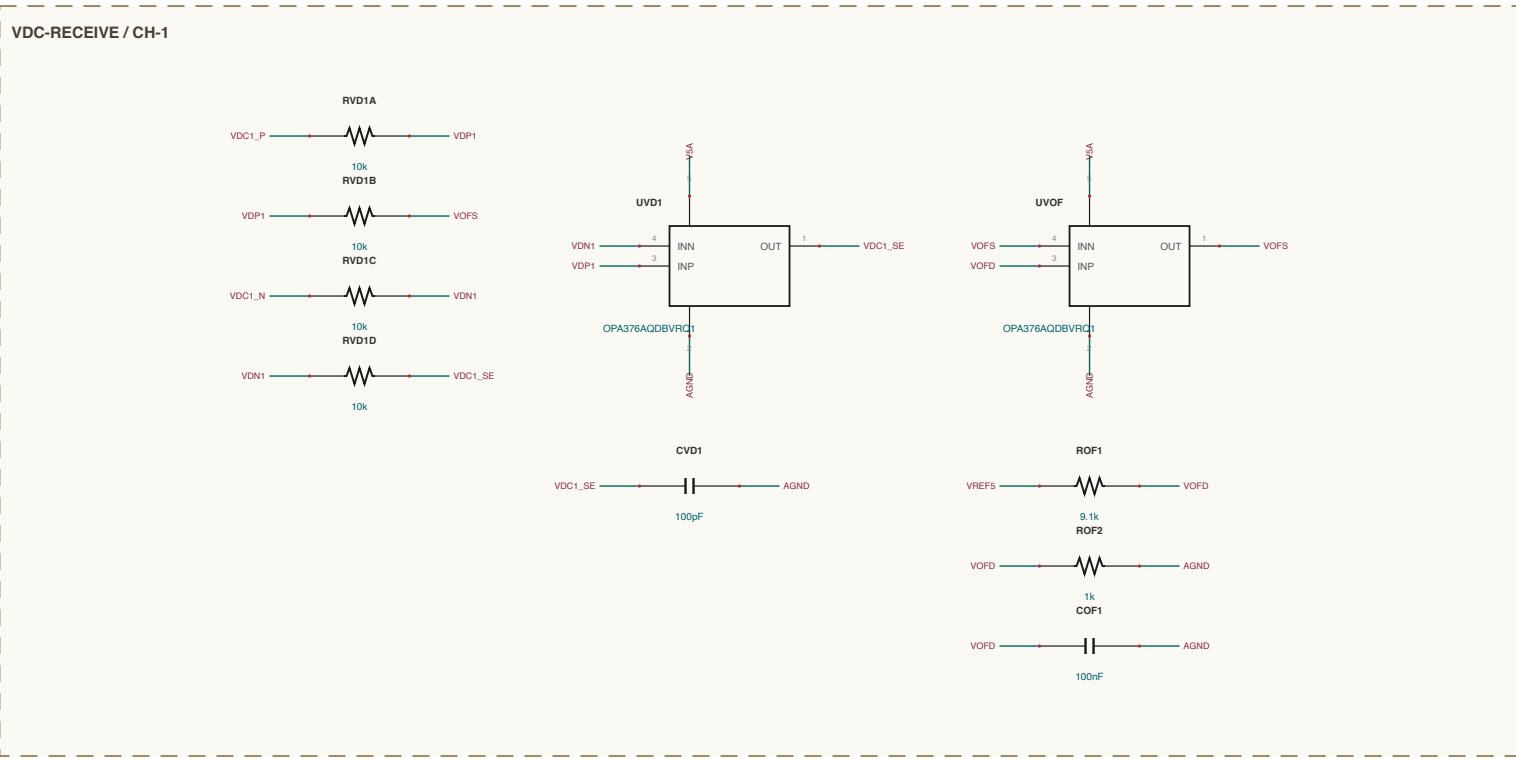
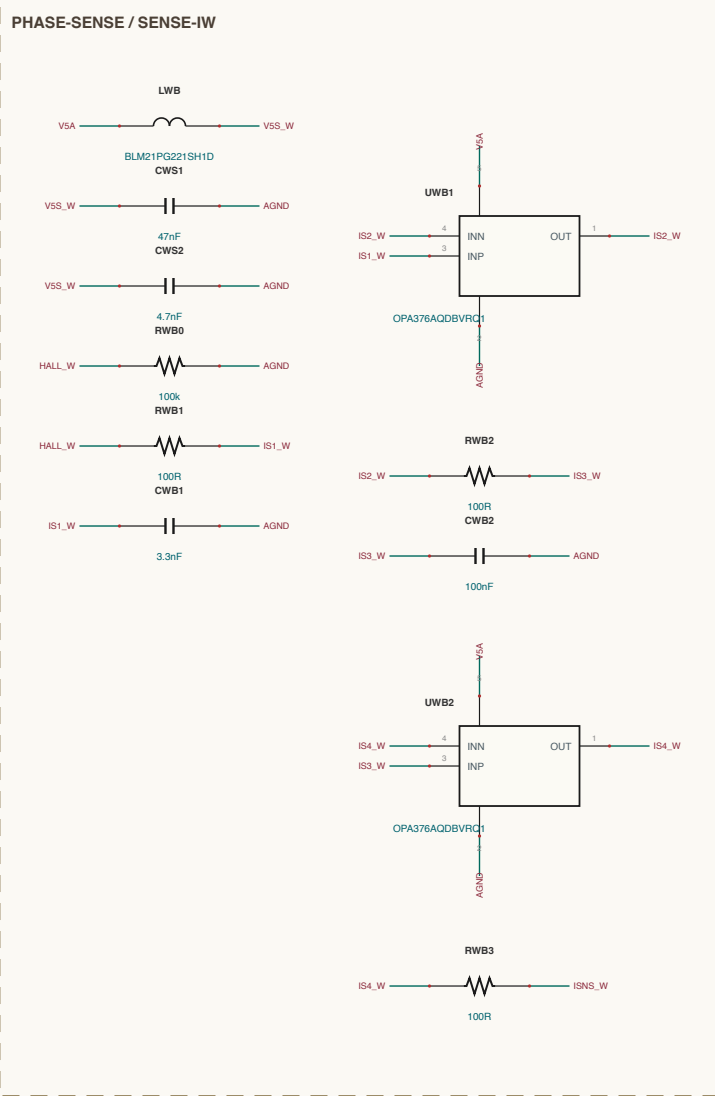
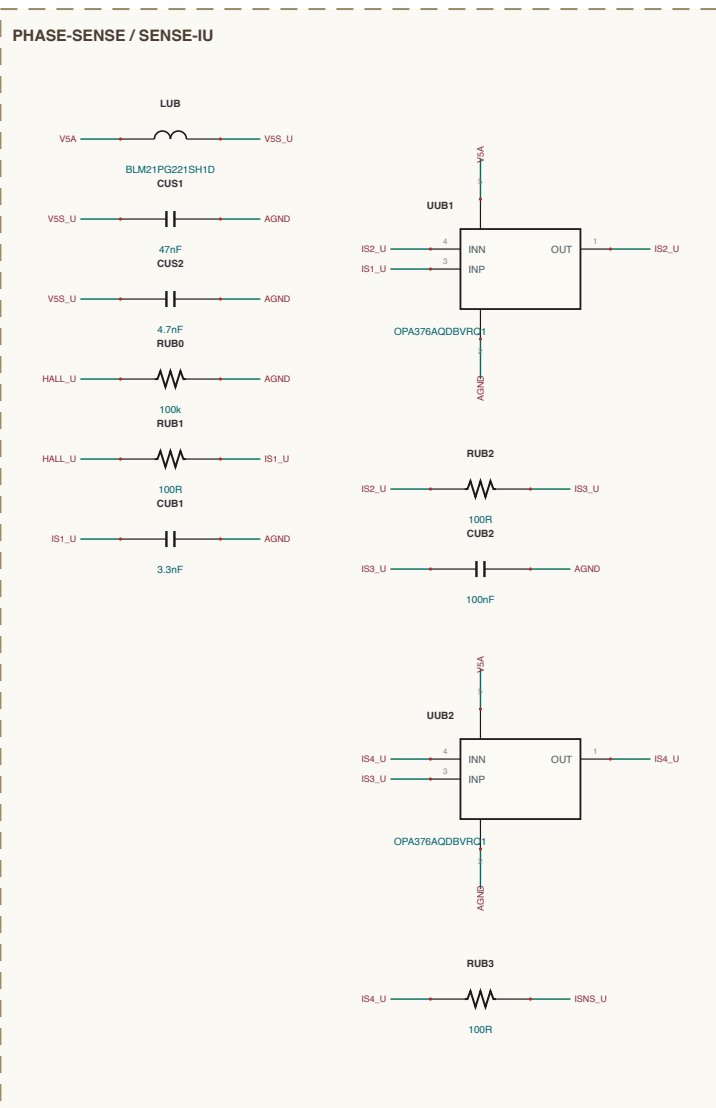
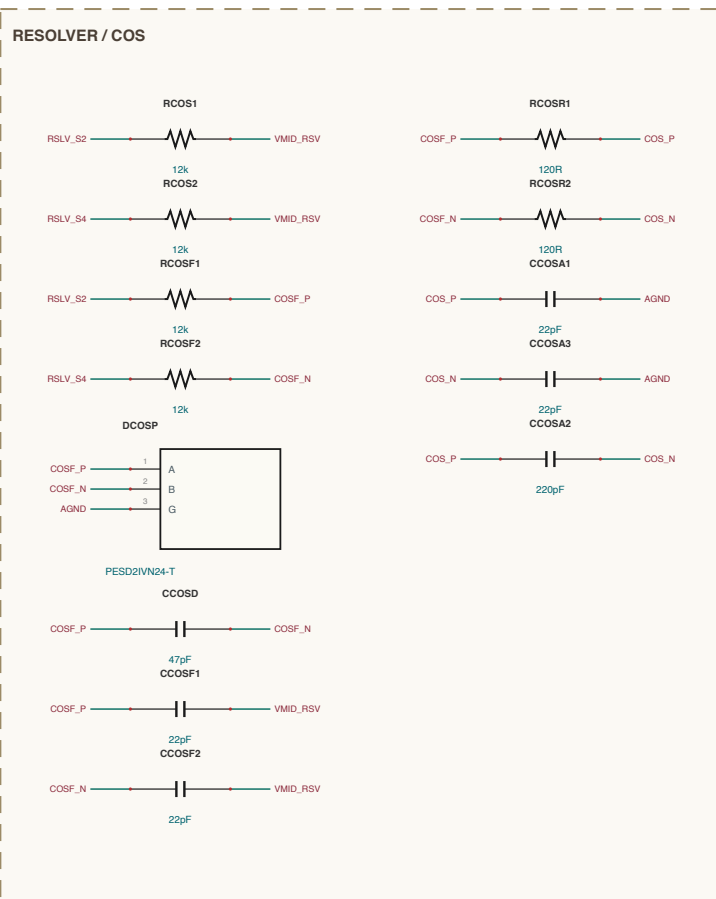
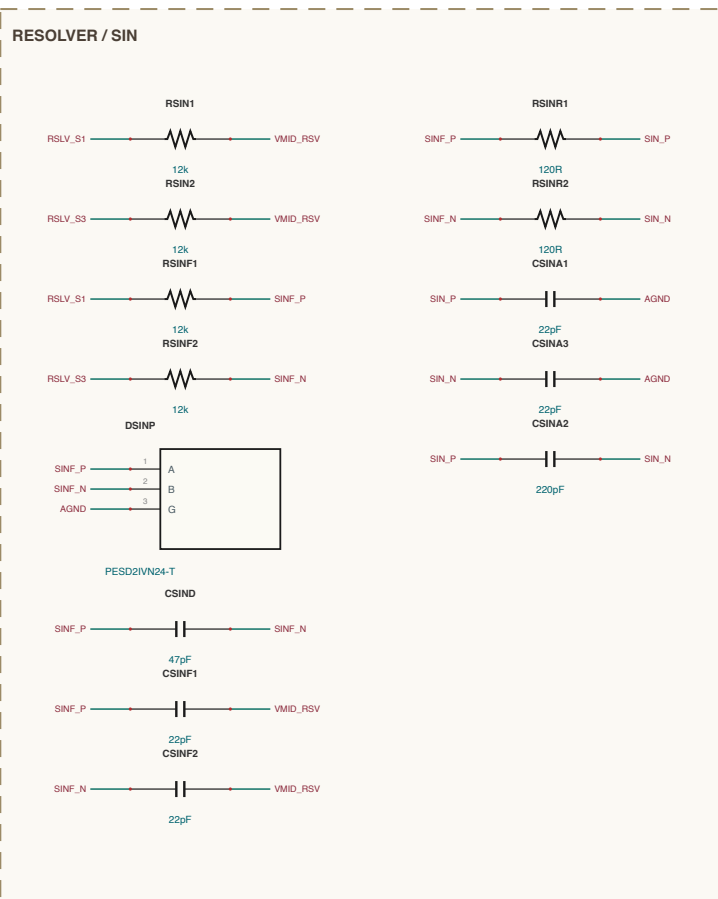
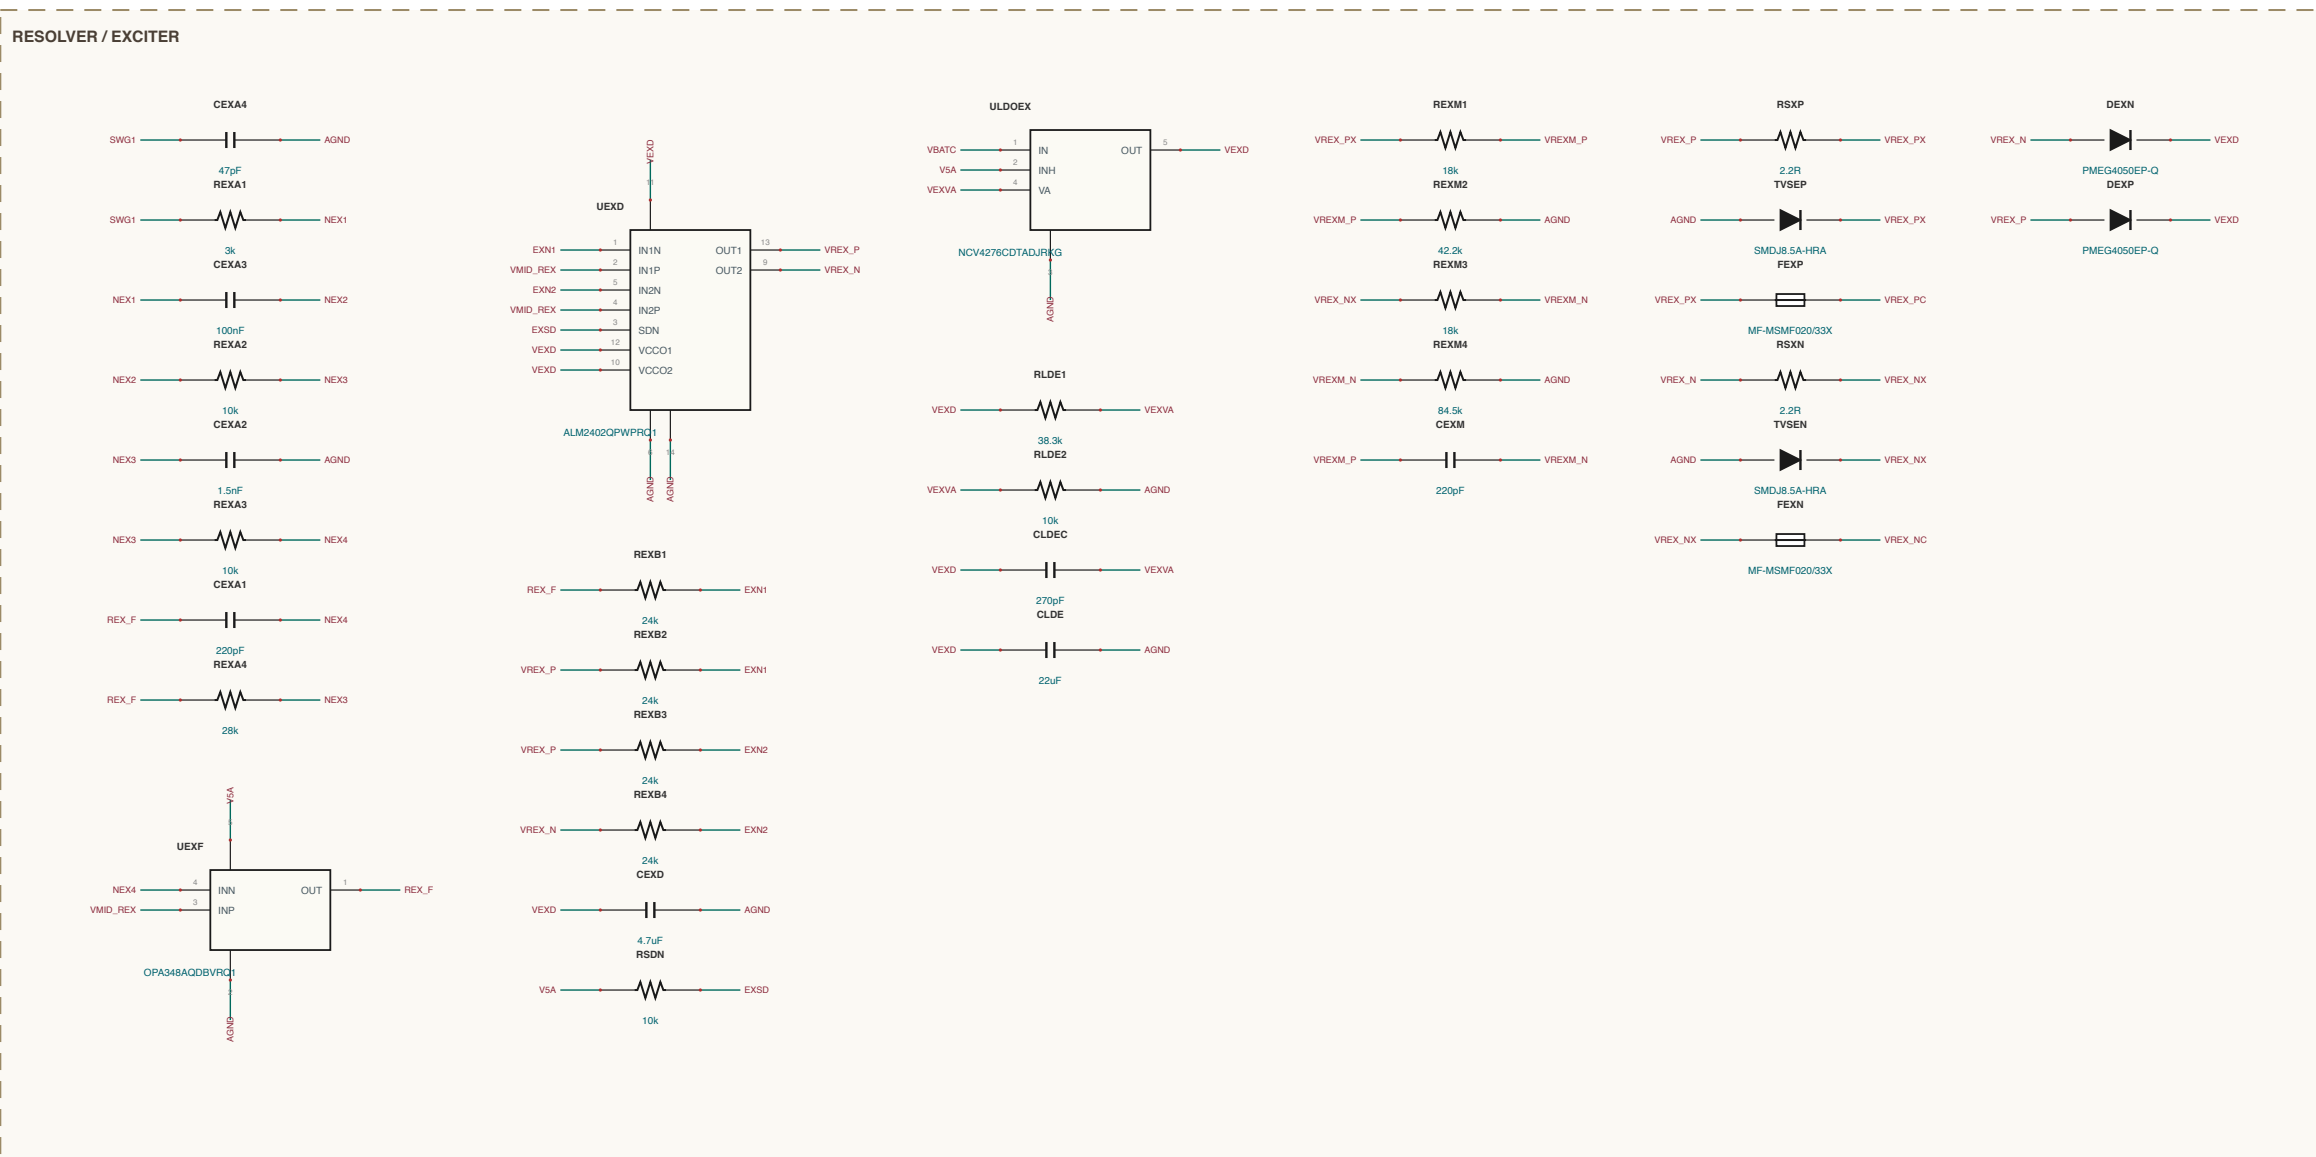
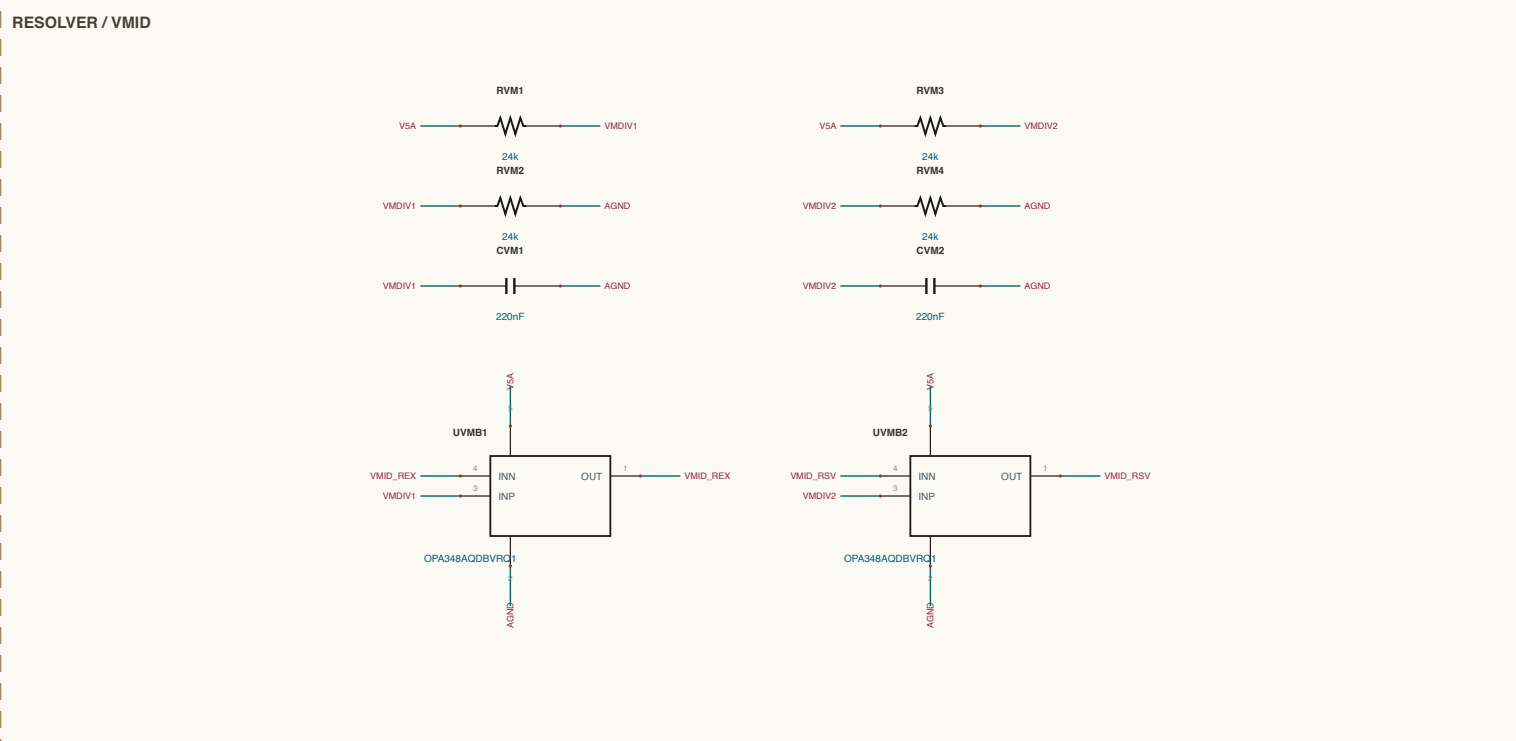
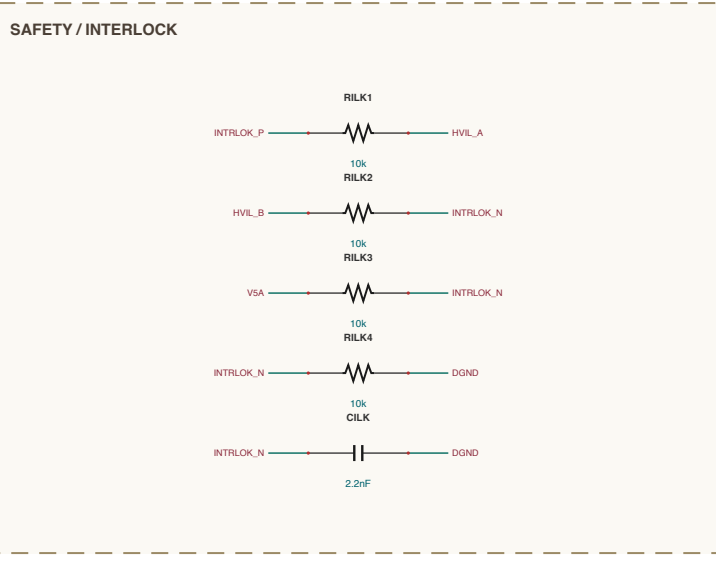
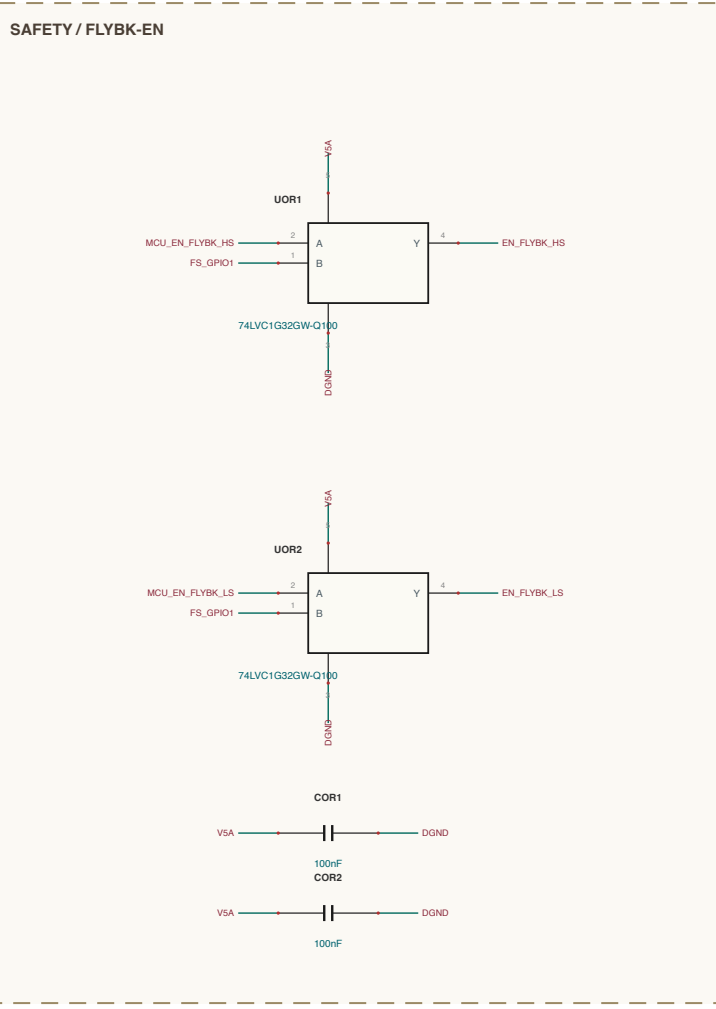
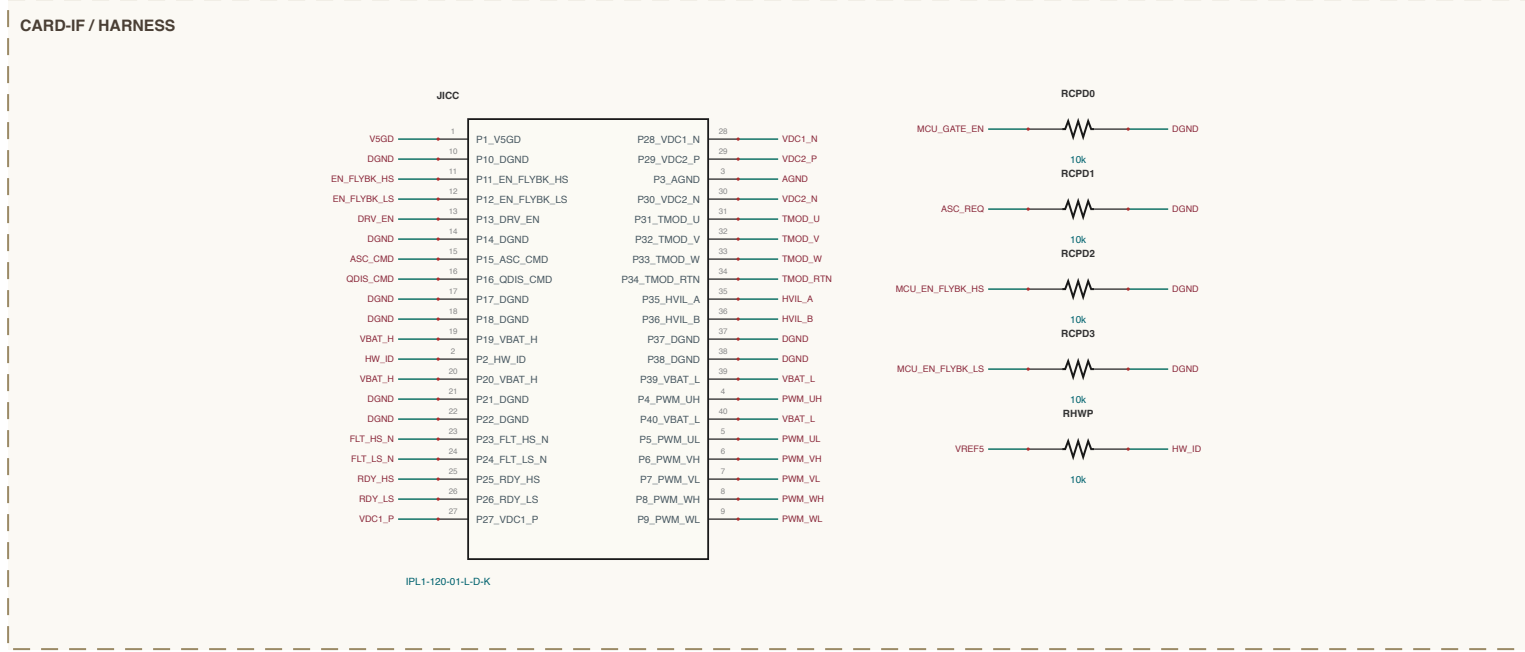
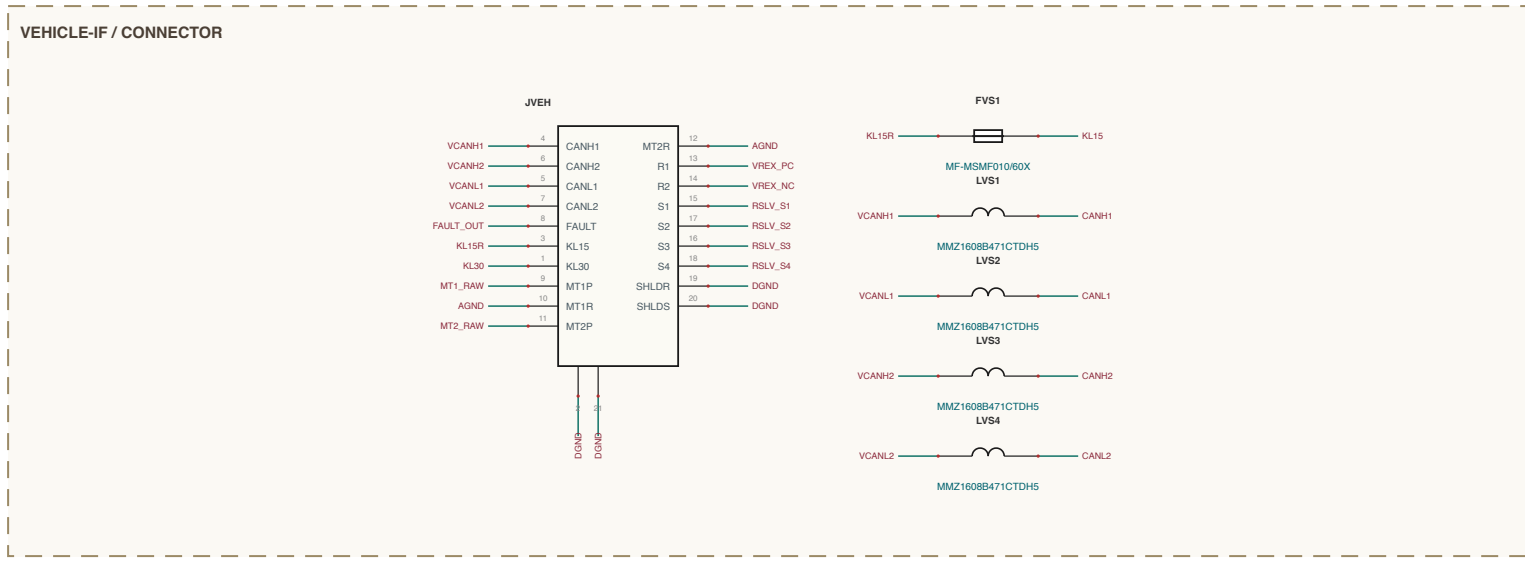
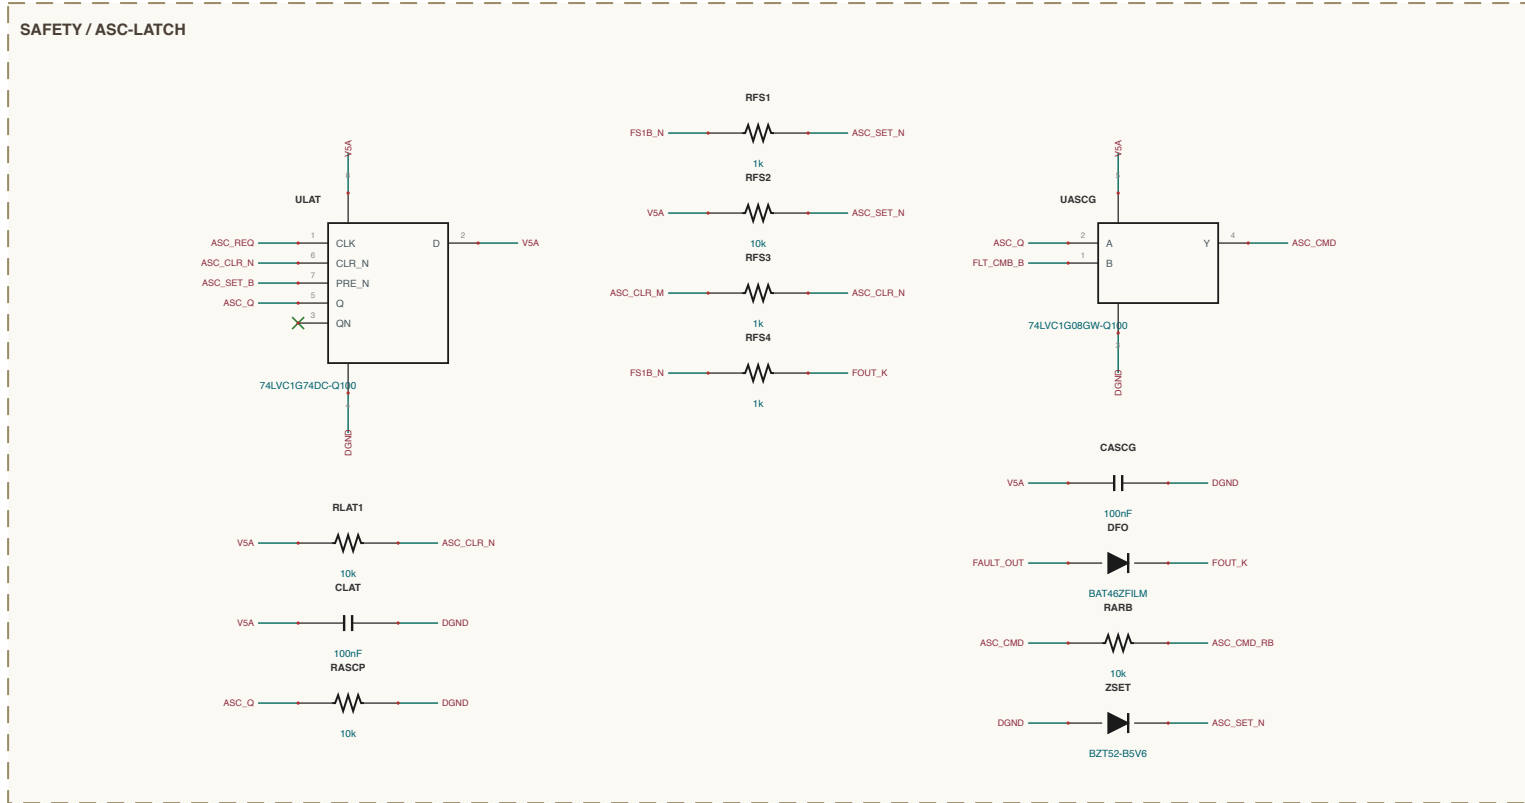
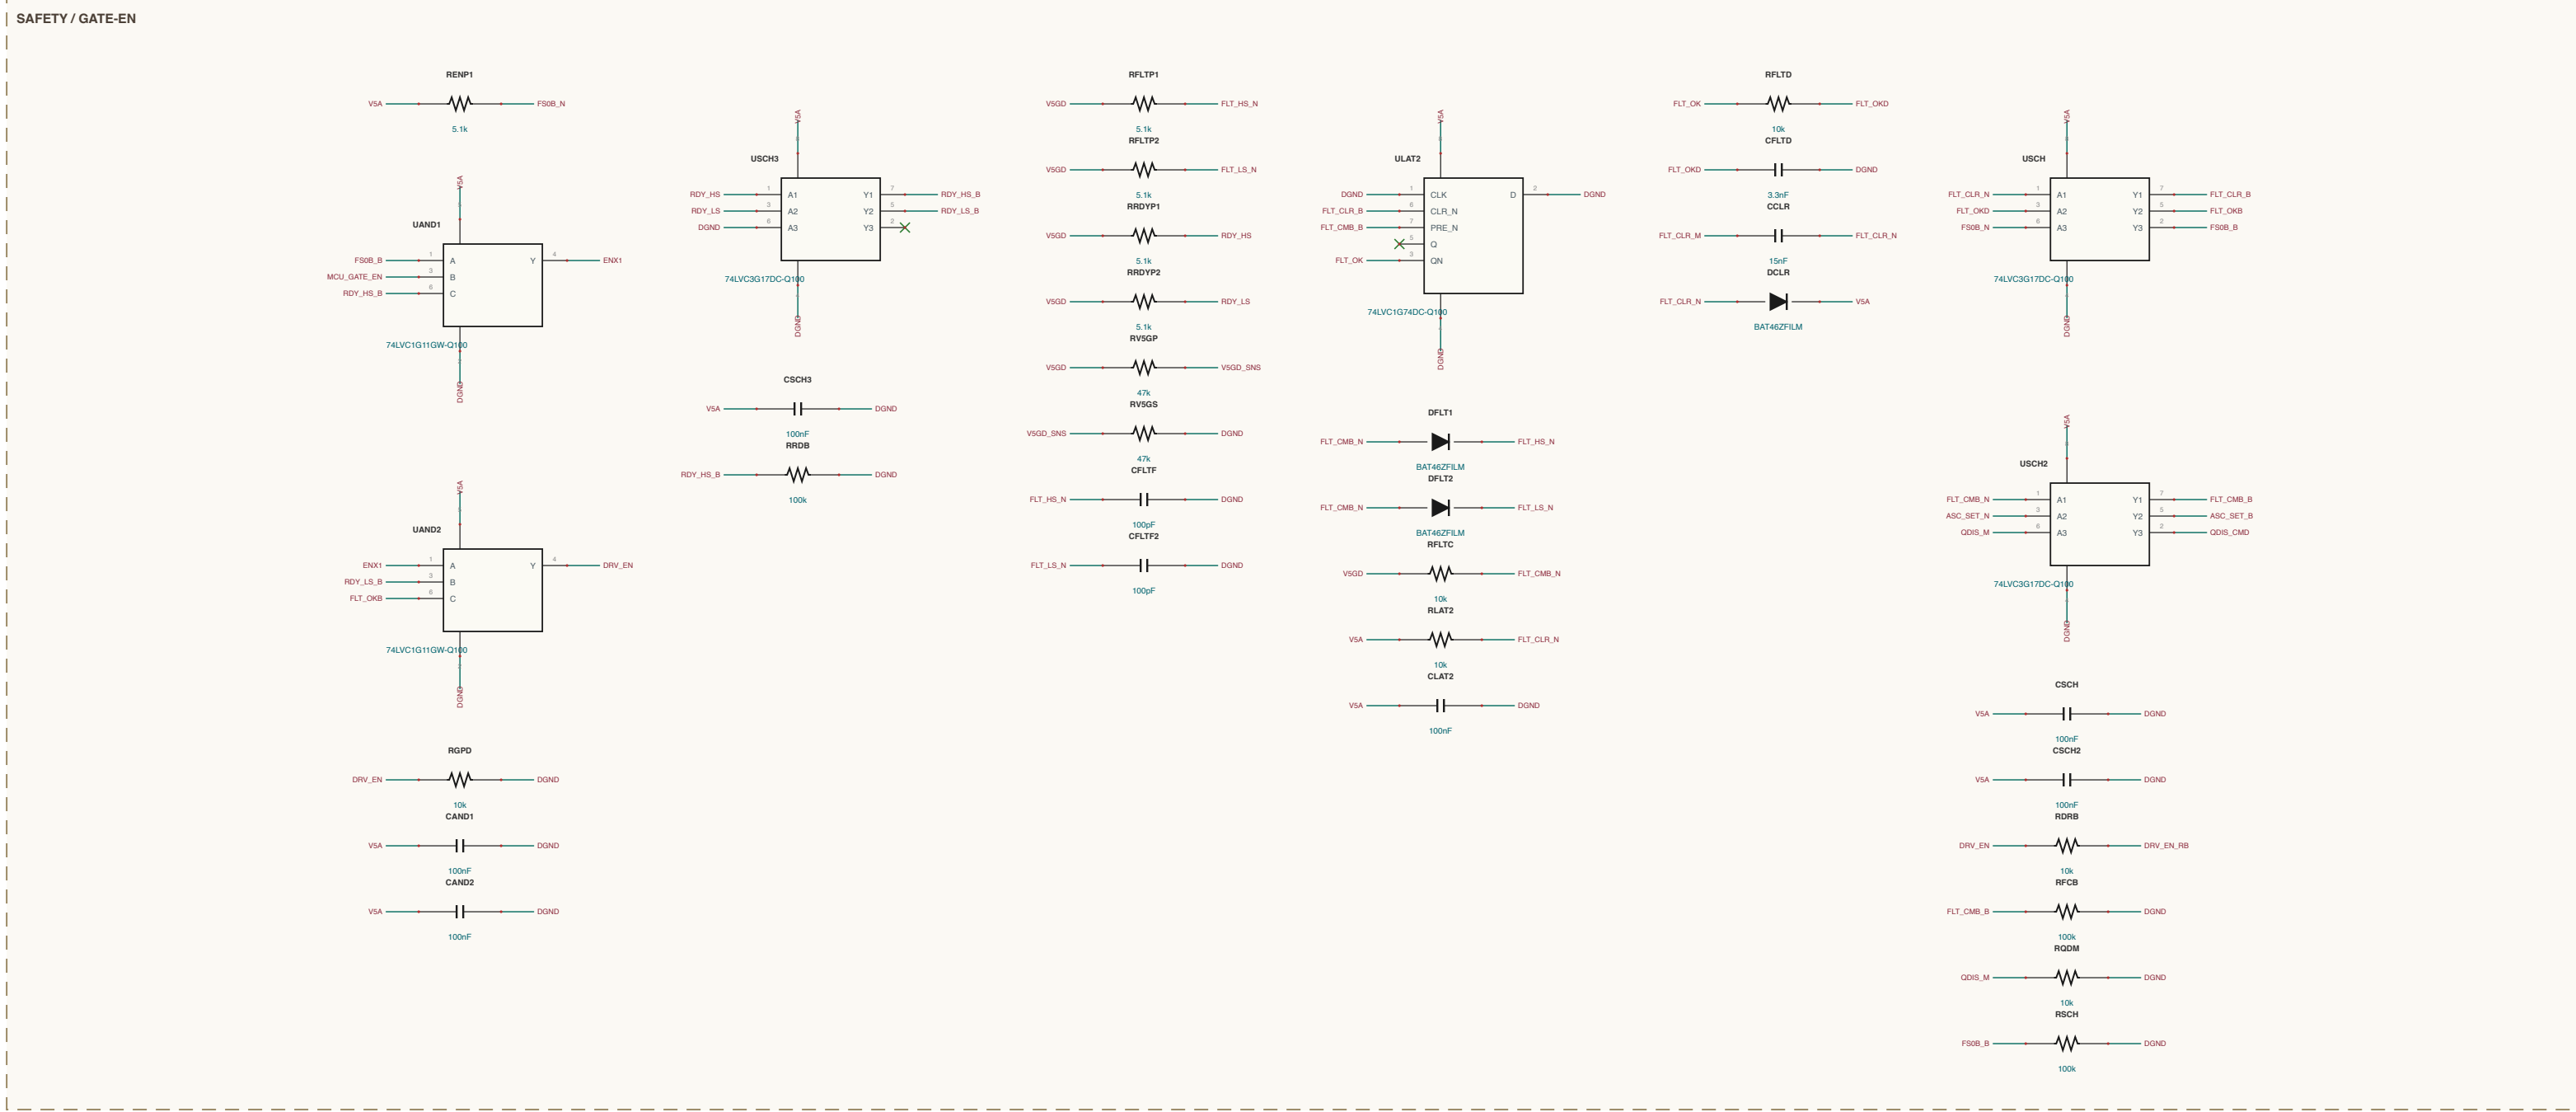
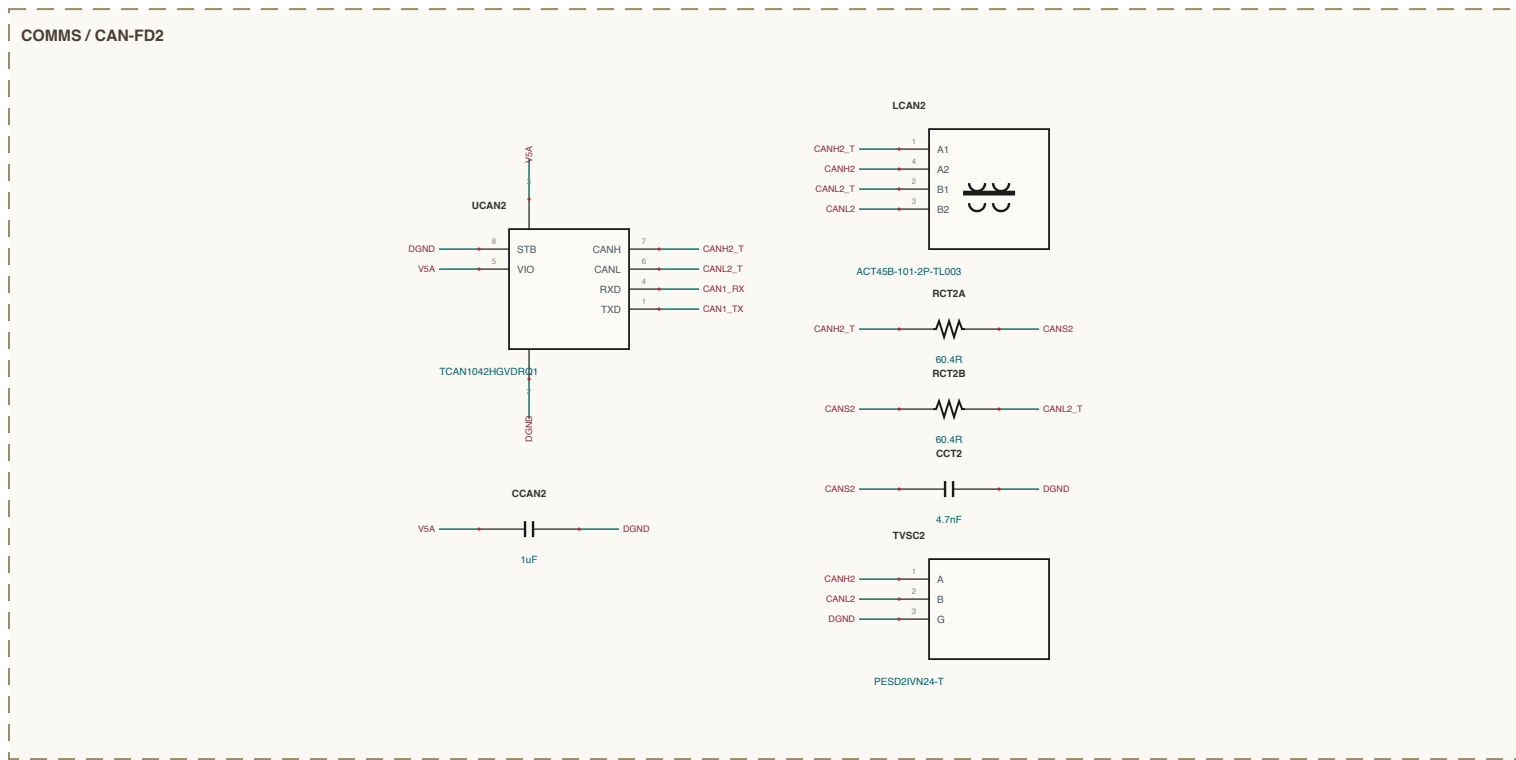
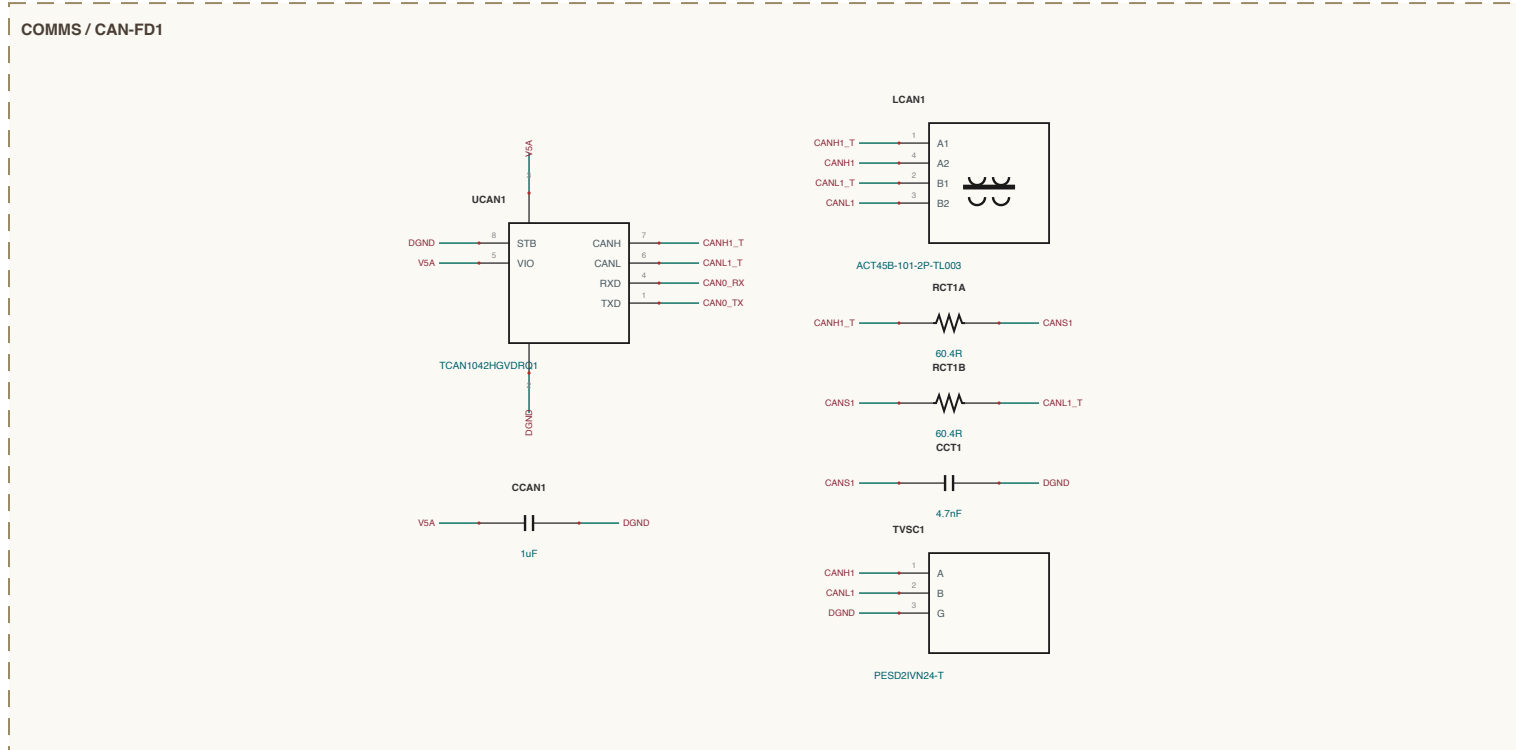
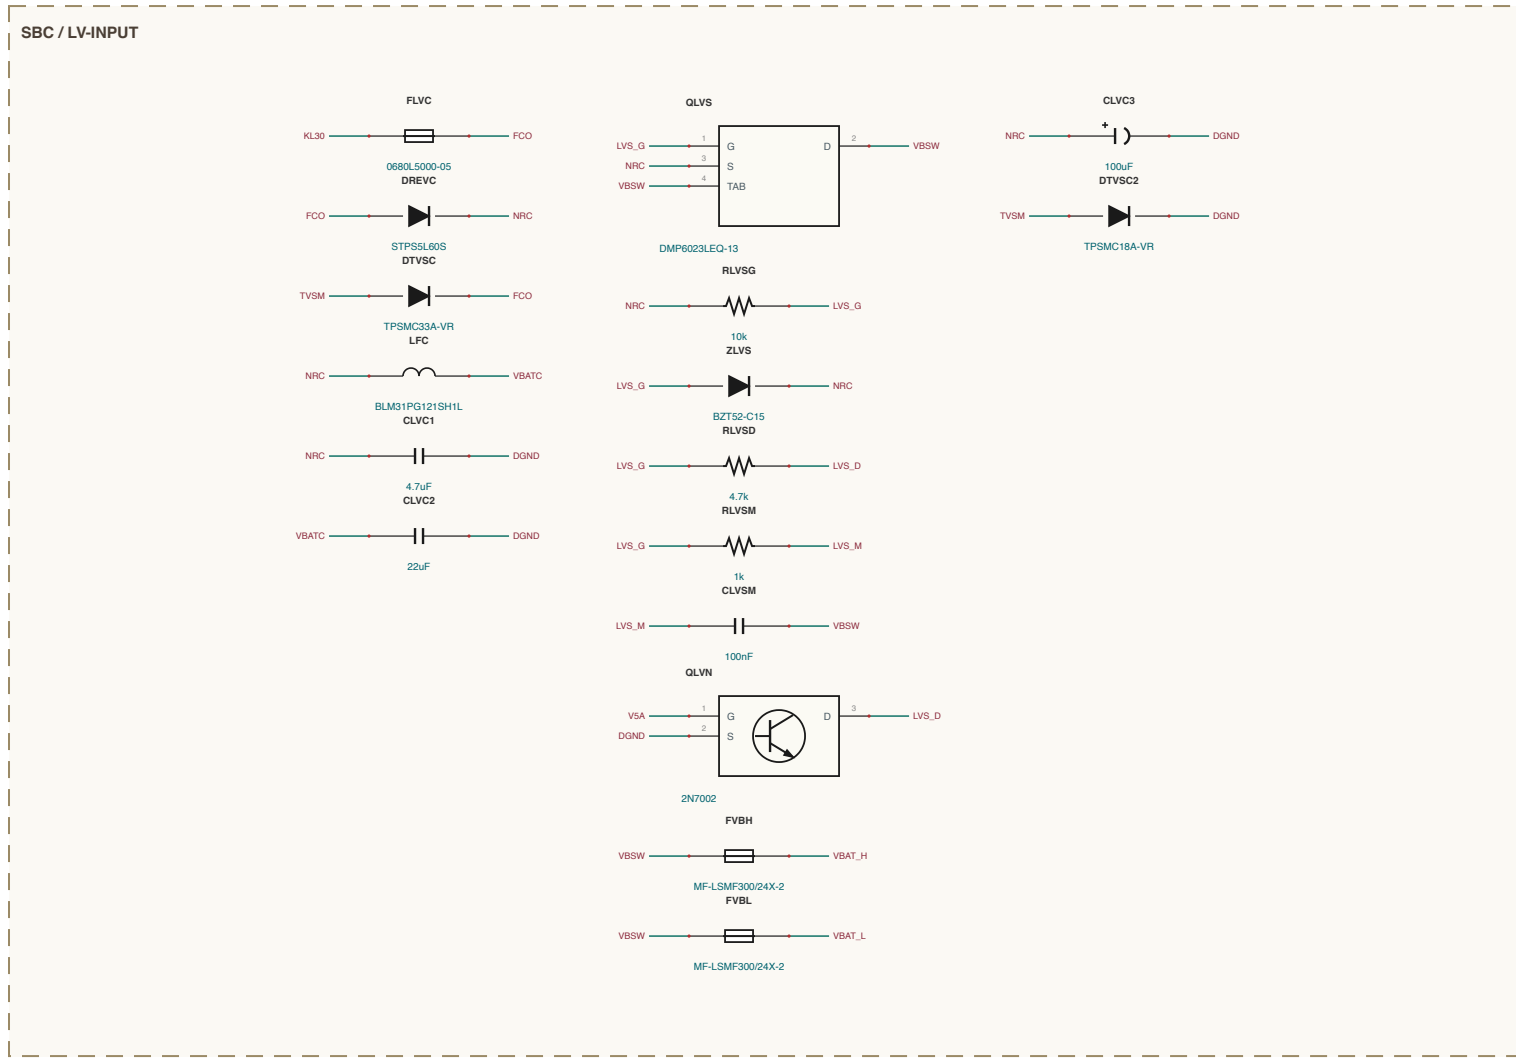
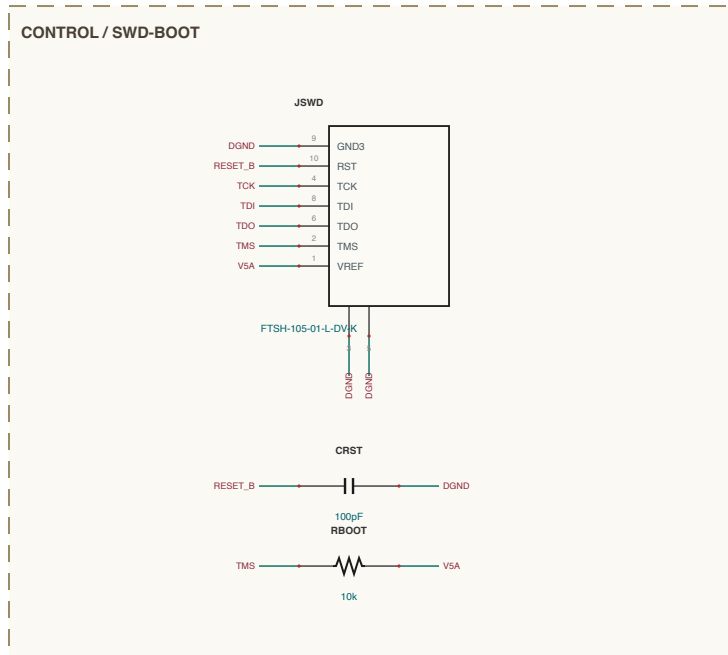
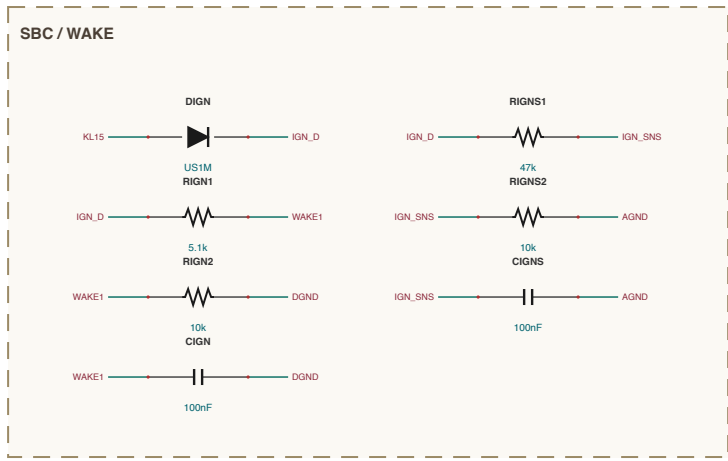
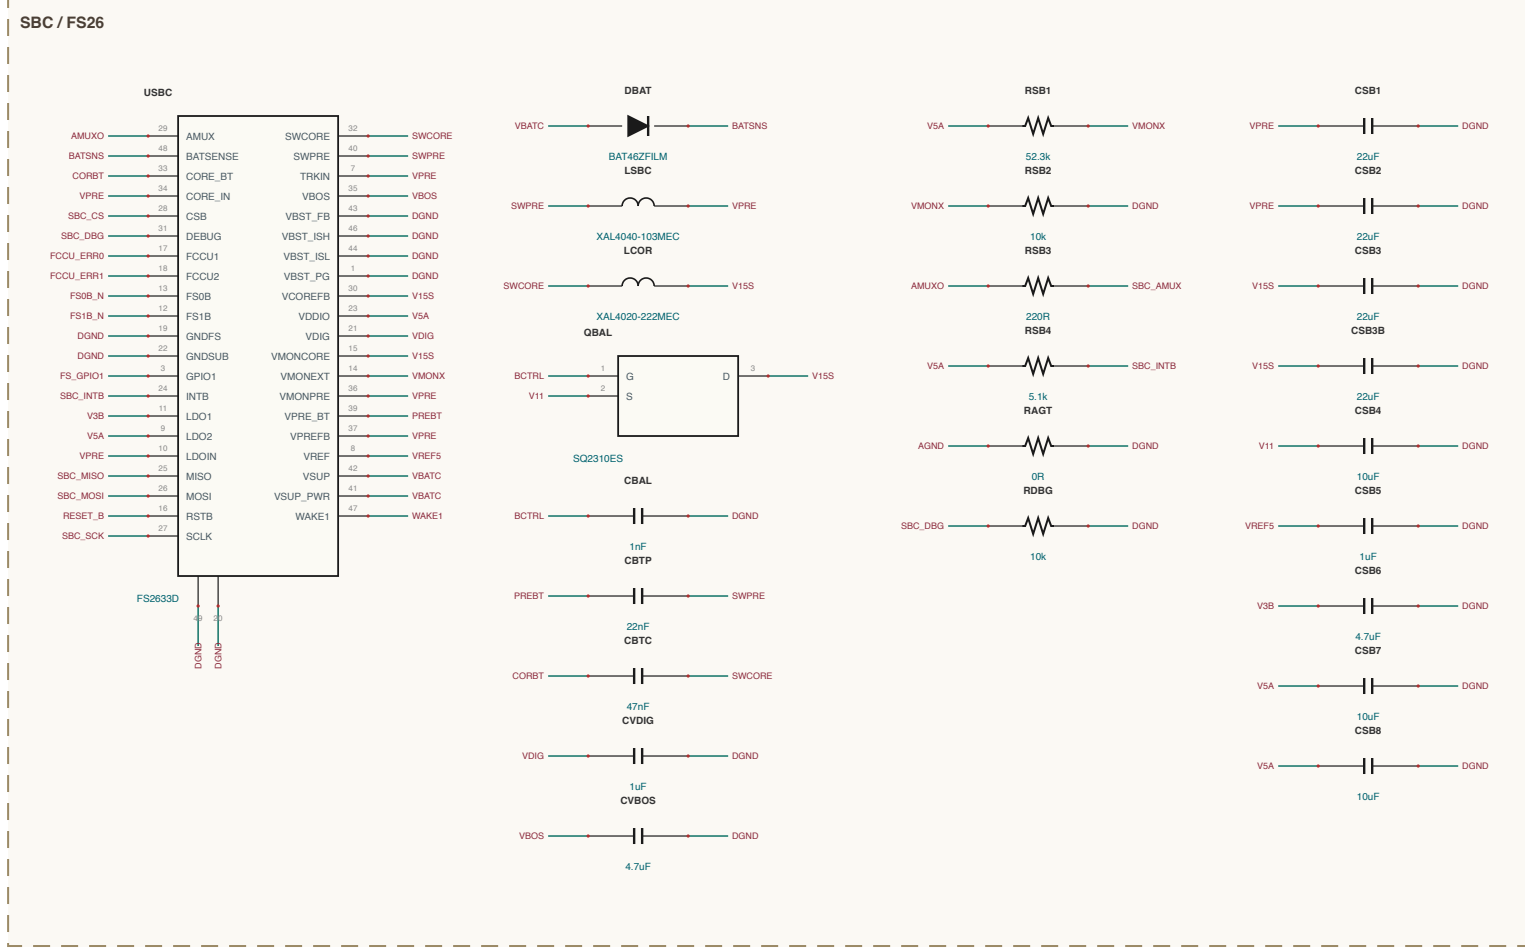


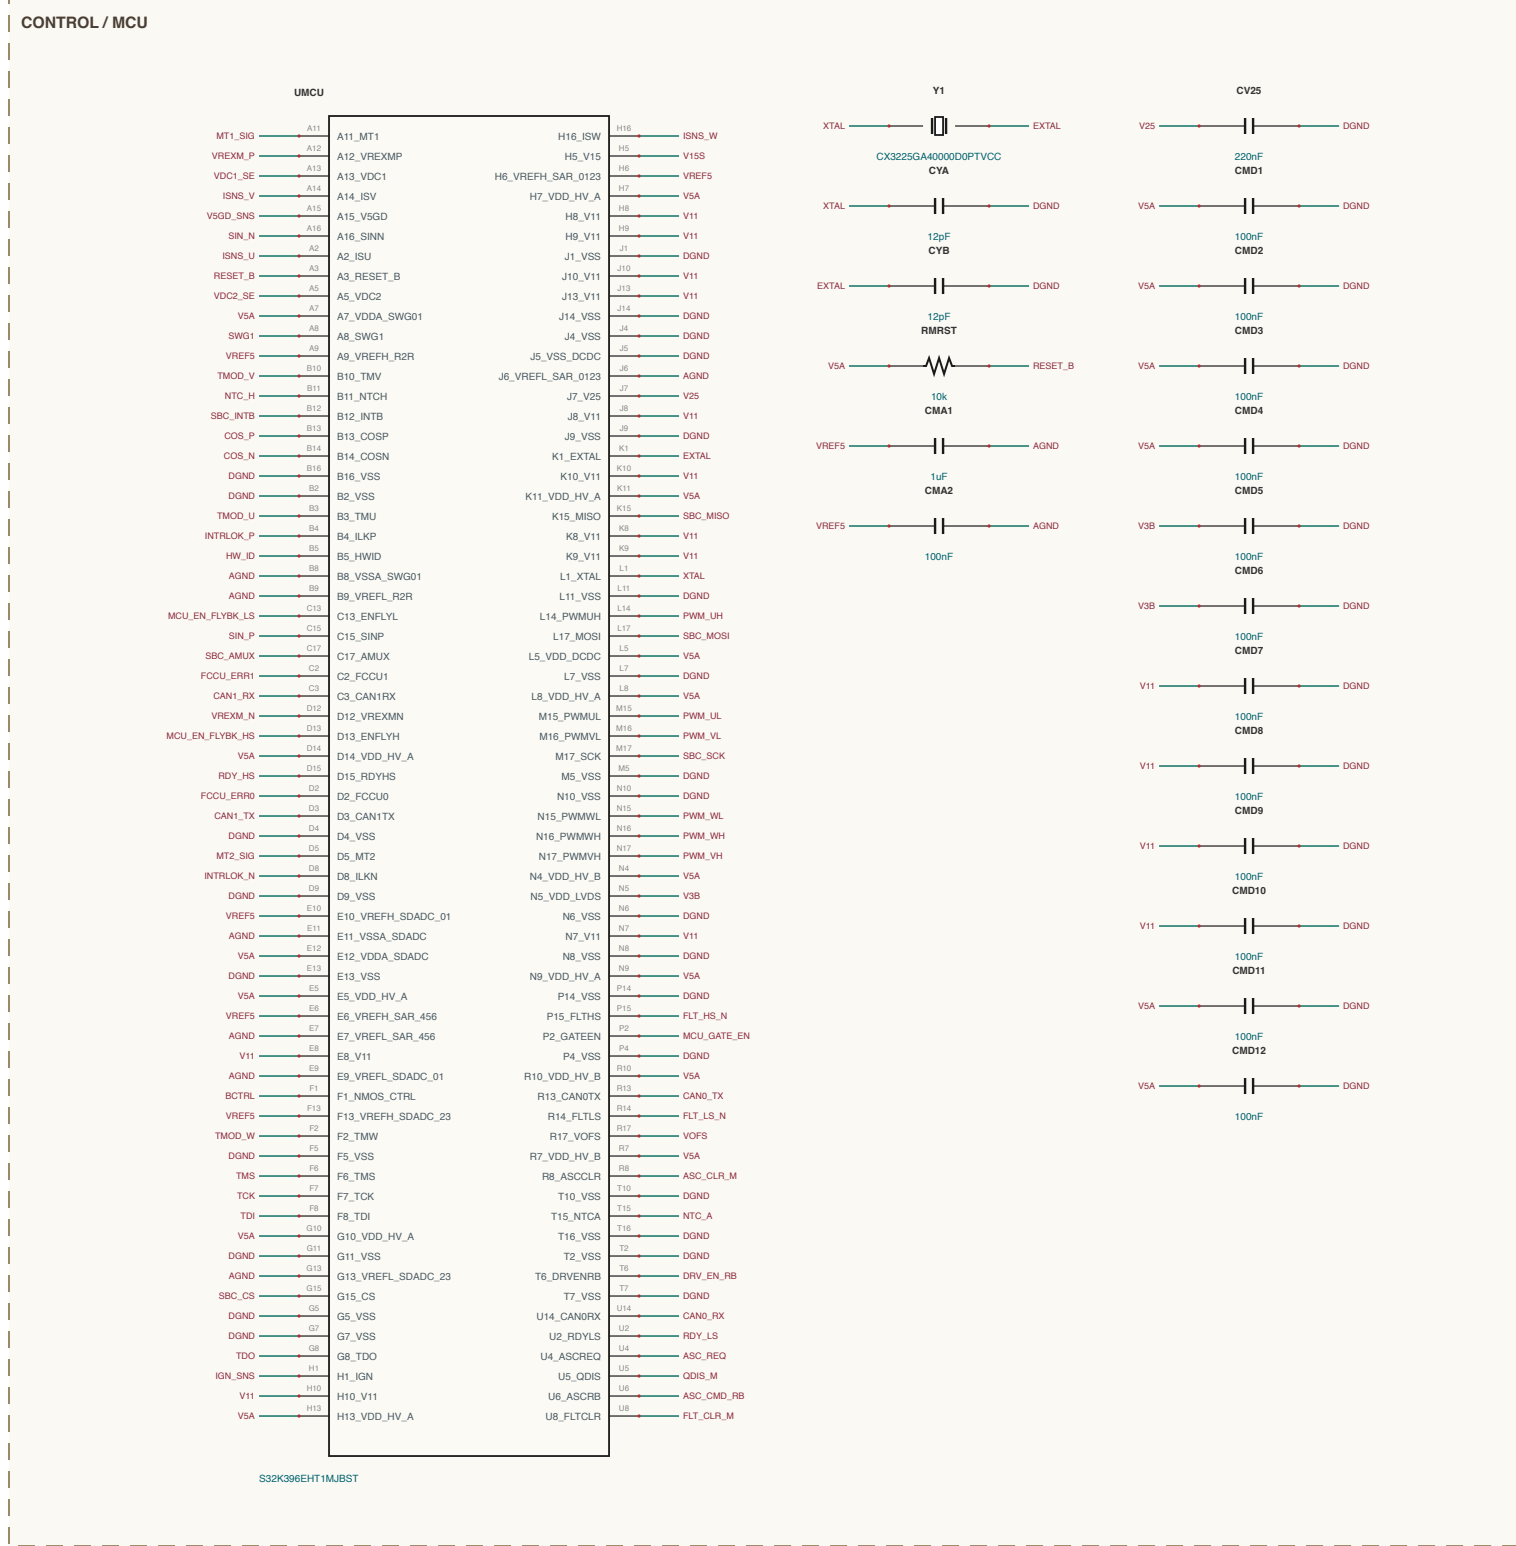

SHEET INDEX

100 Vpk pk Control Card (LV) - 4 of 4
PHASE SENSE - 4 sections
RESOLVER - 4 sections
SAFETY - 4 sections
SBC - 3 sections
TEMP - 3 sections
COMMS - 2 sections
CONTROL - 2 sections
VOC-RECEIVE - 2 sections
CARD P - 1 section
VEHICLE P - 1 section

Rev 4.17 - 28 sections - 381 components

NET NAMING

Internal positions are noted for what they are.

Excludes: off-board or that is not a pin (e.g. VDD, VREF, VREF).

Position: 30 components of a section per pin (e.g. VDD, VREF).

Position: either top (between Position and e.g. VDD, VREF).

All others are implied design rules.

Notes: items on section sheet or same as, placed ONLY at the bottom of the section sheet.

Internal connections (e.g. between VDD, VREF, VREF, VREF).