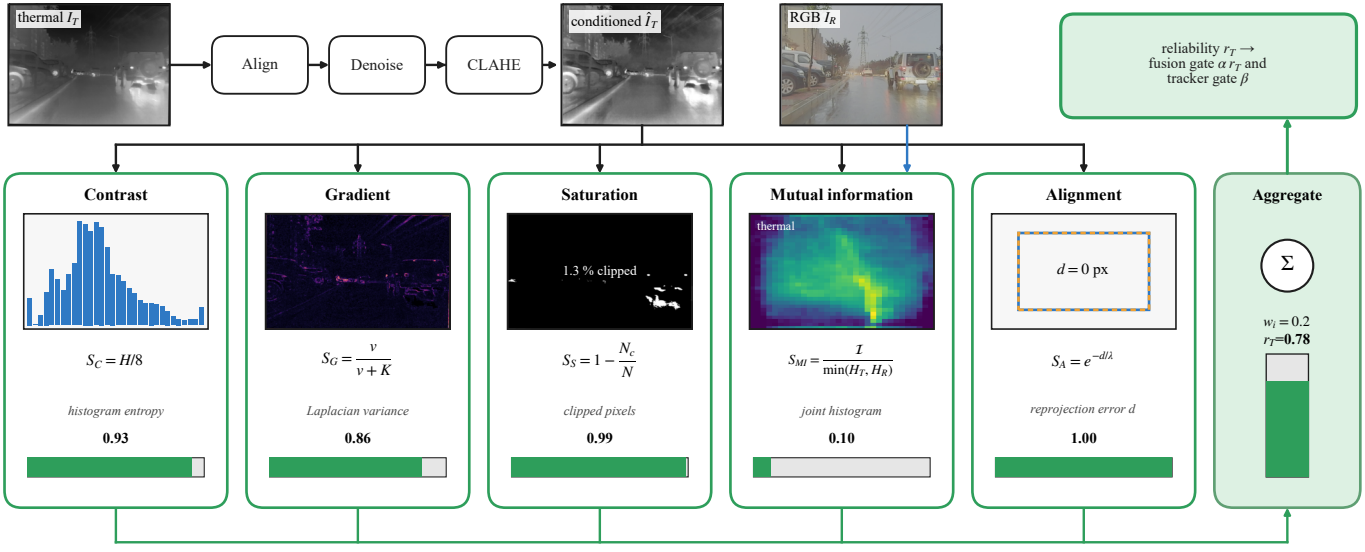

thermal I_T
Align
Denoise
CLAHE
conditioned $\hat{I}_T$
used only by the mutual-information cue
RGB I_R
reliability $r_T \rightarrow$
fusion gate α r_T and
tracker gate β
Contrast
$S_C = H/8$
histogram entropy
0.93
Gradient
$S_G = \frac{v}{v+K}$
Laplacian variance
0.86
Saturation
1.3 % clipped
$S_S = 1 - \frac{N_c}{N}$
clipped pixels
0.99
Mutual information
thermal
$S_{MI} = \frac{I}{\min(H_T, H_R)}$
joint histogram
0.10
Alignment
$d = 0$ px
$S_A = e^{-d/\lambda}$
reprojection error d
1.00
Aggregate
Σ
$w_i = 0.2$
r_T=0.78