


1. Open Cisco Packet Tracer and create a new project file named 'HomeWiFiNetwork.pkt' with three PCs and one wireless router connected appropriately.

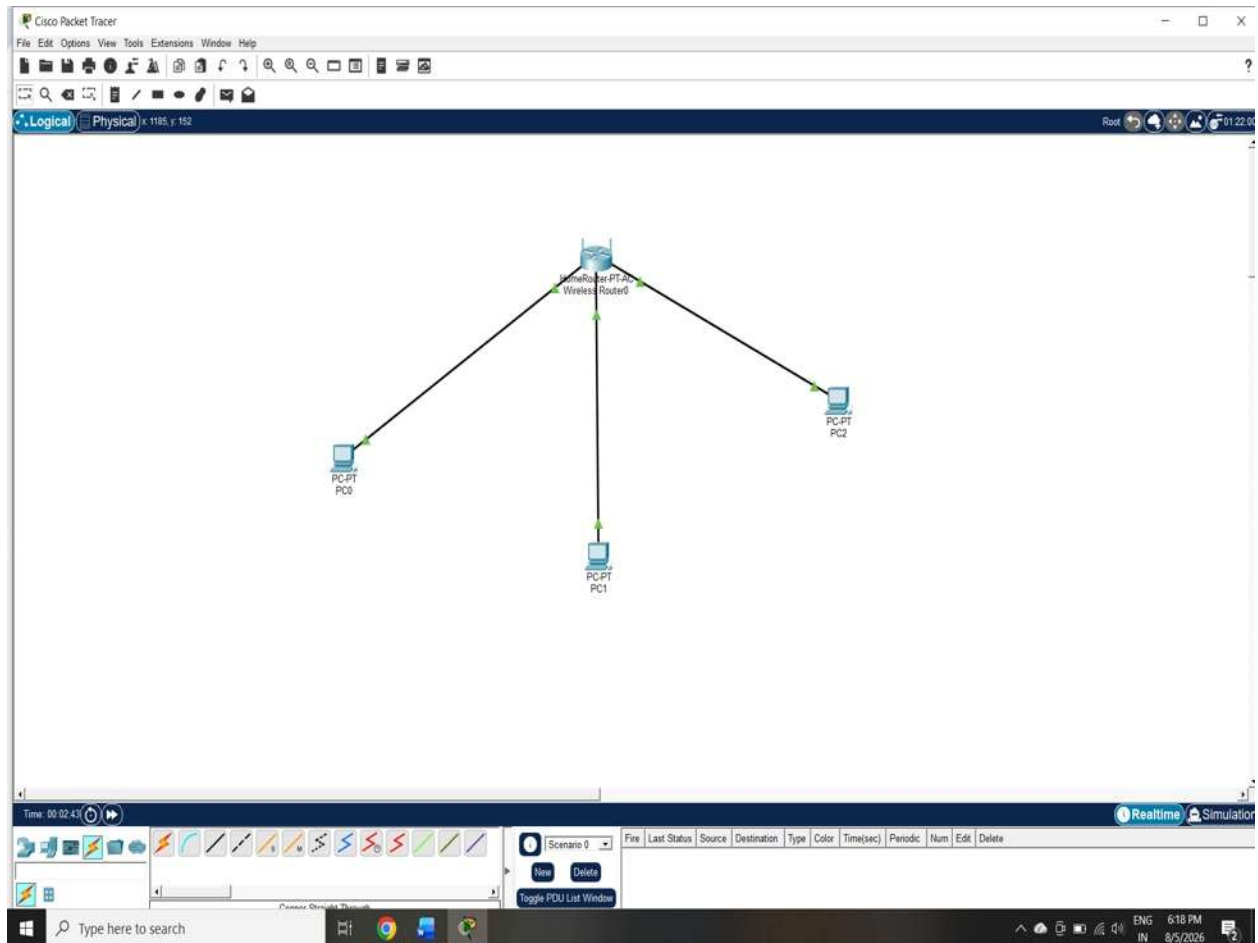

2. Assign static IP addresses to each PC in your Packet Tracer network so they are on the same subnet (e.g., 192.168.10.x), and configure the default gateway to the router's IP.


```
System Configuration Dialog (Read/Write)



--- System Configuration Dialog ---
Would you like to enter the initial configuration dialog? [yes/no]: no

Press RETURN to get started!


Router>
Router>
Router>
Router>en
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface g0/0
Router(config-if)#ip address 192.168.10.1 255.255.255.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0, changed state to up
```

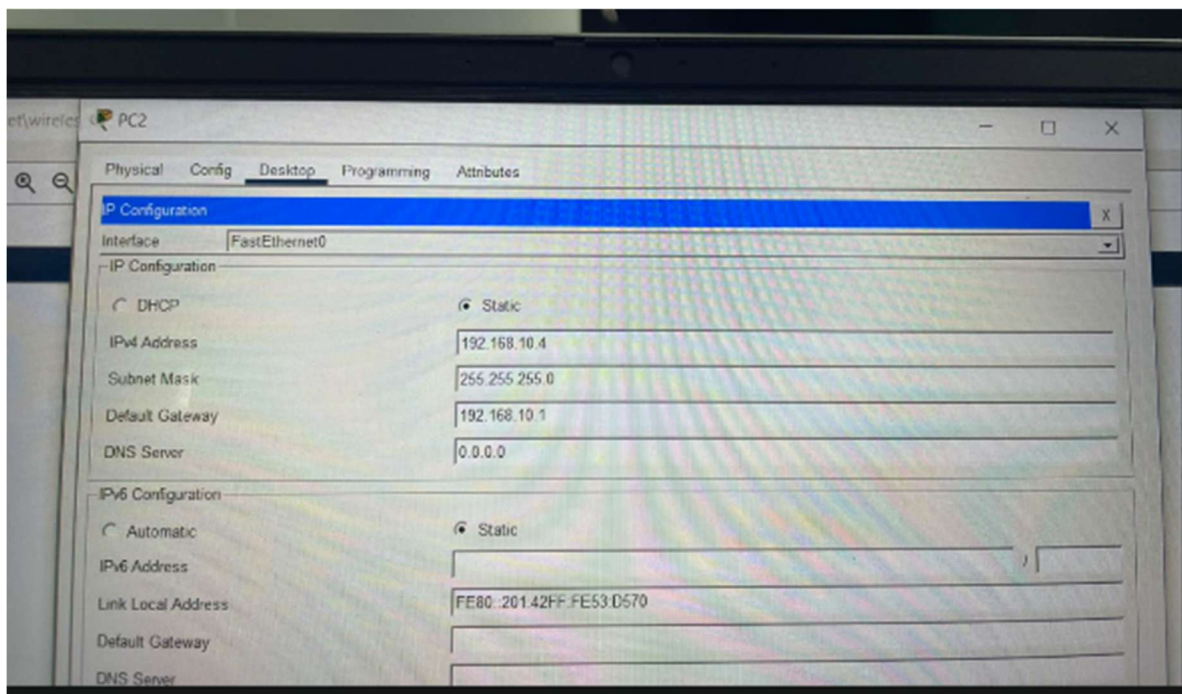

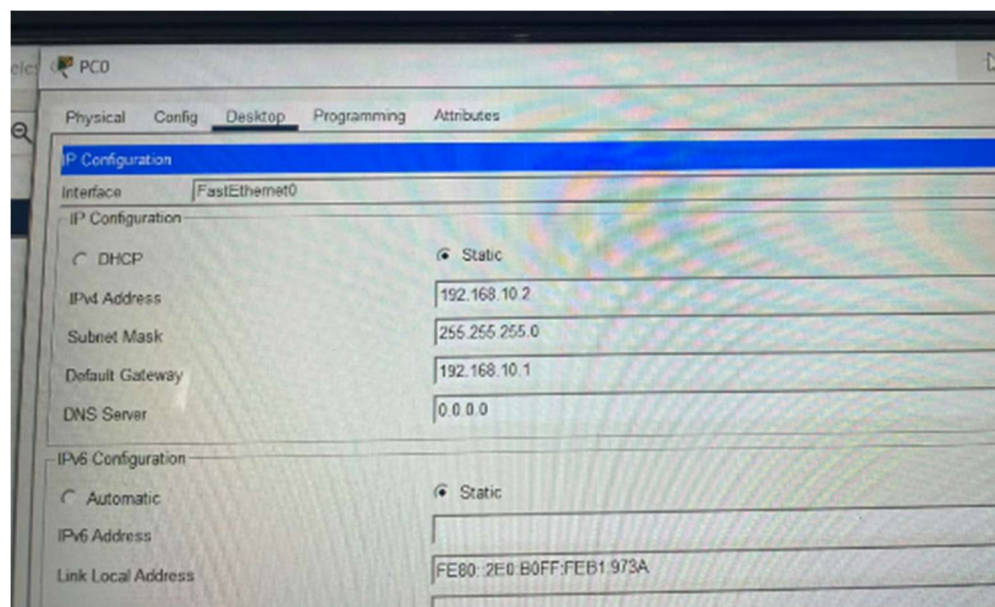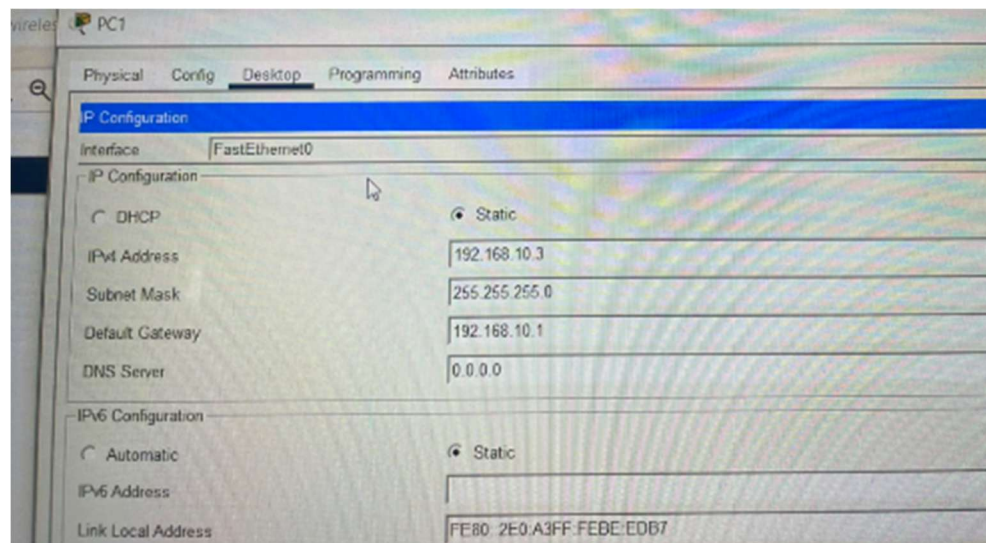

3. Test connectivity by using the Packet Tracer 'ping' tool to verify that all PCs can communicate with each other and the router. **Hint:** Use the Command Prompt tool on each PC and type 'ping [other PC's IP]'.

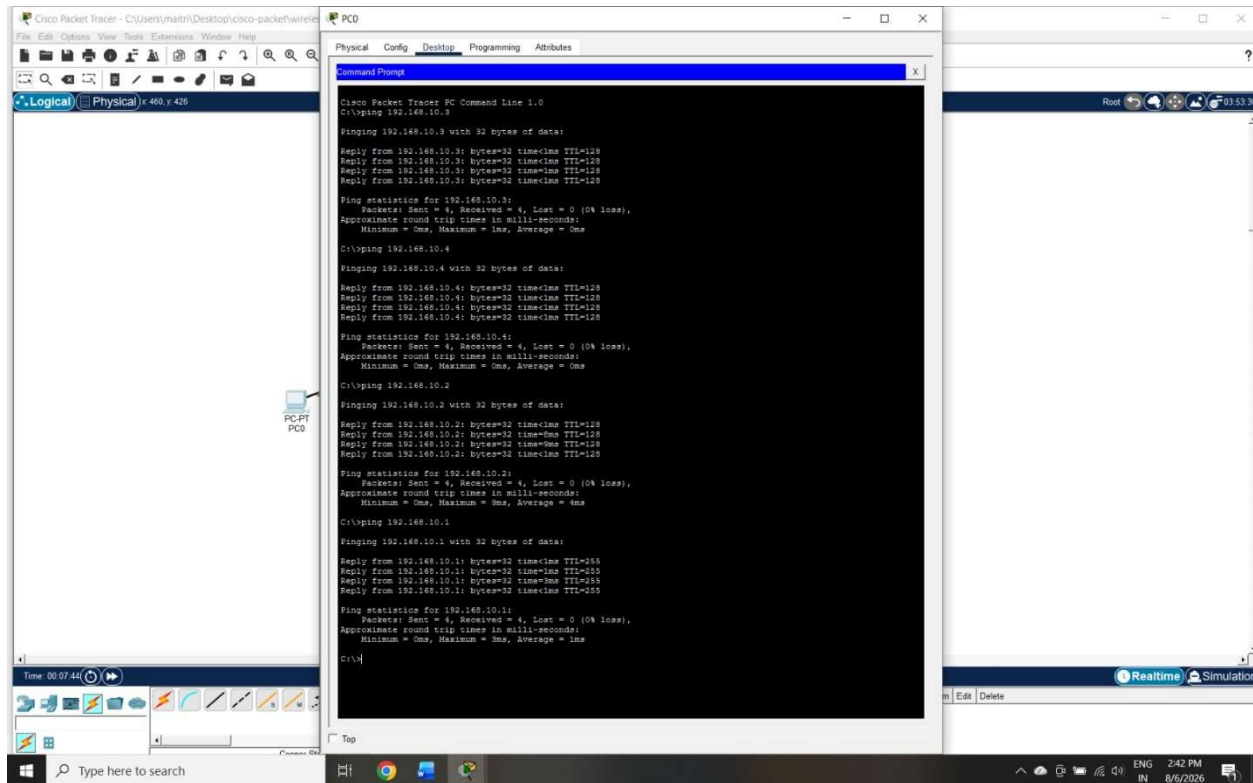

4. Document each step you took to build and configure your Packet Tracer network, including screenshots of your topology and the IP configuration windows for each PC, in a Word or PDF file.

Step 1

- Open Cisco Packet Tracer.
- Create a new project.
- Add one wireless router and three PCs.
- Save the project as HomeWiFiNetwork.pkt.

Step 2

- Configure the router IP as 192.168.10.1.
- Assign static IP addresses to all three PCs.
- Set the subnet mask to 255.255.255.0.
- Set the default gateway to 192.168.10.1.

Step 3

- Open the Command Prompt on each PC.
- Use the ping command to test communication with the other PCs and the router.
- All ping tests were successful.

Step 4

Add these screenshots to your Word or PDF:

-  Network topology
-  PC1 IP Configuration
-  PC2 IP Configuration
-  PC3 IP Configuration
-  Ping test results