



Estd. 1995
Take a Safe Ride

BG Elevators
& Escalators Pvt. Ltd.

Your **Safety** is
Our Top **Priority**

Government Certified Company

(An ISO 9001-2015 Certified Company)

Regd No. MLS/LEP (EM/027)

www.bgelevators.com

A Commitment to EXCELLENCE

www.bgelevators.com

Why Choose us?

- Better Quality Control
- Savings in Cost & Time
- Reduced Administrative Burden
- Rich Experienced Team
- Long-term Customer Relationships
- Exclusive Industry Knowledge



To be the most trusted for Safe and reliable Elevator Brand in the Industry.



To Provide Quality Experience to our Customers from our Products and People integrated with top class processes.

Company Profile

BG Elevators and Escalators Pvt Ltd., was established in **1995** with a vision to fully understand the needs of our customers and always provide safe and high-quality Vertical Transportation Solutions. Our experts develop advanced solutions, adopt the innovative ways to make use of the existing technologies to meet customer requirements, improve the transportation capacity and time efficiency, respect the building space, reduce the energy consumption effectively, provide the most suitable solutions for every elevator project, and make it unique! at a competitive price.

Team BG has an exclusive elevator experience in Design, Development, installation and maintenance for more than **25 Years**.

Actually, elevator is an assembled product. However, skilled workmanship only reflects in the performance of the elevator, **The Brand value**. We use the best parts for our elevators from the biggest and the best suppliers in the world. And we control the design, control system, and the parts quality and delivery.

To make your elevator aesthetically appealing, we have stunning interiors which will give your building a Rich Look with our BG Rich and BG Royal Models.


BG Group takes this opportunity to introduce ourselves as one of the Market Leaders in Karnataka and Pioneers in Elevator Technology. BG Elevator is Government Certified Registered Company (Regd No. MLS/LEP (EM/027) and also an ISO 9001:2015 Certified Company.

A company with more than **24** years of experience, BG vision is to deliver the best People Flow experience by developing and delivering solutions that enable people to move smoothly, safely, comfortably and without waiting in the building in an increasingly urbanizing environment.

Our partnership with the customer begins early, right from the planning stages and is enriched during every stage of the project thought best in class project management. Furthermore, our service leadership ensures uninterrupted and hassle-free operations day after day, extending the relationship with our customers throughout the life cycle of the product.

With BG products, we assure you and your building's users a best vertical travel experience, well supported by our experts and skilled professionals.

Cabin Designs

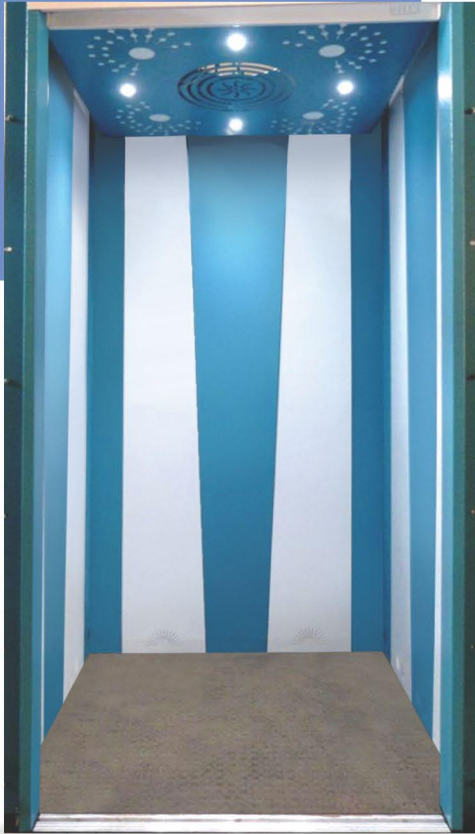

M.S. Powder Coated Cabin



Stainless Steel Finish Cabin




Glass Finish Cabin



Mirror Finish Cabin

Passenger Elevator Manual Door


Capacity **04** to **20** Passenger

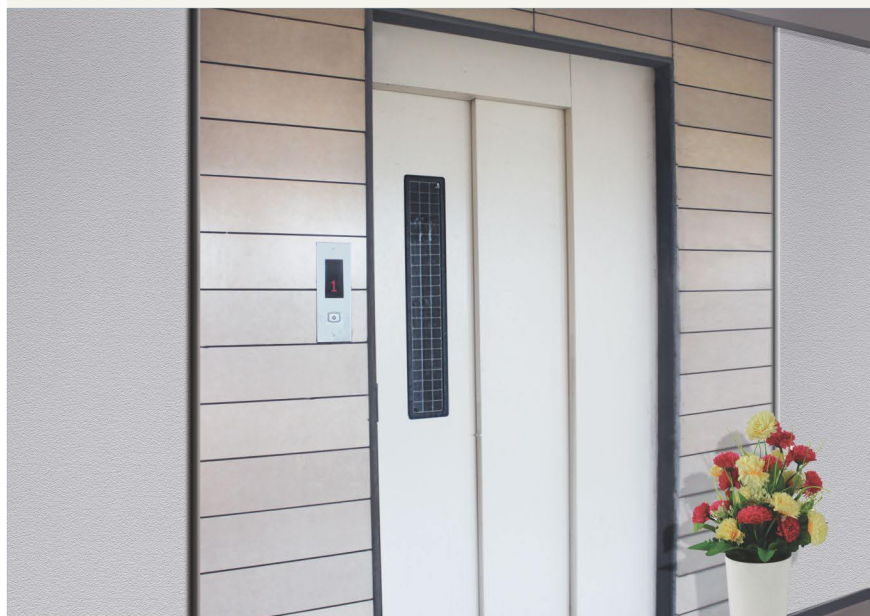


Manual Full Glass Door

Construction Parameters

Hoistway Machine Room Plan For Manual Door

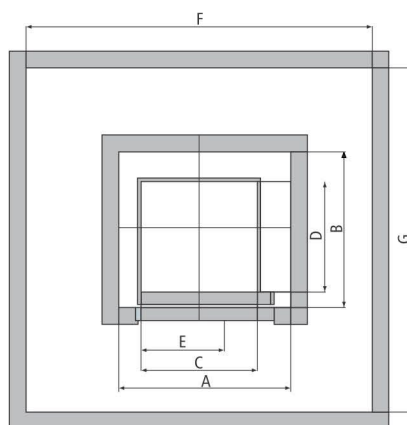

Hoistway Elevation Drawing

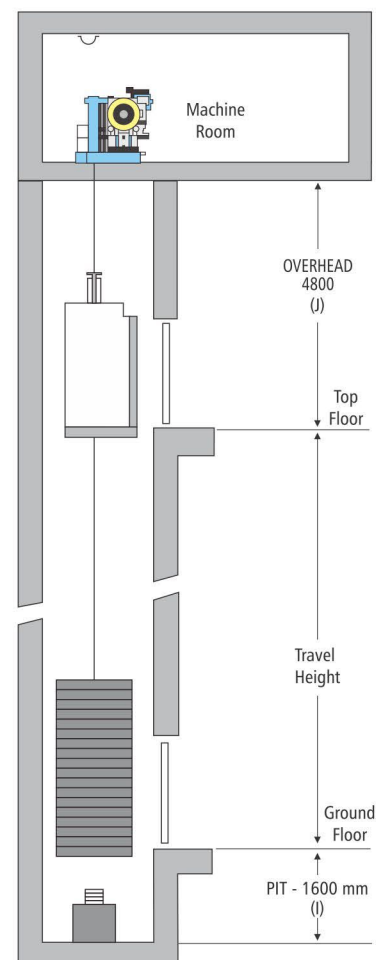

Load		Lift Shaft		Car Inside		Entrance	Machine Room			Speed Up To 1 M/s.	
Person	Weight	Width	Depth	Width	Depth		Width	Depth	Height	Pit	O.H.
IN KG.		A	B	C	D	E	F	G	H	I	J
4	272	1300	1300	1100	700	700	2600	3200	2500	1350	4100
5	340	1400	1300	1100	850	700	2600	3350	2500	1350	4100
6	408	1500	1500	1100	1000	700	2600	3500	2500	1350	4100
8	544	1800	1800	1350	1300	800	2850	3800	2500	1500	4500
10	680	2300	2100	2000	1300	800	3500	3800	2500	1500	4800
13	884	2600	2300	2000	1300	900	3500	3800	2500	1500	4800
15	1020	2700	2400	2000	1300	900	3500	3800	2500	1500	4800
20	1360	2400	3000	2000	1500	1000	3500	4400	2500	1500	4800

• All Dimension are in mm. • This is General Data, it may be changed without notice. • All hoist way walls should be minimum 230 mm brick or 150 mm R. C. C.

Passenger Elevator Auto Door

Whether you are planning for a high rise performance, high speed or simply high specification solution.


We offer a range of elevators and innovation that were developed with these needs in mind.

Capacity **04 to 20** Passenger




Construction Parameters

Hoistway Machine Room Plan For Auto Door

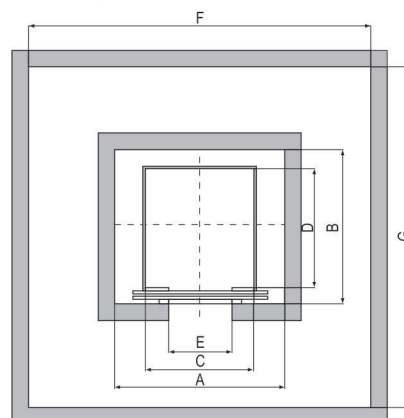

Hoistway Elevation Drawing

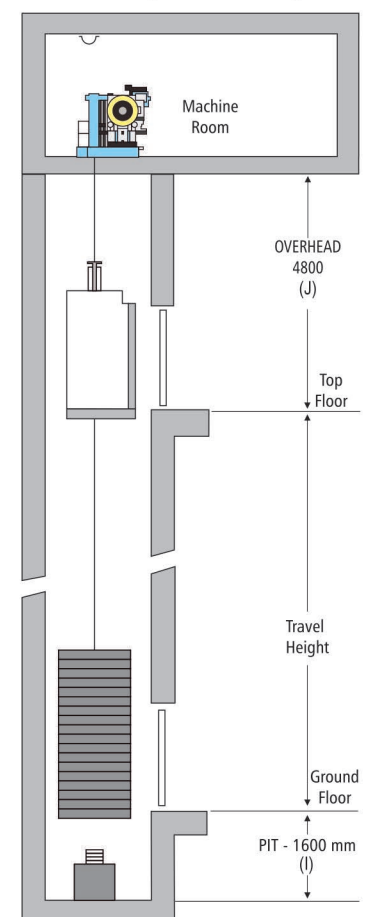

Load		Lift Shaft		Car Inside		Entrance	Machine Room			Speed Up To 1 M/s.	
Person	Weight	Width	Depth	Width	Depth		Width	Depth	Height	Pit	O.H.
IN KG.		A	B	C	D	E	F	G	H	I	J
4	272	1500	1500	1100	700	700	2900	3300	2500	1350	4100
6	408	1500	1500	1100	1000	700	2900	3700	2500	1350	4100
8	544	1800	1800	1300	1100	800	2900	3900	2500	1500	4500
10	680	1800	1800	1300	1350	800	2900	4100	2500	1500	4800
13	884	2200	2200	2000	1100	900	3500	3900	2500	1500	4800
16	1088	2400	2500	2000	1300	900	3500	4100	2500	1500	4800
20	1360	2400	3000	2000	1500	1000	3500	4400	2500	1500	4800

• All Dimension are in mm. • This is General Data, it may be changed without notice. • All hoist way walls should be minimum 230 mm brick or 150 mm R. C. C.

Hospital Elevator

Capacity 15 to 26 Passenger



Intellectual Control





Noise Reducing



Smooth and Comfortable

Construction Parameters

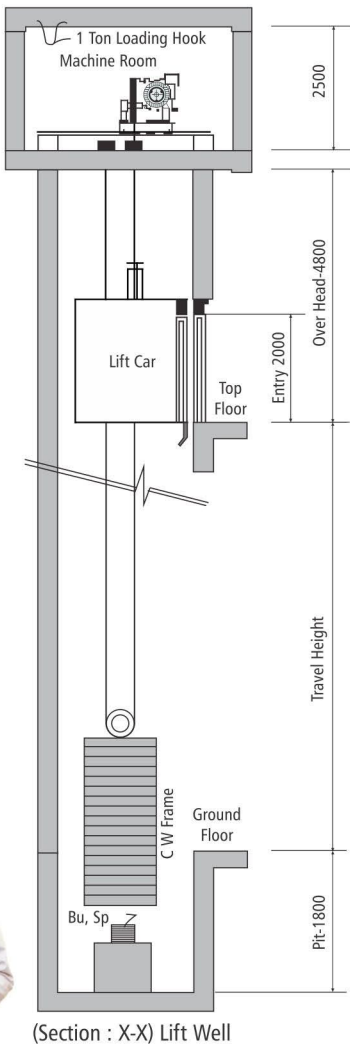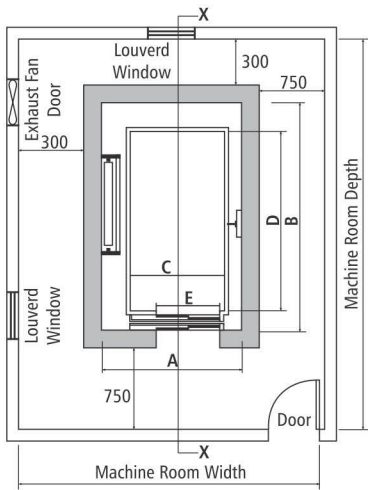

Automatic Centre Opening Door Lifts

Person	Capacity	Shaft-W	Shaft-D	Car-W	Car-D	Entrance
	Kg	(A)	(B)	(C)	(D)	(E)
15	1020	1900	3000	1000	2400	800
20	1360	2300	3000	1300	2400	900
26	1768	2600	3000	1600	2400	1000

Automatic Telescopic Door Lifts

Person	Capacity	Shaft-W	Shaft-D	Car-W	Car-D	Entrance
	Kg	(A)	(B)	(C)	(D)	(E)
15	1020	1700	3000	1000	2400	800
20	1360	1950	3000	1300	2400	900
26	1768	2100	3000	1600	2400	1000

All Dimension in mm



Goods Elevator

Capacity **500 to 4000 kg** Load





Optimized intellectual properties Bear any heavy load at easy

STURDY AND DURABLE :
Cabin is made of highly intensified shaped materials, able to carry various kind of cargos.

ACCURATE LEVELING :
The Accuracy of Leveling can be controlled with in a scope of several millimeter.

LARGE DOOR WIDTH :
Multiple folded cabindoor structure is employed to reach the max width which facilities the entry of large cargos

Construction Parameters

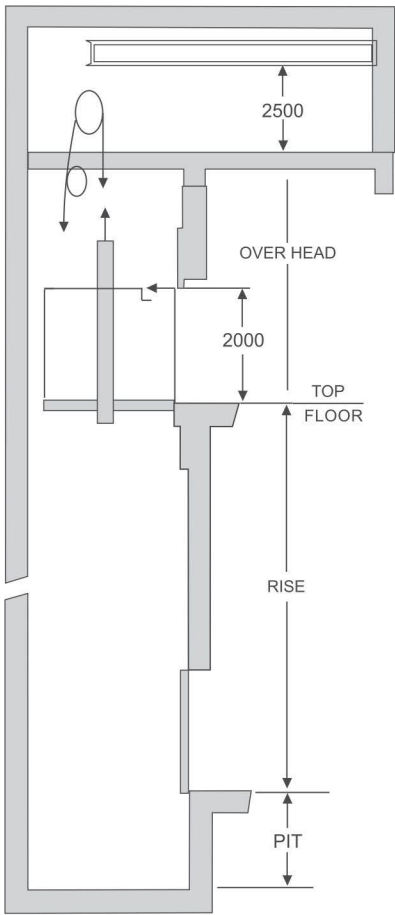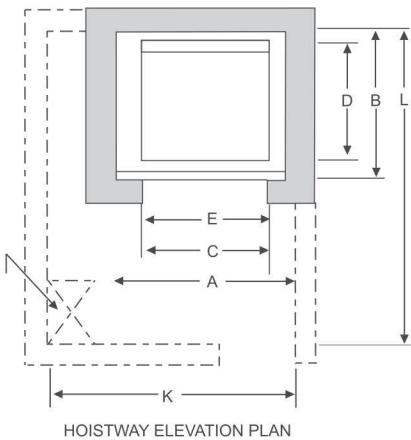

Load		Lift Well		Car Inside		Entrance		Machine Room		Upto 0.7 M / Sec.	
Weight		Width		Depth	Width	Depth	Width	Depth	Height	Pit	O.H.
IN KG		A	B	C	D	E	F	G	H	K	M
500		1900	1500	1100	1200	750	3000	3800	2500	1600	4800
1000		2300	2100	1400	1800	1000	3000	4000	2500	1600	4800
1500		2600	2300	1700	2000	1250	3200	4200	2500	1600	4800
2000		2600	2800	1700	2500	1500	3200	4200	2500	1600	4800
2500		2900	2800	2000	2500	1500	3500	4400	2500	1600	4800
3000		2900	3300	2000	3000	2000	3500	4500	2500	1600	4800
4000		3400	3300	2500	3000	2000	4000	4600	2500	1600	4800

All Dimension are in mm. This is General Data, without notice.

Gearless Elevator

Capacity **06 to 16** Passenger



Advantages:

- ▶ Latest technology in the world
- ▶ Smooth and swift in operations
- ▶ Flexible to all building designs
- ▶ Consumes less electricity
- ▶ Safe and reliable



Low Noise




Green Environmental
Protection




High Efficiency &
Energy Saving


Construction Parameters

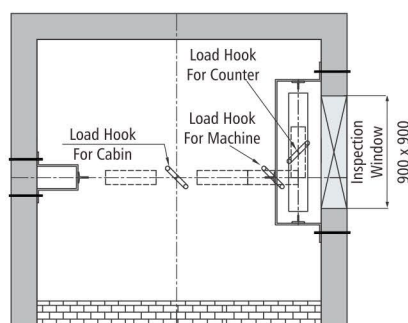

Inspection Window at Terrace Level

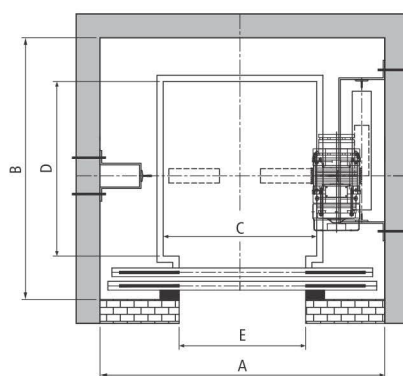

Lift Well Plan

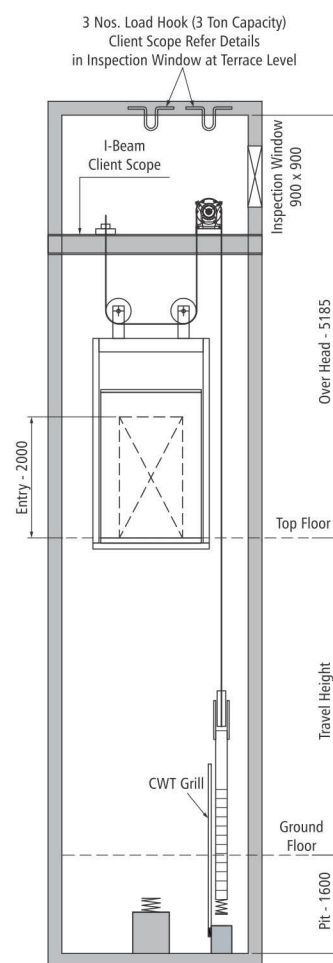

Lift Well Section View

Capacity		Lift Well		Cabin Inside		Entry
Person	Kgs.	A	B	C	D	E
5	340	1600	1500	920*	1050	700
6	408	1650	1600	970*	1130	700
8	544	1850	1700	1120	1280	800
10	680	2000	1850	1270	1380	800
13	884	2100	2600	1070	2100	800/900
15	1020	2100	3000	1070	2400	800/900
20	1360	2300	3000	1320	2400	900/1000
26	1768	2450	3000	1620	2400	900/1000

Home Elevator

Capacity **04 to 06** Passenger



Save Energy



Low Noise




Comfortable





Up to **30%**
Power Saving
(Single Phase)

Mini Gearless Machine
For Home Lift

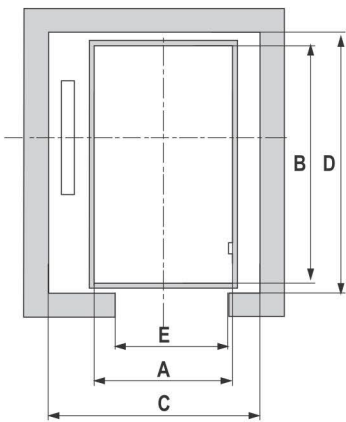

Construction Parameters

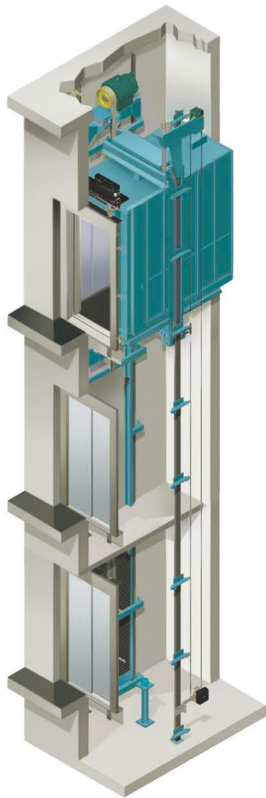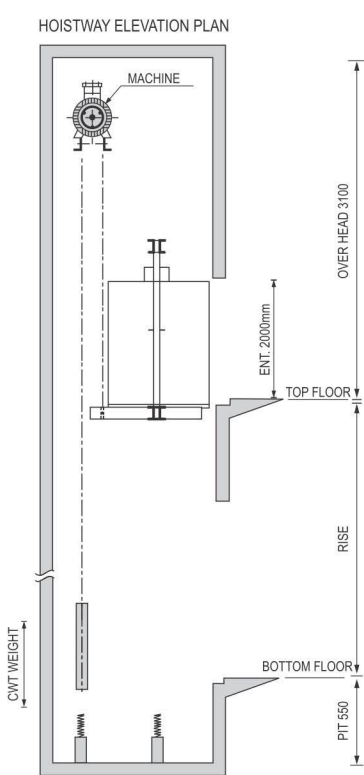

Door Operation	Load		Lift Well		Car Inside		Entrance	Speed	Pit	Over Head
	Persons	KGS	C	D	A	B	E	(MPS)		
Manual Door	3	204	1100	1200	810	700	700	0.3	550	3100
Manual Door	4	272	1300	1400	800	1200	700	0.3	550	3100
Auto Door	3	204	1250	1250	810	700	700	0.3	550	3100
Auto Door	4	272	1300	1600	850	1150	700	0.3	550	3100

Note : This Is Our Standard Data, If other Special Requirement Please Contact us.

Hydraulic Elevator

For Low Rise

- Safe, secure and powerful vertical transportation.
- A longer operating lifetime.
- Comfort and low noise.
- Simple & fast installation.
- Single-time phase-3 power (for ascending) and phase-1 (for descending).
- Low unit cost, even with minimal inventory.
- Down time power free.
- ARD (Auto Rescue Device).

Capacity 04 to 15 Passenger



Advantages & Benefits



Machine Room
Not Required



No
Maintenance.




Power
Sawing



Electric Power
Not Required in
Down Direction.

Construction Parameters

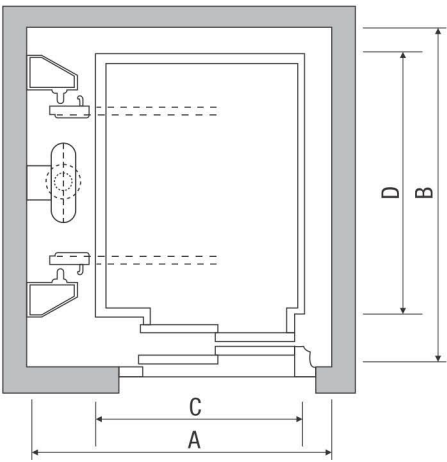

Roping Type

It is a single side direct suspension with a piston for regular loads and short travels of maximum 4 meters.

Person	Capacity Kg.	Shaft - W (A)	Shaft-D (B)	Car-W (C)	Car-D (D)
3	225	1500	1500	800	900
4	300	1550	1550	850	1050
5	375	1700	1700	1000	1100
6	450	1800	1800	1100	1150
8	600	1800	1800	1100	1400
10	750	1900	1900	1200	1550
12	900	2000	2000	1300	1650
15	1125	2000	2000	1300	2000
20	1600	2100	2100	1400	2400

PIT : 1200 mm • O.H. : 4000 mm

Autodoor



Big Vision Glass Door



S.S. Small Vision Door



S.S. Hairline Finish Door

Celing



Manual Door



Wooden Glass Swing Door



Manual Sliding Glass Door



M.S. Telescopic Door

Cabin Option

A Wide choice of Durable Interior Material



Golden Finish Hairline Cabin



S.S. Decorated Cabin



Powder Coated Finish Cabin

Etching Gold Finish



BGE-DEG016



BGE-402



BGE-404



BGE-408



BGE-301



BGE-304



BGE-308



BGE-306

Etching S.S. Finish

COP & LOP

Car Operating Panel &
Landing Operating Panel

- ▶ Safety Buttons: Alarm button, Door open button, Door close button.
- ▶ Service Buttons: Stop Switch (ES), Attendant Switch (ATS), Fan switch
Box Display Option: Standard 7 Segment, Dot Matrix, LCD Display Optional.

- ▶ COP Finishes: Stainless Steel Hairline finish, Stainless Steel Mirror finish, Stainless Steel Special finish.
- ▶ Stainless steel hairline finish faceplate.
- ▶ Position Indicator display for floor, up/down direction and overload message.
- ▶ Optional interphone button.

OPTIONAL



RF ID Card



Intercom System (BST)



Voice Announcer




Biometric System



CC TV Camera



BXK - 191

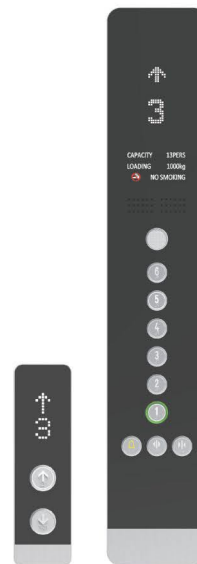

BCG - 451 COP - LOP



EL 03



S.S. Box Type COP - LOP



Acrylic / Glass Touch COP - LOP



Touch COP



Touch COP



Energy Saving



Steady Running




Sturdy and
Durable




Green and
Maintenance-free

Gearless Motor Unit

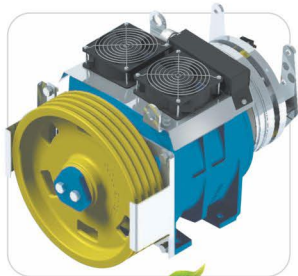


Gearless Machine

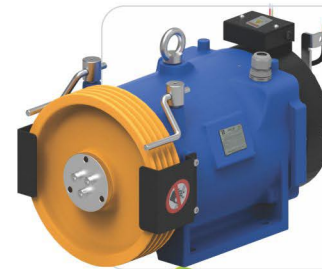

Gearless Machine

Geared Motor Unit

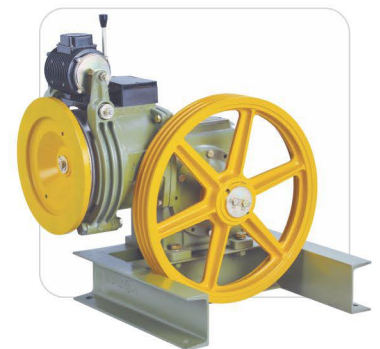

The safe and more energy-saving integrated control

Positioned to a proper distance and in limited room, the control panel requires limited energy consumption, comparable to a common electric household appliance.



V3F Drive



ARD Panel



MRL Panel



Integrated Control Panel







Microprocessor with
Integrated Controller




Standard Panel

Accolades Letters

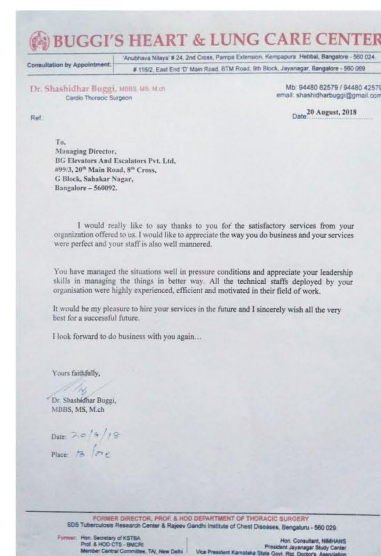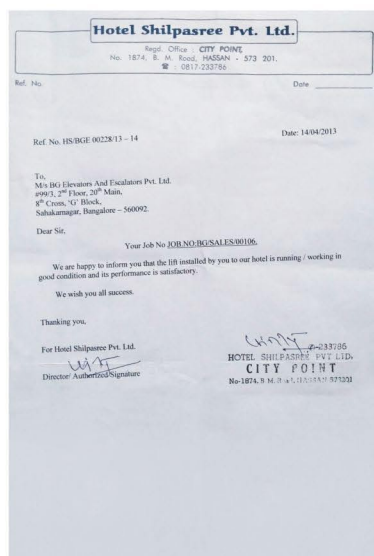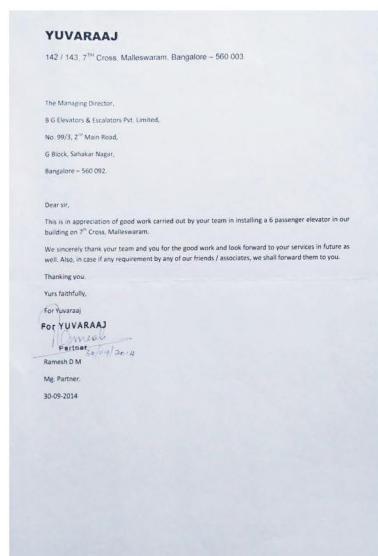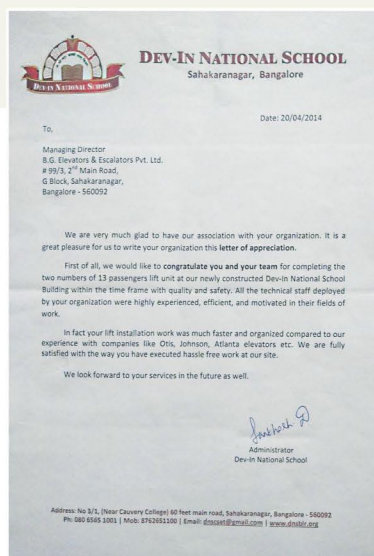

TMR Blossoms

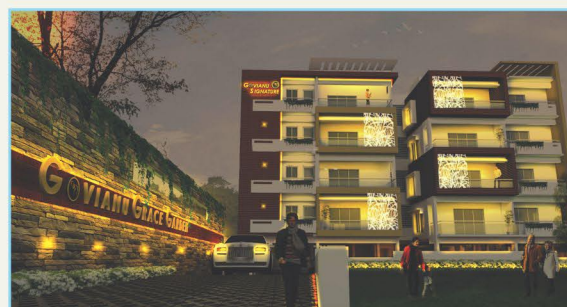

Govianu Grace Garden



BGS - Global Hospital, Bangalore



Dev In National School

Our Major Projects



G.M Infinite Daffodils



Regenta Inn By Royal Orchid



Venkataramana Venture Venkatadri Hills



Unique Infrastructure



V R Meadows



Rio The Hotel



Sai Brindavan



Sai Rachna

Our Major Projects



G.M. Infinite (Electronic City Town)



Hansamaranahalli -Hosahalli Road, Bangalore

**Walk in to Our Show Room to
Experience Live Demo**

Government Certified Company

(An ISO 9001-2015 Certified Company)

Regd No. MLS/LEP (EM/027)



Estd. 1995
Take a Safe Ride

**BG Elevators
& Escalators Pvt. Ltd.**

Corporate Office:

99/3, 20th Main, 8th Cross, G-Block,
Sahakaranagar, Bangalore - 560092.

Phone : 080 - 41471727

Mobile : 7676258077 / 9845558081

Toll Free : 1800 103 7018

E-mail : info@bgelevators.com

Website : www.bgelevators.com