



NTNU – Trondheim
Norwegian University of
Science and Technology

Title

Firstname Lastname

Submission date: February 2016
Responsible professor: Firstname Lastname, Affiliation
Supervisor: Firstname Lastname, Affiliation

Norwegian University of Science and Technology
Department of Telematics

Title: Title
Student: Firstname Lastname

Problem description:

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

This is the second paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

Responsible professor: Firstname Lastname, Affiliation
Supervisor: Firstname Lastname, Affiliation

Abstract

Mobile robot platforms etc...

Sammendrag

Mobile robotplattformer kan kjøre rundt og...

Preface

Hva synes jeg om oppgaven? Kjempeartig! Eget acknowledgemet-
kapittel?

Contents

List of Acronyms	ix
List of Acronyms	ix
List of Figures	xi
List of Tables	xiii
List of Algorithms	xv
1 Introduction	1
1.1 About the Thesis	1
1.2 Autonomous Mobile Robotic Maintenance	1
1.2.1 What and Why?	1
1.2.2 State of the art	1
1.2.3 Notable Projects	1
1.2.4 Future Goal (The final product)	1
1.2.5 State of the Art in Autonomous Robots	1
1.3 Implementation Overview	1
1.4 Thesis Structure	1
2 Background Theory	3
2.1 Modern Robotics	3
2.2 Modelling and Simulation	3
2.2.1 Some Terminology	3
2.2.2 Robot Modelling	3
2.2.3 Simulating in Gazebo	3
2.3 ROS	3
2.3.1 Introduction	3
2.3.2 Important ROS Concepts	4
2.3.3 Structure of a ROS Application	4
2.4 Software	4
2.4.1 Qt	4

2.4.2	PCL	4
2.5	The Kinect Sensor	4
2.6	Software Tools	4
2.6.1	Point Cloud Library	4
2.6.2	ROS	4
2.6.3	Qt	4
2.6.4	Current Research and Applications	4
2.7	Modern Sensors in Autonomous Robots	4
2.7.1	Depth Cameras	4
2.7.2	Laser Scanners (LIDAR)	6
2.7.3	Odometers	6
2.7.4	Sensor Fusion	6
2.8	RTAB-Map	6
3	Implementation	9
3.1	Simulations	9
3.2	Implementatpon 2	9
4	Testing	11
4.1	Testplan	11
4.2	Test Plan	11
4.3	Results	11
5	Discussion	13
6	Conclusion	15
6.1	Future Work	15
6.2	Task Fulfillment	15
6.3	Task Fulfilment	15
6.4	Final Conclusion	15
	References	17

List of Acronyms

SWIFT Structured what-if technique

SWIFT Structured what-if technique

GUI graphical user interface

NUI Natural user interface

ROS Robot Operating System

List of Figures

2.1	Awesome Image	7
2.2	Awesome Image	7

List of Tables

List of Algorithms

Chapter 1

Introduction

Introduction

1.1 About the Thesis

1.2 Autonomous Mobile Robotic Maintenance

1.2.1 What and Why?

1.2.2 State of the art

1.2.3 Notable Projects

1.2.4 Future Goal (The final product)

A nice description of a potential final product.

1.2.5 State of the Art in Autonomous Robots

Notable projects etc.

1.3 Implementation Overview

1.4 Thesis Structure

Chapter 2

Background Theory

2.1 Modern Robotics

2.2 Modelling and Simulation

2.2.1 Some Terminology

Coordinate Systems and Poses

Coordinate systems are essential in the field of robotics.

2.2.2 Robot Modelling

2.2.3 Simulating in Gazebo

2.3 ROS

2.3.1 Introduction

Roots of the Robot Operating System (ROS) can be traced back to Stanford University at the beginning of the 2000s. At Stanford, several robotics software frameworks, including **STAIR!** (**STAIR!**) and the **PR!** (**PR!**) program, were created to provide dynamic, flexible and well tested foundations for further robot development and research. In 2007, a nearby start-up company and robot incubator, Willow Garage, sought to build upon these concepts, and initiated a collaborative and open development process of a new software framework, which eventually became ROS. This framework can be used under the BSD open-source license, which means that ... Today, ROS comes in many forms and comprise hundreds of advanced packages, algorithms and drivers, making it applicable for hobbyists, industrial automation and everything in between.

2.3.2 Important ROS Concepts

The following descriptions are included in order to provide a complete, self-contained description of the project implementation. Similar descriptions can be found on the official ROS website (INSERT LINK HERE), as well as in any book on ROS (see [?]).

2.3.3 Structure of a ROS Application

2.4 Software

2.4.1 Qt

2.4.2 PCL

2.5 The Kinect Sensor

2.6 Software Tools

2.6.1 Point Cloud Library

2.6.2 ROS

2.6.3 Qt

2.6.4 Current Research and Applications

2.7 Modern Sensors in Autonomous Robots

2.7.1 Depth Cameras

Different Methods for Depth Perception

In the context of this thesis, a depth camera is considered to be a sensor which the functionality of a regular video camera

A depth camera can be described as a regular color video camera with the ability to create spatial images. In the context of this thesis, a depth camera can more precisely be described as a RGB-D camera, which is short for red, green, blue and depth camera. A regular RGB camera will project a spatial scene onto a rectangular pixel grid, where each pixel contains intensity values for red, green and blue colors. These pixel values represents the detected scene. A major problem with RGB cameras is the significant loss of information. The information loss is mostly a consequence of 3d to 2d projection and digital quantization. RGB-D cameras have the means to reduce this information loss by mapping the pixel values to spatial coordinates, turning each pixel into voxels and the image into a point cloud of voxels.

Different variations of depth cameras will usually fall into one of two categories: active or passive. Passive sensors perceive the surroundings as it is, without actively interfering with the environment as a part of the sensing process. A typical passive RGB-D sensor is the stereo camera. Stereo cameras use a stream of synchronized image pairs to perceive depth. The image pairs are displaced along the horizontal axis, and the depth information is extracted by searching for mutual information in the image pairs. How far the information is displaced from the left to the right image is directly related to how far away from the camera the information source is located.

Active sensors depend on some form of projection onto the surroundings. For depth cameras, the projection is usually in the form of laser or infra red light. In RGB-D cameras it is essential that the projected light is distinguishable from the visible spectrum. The Kinect sensor used in this project is an example of an active RGB-D sensor. A proper introduction to the Kinect, will follow shortly.

Natural User Interfaces

Forslag: When a group of designers are developing a new graphical user interface (GUI), they will often use a conceptual model when planning their design. The conceptual model is the mental model the designers want to put into the head of the user. All users will develop their own individual mental model, which is their high level understanding of how the GUI works. A conceptual model may contain metaphors for things the user already is familiar with. A painting program for example may use a metaphor for a canvas, paint brushes and palettes. When the mouse icon changes to a paint brush, most users will have an intuitive understanding of what it can do and how it is used. A Natural user interface (NUI) will seek to remove the metaphors and create a more seamless interaction between the user and the machine. Some NUIs may allow a user to write text with a pen instead of a keyboard, or dictate a letter with their voice while the computer converts audio into text.

Forslag: The idea behind a NUI is to make **HMI!** (**HMI!**) as seamless and natural as possible. A NUI allows the user to communicate without tools such as a keyboard or a mouse. Initially starting as ideas and rare research projects, NUIs can now be considered to have become ubiquitous, where the most common form is the touch screen found in smart phones and tablets.

The Microsoft Kinect sensor was initially designed as a NUI for the Xbox 360 gaming console. The sensor allows users to use gestures and sounds to play console games. Later on, Microsoft has released SDKs, enabling developers to create NUI applications for Windows.

The modern RGB-D sensors which are commonly used in robot research projects today were initially intended as NUI.

Kinect for Xbox 360

Kinect for Xbox 360 is the RGB-D sensor used in this project. The device was initially intended as a NUI for gaming and

The depth sensor

2.7.2 Laser Scanners (LIDAR)

2.7.3 Odometers

2.7.4 Sensor Fusion

2.8 RTAB-Map



Figure 2.1: Awesome Image

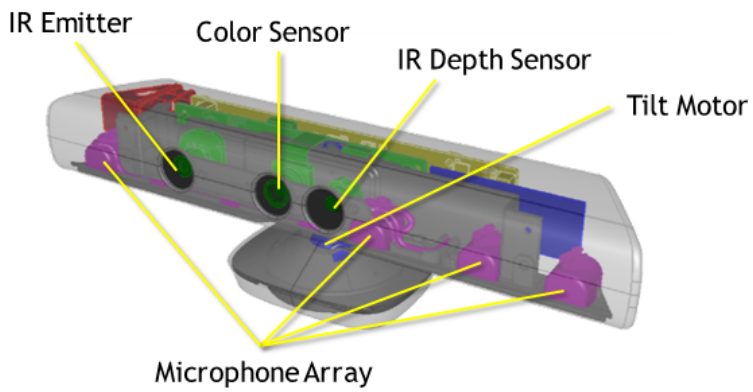


Figure 2.2: Awesome Image

Chapter 3 Implementation

Implementation procedure for mobile robot:

- Decide on ROS message interface.
- Write interfaces for the motor drivers.
- Create a description of the physical structure and properties of the robot in **URDF! (URDF!)**.
- Extend the model to enable simulation in Gazebo.
- Publish coordinate transform data via *tf* and visualize it in rviz.
- Add sensors, with driver and simulation support.
- Apply algorithms for navigation and other functionality.

3.1 Simulations

3.2 Implementatpon 2

Chapter 4

Testing

4.1 Testplan

4.2 Test Plan

4.3 Results

Chapter 5

Discussion

Chapter 6

Conclusion

- 6.1 Future Work
- 6.2 Task Fulfillment
- 6.3 Task Fulfilment
- 6.4 Final Conclusion

References