
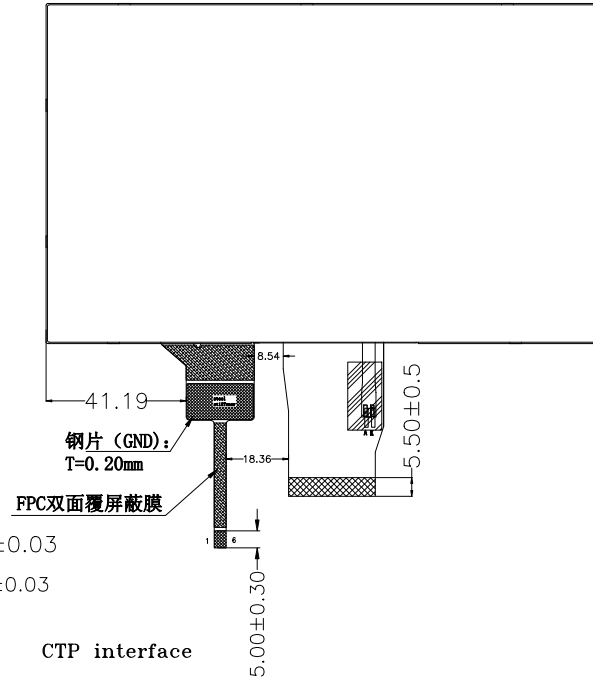


Customer Approved
(客户确认回签)


版本	更改内容	拟定	日期
V0	初版发行	Jason	2018.10.20

LCD interface


PIN	Symbol	PIN	Symbol
1	VLED+	26	G1
2	VLED+	27	G0
3	VLED-	28	R7
4	VLED-	29	R6
5	GND	30	R5
6	VCOM	31	R4
7	VDD	32	R3
8	MODE	33	R2
9	DEN	34	R1
10	VSYNC	35	R0
11	HSYNC	36	GND
12	B7	37	PCLK
13	B6	38	GND
14	B5	39	L/R
15	B4	40	U/D
16	B3	41	VGH
17	B2	42	VGL
18	B1	43	AVDD
19	B0	44	RESET
20	G7	45	NC
21	G6	46	VCOM
22	G5	47	DITHB
23	G4	48	GND
24	G3	49	NC
25	G2	50	NC

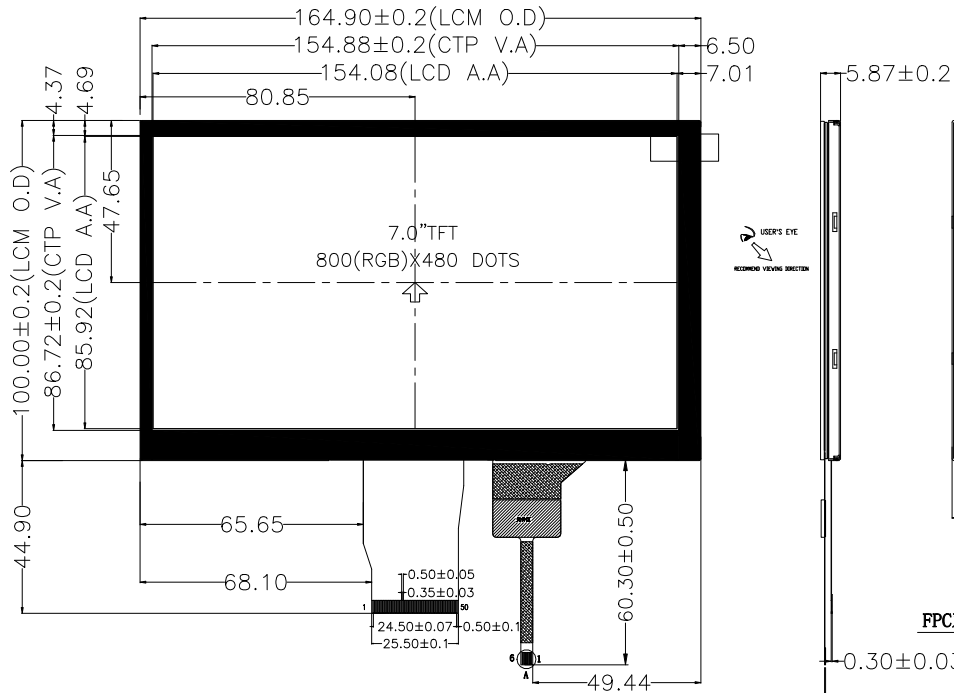

Backlight Circuit:

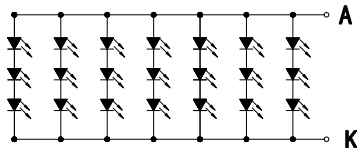

Vf=9.3±0.6V. If=140mA




CTP interface

PIN#	ASSIGNMENT
1	INT
2	SDA
3	SCL
4	RST
5	GND
6	VDD

WKS 慧勤智远科技有限公司

第三视角:



DISPLAY TYPE:	7.0" TFT	DISPLAY DRIVER:	EK9713CA&EK73002ACGB	PIXEL PITCH:	0.1926 X 0.179 mm
POLARIZER MODE:	TRANSMISSIVE	OPERATING TEMP:	-20°C TO +70°C	BACK LIGHT:	LED WHITE(X21),3串7并
VIEWING DIRECTION:	6 O'CLOCK	STORAGE TEMP:	-30°C TO +80°C		
Dot matrix:	800(RGB)X480 DOTS	STRUCTURE:	LCD+IC+FPC+BL+CTP	MATERIAL NOTE	ROHS REQUEST

产品型号:	WKS70133				
部品型号:	LCM外形图		确认:	Henry	
版本:	V2	单位:	mm	审核:	Eric
日期:	2018.10.20	比例:	1:1	设计:	Jason
UNMARKED TOLERANCE:			±0.20 mm	页码:	1 OF 1

THIS DRAWING IS PROPERTY OF WKS CO. LTD, IT CANNOT BE REPRODUCED WITHOUT PERMISSION.