


REV.	E.C.N.	CHANGE DESCRIPTION	IMPLD	DATE
D	E1339	UPDATED NOTES; ADDED ID LABEL	DJH	8/29/12
..			...	

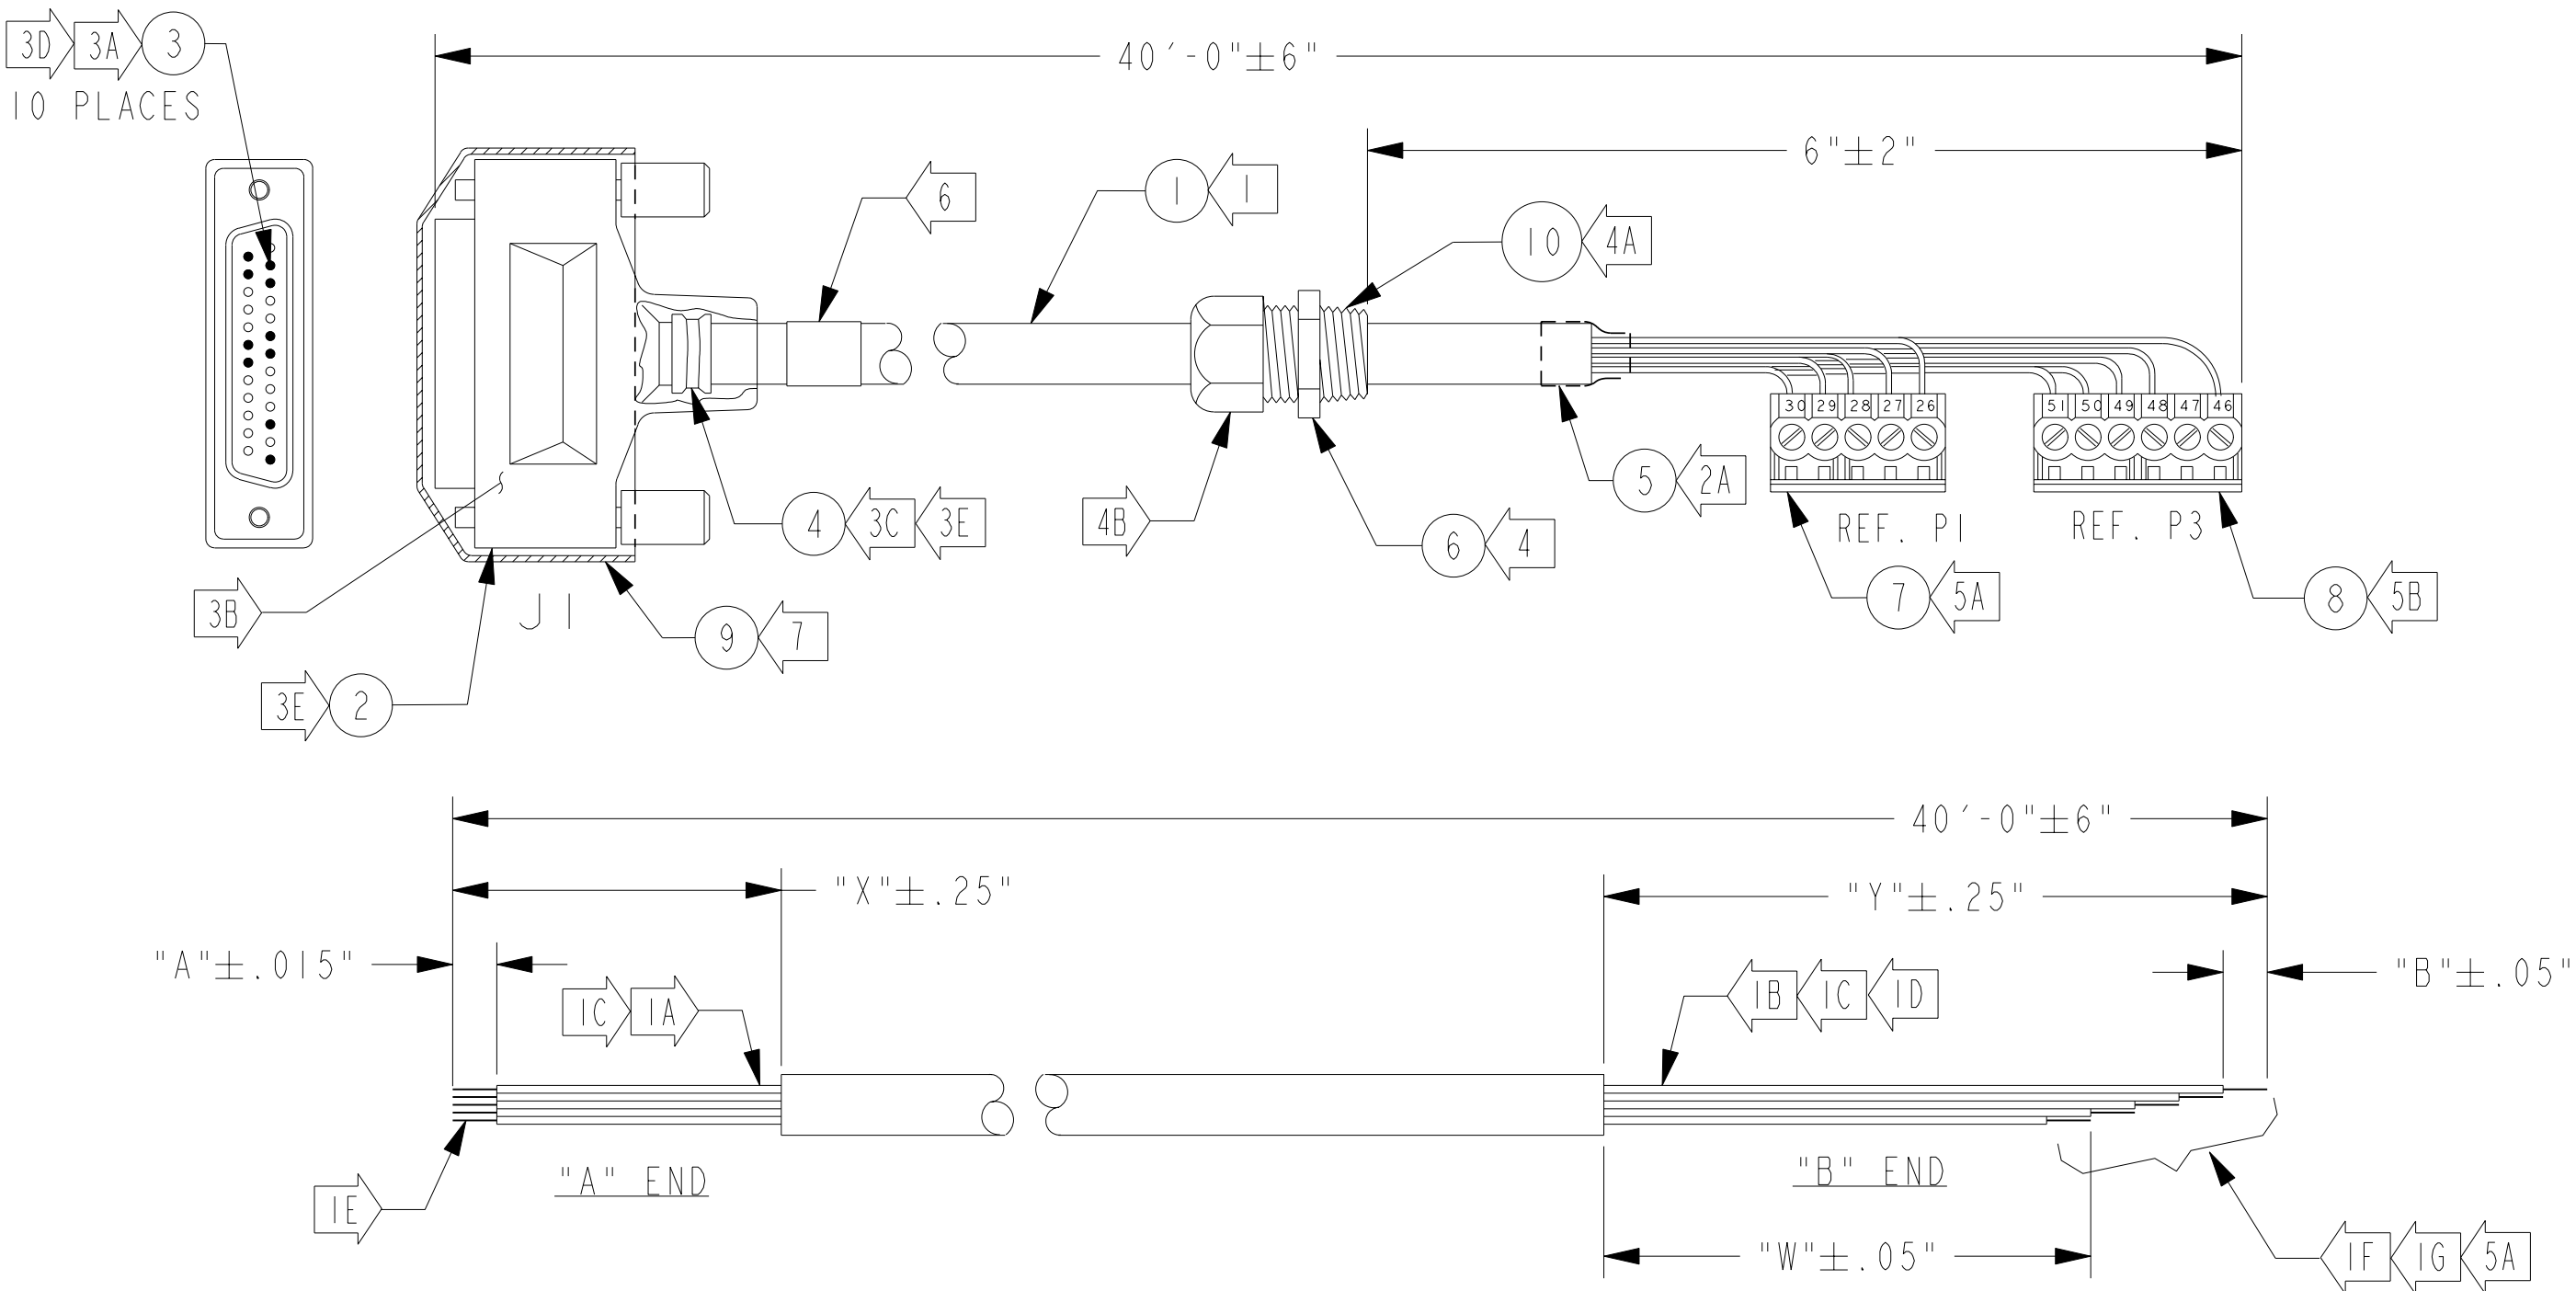

ASSEMBLY NOTES:
FOR 81513040 RS232 PRINTER/LAP-PAD 40' CABLE ASSEMBLY.

1. CABLE FABICATION CUT ITEM 1 CABLE 40' LONG AS NOTED.
A. STRIP OUTER INSULATION 1.0" LONG FROM "A" END.
B. STRIP OUTER INSULATION 3.8" FROM "B" END.
C. REMOVE FOIL SHIELD FROM BOTH ENDS.
D. CUT DRAIN WIRE FLUSH TO OUTER INSULATION "B" END ONLY.
E. STRIP .093" ALL 10 CONDUCTORS "A" END.
F. CUT ALL 10 CONDUCTORS "B" END TO "Y" LENGTH ACCORDING TO THE CHART.
G. STRIP .25" ALL 10 CONDUCTORS "B" END.
2. APPLY ITEMS 5 HEAT SHRINK TO CABLE.
A. USE 1" OF ITEM 5 HEAT SHRINK SLIDE DOWN TO OUTER INSULATION TO INSULATE DRAIN WIRE AS SHOWN "B" END.
3. WIRING "A" END OF CABLE TO ITEM 2 D-SUB 25 PIN D-SUB CONNECTOR.
A. CRIMP ITEM 3 MALE PINS TO ALL 10 CONDUCTORS OF "A" END OF CABLE.
B. SOLDER DRAIN WIRE TO ITEM 2 SHELL.
C. SLIDE ITEM 4 FERRULE UP "A" END OF CABLE.
D. INSERT EACH PIN INTO ITEM 2 D-SUB AS PER CHART.
E. ASSEMBLE ITEM 4 FERRULE & ITEM 2 CONNECTOR SHIELDING KIT.
4. ASSMBLE ITEM 6 METAL CORD GRIP TO CABLE "B" END.
A. TAKE ITEM 6 METAL CORD GRIP FACING THE THREADED PORTION, APPLY CW (CLOCK-WISE) 5" OF ITEM 10 TELFLON TAPE.
B. INSERT ITEM 1 CABLE THRU RUBBER GROMET END 6" AS SHOWN. TIGHTEN THE METAL CORD GRIP NUT UNTIL THE CABLE NO LONGER SLIDES FREELY BUT IS SNUG TO THE CABLE. THIS ALLOWS EASY ADJUSTMENT WHEN INSTALLING THE CABLE.
5. WIRING "B" END OF CABLE.
A. TIN WIRES "B"END OF CABLE.
B. WIRE ITEM 7 P1 CONNECTOR (26-30) AS PER CHART, TIGHTEN THE SCREWS TO A MAXIMUM TORQUE OF 3.5inlbs.
C. WIRE ITEM 8 P3 CONNECTOR (46-51) AS PER CHART, TIGHTEN THE SCREWS TO A MAXIMUM TORQUE OF 3.5inlbs.
6. ID LABEL MARK "81513-040 X/Y"; WITH X = LATEST BOM REV, Y = LATEST DWG REV.: APPLY IN LOCATION AS NOTED.
7. PUSH ON ITEM 9 BLACK VINYL COVER ONTO J1 CONNECTOR.
8. LOOP CABLE IN A COIL THEN WIRE CABLE ASSEMBLY USING CABLE TIES QTY 3 EQUALLY SPACED.

WIRE CONNECTIONS				WIRE LENGTHS				
CONNECTOR	COLOR	FUNCTION	LCR CONN.	"W"	"X"	"Y"	"A"	"B"
J1-METAL CASE	DRAIN WIRE	SHIELD	NC	-	1.0 IN.	--	--	--
J1-2	YEL	TRANSMIT DATA	28 RXD	1.4 IN.	1.0 IN.	3.8 IN.	.093 IN.	.25 IN.
J1-3	ORG	RECEIVE DATA	27 TXD	1.6 IN.	1.0 IN.	3.8 IN.	.093 IN.	.25 IN.
J1-6	BRN	DATA SET READY	26 RTS	1.8 IN.	1.0 IN.	3.8 IN.	.093 IN.	.25 IN.
J1-7	BLK	SIGNAL GND	30 GND	1.0 IN.	1.0 IN.	3.8 IN.	.093 IN.	.25 IN.
J1-20	BLU	DATA TERM. READY	29 CTS	1.2 IN.	1.0 IN.	3.8 IN.	.093 IN.	.25 IN.
J1-11	WHT	SEC. SIGNAL GND	51 GND	2.8 IN.	1.0 IN.	3.8 IN.	.093 IN.	.25 IN.
J1-13	RED	SEC. CLEAR TO SEND	46 +12V	3.8 IN.	1.0 IN.	3.8 IN.	.093 IN.	.25 IN.
J1-14	GRY	SEC. TRANSMIT DATA	49 RXD	3.2 IN.	1.0 IN.	3.8 IN.	.093 IN.	.25 IN.
J1-15	VIO	SEC. RECEIVE DATA	48 TXD	3.4 IN.	1.0 IN.	3.8 IN.	.093 IN.	.25 IN.
J1-19	GRN	SEC. REQUEST TO SEND	50 CTS	3.0 IN.	1.0 IN.	3.8 IN.	.093 IN.	.25 IN.

MATERIAL: SEE B.O.M.		LIQUID CONTROLS A UNIT OF IDEX CORPORATION LAKE BLUFF, IL USA		
		TITLE CABLE ASSY, RS-232 PRINTER/LAP-PAD 40' LONG		
FINISH:	N/A	SCALE N/A	SIZE C	PROJECT NO. N/A
TOLERANCES- UNLESS OTHERWISE SPECIFIED REFER TO TOLERANCE STANDARD:	N/A	DRAWN BPROUTY	3/17/98	PART NO. 81513-040
DRW DISTR: . .	CHANGES RESTRICTED BY APPROVAL AGENCY:	NO	APPROVED 4/22/98 J.R.R	SHEET OF

NOTICE: This drawing and the principles and elements of design embodied therein are the exclusive property of Liquid Controls Group and are not to be communicated, disclosed, reproduced or used except as previously authorized in writing by such corporation and must not be submitted to outside parties for examination without the written consent of said corporation.