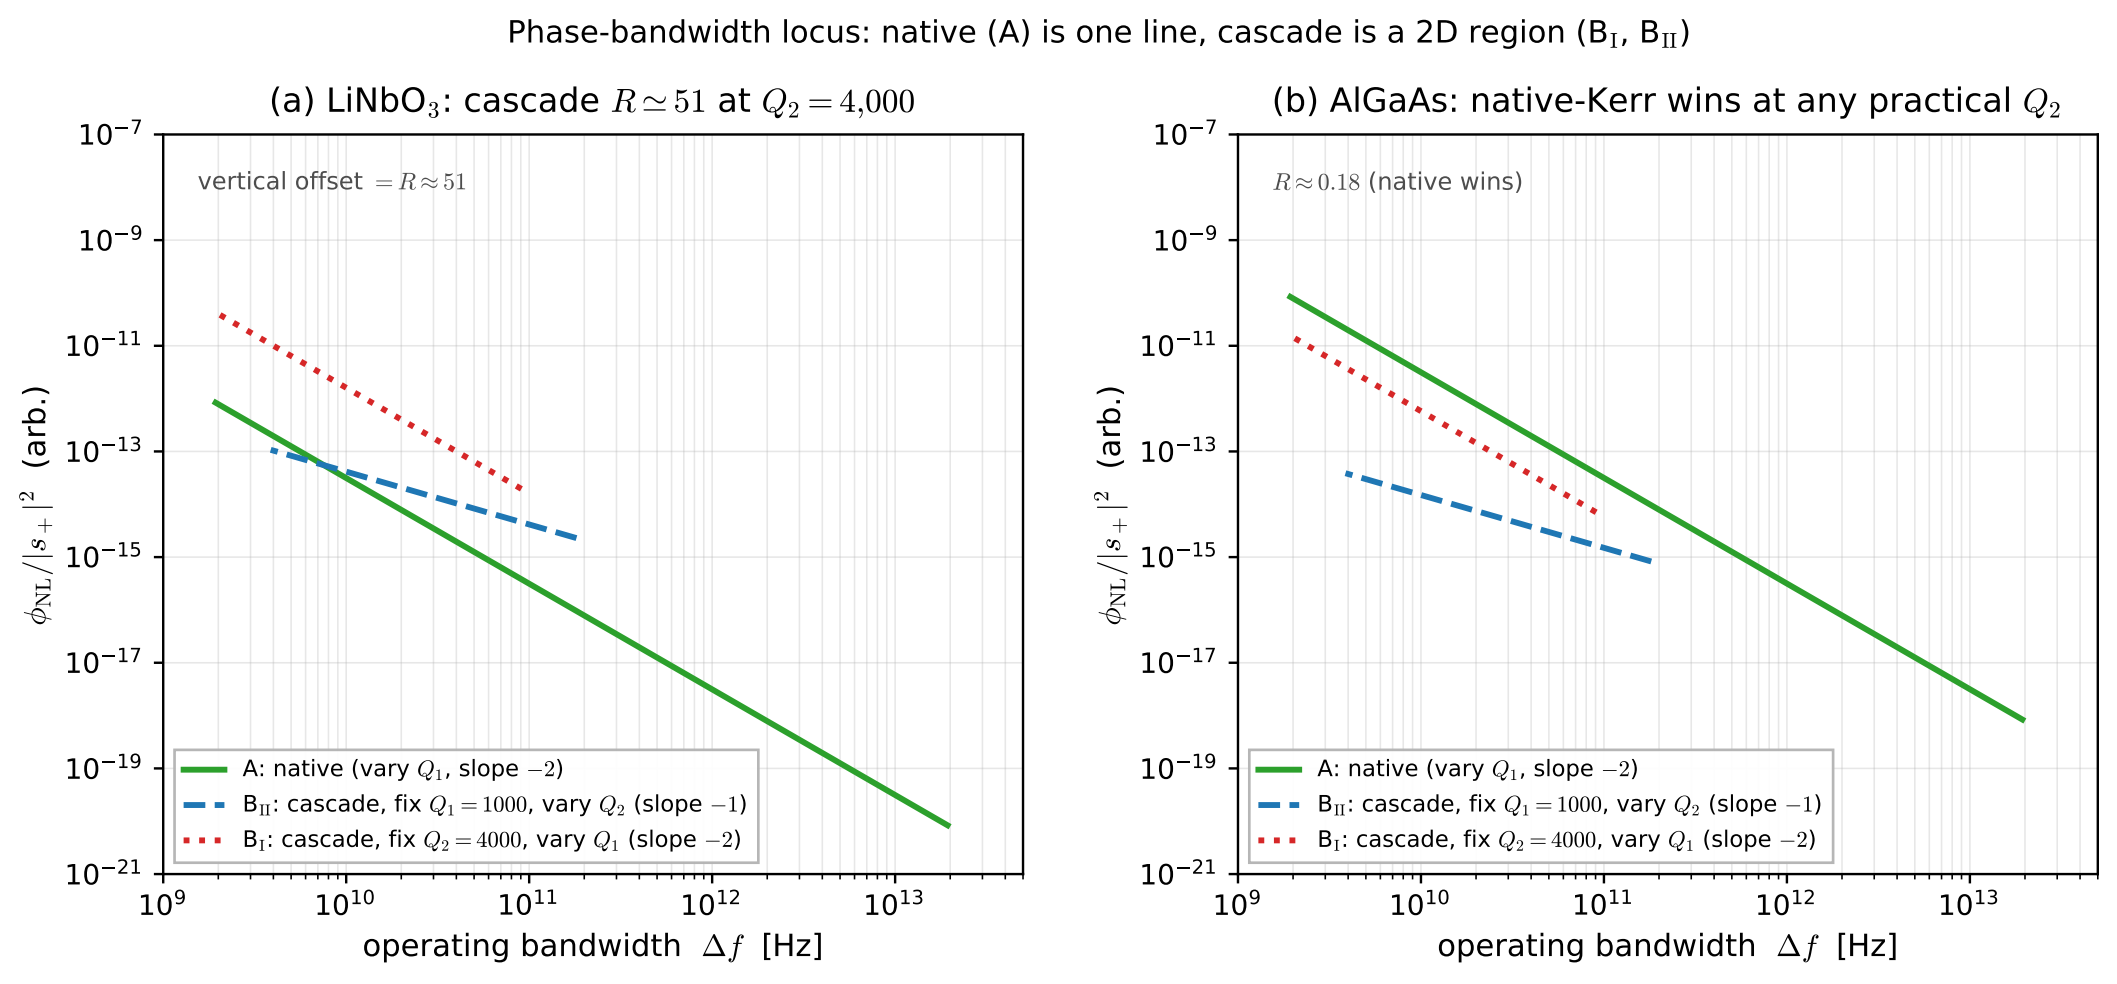
Phase-bandwidth locus: native (A) is one line, cascade is a 2D region (B_I, B_{II})
(a) $LiNbO_3$: cascade $R \simeq 51$ at $Q_2 = 4{,}000$
vertical offset $= R \approx 51$
(b) AlGaAs: native-Kerr wins at any practical Q_2
$R \approx 0.18$ (native wins)
$\phi_{NL}/|s_+|^2$ (arb.)
operating bandwidth Δf [Hz]
A: native (vary Q_1, slope -2)
B_{II}: cascade, fix $Q_1 = 1000$, vary Q_2 (slope -1)
B_I: cascade, fix $Q_2 = 4000$, vary Q_1 (slope -2)