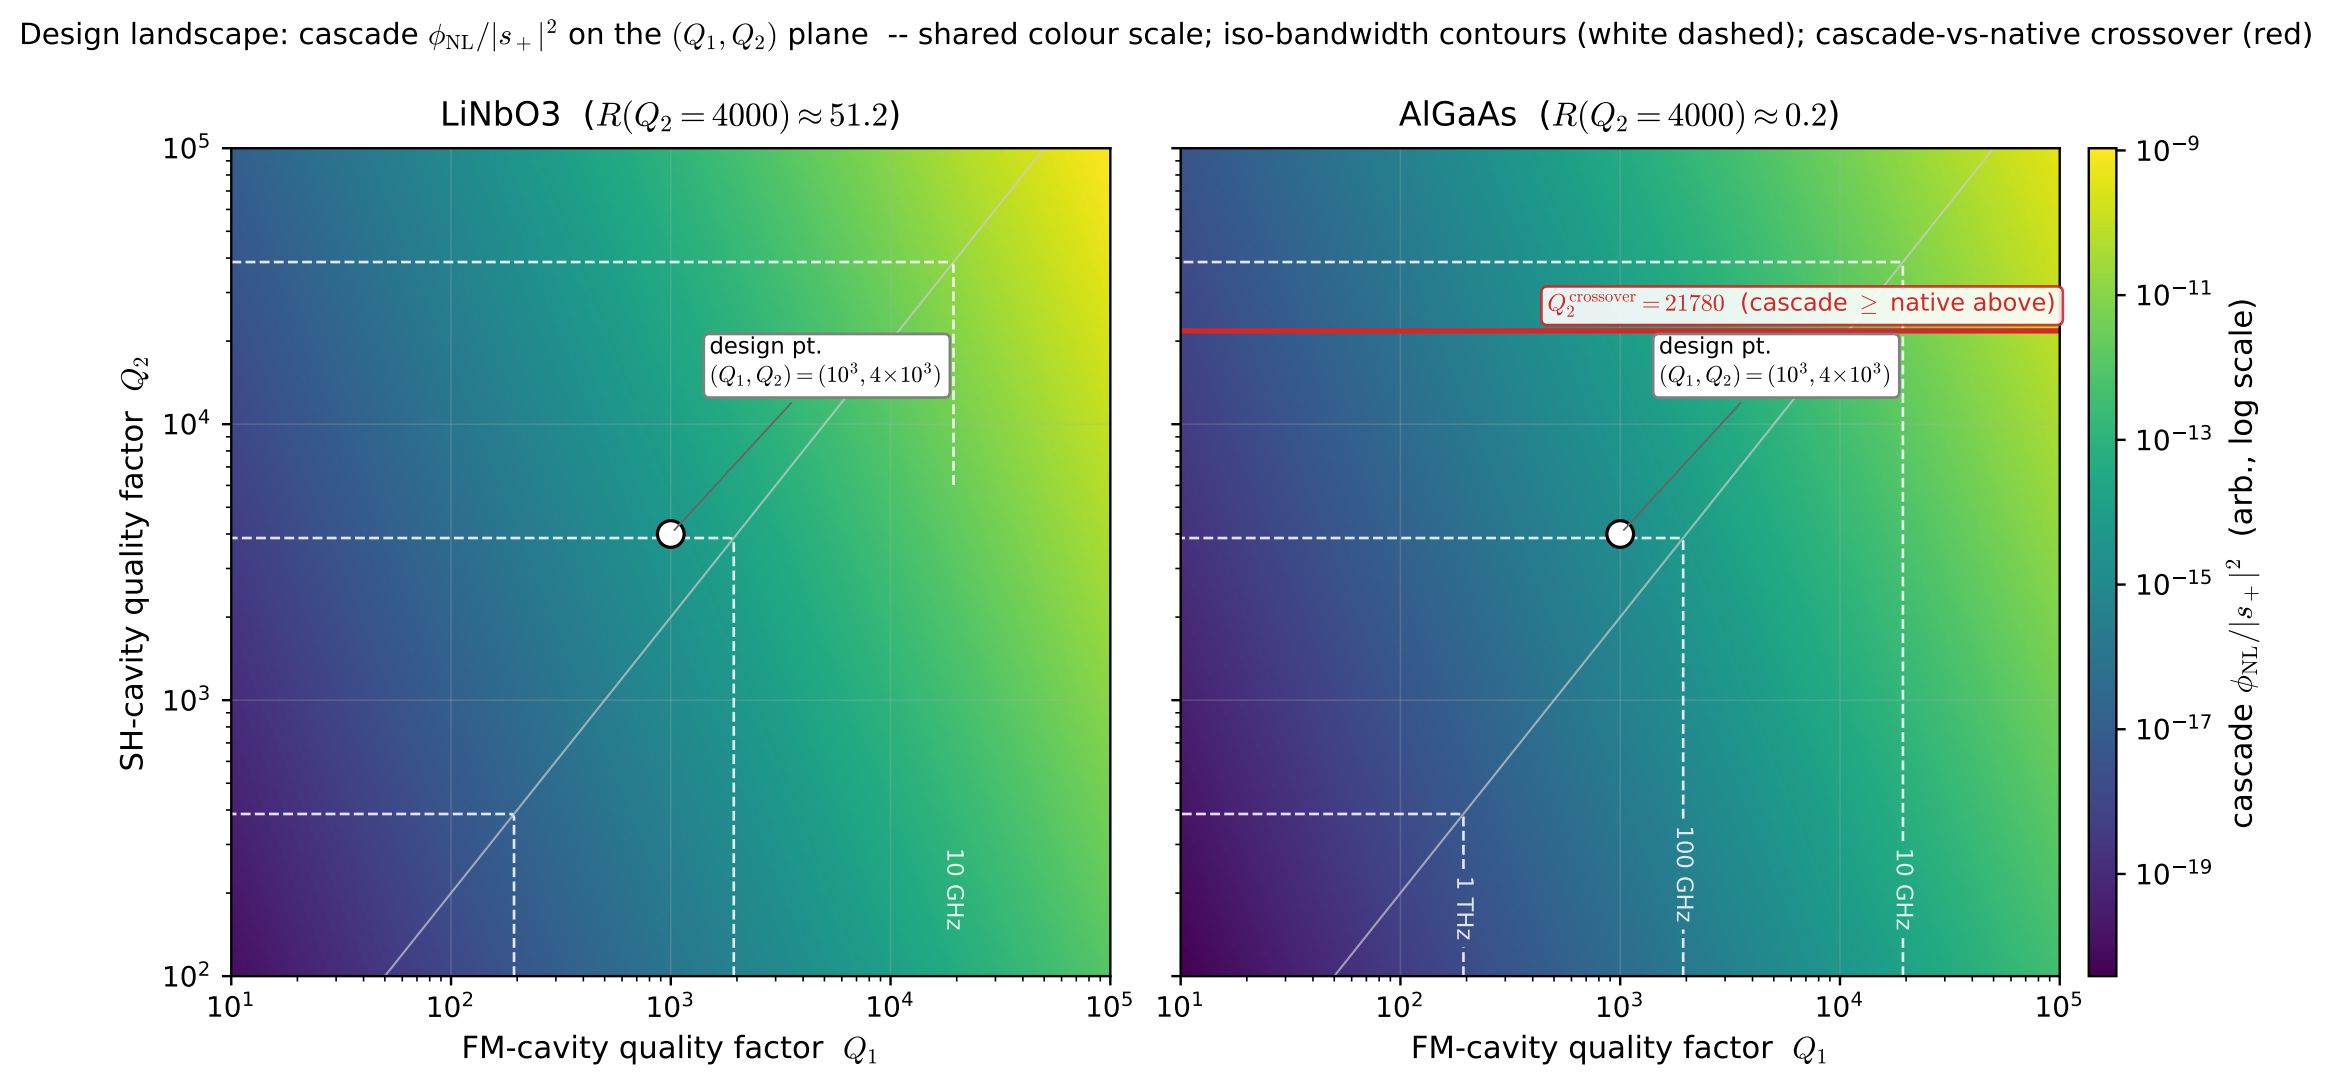

Design landscape: cascade $\phi_{\mathrm{NL}}/|s_+|^2$ on the (Q_1, Q_2) plane -- shared colour scale; iso-bandwidth contours (white dashed); cascade-vs-native crossover (red)
LiNbO3 $(R(Q_2 = 4000) \approx 51.2)$
AlGaAs $(R(Q_2 = 4000) \approx 0.2)$
$Q_2^{\mathrm{crossover}} = 21780$ (cascade $\geq$ native above)
design pt.
$(Q_1, Q_2) = (10^3, 4\times10^3)$
1 THz
100 GHz
10 GHz
SH-cavity quality factor Q_2
FM-cavity quality factor Q_1
cascade $\phi_{\mathrm{NL}}/|s_+|^2$ (arb., log scale)