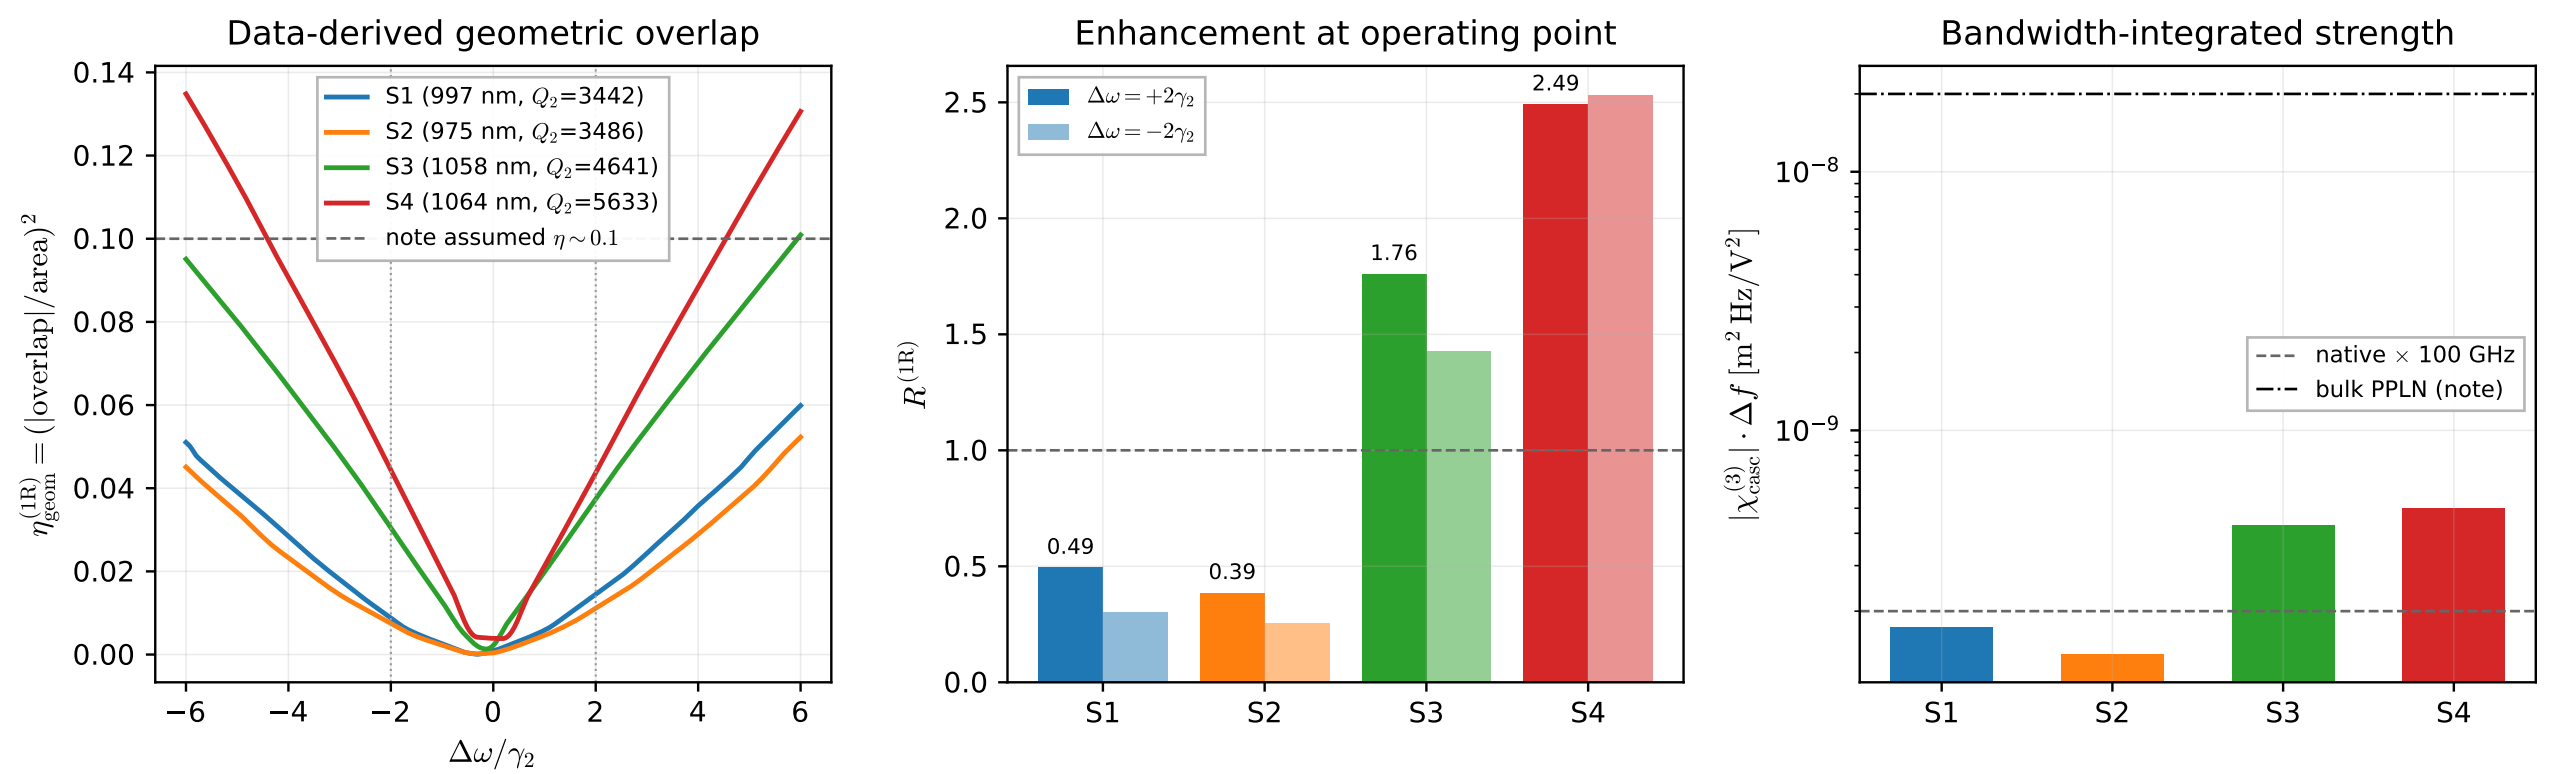
Data-derived geometric overlap
S1 (997 nm, Q_2=3442)
S2 (975 nm, Q_2=3486)
S3 (1058 nm, Q_2=4641)
S4 (1064 nm, Q_2=5633)
note assumed $\eta \sim 0.1$
$\eta^{(1R)}_{geom} = (|overlap|/area)^2$
$\Delta\omega/\gamma_2$
Enhancement at operating point
$\Delta\omega = +2\gamma_2$
$\Delta\omega = -2\gamma_2$
$R^{(1R)}$
0.49
0.39
1.76
2.49
S1
S2
S3
S4
Bandwidth-integrated strength
native × 100 GHz
bulk PPLN (note)
$|\chi^{(3)}_{casc}| \cdot \Delta f$ [m² Hz/V²]