


PE24103 EVB Quick Start Procedure

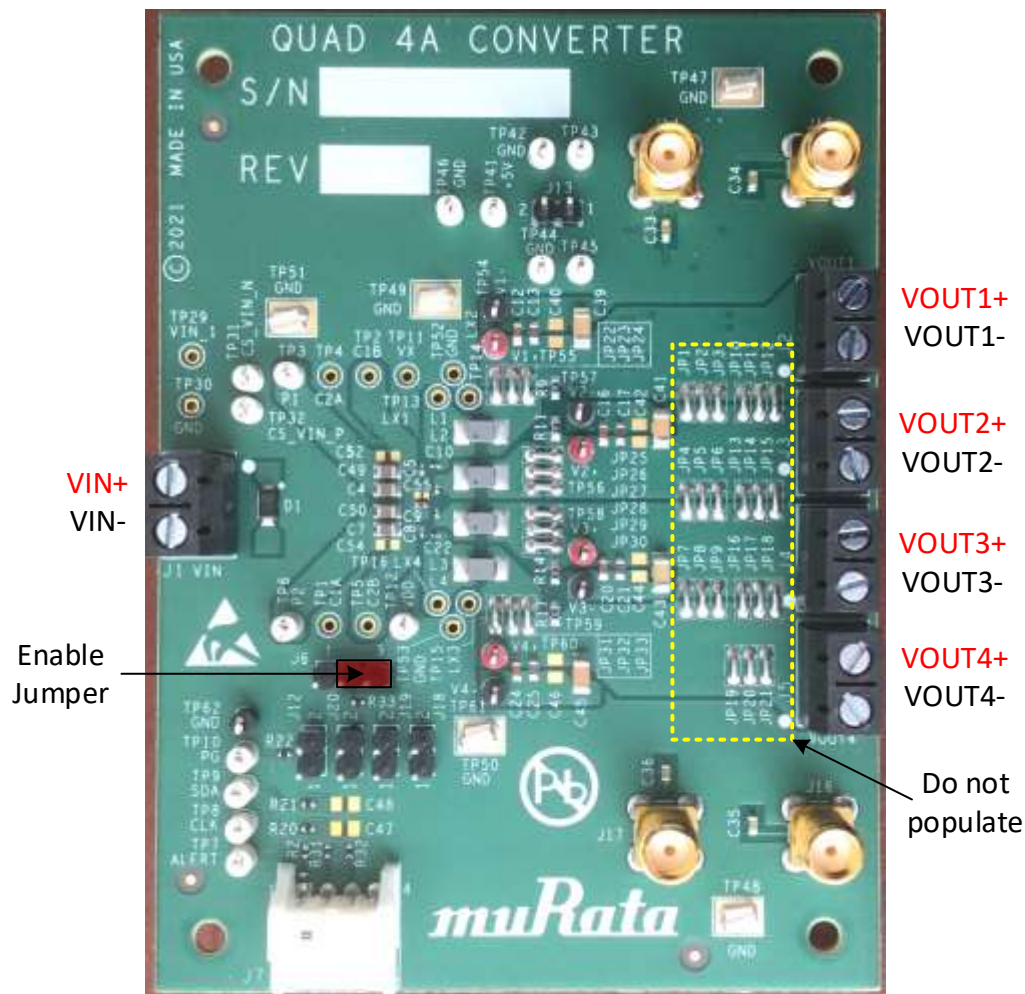

1. Connect FTDI dongle from computer to EVB
2. Apply 9.6V to 15V to VIN
3. The output voltages should read VOUT1=0.6V, VOUT2=1.2V, VOUT3=1.8V and VOUT4=2.0V
4. Enter Master Test mode to enable full I2C access
 - a. Write 0xA596 to the MASTER_TEST register at address 0x03FD.
 - b. Optionally read the MASTER_TEST register. You should get 0x0001 if you have successfully entered the master test mode. I2C communication will work until you are in master test mode.