

HIITIO

POWER GENERATION GLASS

Power Output Not Less Than 85% after 25 Years



Safe




More Aesthetically




High Power Generation



More Economical

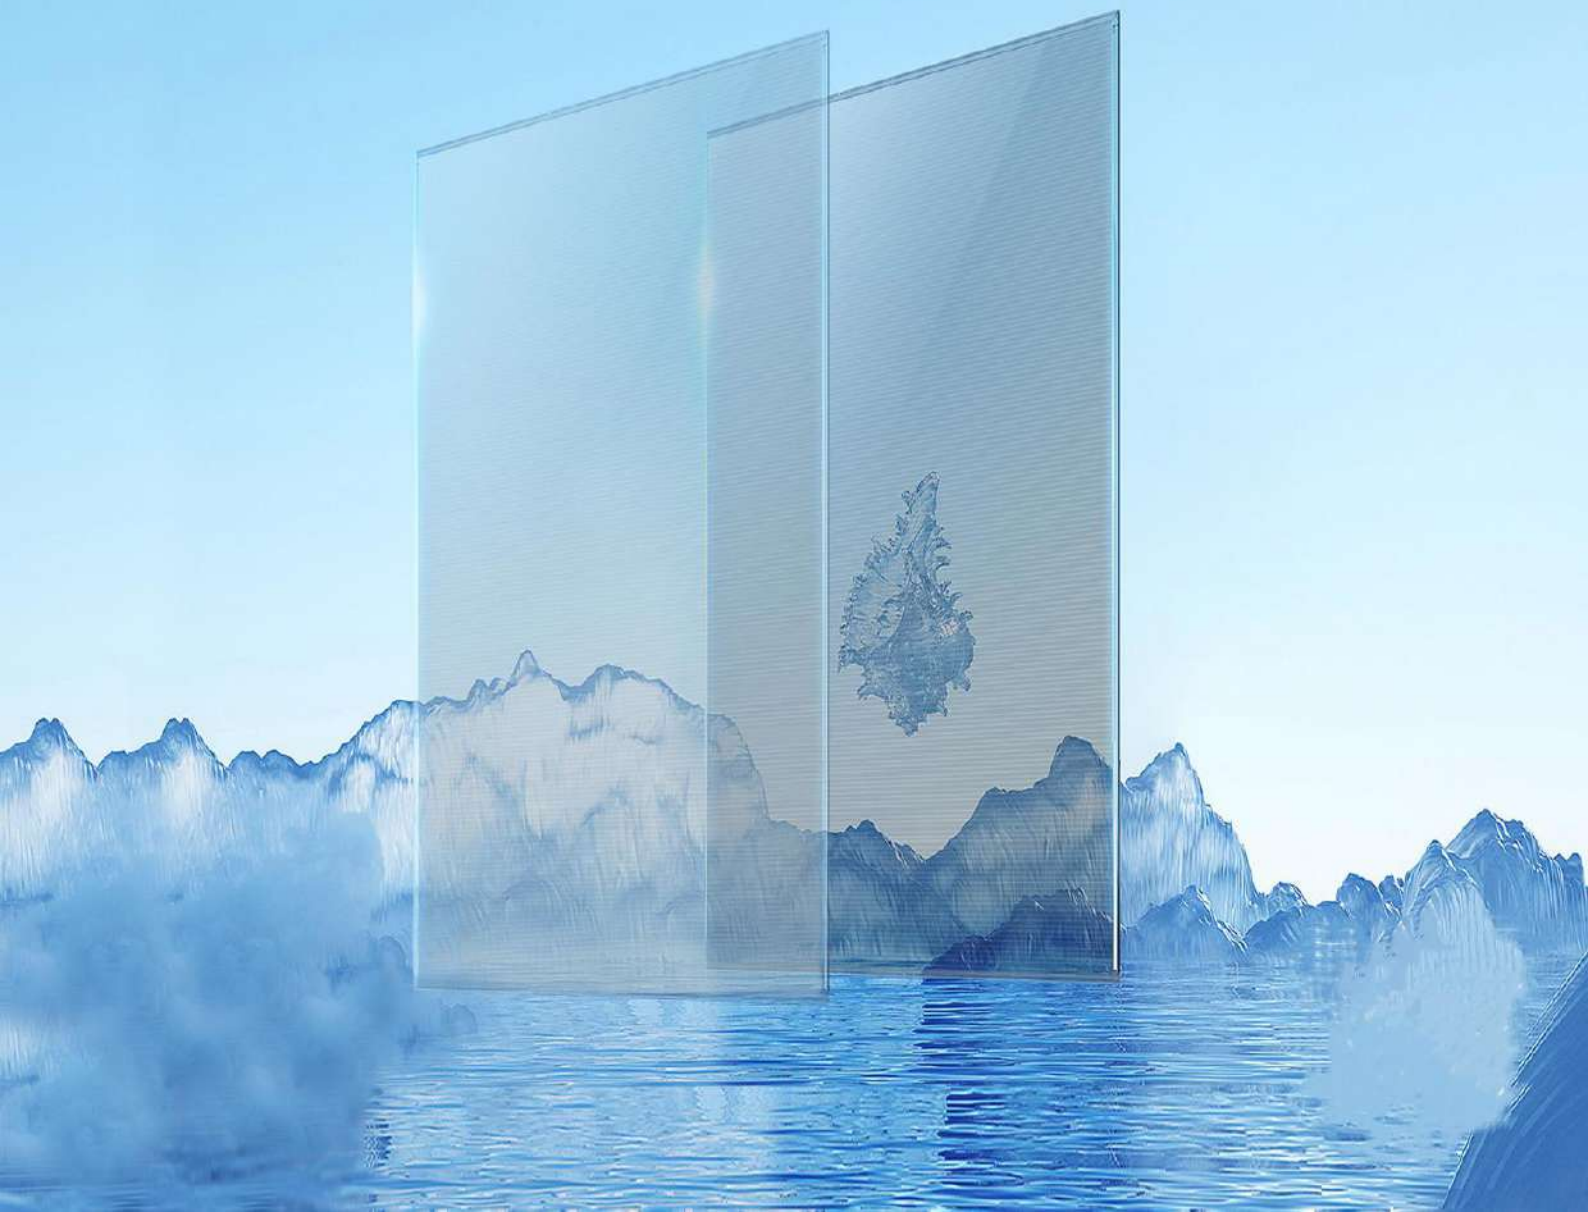

Mechanical Specification

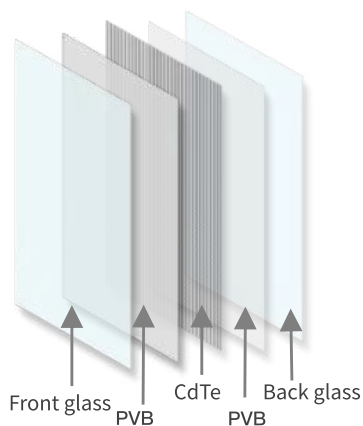

Model	HC-JL-B5	HC-JL-B6	HC-JL-B8
Size	1200*600*16.2mm	1200*600*18.2mm	1200*600*22.2mm
Weight	29Kg	33Kg	40Kg
Area	0.72m²	0.72m²	0.72m²
Structure	5mm+3.2mm	6mm+3.2mm	8mm+3.2mm
Junction Box	IP67 Rated		
Connectors	MC4		
You can choose 1200 * 1200、1200 * 1800 sizes or irregular sizes according to design requirements			

Electrical Specification

Model	HC-JL-B5-20	HC-JL-B5-40	HC-JL-B5-60	HC-JL-B6-20	HC-JL-B6-40	HC-JL-B6-60
Transmittance	20%	40%	60%	20%	40%	60%
Normal Power (Pmpp/W)	85	60	40	85	60	40
Power Tolerance	±5%	±5%	±5%	±5%	±5%	±5%
Short Circuit Current (Isc/A)	0.95	0.71	0.5	0.95	0.71	0.5
Open Circuit Voltage (Voc/V)	122.8	122.8	122.8	122.8	122.8	122.8
Current at Pmax (Impp/A)	0.88	0.66	0.45	0.88	0.66	0.45
Voltage at Pmax (Vmpp/V)	98.5	94.3	90.1	98.5	94.3	90.1

Standard Test Conditions (STC) : 1000W/m², AM2.5, 25°C

Operating Conditions

Maximum System Voltage	DC1000V(IEC)	IP Code	IP67
Maximum Series Fuse	6A	Temperature Range	-40℃ to 85℃
Application Level	A2	Rated battery operating temperature	42.3±2℃
Wind Load	6000Pa (IEC)	Maximum power temperature coefficient	- 0.29%/℃
Snow Load	6000Pa (IEC)	Open circuit voltage temperature coefficient	- 0.28%/℃
Hail Test	IV	Short circuit current temperature coefficient	+0.04%/℃

Consider a Factor of safety of 1.5 when testing



HT-JL2 serie BIPV Module



BIPV Customized Module

Meet all your architectural needs



SUPERIOR PERFORMANCE



Customized BIPV Solution

Shape, color, size and pattern can be customized to meet the specific design requirements of different projects.



Semi - Transparent with Variable Transmittance

The customized transmittance integrates the photovoltaic system with the overall building design, keep the building open and lighting effect.



Low Degradation Rate

Power output warrant more than 85% in 25 years, degradation rate is 2% in the 1st year and 0.5% every year thereafter.



International Recognized Certificates

All of the products are certified by the authorized certification authority and meet BIPV construction standards.



QUALITY WARRANTY


0.5% Annual Degradation

2.0% First Year Power Degradation

10 year Product Warranty

25 year Performance Warranty

Color

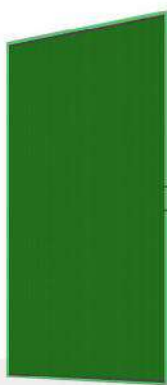

Pattern



Transmittance



10%



20%



30%



40%

Structure



Two Layers
of Glass



Three Layers
of Glass



Three Layers of
Glass with Hollow Glass




Three Layers of Glass
+Hollow Glass
+Double Glass

Customized products tailored to your specific dimensions, patterns, colors, and light transmission.
For detailed power, please consult our sales engineers.

Semi-Transparent PV Module

High Power Performance

Bring the sunlight to the home
Enjoy the green energy life
Reduce your electricity bill

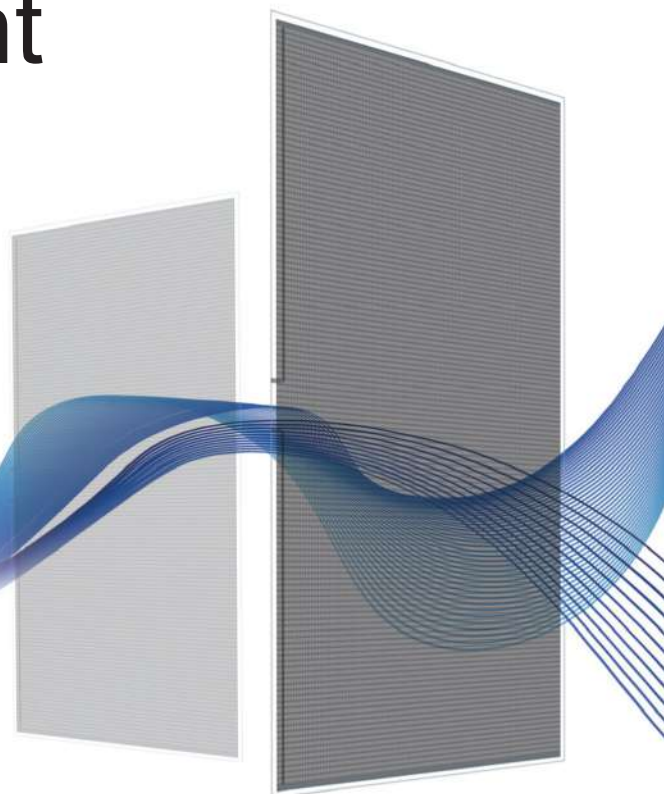

SUPERIOR PERFORMANCE

High Efficiency



HIITIO thin film pv module produces higher energy output compared with traditional crystalline silicon module.



Good Low - Light Effect

Better performance in morning and evening hours, cloudy and haze conditions.



Excellent Temperature Coefficient

It generates much power in different temperature environments.



Low Degradation Rate

Power output warrant more than 85% in 25 years, degradation rate is 2% in the 1st year and 0.5% every year thereafter.



Easy to Install

It's adaptable for different structures.

QUALITY WARRANTY

0.5% Annual Degradation

2.0% First Year Power Degradation

10 year Product Warranty

25 year Performance Warranty



Electrical Specification

Item No.	HC-3CT0	HC-3CT20	HC-3CT40	HC-3CT60
Transparency	0%	20%	40%	60%
Maximum Power(Pmax)	115W	92W	69W	46W
Peak Power Voltage(Vmpp)	101.8V	101.8V	101.8V	101.8V
Peak Power Current(Impv)	1.13A	0.90A	0.68A	0.45A
Open Circuit Voltage(Voc)	125.5V	125.5V	125.5V	125.5V
Short Circuit Current(Isc)	1.24A	0.99A	0.74A	0.50A

Standard Test Condition (STC) :1000W/m², STC AM 1.5, 25℃, power fluctuation range ±5%.

Mechanical Specification

Module Size	1200×600×6.8mm
Weight	12Kg
Area	0.72mm ²
Structure	3.2mmCdTe + 0.4mmEVA +3.2mm back glass
Output Cable	2.5mm ² , 650±10mm
Connecting Plug	MC4
Junction Box	IP67

Temperature Characteristics


Operating Temperature Range	-40℃~+85℃
Temperature Coefficient of Pmax	-0.29%/℃
Temperature Coefficient of Voc	-0.28% /℃
Temperature Coefficient of Isc	+0.04%/℃

Working Parameter

Maximum System Voltage	DC1000V (IEC)
Maximum Rated fuse Current	6A
Application Level	A2
Wind Load	6000Pa (IEC)
Snow Load	6000Pa (IEC)

ISO9001:2015 ISO14001:2015 ISO45001:2018
IEC 61215 IEC 61730

Product Drawing

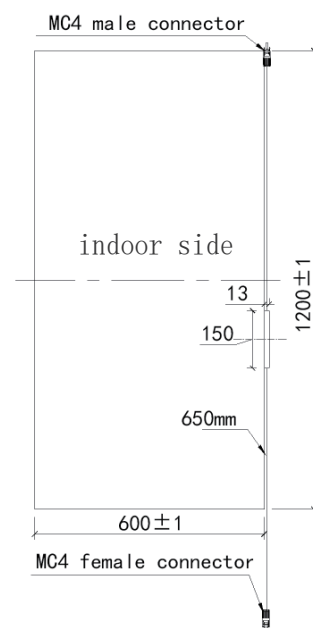

Packing Information

Modules Per Pack	50 Modules/pallet, 700kg/pallet
Standard Container (20 ft)	15 pallets, 750pcs
Standard Container (40 ft)	40 pallets, 1500pcs