CAN 2.0 A → Standard frames

CAN 2.0B → Standard & extended frame

CAN FD → 64 Bytes payload (Data Field)

Standard frames → 11 bit identifier

Extended frames → 29 bit identifier

id → message.

Standard data frame / Remote frame | Extended data frame / Extended R.F


11

Data frames :-

To Broadcast the messag.

Remote frames :-

To request the messag available with Remote nodes.

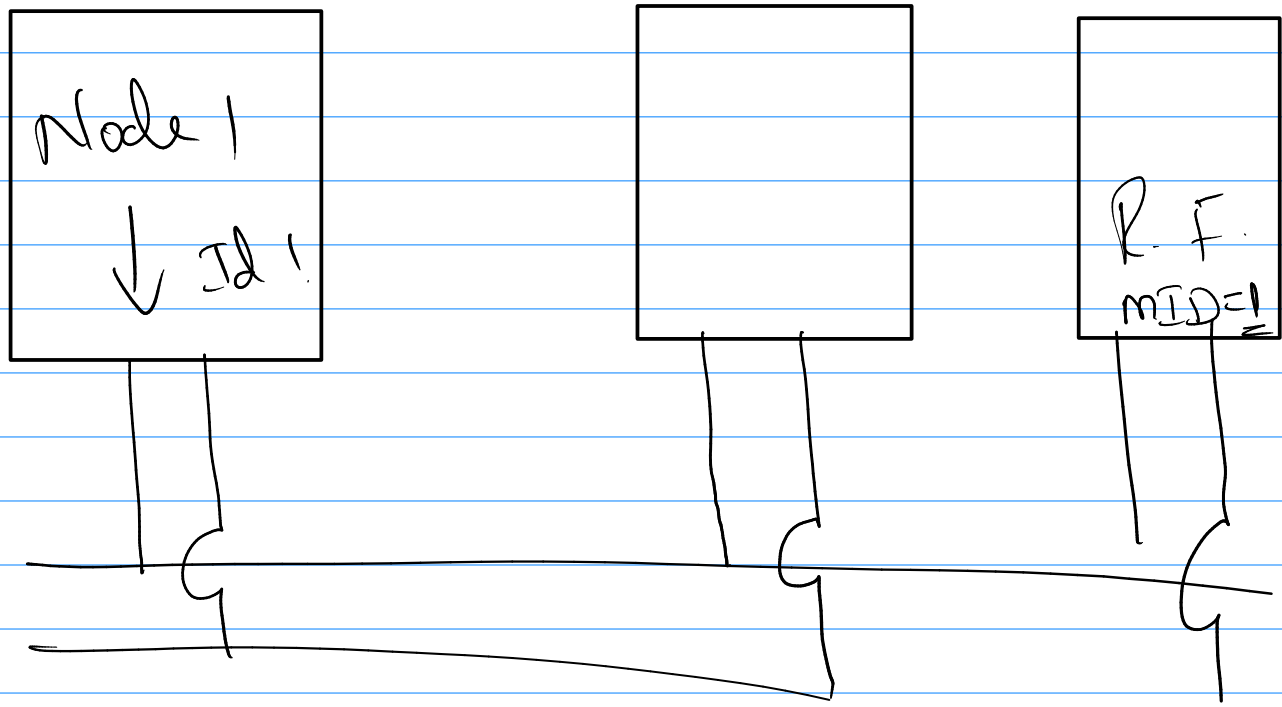

Error frame → Tx by the node which detects the error.

Overload frame:-

IFS (Intermission Field Space)

min :- 3 bits duration

x + Data field size

SOF	AF	CF	DF	CRC field	Ack field	EOF	IFS
1	12	6	0-8 bytes	16	2	7	3

SOF → Single bit (0) dominant bit

AF → ID + RTR
(11 bits) (1-bit)

RTR (Remote transmit request) :-

if Data frame RTR=0;

Remote frame RTR=1;

Rx Cal CRC = Rxed CRC

6

DLC 4

Remote frame :-

6 bytes

n-message & bytes

Response Remote frame → Data frame.

who will gain the bus.

Node 1 → SOF | AF

(1)

Node 1 → 000 0000 0001

(2)

Node 2 → 000 0000 0010

Bus level 000 0000 000

(1)

Node 1 000 0000 0001 0

(1)

Node 2 000 0000 0001 1

Bus level 000 0000 0001 0