
# Inter process Communication (IPC)

parent


fork

child


exit(

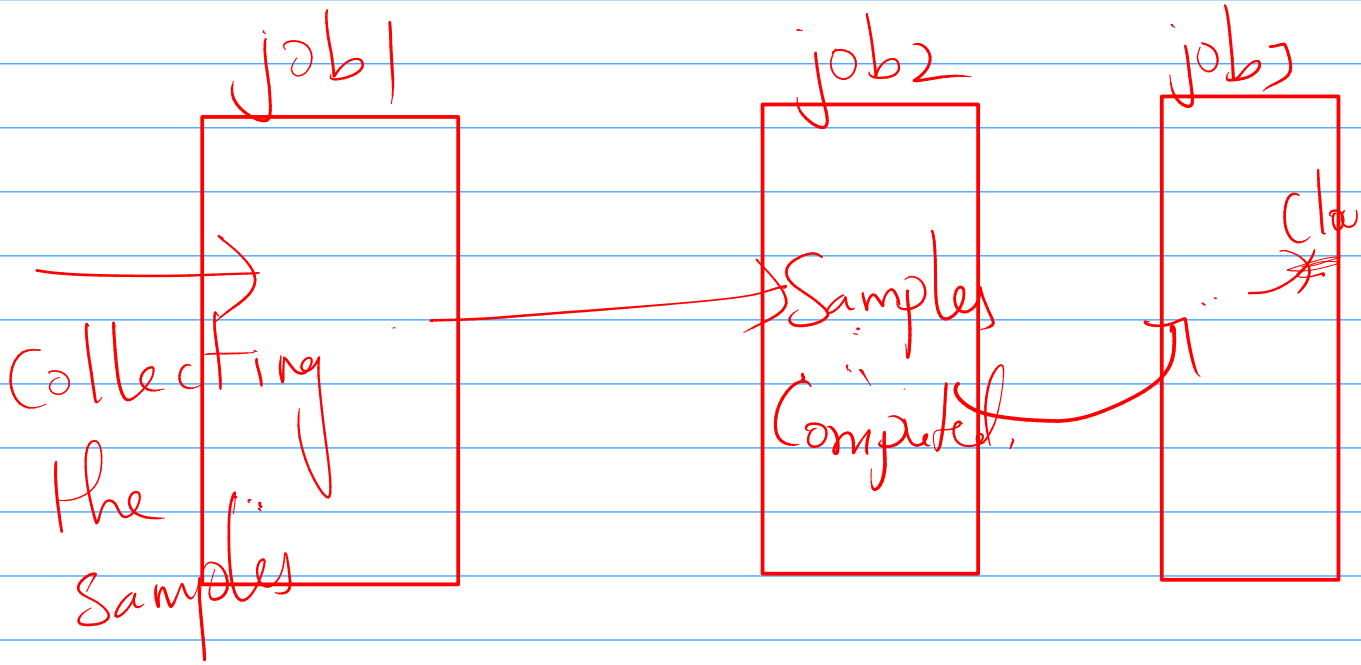

Data T/f :-

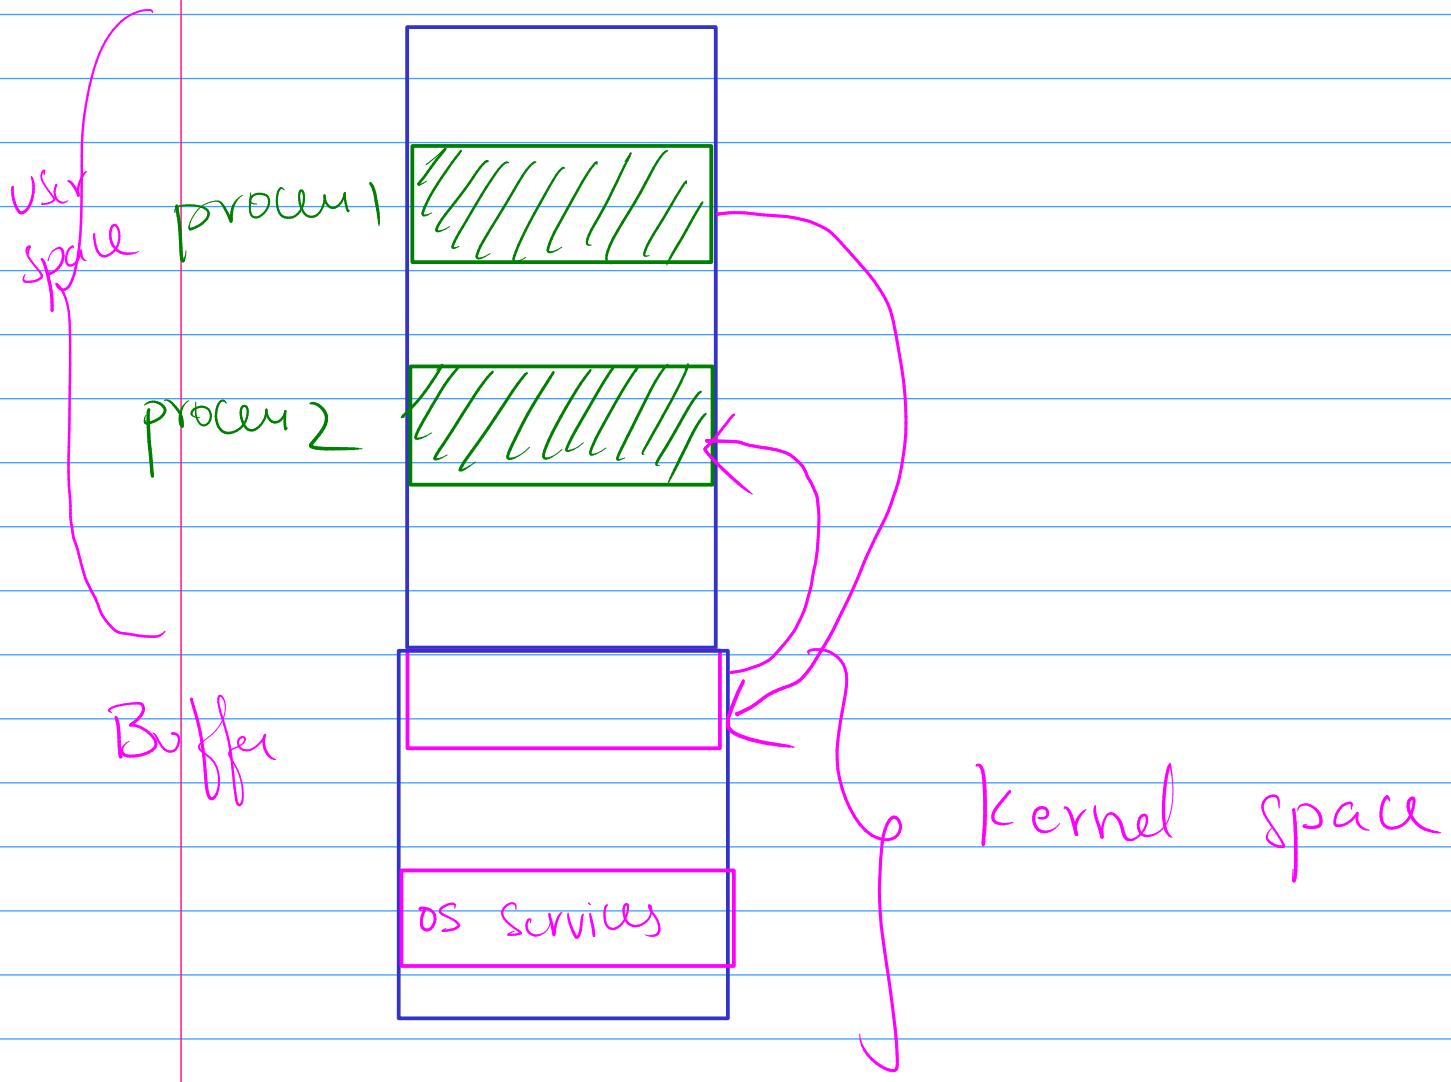

## Shared Memory :-

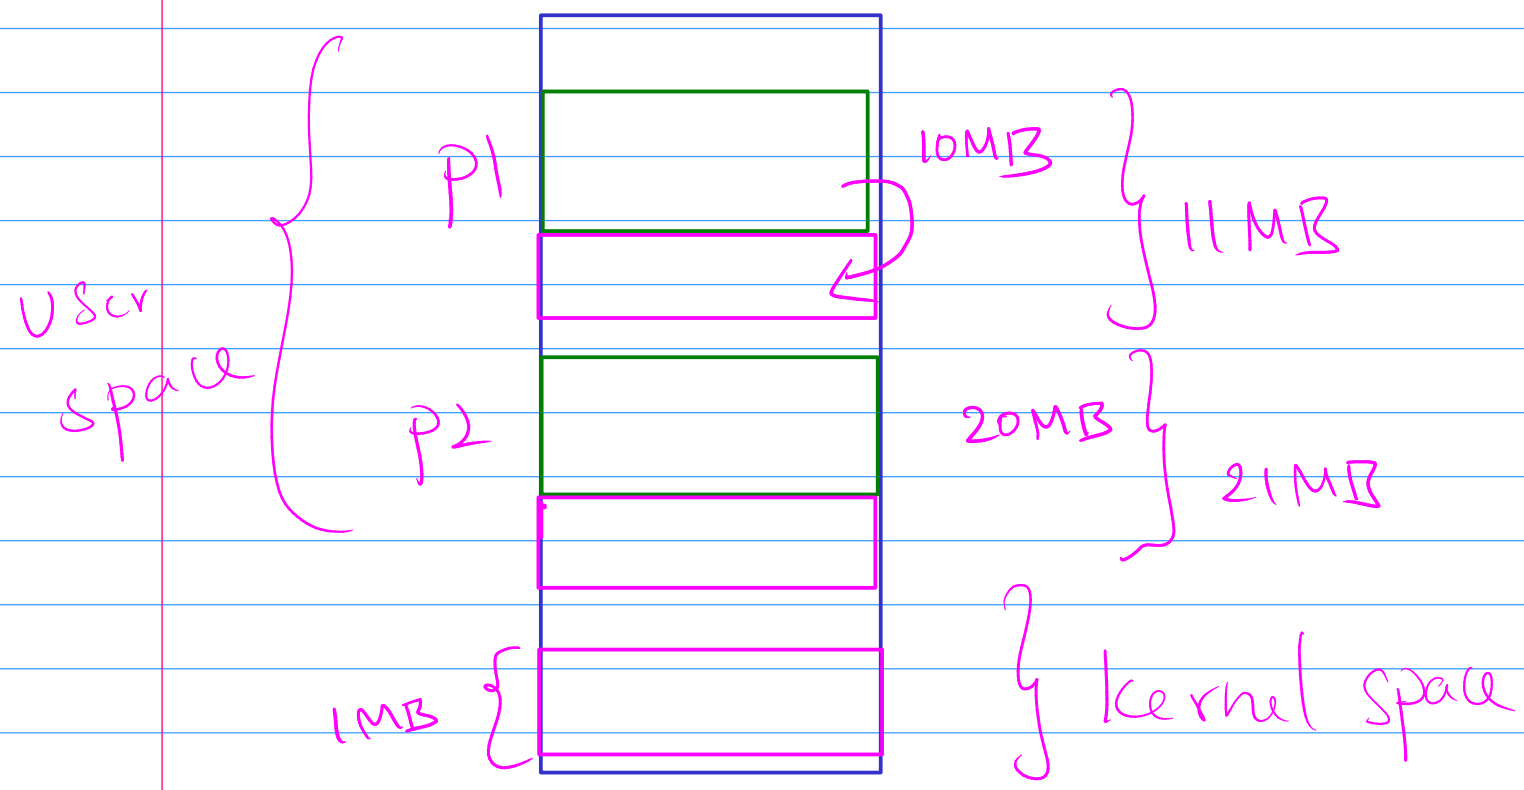


## Byte Stream :-

Sender → Receiver

n Bytes

10 Bytes → [10B] → 5 Bytes

10 Bytes → [10B] → 15 Bytes

Receiver

→ B1 B2 B3 B4

Sequential Order followed for reading.

FIFO ⇒ Byte Stream.

Message :-

→ message < type, data (↓ 20 Byte) > Buffer

Rxer

20 Byte

Receiver has to read full message

(Message-oriented comm$^n$).

Rxer

3 2 1

→ msg3 msg2 msg1

→ FIFO type ✗

type 2 =
type 1
type 1

Pipe :- → Can be used only for comm b/w related process.

It is a Buffer created in kernel space for IPC.

Create a pipe (PIPE system call)

↓

Two descriptors

P1 → pipe fd1, fd2

fork() → P2 created.

P1 → pipe created

P2

P1 pipe

P2


P1


P1

P2 P3

pipe ← P2

P4

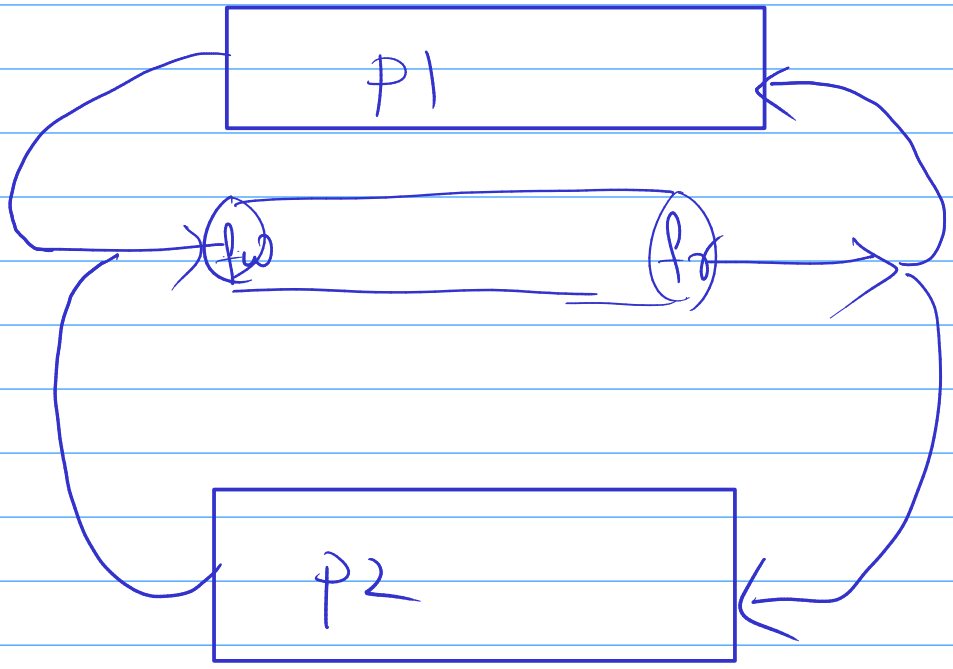

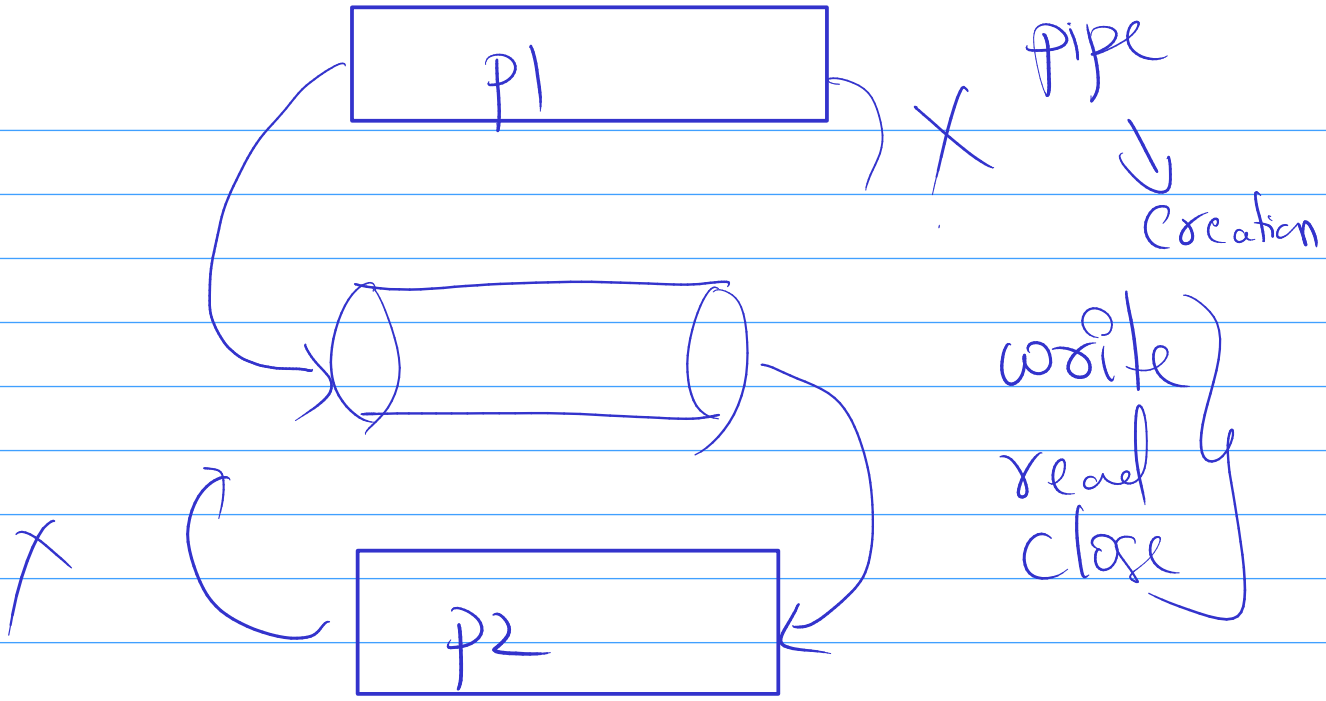
p1
pipe
creation
write
read
close
p2