

4


3

2

1

PIN OUT			
Object from	Pin from	Object to	Pin to
S1	NC	X1	1
S1	C	X1	9
S2	NC	X1	2
S2	C	X1	9
S3	NC	X1	3
S3	C	X1	9
S4	NC	X1	4
S4	C	X1	9

ITEM	DESCRIPTION	UNIT	QTY
1	D-SUB 9pin male (Digikey P/N: AE10972-ND)	pcs	1
2	D-SUB 9pin Backshell 9pos 180deg (Digikey P/N: 116-40-9709H-ND)	pcs	1
3	Multiple Conductor Cable (Digikey P/N: T1430-153-ND)	mm	1040
4			
5	Cable label DWG. NO.:	pcs	1
6	Heat-Shrink Tubing (Digikey P/N: ATU031K-ND)	mm	110
7	Heat-Shrink Tubing (Digikey P/N: SCT-NO.2-E5-0-12MM-ND)	mm	25
8	Hook-Up Wire (Digikey P/N: FLTWC0311-26-9-ND)	m	

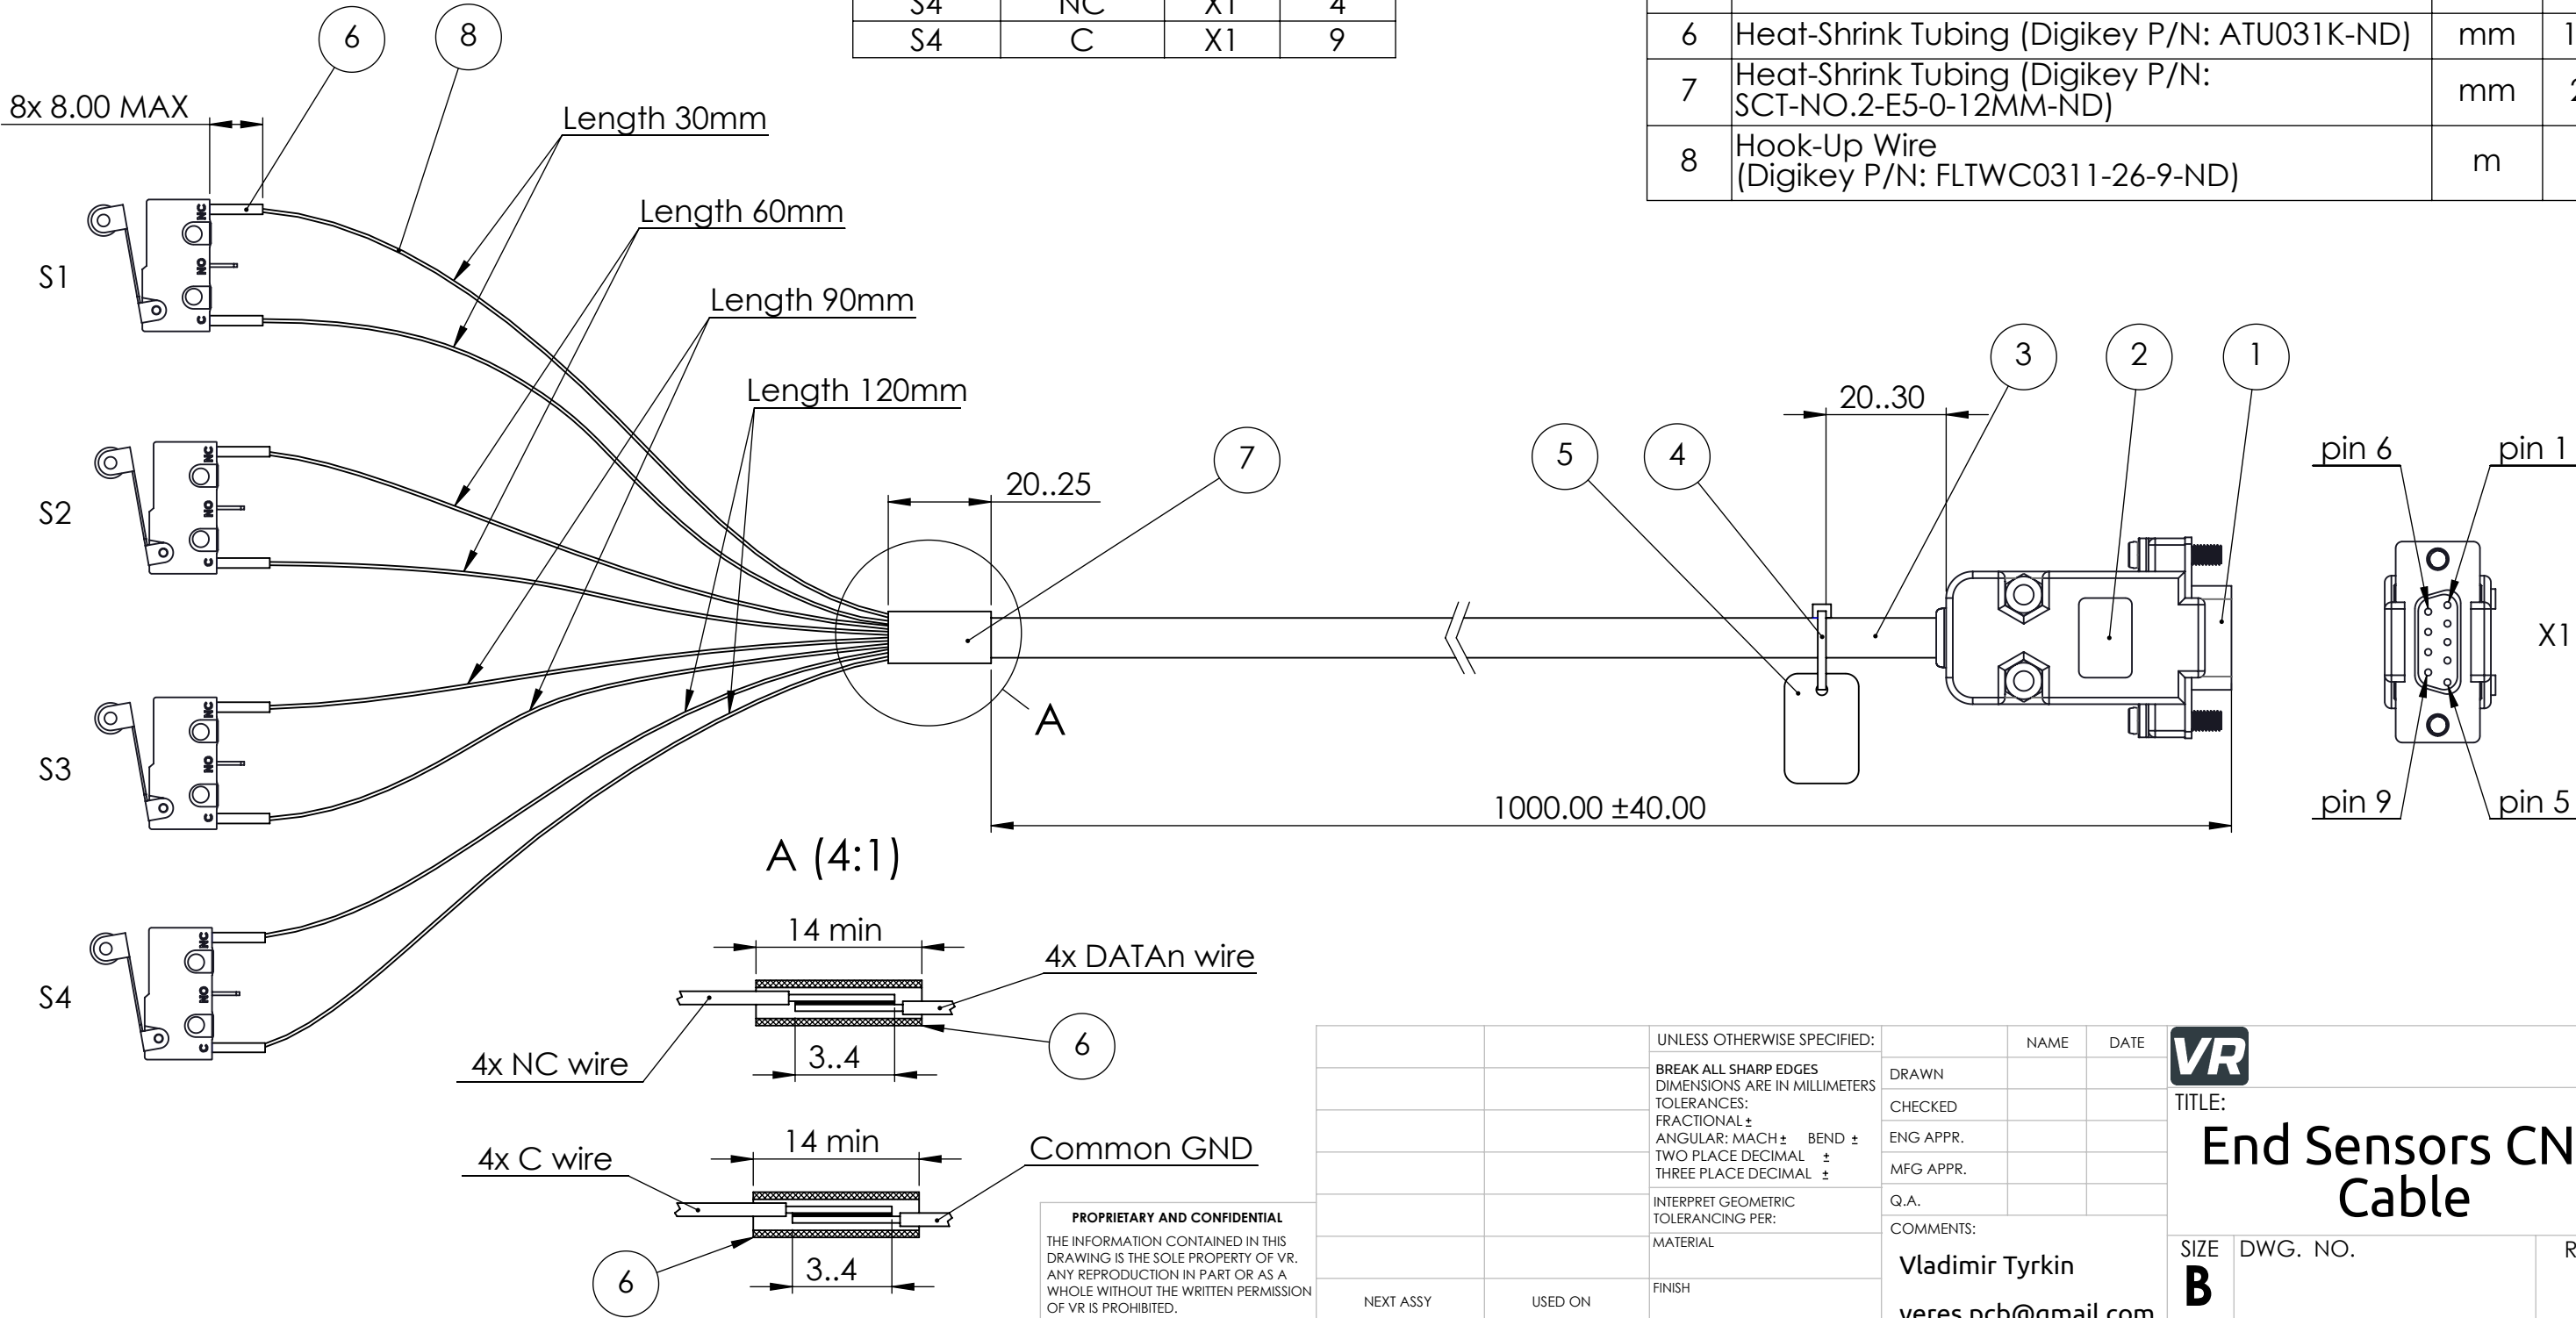

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE	<div>VR</div> <div>TITLE: End Sensors CNC Cable</div>		
		BREAK ALL SHARP EDGES DIMENSIONS ARE IN MILLIMETERS	DRAWN					
		TOLERANCES: FRACTIONAL ±	CHECKED					
		ANGULAR: MACH ± BEND ±	ENG APPR.					
		TWO PLACE DECIMAL ±	MFG APPR.					
		THREE PLACE DECIMAL ±						
		INTERPRET GEOMETRIC TOLERANCING PER:	Q.A.					
		MATERIAL	COMMENTS:			SIZE	DWG. NO.	REV
		FINISH	Vladimir Tyrkin			B		
			veres.pcb@gmail.com					
NEXT ASSY	USED ON					SCALE: 1:1	WEIGHT:	SHEET 1 OF 1
APPLICATION		DO NOT SCALE DRAWING						

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF VR.
ANY REPRODUCTION IN PART OR AS A
WHOLE WITHOUT THE WRITTEN PERMISSION
OF VR IS PROHIBITED.