42.00

31.00 ±0.50

42.00

31.00 ±0.50
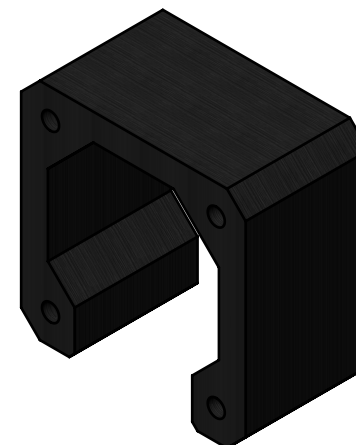
22.00

4 x ⌀ 3.20 $^{+0.10}_{0.00}$ THRU

23.00

NOTES:
1. MINIMALLY DIMENSIONED DRAWING. FOR MORE DIMENSIONS SEE CAD FILE: SpacerForStepper.sldprt.
2. MATERIAL: PETG 3D PRINTER FILAMENT MCMASTER-CARR P/N: 3462N1. ALTERNATE: ABS PLASTIC P/N: 1317N538-1317N327.
3. INFILL: 100%. NOZZLE: 0.4mm.
4. GENERAL TOLERANCE DIN ISO 2768-c.
5. FOR MATERIALS AND MANUFACTURING LINKS REFER TO CNC_BOM.PDF

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE	VR	VR	
		BREAK ALL SHARP EDGES DIMENSIONS ARE IN MILLIMETERS TOLERANCES: FRACTIONAL ± ANGULAR: MACH ± BEND ± TWO PLACE DECIMAL ± THREE PLACE DECIMAL ±	DRAWN			TITLE:		
			CHECKED					
			ENG APPR.			Spacer For Stepper		
			MFG APPR.					
		INTERPRET GEOMETRIC TOLERANCING PER:	Q.A.					
		MATERIAL PET-G	COMMENTS:			SIZE	DWG. NO.	REV
NEXT ASSY	USED ON	FINISH As machined	Vladimir Tyrkin veres.pcb@gmail.com			A	CNC.02.23	
APPLICATION		DO NOT SCALE DRAWING				SCALE: 1:1	WEIGHT: 20.90	SHEET 1 OF 1