


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	9V_Battery	9V Battery	1
2	Glass	DWG.NO. 001	1
3	Switch DC30V	Switch DC30V	1
4	CaseTop	Snap-fit	1
5	CaseBottom	Case Bottom	1
6	CaseLid	Lid	1
7	Self Tapping Cross recessed Screw 4Plastic	Screw D=2.6 L=16mm	2
8	PCB Assembly	PCB for flashlight	1
9	Wires	26AWG wires, total length 75mm	1
10	Spring	Spring length 15mm	2

WIRING VIEW (SCALE 2 : 1)

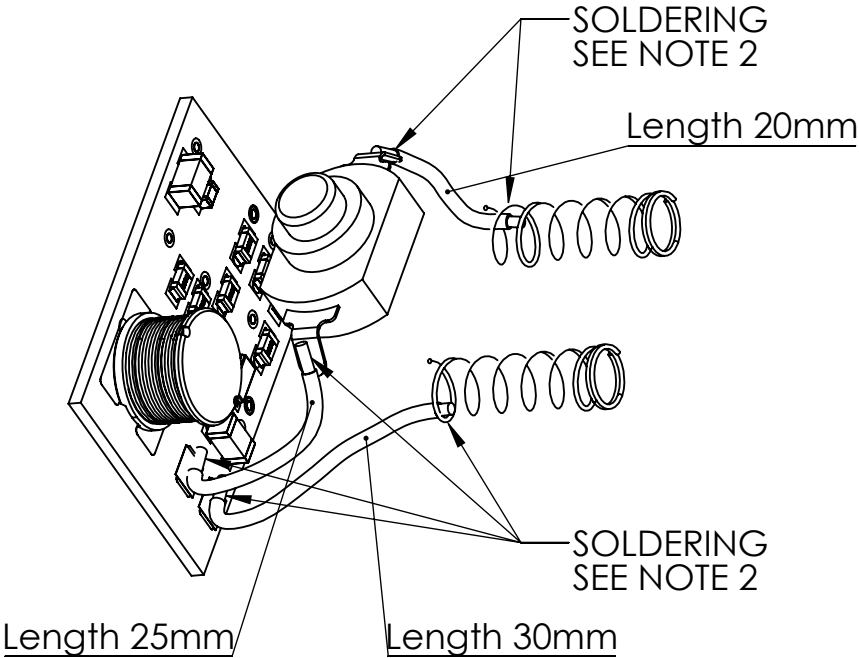

- NOTE:
- 1. For materials and manufacturing links refer to AssemblyBOM.pdf
 - 2. Soldering with no-clean Sn60Pb40 solder (Digikey P/N: 91-6040-9013-ND) or similar. Strip wire jacket to 3mm.

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF VR.
ANY REPRODUCTION IN PART OR AS A
WHOLE WITHOUT THE WRITTEN PERMISSION
OF VR IS PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE	<div><div>VR</div><div>VR</div></div>			
		BREAK ALL SHARP EDGES DIMENSIONS ARE IN MILLIMETERS TOLERANCES: FRACTIONAL ± ANGULAR: MACH± BEND ± TWO PLACE DECIMAL ± THREE PLACE DECIMAL ±	DRAWN			TITLE: <div>Flashlight</div>			
			CHECKED						
			ENG APPR.						
			MFG APPR.						
		INTERPRET GEOMETRIC TOLERANCING PER:	Q.A.			SIZE DWG. NO. REV <div>B</div> 000			
		MATERIAL	COMMENTS: Vladimir Tyrkin veres.pcb@gmail.com						
		Multimaterial							
NEXT ASSY	USED ON	FINISH							
APPLICATION		DO NOT SCALE DRAWING				SCALE: 1:1 WEIGHT: 48.09 SHEET 1 OF 1			