

DRAUFSICHT (M 1:1)

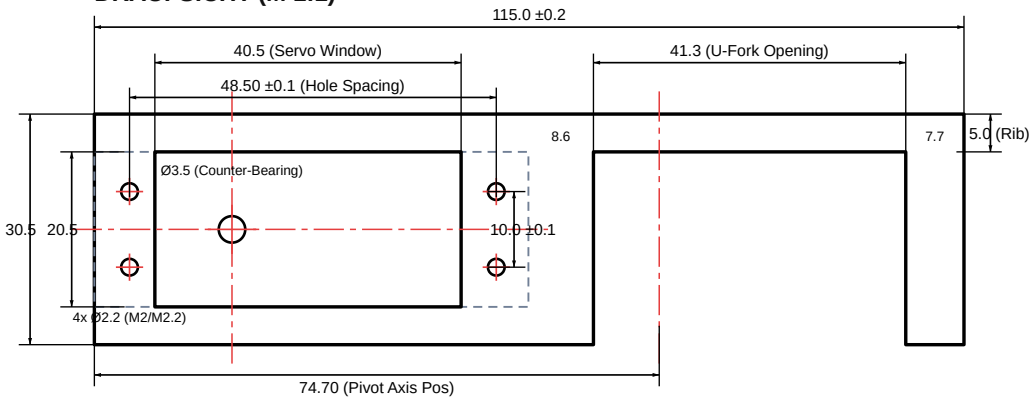


REAR VIEW (Scale 1:1) — SERVO 2 (COXA)


View of rear face (Y=30.5). Calibrated for NR-645 MG BB (48.5 x 10.0 mm pattern).

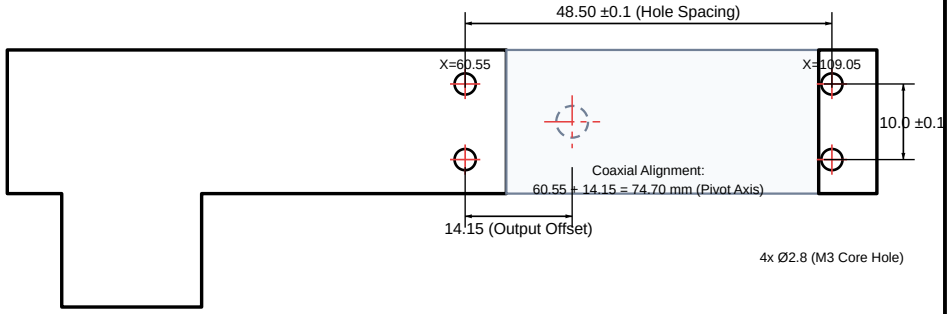

FRONT VIEW (Scale 1:1)

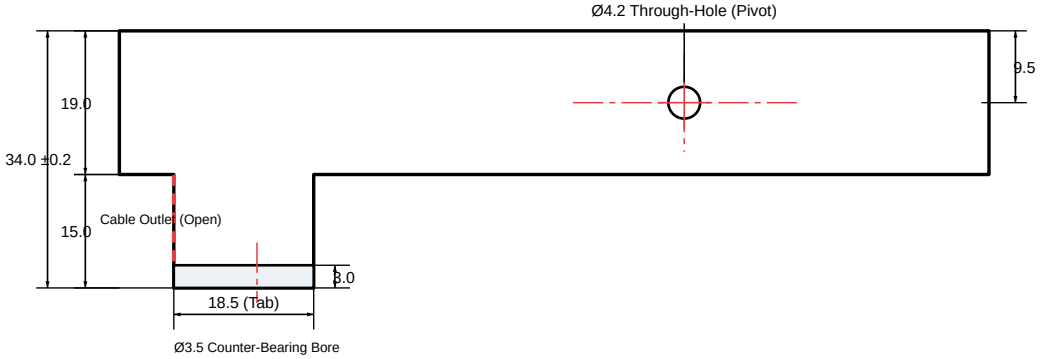

3D ISOMETRIC (Scale 0.75:1)

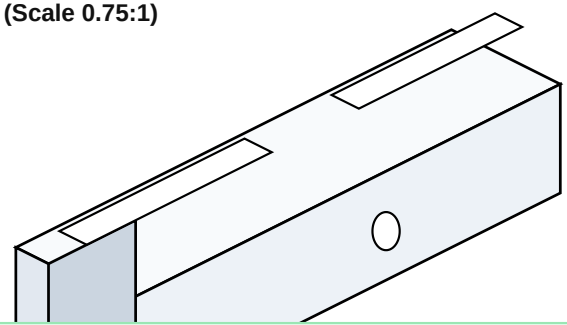

Design Highlights (Rev 3):

- Stress-relief: Solid 5.0 mm rib & reinforced base
- Servo 1 cable outlet open to left (unobstructed routing)
- Coaxial alignment: Coxa servo shaft & pivot axis at X = 74.70 mm

VERIFICATION DIMENSIONS (CALIPER INSPECTION)

No.	Feature / Dimension	Target	Tolerance
1	Overall Part Length (X)	**115.00 mm**	±0.20 mm
2	Main Body Width (Y)	**30.50 mm**	±0.20 mm
3	Base Body Height (Z)	**19.00 mm**	±0.15 mm
4	Total Height with Tab (Z)	**34.00 mm**	±0.20 mm
5	Servo 1 Cavity (X × Y)	**40.5 × 20.5 mm**	±0.20 mm
6	Servo 1 Hole Spacing (X × Y)	**48.50 × 10.00 mm**	±0.10 mm
7	Servo 2 Hole Spacing (X × Z)	**48.50 × 10.00 mm**	±0.10 mm
8	U-Fork Inner Span (X)	**41.30 mm**	±0.20 mm
9	U-Fork Rib Thickness (Y)	**5.00 mm**	±0.15 mm
10	Pivot Axis Pos from Edge	**74.70 mm**	±0.15 mm
11	Pivot Bore Ø	**4.20 mm**	+0.15 mm
12	Tab Counter-Bearing Bore Ø	**3.50 mm**	+0.15 mm

Project / Assembly: **LASIUS HEXAPOD**	Drawing No. / Rev: **LH-COX-001-REV3**
Part Name: **COXA BRACKET**	Servo Model: **Torcster / Reely NR-645 MG BB**
Material / Process: **3D Print (PETG / ABS)** Infill ≥ 40%, Perimeters ≥ 4	Scale: **1:1** (Isometric 0.75:1)
General Tolerance: **DIN ISO 2768-m (±0.2 mm)**	Sheet Size: **DIN A4 Landscape**
Author / Date: 2026-11-05 / Antigravity	CAD Source: coxa_bracket.FCStd
	Status: **APPROVED**