

Liquid Applied Roof Coatings



ABOUT PCS



In business for 15 years

Largest silicone roof applicator serving the Rocky Mountain Region

Only Uniflex Premier Elite Contractor in Rocky Mountain Region

50% of projects with roofing companies and property managers

Gaco and Uniflex Specialists. Certified with most other top manufacturers

Large crew equipped to handle projects of any scale

Silicone Experts

WHY PCS?



Free inspections

Will meet your designated contact on site

Turnkey Solutions = Peace of Mind

- Conduct pre-inspection
- Order and coordinate material
- Schedule final inspection
- Provide daily progress photos

Strictly a coatings company

FLUID APPLIED MARKET



- **Globally**

- 2021 4.2 B USD
- 2022 4.6B USD
- 2032 8.3B USD

- **US Market**

- 26% of Global market share
- 2017-2021 Grew at a CAGR of 7.3% to \$1.1B+
- 2022 \$1.4B USD
- 2032 \$2.2B estimated


- **KeyGrowth Factors**

- Increase in Corporate Sustainability Initiatives
- Upsurge in the adoption of green building codes
- Growing concern towards energy consumption & carbon emissions

Common Commercial Roofs

FLAT ROOF SYSTEMS

- Single Ply
 - EPDM
 - TPO
 - PVC
- Asphalt
 - Modified Bitumen
 - Tar and Gravel
- Metal
 - Standing Seam
 - Standard Profile
- Rock Ballasted
 - 45 mil & 60 mil

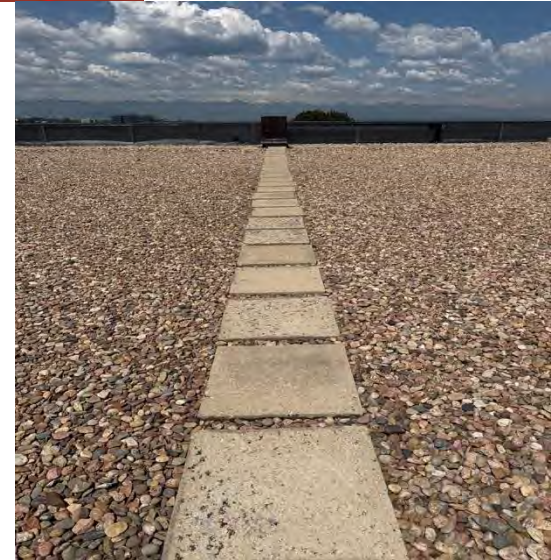

TECHNOLOGIES



- ### Silicone

- One Coat
- Non Reinforced
- Ponding Water Resistant
- Doesn't lose mil thickness over time



- ### Acrylic

- Multi-Coat
- Base Coat Required
- Used primarily in New Mexico/Nevada
- Loses 1-2 mils per year



PRODUCT



UNIFLEX SILICONE 44



- 100% Silicone Formulation
- Excellent Ponding Water Resistance
- High Solar Reflectance Index
- One Coat Application
- Optional Colors
 - Gray
 - Tan
 - Safety Yellow

SEALANTS



Uniflex OneFlash

- 732% Elongation
- No Fabric Required
- Can use with Silicone & Acrylic Coatings

Silicone 44-900

- 540% Elongation
- No Fabric Required
- Only for use with Silicone Coatings

MS Hybrid Lap Sealant

- 324% Elongation
- Can be used in wet conditions
- Versatile Lap Sealant



FOAM + COAT



Spray Foam

- Application
 - 1 ½ inch of closed cell foam
 - Silicone top coating
 - Makes foam UV stable
 - Withstand permanent ponding water
- Ideal for tar and gravel roof systems
- Can be applied to all roofing systems
 - Adds R-value



MOISUTRE TESTING



SILICONE

Withstand PERMANENT ponding water

UV Stable

White roof = reflective = energy savings

Creates seamless, monolithic roof system

Excellent hail performance

Retains mil thickness

