

**WARREN
RUPP, INC.®**



Product Profile



**Warren Rupp, Inc.
Mansfield, Ohio Plant,
Facility built in 1975**



Industry Week's Best Plant award 2012



Factory :

IDEX Fluid and Metering Pvt. Ltd.

Survey No.256, GIDC Manjusar Savli
Near Bombardier Circle, Distt. Vadodara
391770,Gujarat, India

Head Office:


India Commercial Organization

Solitaire Corporate Park
S14, 1st Floor, 167, Hargovindji Marg, Chakala,
Andheri East, Mumbai, India


Sandpiper- Product range

SANDPIPER®
A WARREN RUPP PUMP BRAND


Heavy Duty Ball

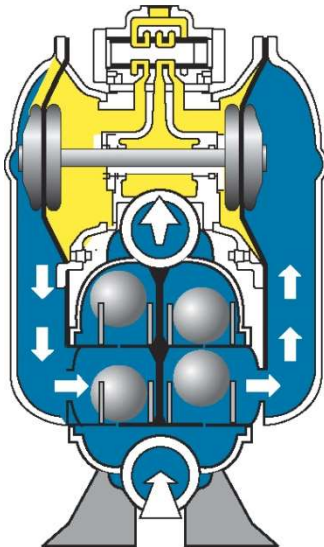


Heavy Duty Flap

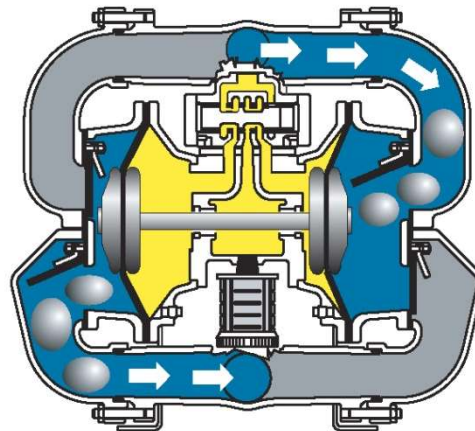

Containment Duty

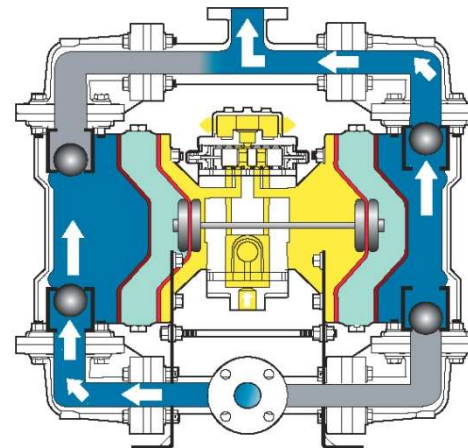

Standard Duty

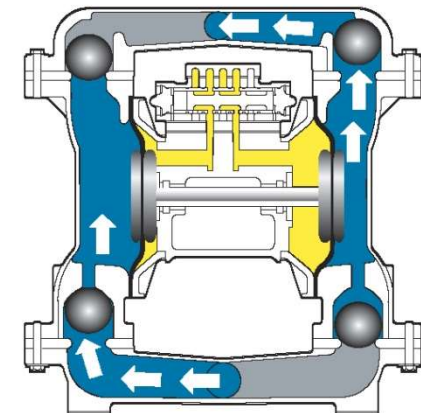

Different pumps catering to specific applications


Metallic Pumps

- Bolted Design
- Center Ported
- Available Sizes: 1/2", 1", 1-1/2", 2", 3", 4"
- MOC Options :
 - Stainless Steel, Aluminum, Cast Iron, Alloy C
 - Elastomers – PTFE, Santoprene, Neoprene, Buna, EPDM, Viton
- Flow Rate: 0- 238GPM
- Maximum discharge Pressure – 125PSI
- Can Handle Solids up to 9.5mm in size.
- Air Distribution System (ESADS)
- In-line Serviceable
- Ball Type Check Valves



Non- Metallic Pumps

- Bolted Design
- Porting Option – Center, Side & Dual
- Available Sizes: 1/4", 1/2", 1", 1-1/2", 2", 3"
- MOC Options :
 - Polypropylene, Conductive
 - Polypropylene, PVDF, Conductive PVDF, Conductive Acetal
 - Elastomers – PTFE, Santoprene, Neoprene, Buna, EPDM, Viton
- Flow Rate: 0- 238GPM
- Maximum discharge Pressure – 100PSI
- Can Handle Solids up to 18mm in size.
- Air Distribution System (ESADS)
- In-line Serviceable
- Ball Type Check Valves

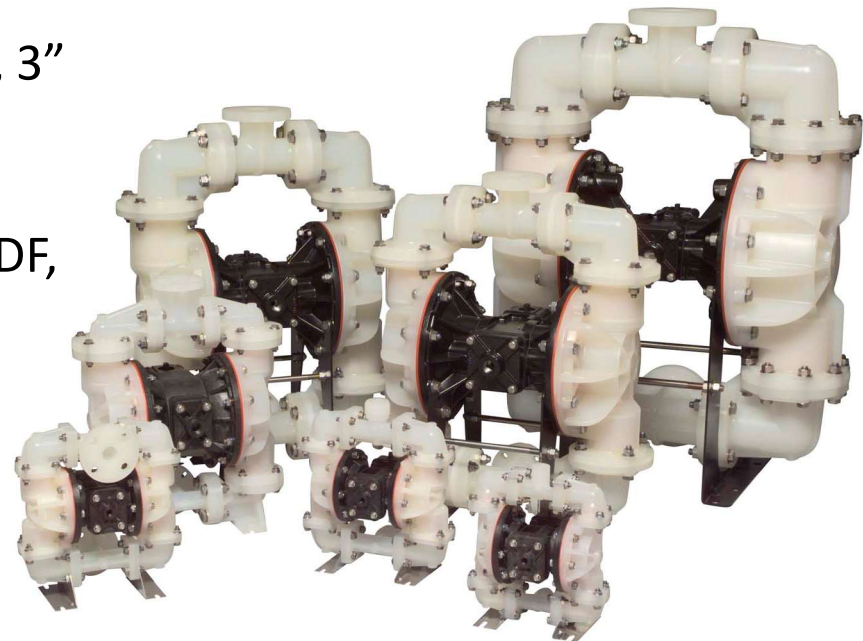


Heavy Duty- Ball Valve

- **Better Priming Capabilities**
- Bolted Design
- Bottom/Top/Side Porting Arrangement
- Available Sizes: 1", 1-1/2", 2", 3", 4"
- MOC Options :
 - Stainless Steel, Aluminum, Cast Iron, Alloy C
 - Elastomers – Santoprene, Neoprene, Buna, EPDM, Viton
- Flow Rate: 0- 260GPM
- Maximum discharge Pressure – 125PSI
- Can Handle Solids up to 22mm in size.
- Ball Type Check Valves



Heavy Duty- Flap Valve

- Flap Type Check Valves
- Bolted Design
- Bottom Discharge Porting Arrangement
- Available Sizes: 1", 2", 3", 4"
- MOC Options :
 - Stainless Steel, Aluminum, Cast Iron
 - Elastomers – Santoprene, Neoprene, Viton
- Flow Rate: 0- 260GPM
- Maximum discharge Pressure – 125PSI
- Can Handle Solids up to 80mm in size.

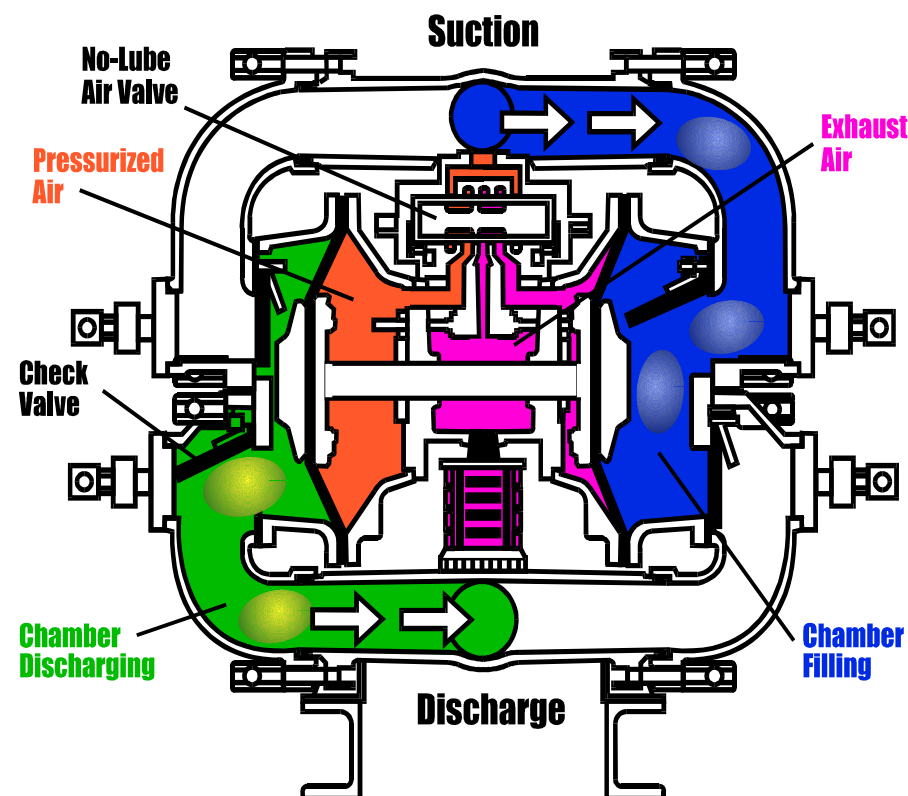

Best for handling slurries
with large solids up to
80mm/3"

SANPIPER – Value Stream

SANDPIPER®
A WARREN RUPP PUMP BRAND

