




Microcontroller

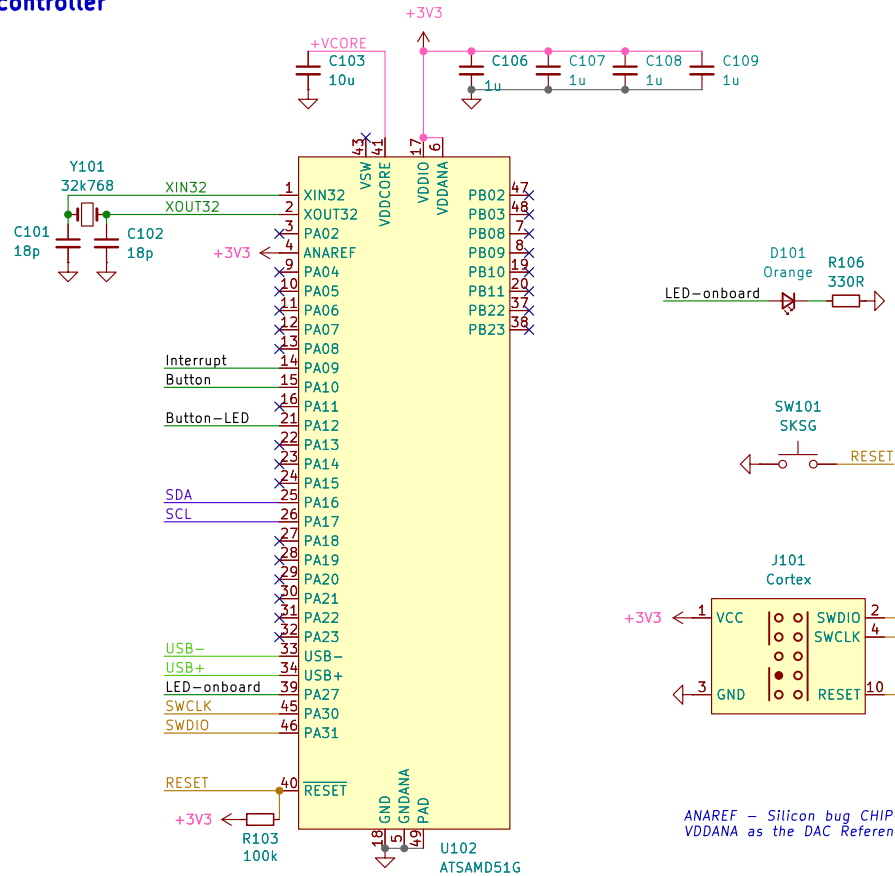


Power



Button

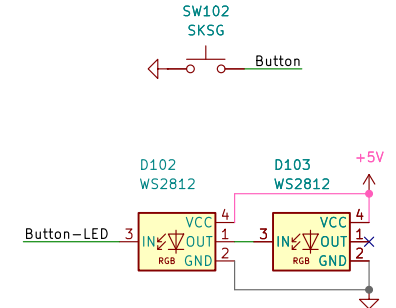

USB

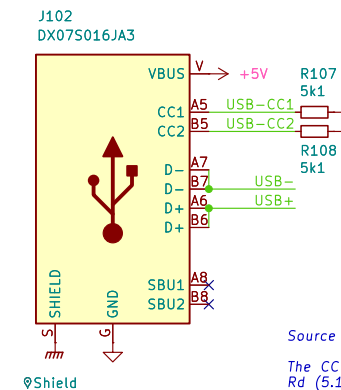


PWR_FLAG → +5V
PWR_FLAG →
PWR_FLAG → ΦShield


Source connected to a legacy device port.

The CC pins are pulled-down to GND Rd (5.1 kΩ ± 20%) to indicate that VBUS should be supplied by the host.

Orientation Sensor

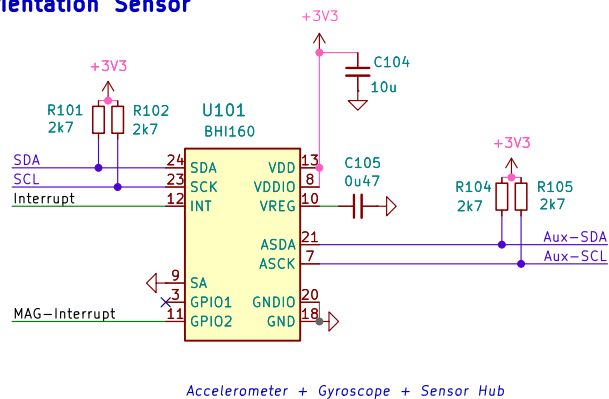

Accelerometer + Gyroscope + Sensor Hub

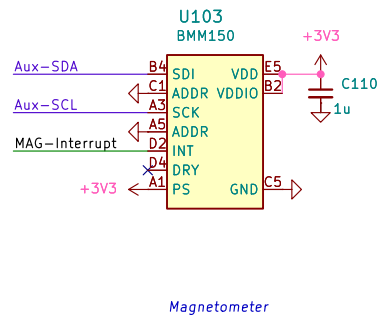

Magnetometer

Mechanical / Production

V2
ICON101
axis
ICON102
Revision
INFO101
1 2
INFO102

SWB101
Button-bottom
H101 2mm
H102 2mm
FID101
FID102
FID103

V2 axis
Versio Duo
Orientation Sensor
axis
1/1
2026-01-14 (2026-05-27)