


V2 Link - WAGO

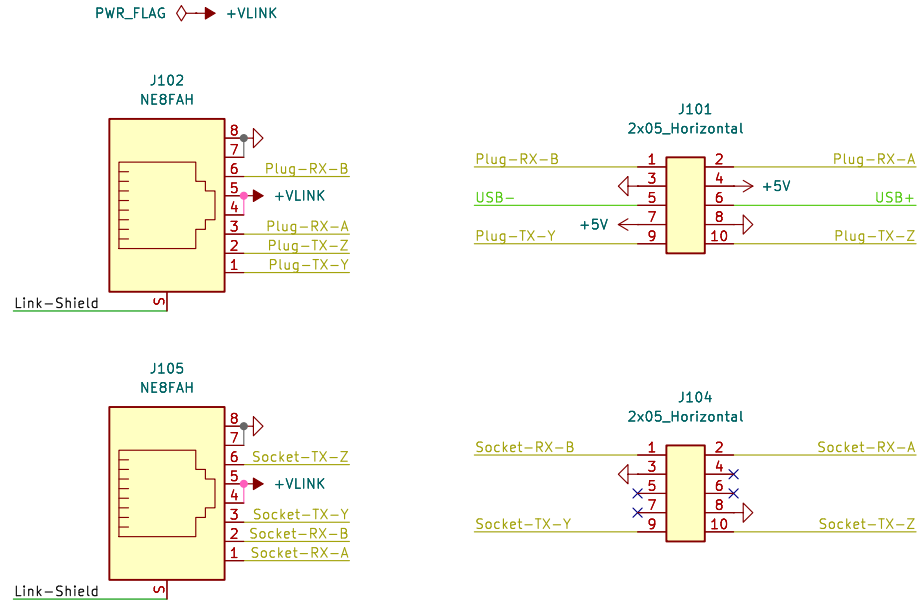


PoE Passive +24V
IEEE 802.3af Mode B

RS-422 3MHz


The cables used to connect the device and the power adapter
reverse the order of the wires.

USB


PWR_FLAG → +VBUS
PWR_FLAG → Shield
PWR_FLAG → Shield

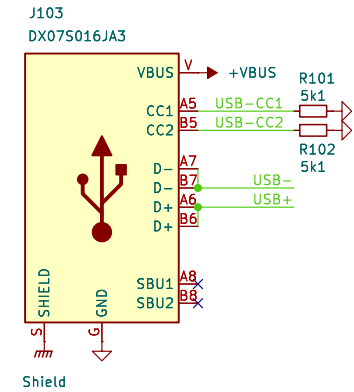

Power Input / +5V Power

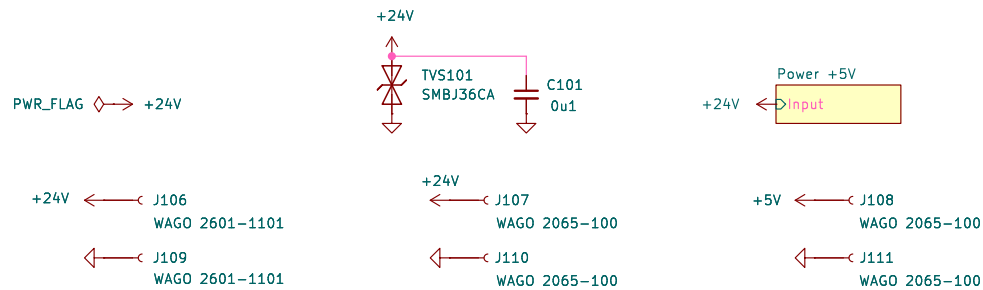


Mechanical / Production

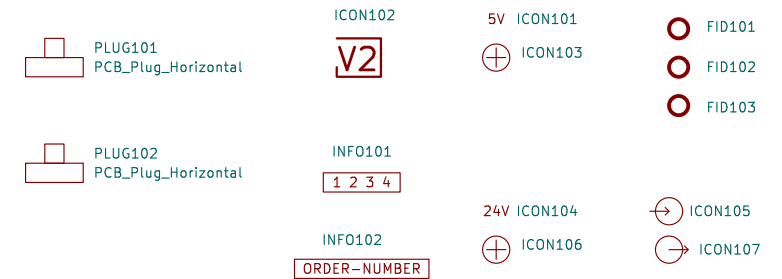

V2 Link WAGO
Versio Duo
External Power Supply

Rev: 3
Id: 1/2
Sheet: Root
Date: 2026-01-12

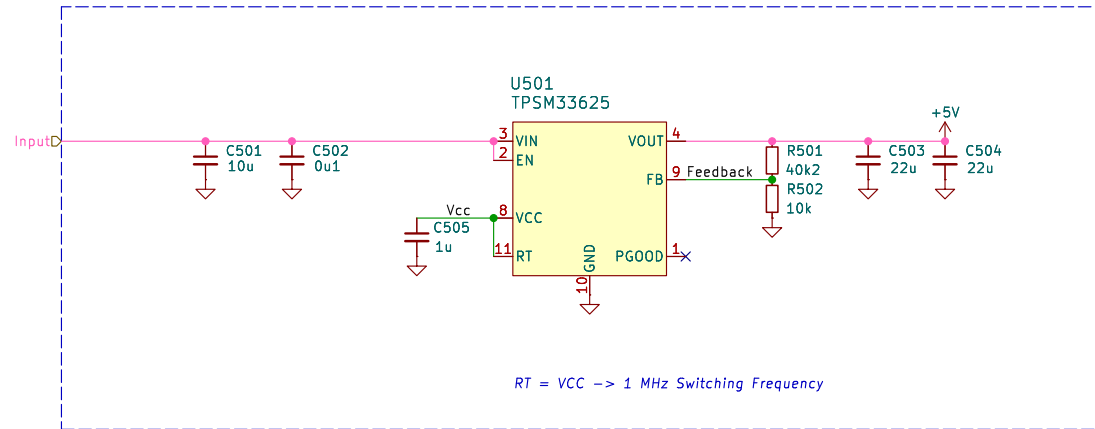

Power Supply
+5V

Rev: 4
Id: 5/2
Sheet: Power +5V
Date: 2024-03-28