

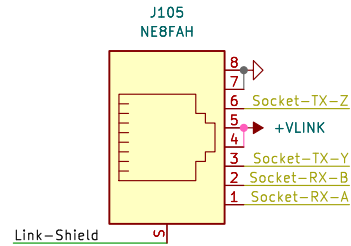
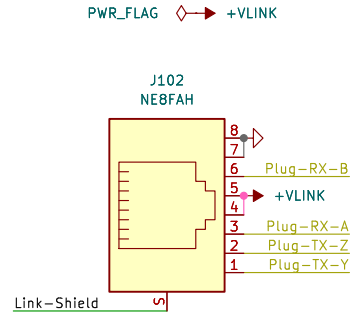


V2 Link - WAGO

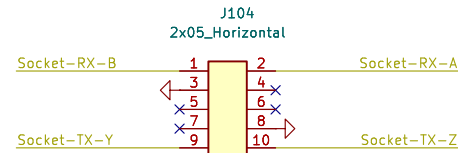

PoE Passive +24V
IEEE 802.3af Mode B


RS-422 3MHz

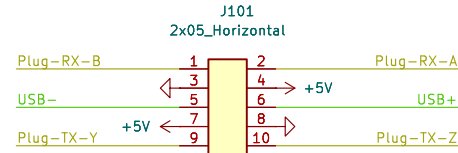

The cables used to connect the device and the power adapter
reverse the order of the wires.


USB

PWR_FLAG \rightarrow +VBUS
PWR_FLAG \rightarrow Shield
PWR_FLAG \rightarrow Shield

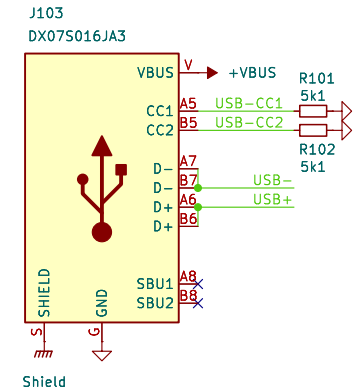


Power Input / +5V Power

PWR_FLAG \rightarrow +28V
+28V \leftarrow J106
WAGO 2601-1101
+28V \leftarrow J109
WAGO 2601-1101




+28V \leftarrow J107
WAGO 2065-100
+28V \leftarrow J110
WAGO 2065-100




+5V \leftarrow J108
WAGO 2065-100
+5V \leftarrow J111
WAGO 2065-100

Mechanical / Production

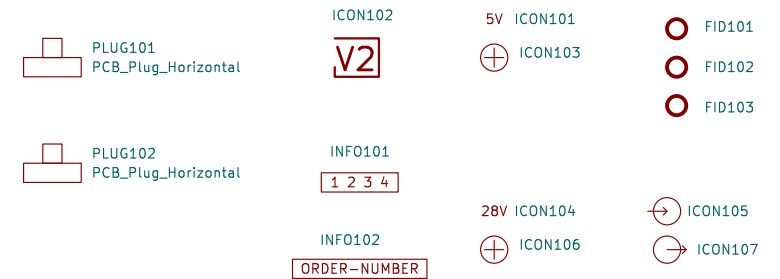

V2 Link WAGO
Versio Duo
External Power Supply

Revision: 2026-01-12
Id: 1/2
Sheet: Root
Updated: 2026-02-10

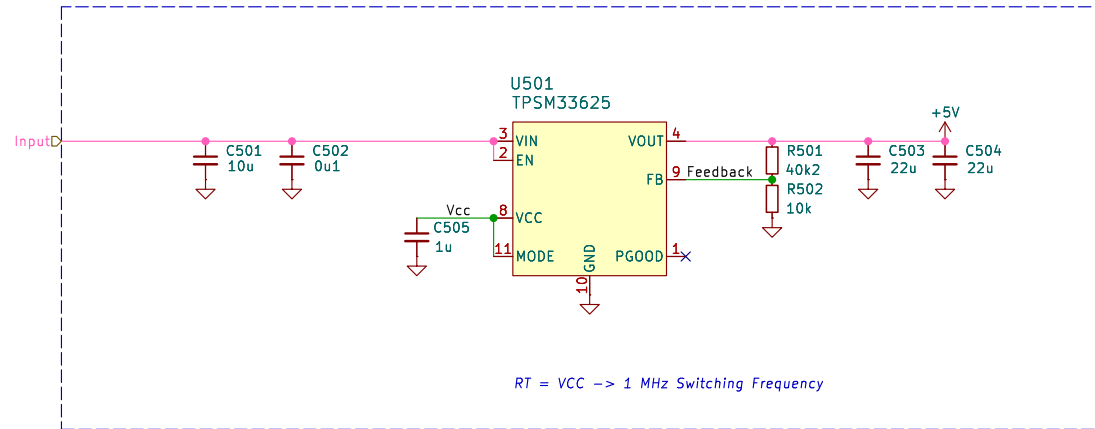

Power Supply
+5V

Revision: 4
Id: 5/2
Sheet: Power +5V
Updated: 2024-03-28