


## V2 Link - PoE

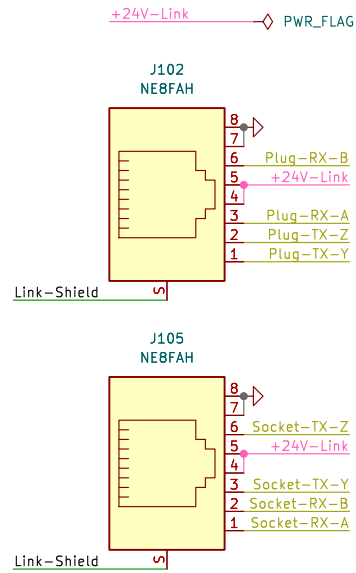


PoE Passive +24V  
IEEE 802.3af Mode B

RS-422 3MHz


The cables used to connect the device and the power adapter  
reverse the order of the wires.

## USB


PWR\_FLAG → VBUS  
PWR\_FLAG →  
PWR\_FLAG → Shield

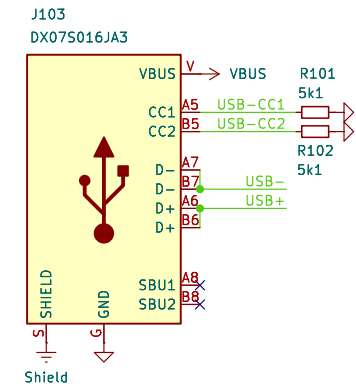

## Polarity Protection / +5V Power

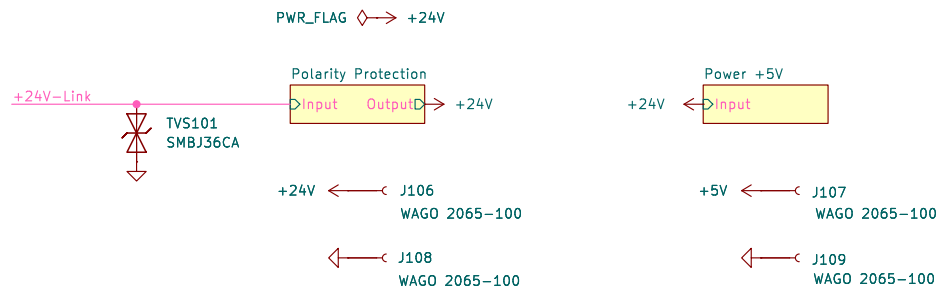



## Mechanical / Production

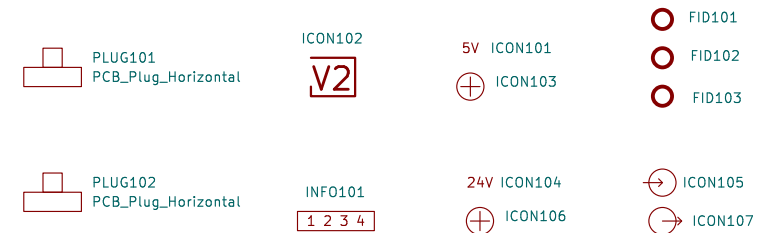

**V2 Link PoE**  
Versio Duo  
CAT Cable Power Supply

Rev: 7  
Id: 1/3  
Sheet: Root  
Date: 2026-01-12

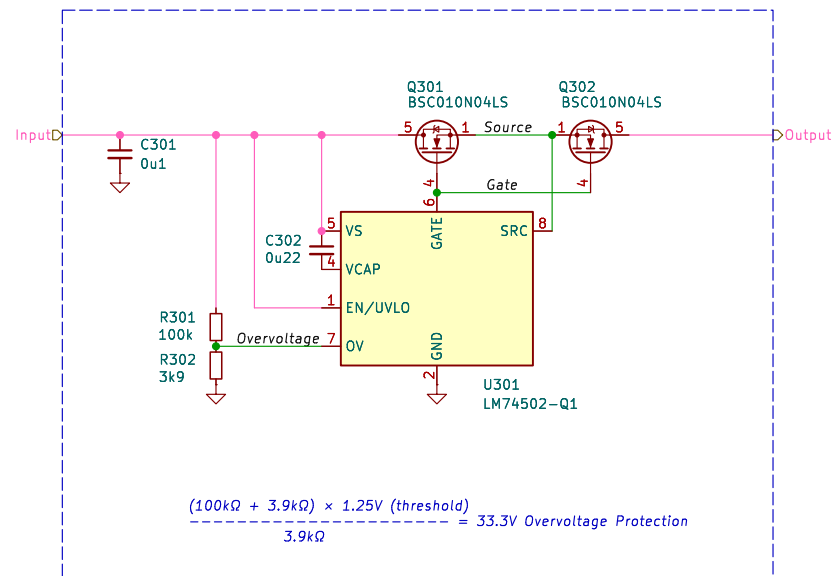

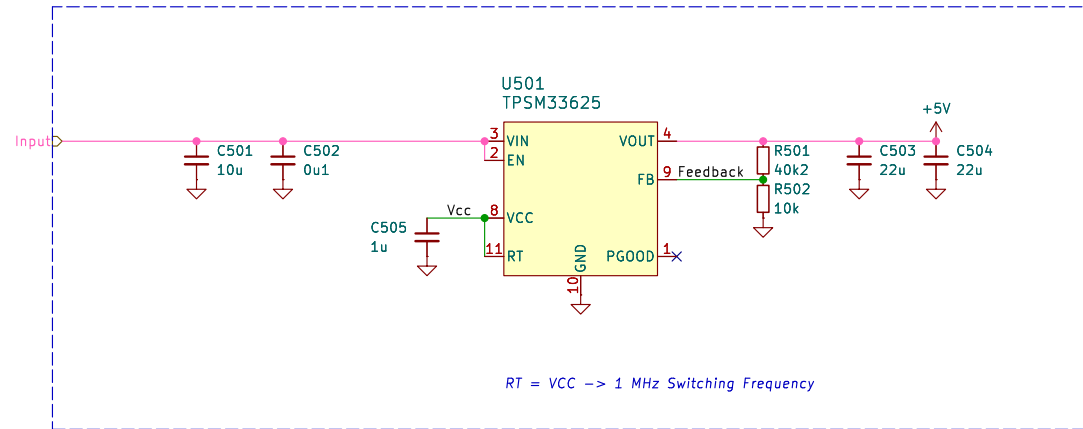

**Power Supply**  
+5V

Rev: 4  
Id: 5/3  
Sheet: Power +5V  
Date: 2024-03-28